



TableTop™, MatTop™ & KleanTop™ Products

ISSUE 13 • NORTH AMERICA

Conveniently Accessible Online Information

We realize the success of your business depends on up-to-date product information, superior technical support and customer service. Visit our website, regalrexnord.com, for additional product information, useful tools such as our distributor locator, and technical support options to help your business succeed.



Patents

3622018, 3701413, 3706200, 3759579, 3773391, 3782527, 3802033, 3804230, 3804232, 3826352, 3854414, 3854574, 3893564, 3902590, 3964800, 3976177, 3994405, 4008798, 4008800, 4018322, 4019627, 4033451, 4096943, 4436200, 4438838, 4441605, 4464151, 4476974, 4586601, 4629063, 4643291, 4682687, 4711605, 4765454, 4805764, 4809846, 4821869, 4823939, 4840269, 4858751, 4858753, 4865183, 4880107, 4893464, 4893709, 4909380, 4958726, 5020659, 5088597, 5096050, 5096053, 5125504, 5131960, 5158505, 5176247, 5186390, 5199197, 5199551, 5215185, 5219065, 5249415, 5253749, 5330045, 5332158, 5335768, 5337886, 5402880, 5429226, 5573106, 5597062, 5634550, 5662211, 5678682, 5678683, 5759304, 5779027, 5816390, 5860511, 5896980, 5960937, 6029802, 6036001, 6079544, 6086495, 6161685, 6164435, 6164439, 6173832, 6177113, 6196375, 6247582, 6247583, 6250459, 6360881, 6367619, 6428436, 6758327, 6840371, 6932211, 6978885, 6945388, 6997309, 7097032, 7132167, 7168557, 7246700, 7293644, 7377380, 9840370, D263211, D263292, D269217, D270201, D270202, D282907, D284640, D286136, D289496, D289497, D289606, D289607, D289608, D289734, D299424, D299425, D332213, EP0286173, EP0509605, EP0700843 EP5199551, 6932211 B2 and RE38543.

Disclaimers

Friction values are derived from internal lab tests which can show differences compared to values in the field due to the conveyor design, conveyor robustness (how well the conveyors are built), temperature, humidity, speed, contamination, length chain has been in service, conveyed product material, design of conveyed product, recycled conveyed product vs new, cleaning procedure, etc.

Actual chain color can slightly vary from chain to chain, and within the same chain series itself. These variations are normal in the manufacturing of plastic components and are only cosmetic in nature. They do not affect the integrity or performance of the product.


Dimensions are subject to change.

Certified dimensions of ordered products are furnished upon request.

The contents of this catalog may not be reproduced in whole or in part without consent of the copyright owner.

Regal Rexnord is continually investigating methods of improving products and introducing new technologies, and therefore reserves the right to modify data and features shown in this catalog at any time.

For updated information, please visit our web site at regalrexnord.com.

A collection of Rexnord conveyor components including chains, sprockets, and rollers. The components are arranged on a dark surface, with some parts like sprockets and rollers in the foreground and chains in the background. The lighting is dramatic, highlighting the textures and shapes of the metal parts.

Customer-focused Solutions.

Reliable Performance.

Trusted Brands.

With more than 125 years of experience, Regal Rexnord offers the broadest selection of high-quality chain, components, sprockets and accessories available in the world. Our team of experience application engineers and industry experts are committed to helping you select the ideal component products for your application. Our dedication to new product development enables us to provide innovative product solutions for our customers' most demanding application requirements.


Rexnord™ a leading Regal Rexnord™ brand, includes FlatTop Conveyor Chain and Components were designed to continuously improve productivity for customers in every application. Every chain, belt and component stamped with the Rexnord logo has undergone extensive research and quality testing, ensuring our customers' conveying needs will be met with the most efficient, reliable and sustainable means possible.

Table of Contents

Chain Photo Index	5	MatTop™ Chain	146
TableTop™ Chain	10	MatTop Ordering Guidelines.....	147
TableTop Ordering Guidelines.....	11	390 Series.....	148
279 Series.....	12	505 Series.....	150
770 Series.....	14	1000 Series.....	152
815 Series.....	16	1001 Series.....	160
820 Series.....	23	1200 Series.....	162
821 Series.....	27	1500 Series.....	168
831 Series.....	32	1625 Series.....	180
843 Series.....	36	3100 Series.....	182
845 Series.....	38	3120HYB Series.....	191
863 Series.....	40	4700 Series.....	196
879 Series.....	43	5700 Series.....	207
880 Series.....	46	5930 Series.....	218
881 Series.....	51	5990 Series.....	224
882 Series.....	56	6930 Series.....	234
883 Series.....	64	6990 Series.....	236
963 Series.....	66	6990 HYB Series.....	245
1040 Series.....	69	7700 Series.....	252
1050 Series.....	72	7956 Series.....	271
1055 Series.....	75	7960 Series.....	276
1673 Series.....	79	8500 Series.....	283
1700 Series.....	82	Rexnord™ Chain Width Table (MTW vs Standard Vs Nonstandard)	300
1701 Series.....	86	KleanTop™ Belts	301
1702 Series.....	92	KleanTop Ordering Guidelines.....	302
1755 Series.....	95	390 Series.....	303
1757 Series.....	97	505 Series.....	305
1765 Series.....	103	590 Series.....	307
1843 Series.....	106	1010 Series.....	310
1844 Series.....	111	1090 Series.....	317
1863 Series.....	112	1200 Series.....	321
1864 Series.....	114	1600 Series.....	325
1873 Series.....	117	2010 Series.....	330
1874 Series.....	126	5960 Series.....	336
2500 Series.....	132	5990 Series.....	339
2550 Series.....	134	6400 Series.....	343
2560 Series.....	136	8500 Series.....	345
3873 Series.....	138	Rexnord Belt Width Table (MTW vs Standard Vs Nonstandard)	349
8811 Series.....	141	KleanTop Sprocket and Shaftdrop Height Adjustment.....	350
		Rexnord Materials	351
		Material Index	352

TableTop™ Chain by Series

Plastic Straight Running Chains

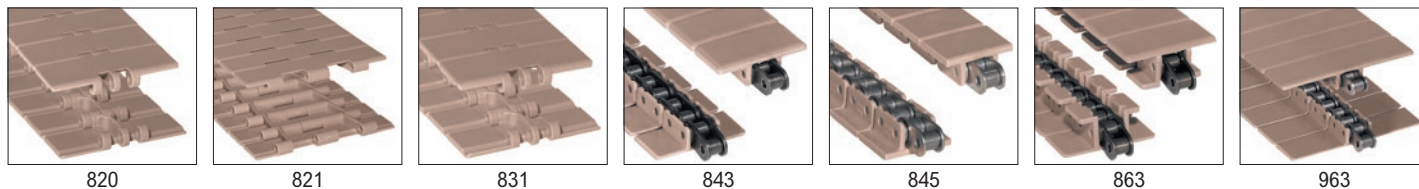

820

821

831


843

845

863

963

Plastic Side-Flexing Chains

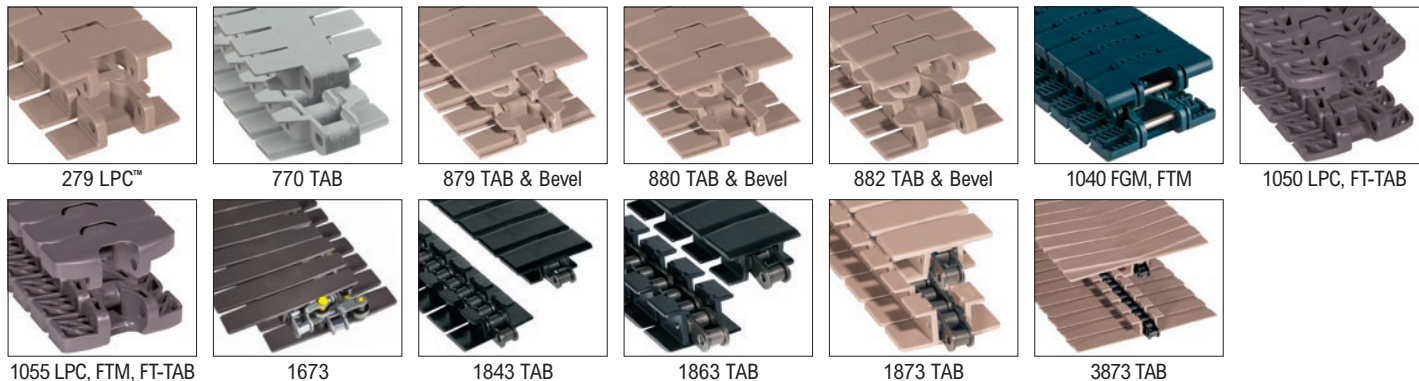

279 LPC™

770 TAB

879 TAB & Bevel

880 TAB & Bevel

882 TAB & Bevel

1040 FGM, FTM

1050 LPC, FT-TAB

1055 LPC, FTM, FT-TAB

1673


1843 TAB

1863 TAB

1873 TAB

3873 TAB

Metal Straight Running Chains

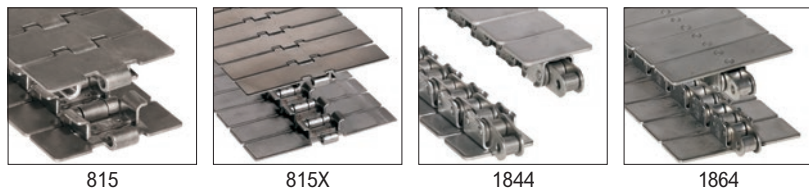


815

815X

1844

1864

Metal Side-Flexing Chains

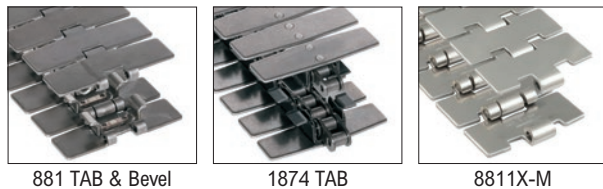


881 TAB & Bevel

1874 TAB

8811X-M

SideGrip™ Chains

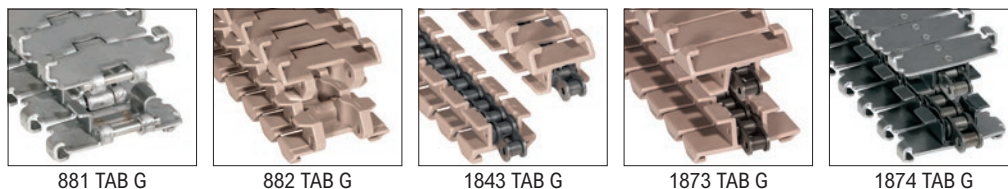

881 TAB G


882 TAB G

1843 TAB G

1873 TAB G

1874 TAB G

High Friction Chains

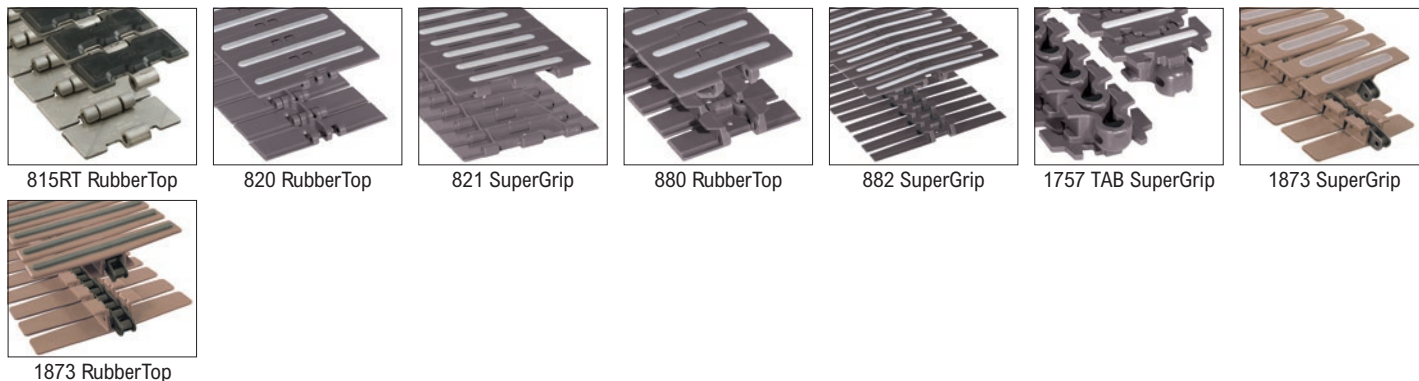

815RT RubberTop

820 RubberTop

821 SuperGrip

880 RubberTop

882 SuperGrip


1757 TAB SuperGrip

1873 SuperGrip


1873 RubberTop

TableTop™ Chain by Series


LBP Chains




821 LBP




LBP 882 TAB



LBP 883 TAB



SWH LBP




SHD LBP




HDF LBP

Other Chains




880 TAB BO

Multiflex Chains




1700




1701 TAB & Bevel



1702



1755



1757 TAB



1765 ZeroGap™



2500 TAB



2550 TAB



2565 ZeroGap


Other Chains




1700 AC



1701 TAB AC




LBP1757 TAB




1757 TAB G

MatTop™ Chain by Series


Solid Top Chains

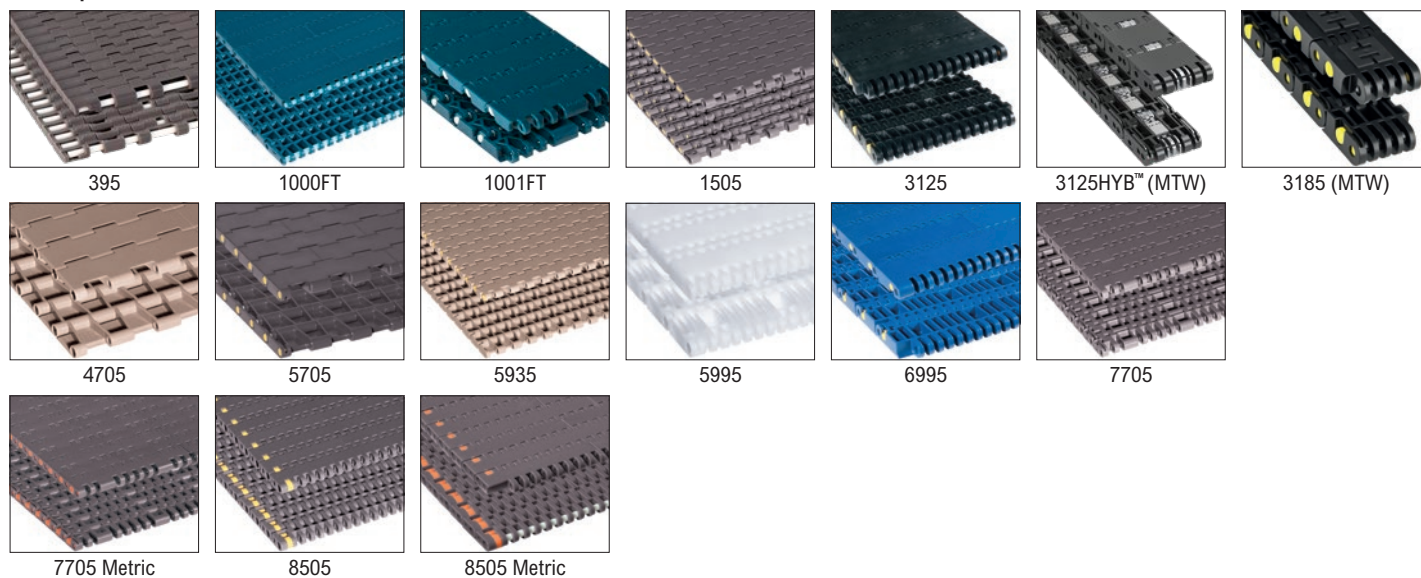


Perforated Top Chains

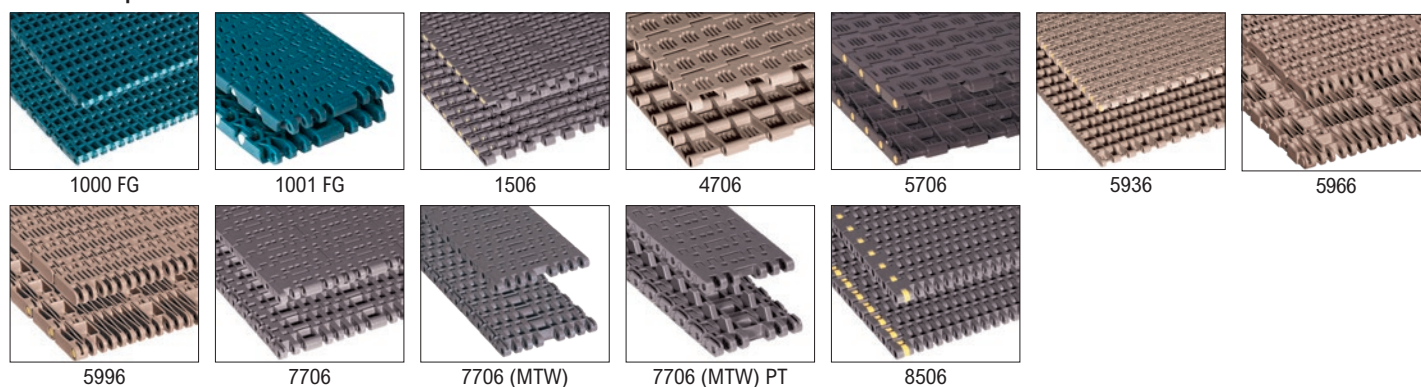


Open Area Chains

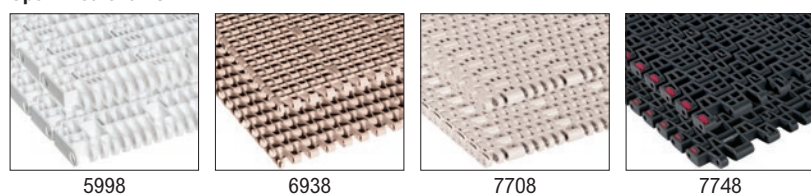

Raised Rib Chains

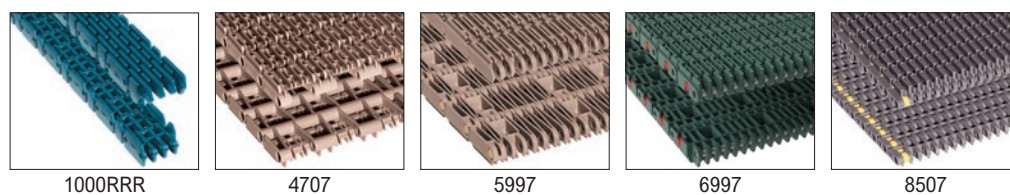


Low Backline Pressure (LBP) Chains

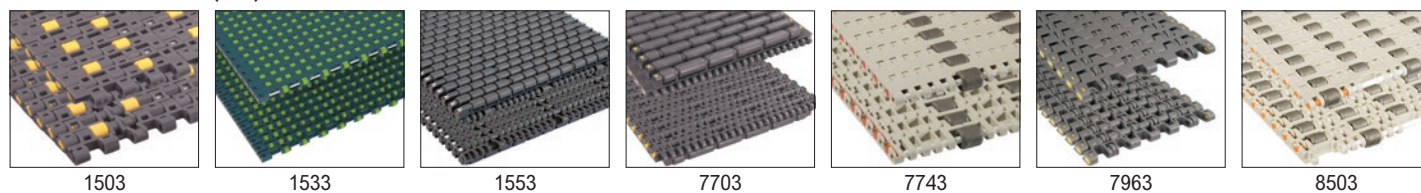

MatTop™ Chain by Series


Side-Flexing Chains

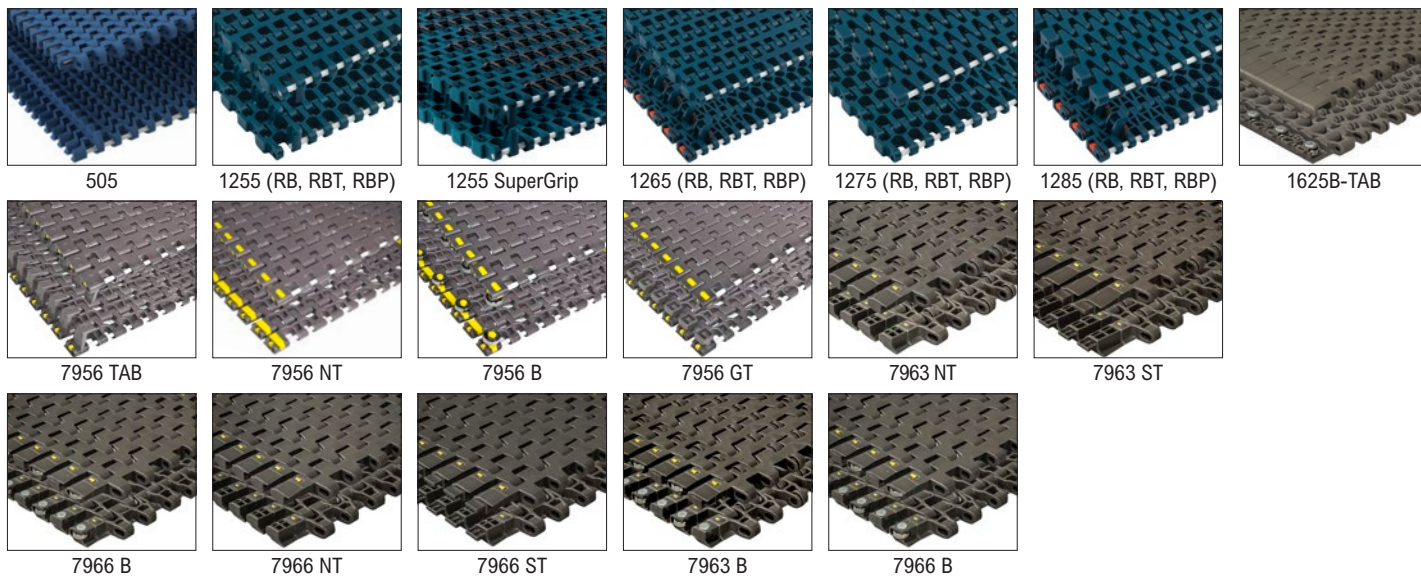


High Friction Chains



Vacuum Chains

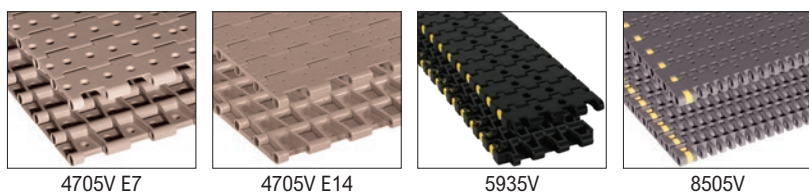


Safety Top

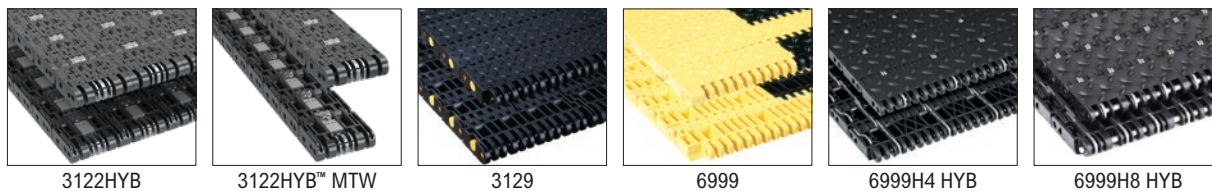


KleanTop™ Belt by Series


Solid Top Belts




395




595



1015




1095




2015


Flush Grid Belts




596




1016




1096




1654



1655




1655RT



1675




2016




5966



5998 Heavy Duty




6400




8506

Side-Flexing Belts




505




1255




1255 SuperGrip




1275




1654




1655



1655RT




1675




6400

NubTop Belts




1011




2011

Perforated NubTop Belts



1018

Plastic Spiral Cage Belts



6400



Rexnord™ TableTop™ Chain

Rexnord TableTop Chain is engineered to satisfy a wide range of conveyor applications for virtually any industry. The large selection of straight running and side-flexing chains are designed to convey flawlessly in even the most demanding environments. Chains formed from metal or molded from thermoplastic are perfect for high-strength and high-speed applications. Narrow widths are ideal for multiple-strand and variable speed conveyors. Chain with low backline pressure rollers minimizes product damage. The TableTop Chain series coupled with traditional top plates with roller base chain, increase strength and precision.

Description	Format	Example 1	Example 2	Example 3	Explanation
Chains					
Material Prefix	...	LF	HP™	LF	Chain material from chain page
Chain Description	...	963 (SS)	882 TAB	882 TAB GRIP	Chain description from chain page
Width Description	-	7.5IN	3.25IN	3.75IN	Chain width from chain page
Pusher Attachments					
Height	F...IN (MM)	-	F2IN	-	Height of pusher
Pitches Between Pushers	T...P	-	T3P	-	1 = every row, 2 = every other row, etc
Side-Indent	N...IN (MM)	-	N1IN	-	Distance from edge of chain to side of pusher
Gripper Attachments					
Gripper Style	...	-	-	D	“D” Style, “J” Style or “FJ” Style
Gripper Material	-	-	-	NEO	EPDM or Neoprene
Gripper Color	-	-	-	BLACK	Black or White
Gripper Hardness	...	-	-	40SH	40 shore, 60 shore, etc.
Sprockets					
Sprocket Description	...	N63	CI821	NS882	Sprocket description
No. of Teeth	-...T	-23T	-9T	-12T	Actual number of teeth
Bore Diameter	...IN (...MM)	1-5/8IN	1IN	30MM	Bore diameter
No. of Keyways	...KW	-	1KW	1KW	Number of keyways required
No. of Setscrews	...SS	-	2SS	-	Number of setscrews required
Bore Type	...Bore	Idler	Shaft-Ready	Shaft-Ready	Type of bore

When ordering, please use the guidelines outlined in the chart above to ensure accuracy.

Chain Guideline Examples:

LF963 SS-7.5IN is 963 chain with LF top plates on a stainless steel base chain; width of 7.5 in.

SSA1874TAB SS-3.25IN is stainless steel 874TAB top plates on a stainless steel base chain; width of 3.25 in.

SSA1864TAB S-4.5IN is stainless steel 1864TAB top plates on a steel base chain; width of 4.5 in.

HP882TAB-3.25IN F2IN T3P N1IN is HP882 TAB chain; width of 3.25 in; 2 inch high pushers every 3rd pitch indented 1in.

LF882TAB GRIP-3.75IN D NEO BK 40SH is LF882TAB 3.75 in wide SideGrip™ chain with D style neoprene black 40 shore grippers.

HP1060FTM-84MM is HP1060 FTM (FlatTop Magnetflex™) chain; width of 84 mm.

HP820 RT-6IN 1SD60 T1P is HP820 RT (RubberTop™) chain 6 in wide with solid dome 60 shore inserts every pitch.

LF1873TAB SG-7.5IN 1SGD60 T2P is LF1873TAB SG (SuperGrip) chain 7.5 in wide with SuperGrip dome 60 shore inserts every 2nd pitch.

Made-to-order materials require a 50 ft minimum order quantity.

Sprocket Guideline Examples:

NS63-23T 1-5/8IN I is a thermoplastic split NS63 series sprocket with 23 teeth and a 1-5/8 in diameter idler bore.

CI882-9T 1IN 1KW2SS is a cast iron 882 sprocket with 9 teeth, a 1 in round bore with 1 keyway and 2 setscrews.

NS882-12T 30MM KW is a thermoplastic split 882 series sprocket with 12 teeth and a 30 mm round bore with a keyway.

Split Sprocket Bore Nomenclature:

Shaft-Ready — Tight fit on the shaft with a keyway and setscrew.


Plain Bore — Same tight fit bore as a shaft-ready bore, but without keyway and setscrew.

Idler Bore — Round bore with a clearance fit (no keyway or setscrew). Designed to spin freely on the shaft.

Rough Stock Bore — Wide tolerance bore used for work in process. Not for use on any shaft. Must be further machined for actual use.

Overbore — Round bore with a slightly loose fit on the shaft with keyway but no setscrew. Designed to move laterally on the shaft during setup and still transmit torque through the keyway as a drive sprocket in the actual application. Not recommended for axial float in thermal applications.

If the chain, sprocket or accessory you require is not described within these guidelines, please contact Rexnord for more information.

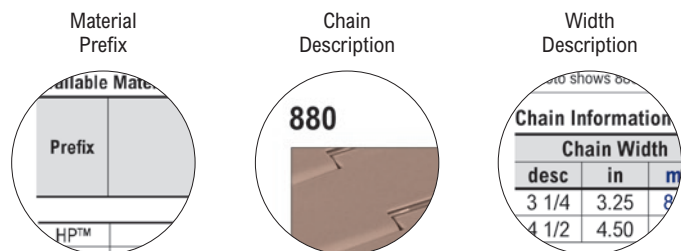

279 LPC™


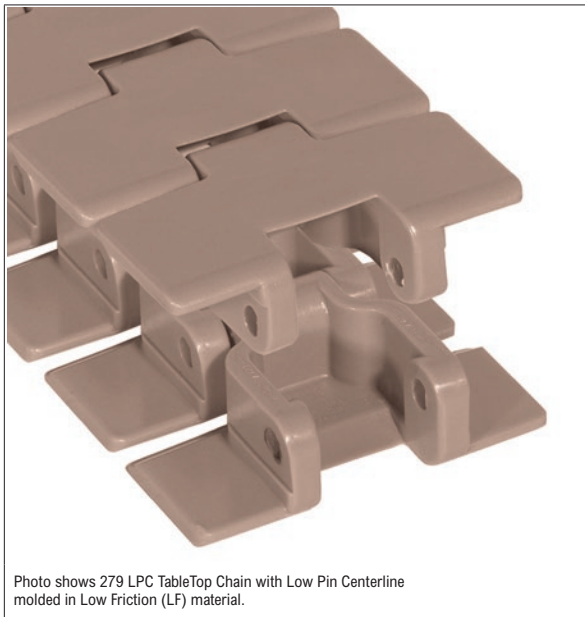


Photo shows 279 LPC TableTop Chain with Low Pin Centerline molded in Low Friction (LF) material.

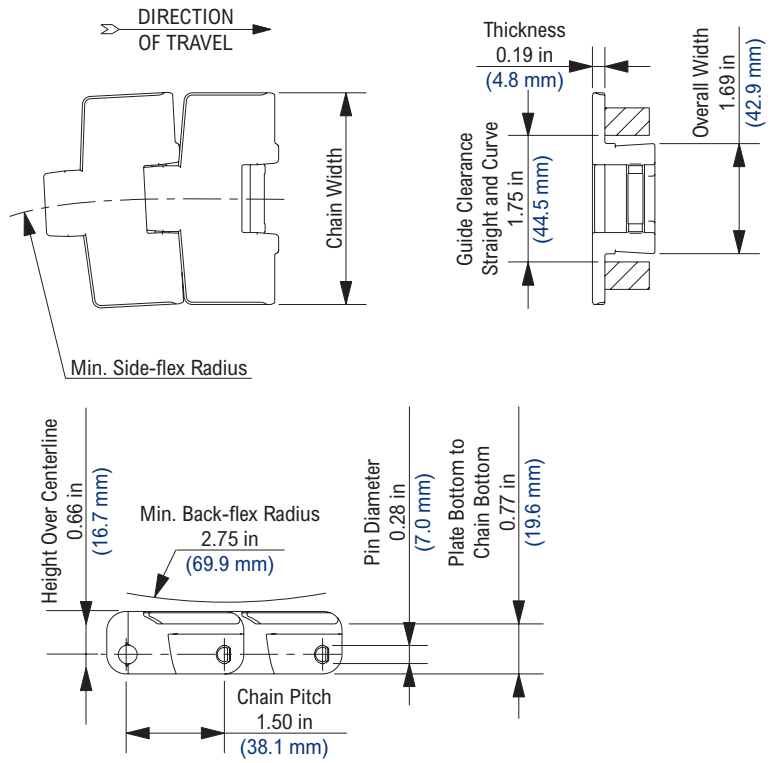

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	18.00	457.2	0.78	1.16
4 1/2	4.50	114.3	18.00	457.2	0.88	1.31
7 1/2	7.50	190.5	18.00	457.2	1.20	1.79

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Non-Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
PSX™	Platinum Series X™	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
WX	Green Abrasion Resistant Polyamide	Stainless Steel	-40	220	NR	-40	104	NR	425	1,890	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, TableTop, Platinum Series X, LPC and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 4436200, 5176247

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 80 pitch, 10 ft (3.048 m) length strands.

Thermoplastic pins are available on a made-to-order basis.


High performance (HPTM) material is offered for the 7-1/2 in (190.5 mm) width only.

Must be used with LPC corner tracks for side-flexing applications. Rexnord curves are recommended for use with these chains because they have the proper profile to maintain chain hold-down.

Low Pin Centerline (LPC) chain is retained in the corners without the use of bevels, TABs or magnets, and can be lifted vertically out of the corners for cleaning and/or maintenance.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

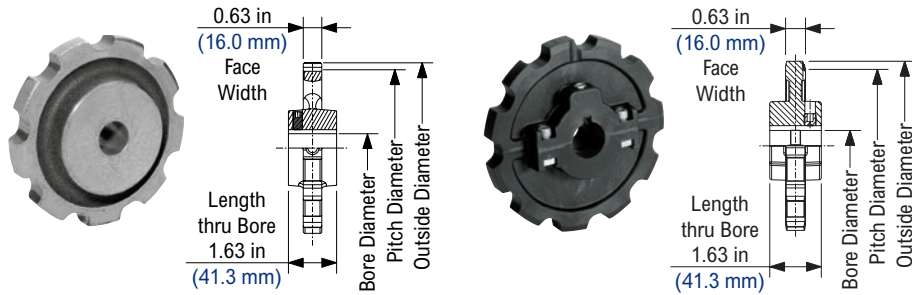

880 Cast Iron Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in		mm		in		mm		in		mm			
actual	effect	min	max	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
9	9	4.386	111.40	4.33	110.0	3/4	1 3/8	20	35	-	-	-	-	3/4	2 1/4	20	55	2.87	1.30
10	10	4.854	123.29	4.82	122.4	3/4	1 1/4	20	30	-	-	-	-	3/4	1 3/4	20	40	3.09	1.40
11	11	5.324	135.23	5.31	134.9	3/4	1 3/8	20	35	-	-	-	-	3/4	2 1/4	20	55	3.31	1.50
12	12	5.796	147.22	5.80	147.3	3/4	1 3/8	20	35	-	-	-	-	3/4	2 1/4	20	55	3.53	1.60
15	15	7.215	183.26	7.26	184.4	3/4	1 3/8	20	35	-	-	-	-	3/4	2 1/4	20	55	4.19	1.90

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

NS880 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in		mm		in		mm		in		mm			
actual	effect	min	max	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
11	11	5.324	135.23	5.30	134.6	1	1 5/8	25	40	-	-	-	-	1	1 3/4	25	45	0.66	0.30
12	12	5.796	147.22	5.80	147.3	1	1 3/4	25	45	-	-	-	-	1	1 3/4	25	45	0.82	0.37

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

770 TAB


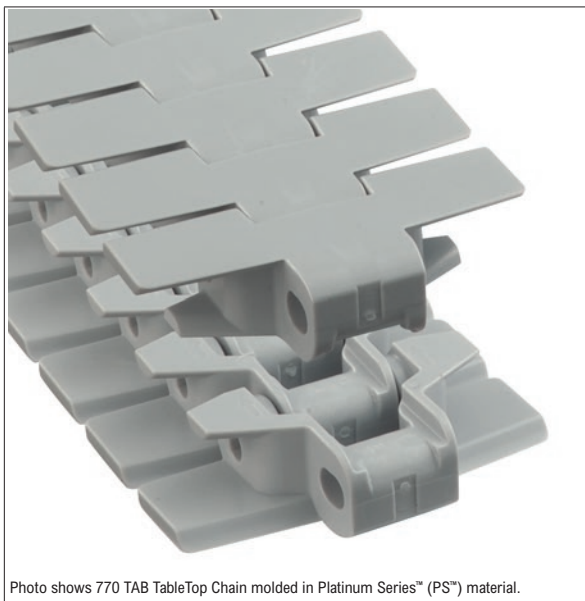


Photo shows 770 TAB TableTop Chain molded in Platinum Series™ (PS™) material.

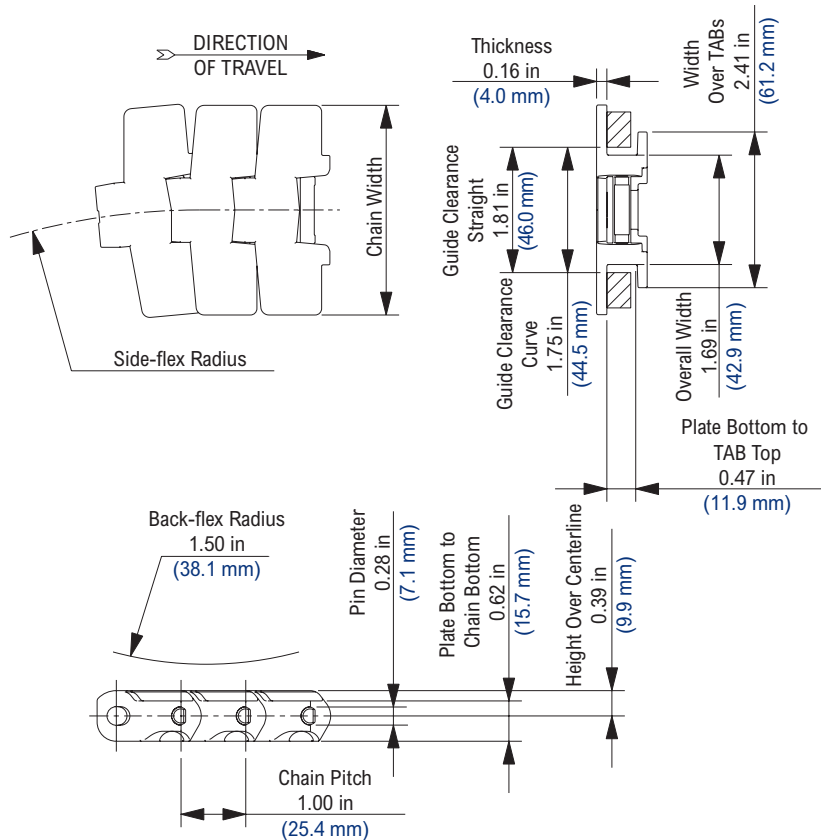

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	11.00	279.4	0.84	1.25

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
PS	Platinum Series	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
Non-Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
AS	Anti-Static	Stainless Steel	0	180	NR	-18	82	NR	255	1,134	No
HCAS	High Capacity Anti-Static	Stainless Steel	0	180	150	-18	82	66	390	1,734	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, TableTop, Platinum Series and PS are trademarks of Regal Rexnord Corporation.

All rights reserved.




Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 120 pitch, 10 ft (3.048 m) length strands.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

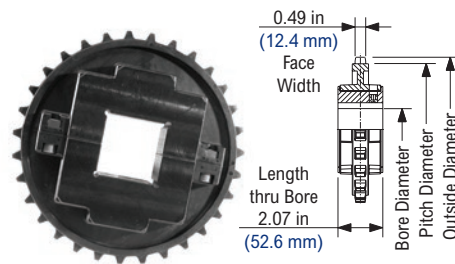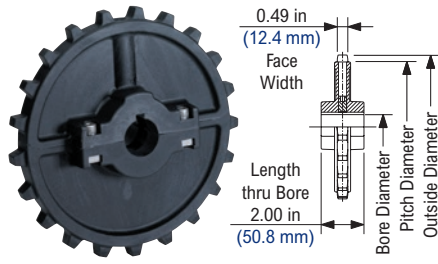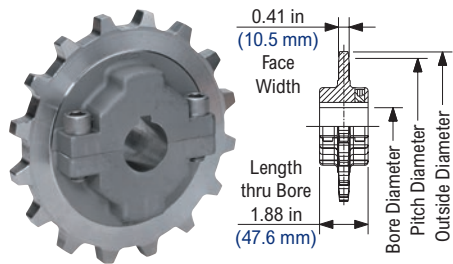

SSS7700 Stainless Steel Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
16	16	5.126	130.20	5.14	130.6	1	2	25	50	1	1	25	25	1	2	25	50	3.50	1.59
18	18	5.759	146.28	5.78	146.8	1	2	25	50	1	1	25	25	1	2	25	50	5.00	2.27
21	21	6.710	170.43	6.72	170.7	1	2 1/2	25	60	1	3 1/2*	25	90*	1	3 1/2	25	60	6.00	2.72

Shaft-ready round bore sprockets are shipped with keyway and no setscrew.

* The 3-1/2 in and 90 mm bores for the 21 tooth square bore sprocket and all round bore sprockets above 1-1/2 in (40 mm) are supplied as machined bores. All other bores are supplied with split bore adapters.

NS7700 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
16	16	5.126	130.20	5.14	130.6	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	0.73	0.33
18	18	5.759	146.28	5.78	146.8	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	0.84	0.38
21	21	6.710	170.43	6.72	170.7	1	1 5/8	25	40	3 1/2	3 1/2	90	90	1	1 5/8	25	40	0.97	0.44
31	31	9.885	251.08	9.93	252.2	2	4 1/2	50	120	2	4 1/2	50	120	2	4 1/2	50	120	3.72	1.69

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

* The 3-1/2 in and 90 mm square bore are supplied with bore adapters. 1-1/2 in and 40 mm round bore are supplied with bore adapters.

NS7700 Thermoplastic Split Sprocket with Adapter Information


Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
21	21	6.710	170.43	6.72	170.7	1 11/16	2 1/2	25	65	1	3	25	75	1 11/16	3	25	75	0.97	0.44
31	31	9.885	251.08	9.93	252.2	1	1 15/16	25	45	1	1 1/2	25	40	1	1 15/16	25	40	3.72	1.69

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

* The 3-1/2 in and 90 mm square bore are supplied with bore adapters. 1-1/2 in and 40 mm round bore are supplied with bore adapters.



Photo shows 815 TableTop Chain in Stainless Steel Austenitic (SSA) material.

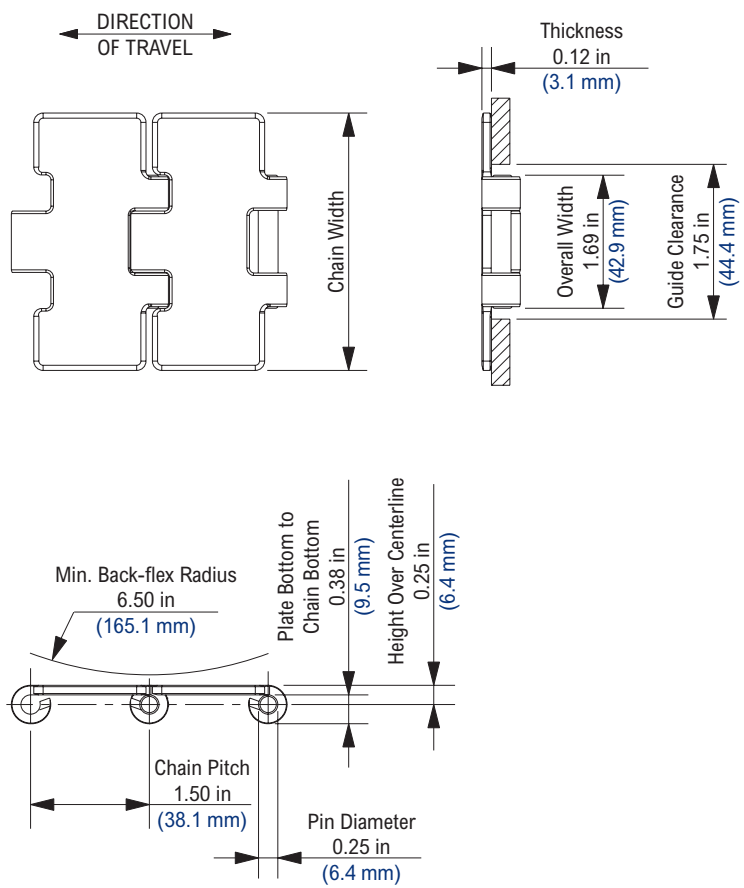

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
2 1/4	2.25	57.2	-	-	1.43	2.13
2 5/8	2.63	66.7	-	-	1.60	2.38
3 1/4	3.25	82.6	-	-	1.84	2.74
4	4.00	101.6	-	-	2.14	3.19
4 1/2	4.50	114.3	-	-	2.34	3.49
6	6.00	152.4	-	-	2.94	4.38
7 1/2	7.50	190.5	-	-	3.54	5.27

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max				
				dry	wet		dry	wet	lbs	N	
Standard Materials											
S	Carbon Steel	Carbon Steel	-40	350	NR	-40	177	NR	625	2,780	No
SSA	Stainless Steel Austenitic	Stainless Steel	-100	800	212	-73	427	100	625	2,780	Yes
SSC	Stainless Steel Ferritic	Stainless Steel	-100	800	212	-73	427	100	625	2,780	Yes
Non-Standard Materials											
SSB	Stainless Steel Low Magnetic	Stainless Steel	-100	800	212	-73	427	100	625	2,780	Yes

Regulatory Information

Based on the material chemistries, industry standards, and the documentation in the Federal Registry, it is the opinion of Rexnord that the Rexnord TableTop stainless steel chains can be considered GRAS for direct food contact. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 80 pitch, 10 ft (3.048 m) length strands. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio. This is a drop-in replacement for the 60 and 66 series.


815RT RubberTop™



Photo shows 815RT TableTop Chain in Stainless Steel Ferritic material.

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
33 1/4	3.25	82.6	-	-	1.88	2.80

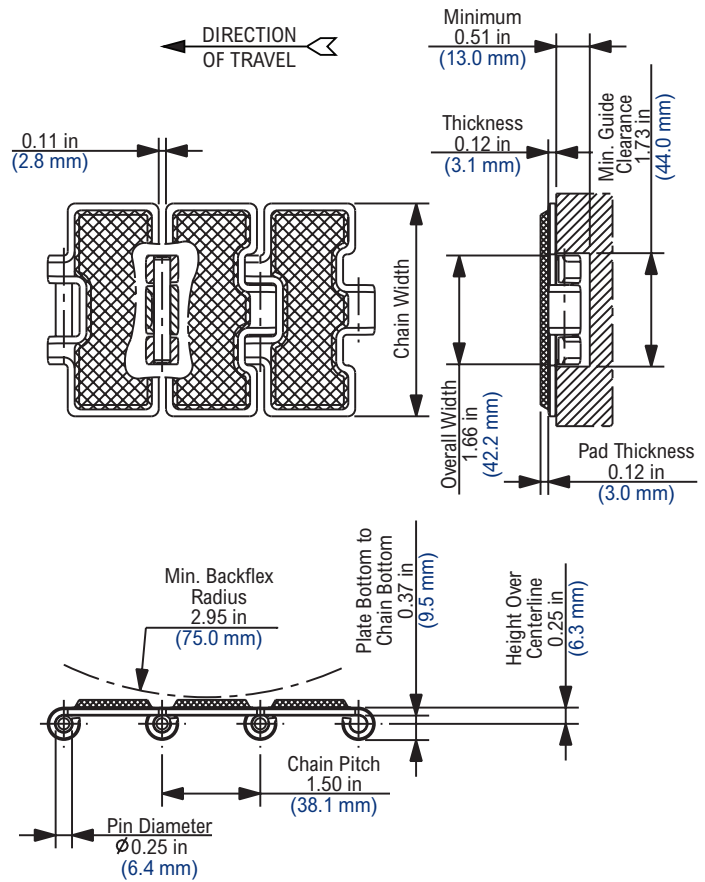

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
			dry	wet	NR	dry	wet				
Standard Materials											
SSC	Stainless Steel Ferritic	Ultra Wear Resistant SS	5	176	NR	-15	80	NR	625	2,780	No

Regulatory Information

Rexnord, RubberTop and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 7097032, 7243783

Additional Notes

Stocked in 80 pitch, 10 ft (3.048 m) length strands.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

66S31XM XHB is Part No. 10139365

This is a drop-in replacement for the 60 and 66 series.

815X Straight


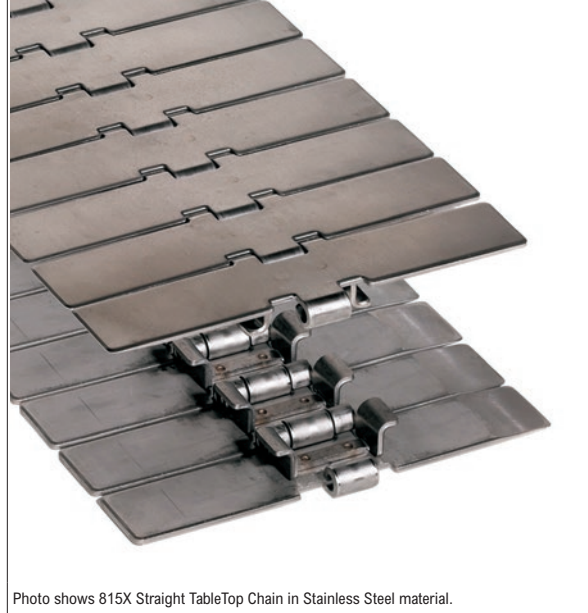


Photo shows 815X Straight TableTop Chain in Stainless Steel material.

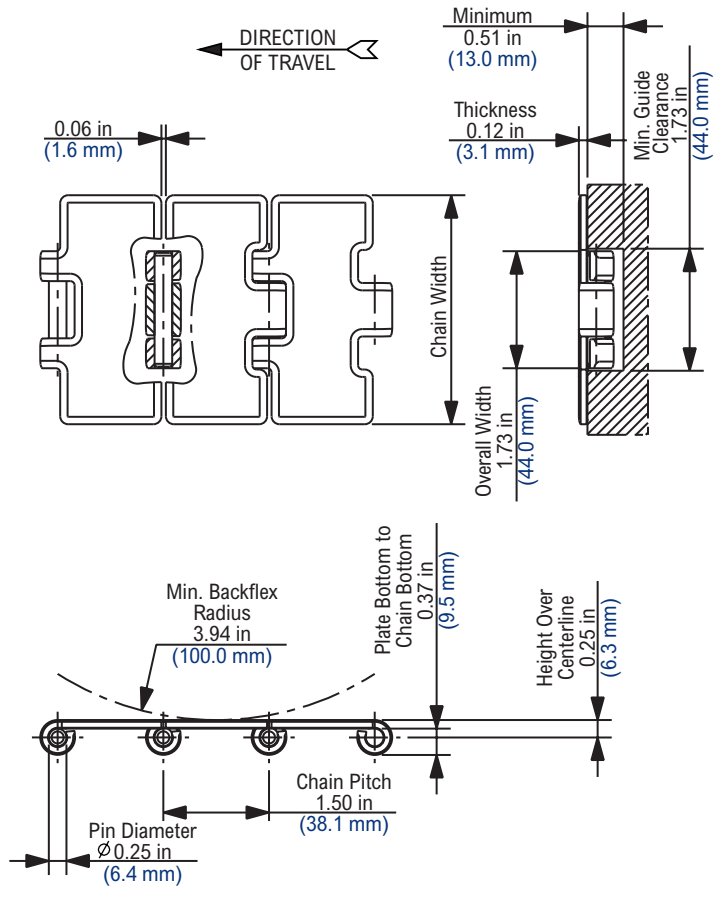

Chain Information

Chain Width		Min. Side-flex Radius		Approximate Weight		
desc	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	-	-	1.84	2.74

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
SSC	Stainless Steel Ferritic	Stainless Steel	-100	800	212	-73	427	100	625	2,780	Yes


Regulatory Information

Based on the material chemistries, industry standards, and the documentation in the Federal Registry, it is the opinion of Rexnord that the TableTop stainless steel chains can be considered GRAS for direct food contact. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.


Additional Notes

Stocked in 80 pitch, 10 ft (3.048 m) length strands. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio. 60S31XM is Part No. 10139394


815 Cast Iron Arm Body Sprocket

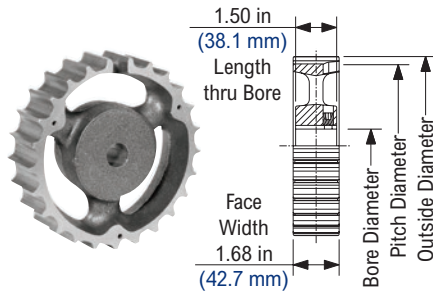

815 Cast Iron Block Body Sprocket

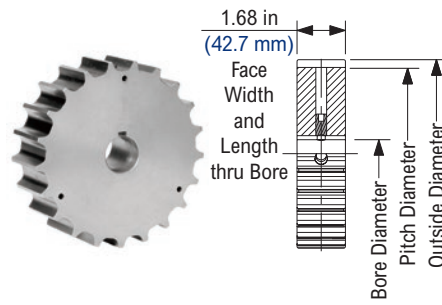

NS815 Thermoplastic Split Sprocket

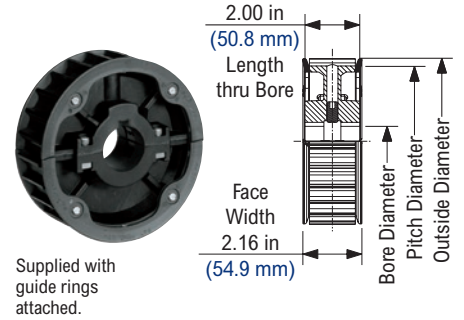

815 Cast Iron Arm Body Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)												Bore Diameter (Round)				Approximate Weight	
			Round				Square				in		mm							
			in		mm		in		mm		in		mm							
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg	
19	9 1/2	4.620	117.35	4.61	117.1	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.28	1.49	
20	10	4.854	123.29	4.86	123.4	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.81	1.73	
21	10 1/2	5.089	129.26	5.12	130.0	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	4.63	2.10	
22	11	5.324	135.23	5.35	135.9	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.12	2.32	
23	11 1/2	5.560	141.22	5.59	142.0	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.31	2.41	
24	12	5.796	147.22	5.83	148.1	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.41	2.45	
25	12 1/2	6.032	153.21	6.07	154.2	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.57	2.53	
27	13 1/2	6.504	165.20	6.56	166.6	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.50	2.95	
29	14 1/2	6.978	177.24	7.05	179.1	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.72	3.05	
31	15 1/2	7.452	189.28	7.53	191.3	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.86	3.11	
41	20 1/2	9.826	249.58	9.93	252.2	1	2 1/2	20	65	-	-	-	-	1	2 1/2	20	65	16.23	7.36	

Shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bores are shipped with metric hardware, but without setscrews.

815 Cast Iron Block Body Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)												Bore Diameter (Round)				Approximate Weight	
			Round				Square				in		mm							
			in		mm		in		mm		in		mm							
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg	
13	6 1/2	3.228	81.99	3.11	79.0	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	2.45	1.11	
15	7 1/2	3.688	93.68	3.63	92.2	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.57	1.62	
17	8 1/2	4.152	105.46	4.12	104.6	1	1 11/16	20	40	-	-	-	-	1	1 11/16	20	40	4.83	2.19	
21	10 1/2	5.089	129.26	5.12	130.0	1	2 11/16	20	70	-	-	-	-	1	2 11/16	20	70	4.63	2.10	
25	12 1/2	6.032	153.21	6.07	154.2	1	3 7/16	20	90	-	-	-	-	1	3 7/16	20	90	5.57	2.53	


Shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bores are shipped with metric hardware, but without setscrews.

NS815 Thermoplastic Split Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)												Bore Diameter (Idler)				Approximate Weight	
			Round				Square				in		mm							
			in		mm		in		mm		in		mm							
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg	
21	10 1/2	5.089	129.26	5.12	130.0	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.01	0.46	
23	11 1/2	5.560	141.22	5.59	142.0	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.19	0.54	
25	12 1/2	6.032	153.21	6.07	154.2	1	2	25	50	-	-	-	-	1	2	25	50	1.39	0.63	
27	13 1/2	6.504	165.20	6.56	166.6	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.76	0.80	


Shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with metric hardware but without setscrews. Idler bores are designed to spin freely on the shaft without keyway or setscrews.

820 Cast Iron Arm Body Sprocket

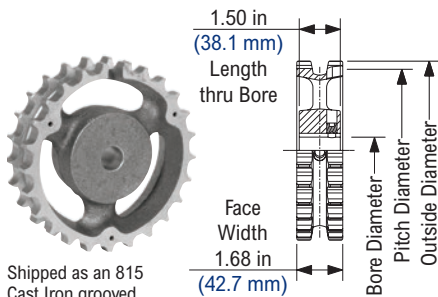


Shipped as an 815 Cast Iron grooved arm body sprocket.

820 Cast Iron Block Body Sprocket

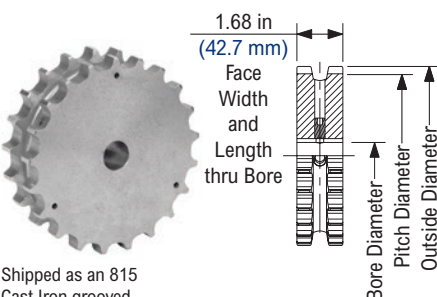

Shipped as an 815 Cast Iron grooved block body sprocket.

NS820 Thermoplastic Split Sprocket

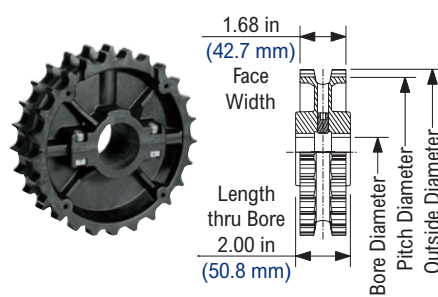

820 Cast Iron Arm Body Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)										Bore Diameter (Round)				Approximate Weight		
			Round				Square						in		mm				
			in		mm		in		mm		in		mm		min	max			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
19	9 1/2	4.620	117.35	4.61	117.1	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.28	1.49
20	10	4.854	123.29	4.86	123.4	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.81	1.73
21	10 1/2	5.089	129.26	5.12	130.0	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	4.63	2.10
22	11	5.324	135.23	5.35	135.9	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.12	2.32
23	11 1/2	5.560	141.22	5.59	142.0	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.31	2.41
24	12	5.796	147.22	5.83	148.1	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.41	2.45
25	12 1/2	6.032	153.21	6.07	154.2	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.57	2.53
27	13 1/2	6.504	165.20	6.56	166.6	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.50	2.95
29	14 1/2	6.978	177.24	7.05	179.1	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.72	3.05
31	15 1/2	7.452	189.28	7.53	191.3	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.86	3.11
41	20 1/2	9.826	249.58	9.93	252.2	1	2 1/2	20	65	-	-	-	-	1	2 1/2	20	65	16.23	7.36

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

820 Cast Iron Block Body Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)										Bore Diameter (Round)				Approximate Weight		
			Round				Square						in		mm				
			in		mm		in		mm		in		mm		min	max			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
13	6 1/2	3.228	81.99	3.11	79.0	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	2.45	1.11
15	7 1/2	3.688	93.68	3.63	92.2	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.57	1.62
17	8 1/2	4.152	105.46	4.12	104.6	1	1 11/16	20	40	-	-	-	-	1	1 11/16	20	40	4.83	2.19
21	10 1/2	5.089	129.26	5.12	130.0	1	2 11/16	20	70	-	-	-	-	1	2 11/16	20	70	4.63	2.10
25	12 1/2	6.032	153.21	6.07	154.2	1	3 7/16	20	90	-	-	-	-	1	3 7/16	20	90	5.57	2.53


Shaft-ready round bore sprockets are shipped with keyway and setscrew.

NS820 Thermoplastic Split Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)										Bore Diameter (Idler)				Approximate Weight		
			Round				Square						in		mm				
			in		mm		in		mm		in		mm		min	max			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
21	10 1/2	5.089	129.26	5.12	130.0	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.01	0.46
23	11 1/2	5.560	141.22	5.59	142.0	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.19	0.54
25	12 1/2	6.032	153.21	6.07	154.2	1	2	25	50	-	-	-	-	1	2	25	50	1.39	0.63
27	13 1/2	6.504	165.20	6.56	166.6	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.76	0.80

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

815/820 Idler Wheel

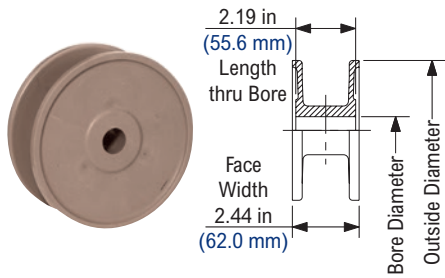

815/820 Idler Wheel Imperial Information



Equivalent Tooth Size	Outside Diameter		Imperial Bore Diameter (Idler)					Approximate Weight	
	in	mm	in					lbs	kg
21	5.11	129.8	7/8	1	1 3/16	1 1/4	1 1/2	0.49	0.22
23	5.60	142.2	7/8	1	1 3/16	1 1/4	1 1/2	0.59	0.27
25	6.09	154.7	7/8	1	1 3/16	1 1/4	1 1/2	0.66	0.30
27	6.56	166.6	-	-	-	1 1/4	-	0.70	0.32

Idler wheels are designed to spin freely on the shaft. 27 tooth idler wheel is available on a made-to-order basis and is subject to minimum order requirements.

815/820 Idler Wheel Metric Information

Equivalent Tooth Size	Outside Diameter		Metric Bore Diameter (Idler)				Approximate Weight	
	in	mm	mm				lbs	kg
21	5.11	129.8	25	30	35	40	0.49	0.22
23	5.60	142.2	25	30	35	40	0.59	0.27
25	6.09	154.7	25	30	35	40	0.66	0.30
27	6.56	166.6	-	-	1 1/4	-	0.70	0.32

Idler wheels are designed to spin freely on the shaft.

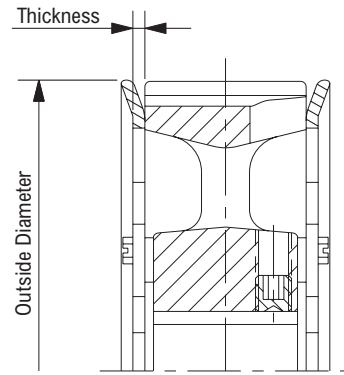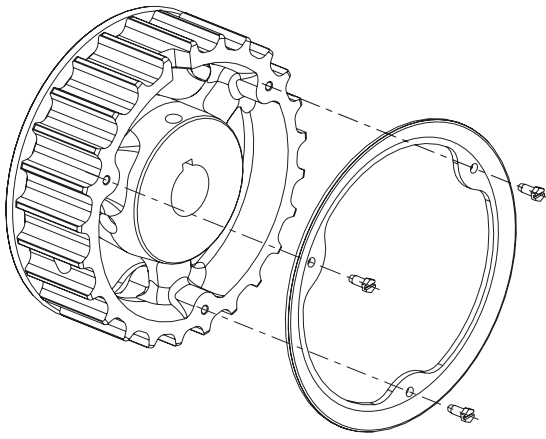

Guide Rings

Part Number		Sprocket Teeth	Outside Diameter		Thickness		Approximate Weight	
Carbon Steel	Stainless Steel		in	mm	in	mm	lbs	kg
10182845	10182847	15-16	3.62	91.9	0.06	1.5	0.23	0.10
10182849	—	17-18	4.11	104.4	0.06	1.5	0.26	0.12
10182877	10182879	19-20	4.58	116.3	0.13	3.3	0.37	0.17
10182861	10182863	21-22	5.09	129.3	0.13	3.3	0.44	0.20
10182857	10182859	23-24	5.56	141.2	0.13	3.3	0.46	0.21
10182865	10182867	25-26	6.04	153.4	0.13	3.3	0.47	0.21
10182869	10182871	27-28	6.53	165.9	0.13	3.3	0.53	0.24
10182873	10182875	29-30	7.02	178.3	0.13	3.3	0.56	0.25
10182853	10182855	31-32	7.50	190.5	0.13	3.3	0.67	0.30
10182881	10182883	41-42	9.89	251.2	0.13	3.3	0.92	0.42

One set = two guide rings and six assembly screws (Part #10025012).

For 815 and 820 Cast Iron sprockets only.


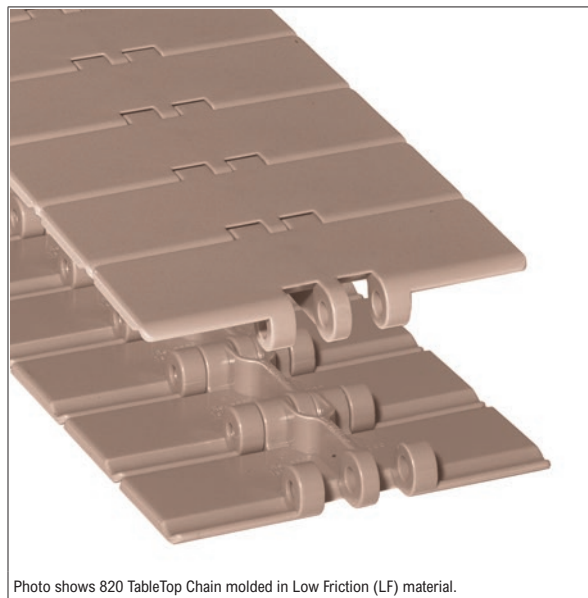


Photo shows 820 TableTop Chain molded in Low Friction (LF) material.

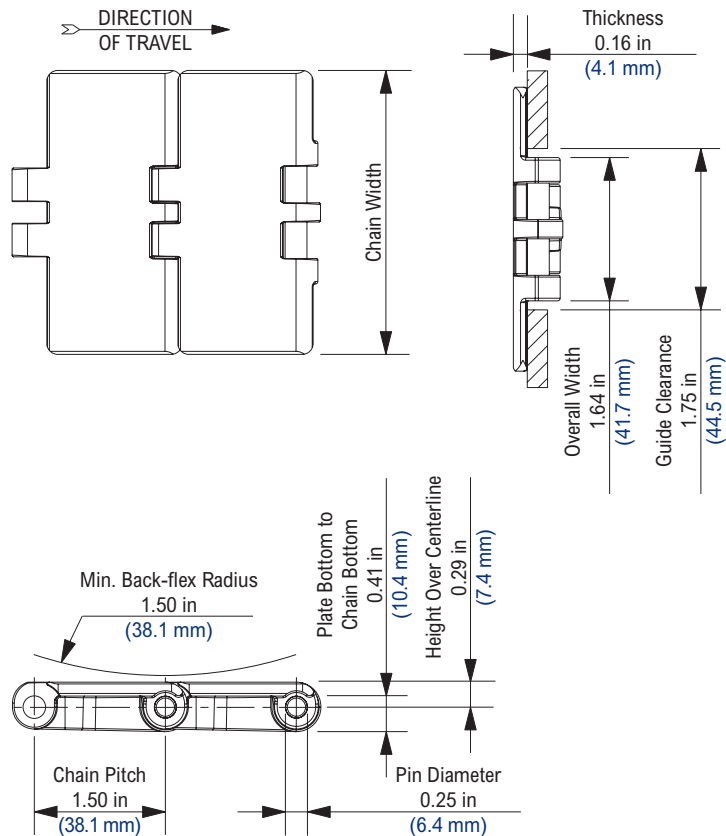

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	-	-	0.56	0.83
4	4.00	101.6	-	-	0.64	0.95
4 1/2	4.50	114.3	-	-	0.69	1.03
6	6.00	152.4	-	-	0.84	1.25
7 1/2	7.50	190.5	-	-	0.99	1.48

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max dry	max wet	min	max dry	max wet			
Standard Materials											
Dry-PT™	Dry PET Low Friction	Stainless Steel	-40	180	150	-40	82	66	365	1,624	Yes
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	365	1,624	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	365	1,624	Yes
PSX™	Platinum Series X™	Stainless Steel	-40	180	150	-40	82	66	365	1,624	Yes
Non-Standard Materials											
AS	Anti-Static	Stainless Steel	0	180	NR	-18	82	NR	219	974	No
BWR	Black Wear Resistant	Stainless Steel	-40	180	NR	-40	82	NR	438	1,948	No
CR	Extreme Chemical Resistant	Stainless Steel	40	240	212	4	116	100	292	1,299	Yes
DUV	Plain Acetal Ultraviolet Resistant	Stainless Steel	0	180	150	-18	82	66	365	1,624	No
FR	Flame Retardant	Stainless Steel	0	180	140	-18	82	60	219	974	No
HS	Heat Stabilized	Stainless Steel	-40	220	212	-40	104	100	365	1,624	No
MR	Melt Resistant	Stainless Steel	-80	220	NR	-62	104	NR	365	1,624	No
P	Chemical Resistant	Stainless Steel	0	180	140	-18	82	60	292	1,299	Yes
PS™	Platinum Series™	Stainless Steel	-40	180	150	-40	82	66	365	1,624	Yes
WHP	White High Performance	Stainless Steel	-40	180	150	-40	82	66	365	1,624	Yes
WX	Green Abrasion Resistant Polyamide	Stainless Steel	-40	220	NR	-40	104	NR	365	1,624	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.
 Rexnord, TableTop, Dry-PT, Platinum Series, Platinum Series X, PS and PSX are trademarks of Regal Rexnord Corporation.
 All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.
 Stocked in 80 pitch, 10 ft (3.048 m) length strands.
 Thermoplastic pins are available on a made-to-order basis.
 Chain strength is listed at room temperature. NR = Not Recommended.
 For additional material information, see material portfolio.

820 RubberTop™


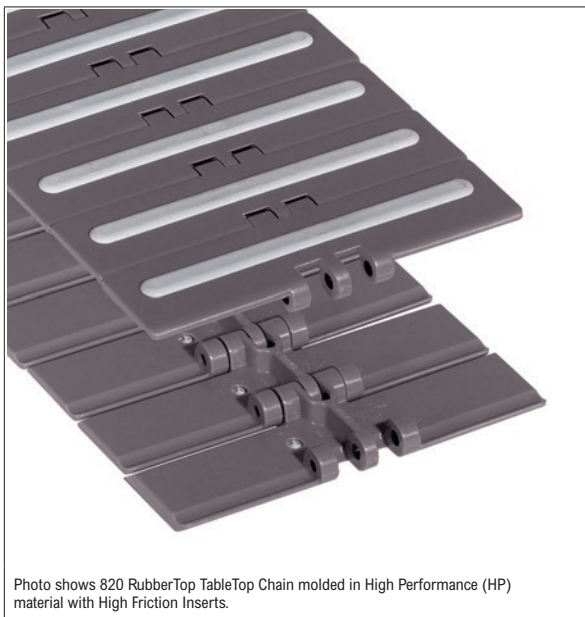


Photo shows 820 RubberTop TableTop Chain molded in High Performance (HP) material with High Friction Inserts.

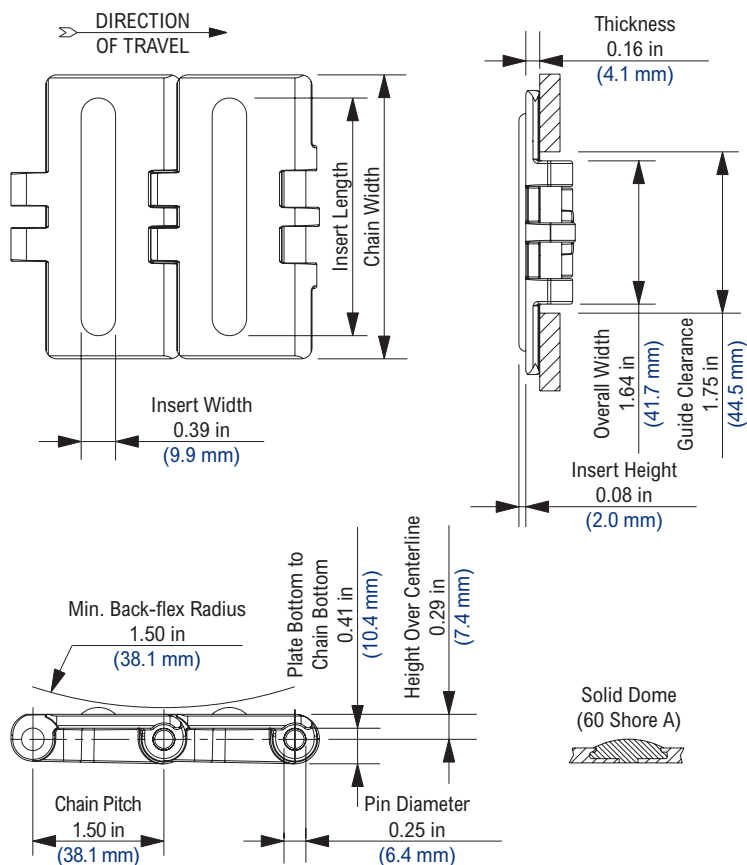

Chain Information

Chain Width		Min. Side-flex Radius		Approximate Weight		
desc	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	2.56	65.0	0.56	0.83
4 1/2	4.50	114.3	3.83	97.3	0.69	1.03
6	6.00	152.4	5.32	135.1	0.84	1.25

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	365	1,624	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	365	1,624	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Stocked in 80 pitch, 10 ft (3.048 m) length strands.


Thermoplastic pins are available on a made-to-order basis.

Inserts may be spaced every pitch, every second pitch, etc.

Chain strength is listed at room temperature. NR = Not Recommended.


For additional material information, see material portfolio.

820 Cast Iron Arm Body Sprocket

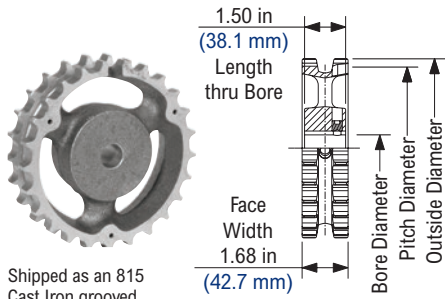


Shipped as an 815 Cast Iron grooved arm body sprocket

820 Cast Iron Block Body Sprocket

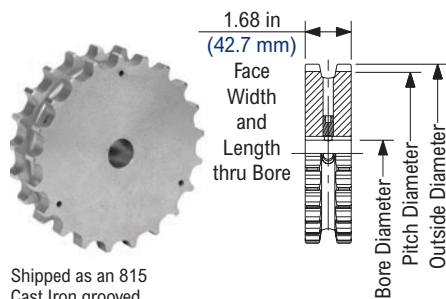

Shipped as an 815 Cast Iron grooved block body sprocket

NS820 Thermoplastic Split Sprocket

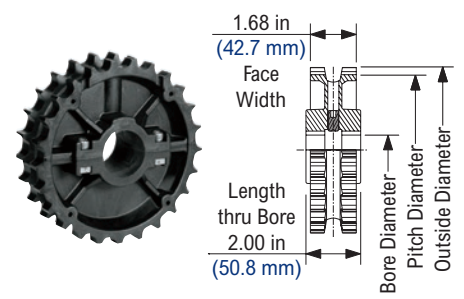

820 Cast Iron Arm Body Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
19	9 1/2	4.620	117.35	4.61	117.1	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.28	1.49
20	10	4.854	123.29	4.86	123.4	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.81	1.73
21	10 1/2	5.089	129.26	5.12	130.0	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	4.63	2.10
22	11	5.324	135.23	5.35	135.9	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.12	2.32
23	11 1/2	5.560	141.22	5.59	142.0	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.31	2.41
24	12	5.796	147.22	5.83	148.1	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.41	2.45
25	12 1/2	6.032	153.21	6.07	154.2	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.57	2.53
27	13 1/2	6.504	165.20	6.56	166.6	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.50	2.95
29	14 1/2	6.978	177.24	7.05	179.1	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.72	3.05
31	15 1/2	7.452	189.28	7.53	191.3	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.86	3.11
41	20 1/2	9.826	249.58	9.93	252.2	1	2 1/2	20	65	-	-	-	-	1	2 1/2	20	65	16.23	7.36

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

820 Cast Iron Block Body Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
13	6 1/2	3.228	81.99	3.11	79.0	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	2.45	1.11
15	7 1/2	3.688	93.68	3.63	92.2	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.57	1.62
17	8 1/2	4.152	105.46	4.12	104.6	1	1 11/16	20	40	-	-	-	-	1	1 11/16	20	40	4.83	2.19
21	10 1/2	5.089	129.26	5.12	130.0	1	2 11/16	20	70	-	-	-	-	1	2 11/16	20	70	4.63	2.10
25	12 1/2	6.032	153.21	6.07	154.2	1	3 7/16	20	90	-	-	-	-	1	3 7/16	20	90	5.57	2.53


Shaft-ready round bore sprockets are shipped with keyway and setscrew.

NS820 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
21	10 1/2	5.089	129.26	5.12	130.0	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.01	0.46
23	11 1/2	5.560	141.22	5.59	142.0	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.19	0.54
25	12 1/2	6.032	153.21	6.07	154.2	1	2	25	50	-	-	-	-	1	2	25	50	1.39	0.63
27	13 1/2	6.504	165.20	6.56	166.6	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.76	0.80

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

815/820 Idler Wheel

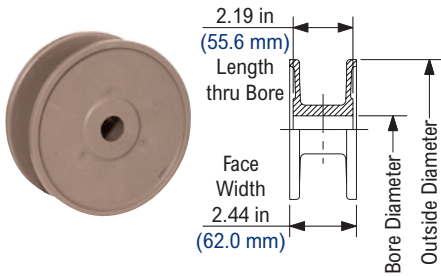

815/820 Idler Wheel Imperial Information

Equivalent Tooth Size	Outside Diameter		Imperial Bore Diameter (Idler)					Approximate Weight	
	in	mm	in					lbs	kg
21	5.11	129.8	7/8	1	1 3/16	1 1/4	1 1/2	0.49	0.22
23	5.60	142.2	7/8	1	1 3/16	1 1/4	1 1/2	0.59	0.27
25	6.09	154.7	7/8	1	1 3/16	1 1/4	1 1/2	0.66	0.30
27	6.56	166.6	-	-	-	1 1/4	-	0.70	0.32

Idler wheels are designed to spin freely on the shaft. 27 tooth idler wheel is available on a made-to-order basis and is subject to minimum order requirements.

815/820 Idler Wheel Metric Information

Equivalent Tooth Size	Outside Diameter		Metric Bore Diameter (Idler)				Approximate Weight	
	in	mm	mm				lbs	kg
21	5.11	129.8	25	30	35	40	0.49	0.22
23	5.60	142.2	25	30	35	40	0.59	0.27
25	6.09	154.7	25	30	35	40	0.66	0.30

Idler wheels are designed to spin freely on the shaft.


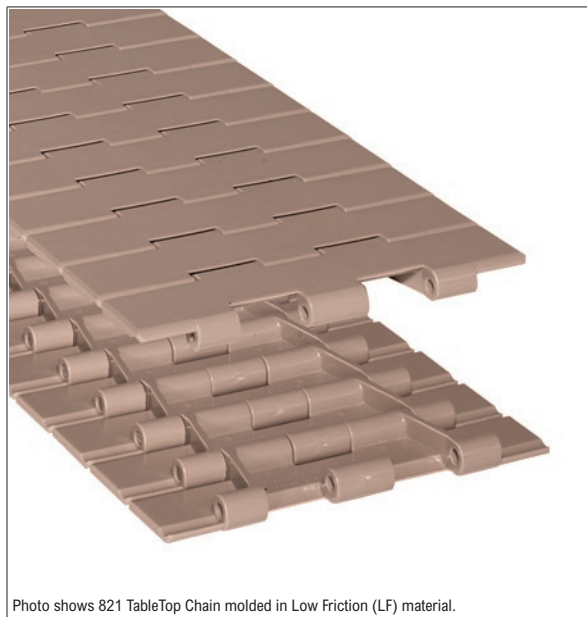


Photo shows 821 TableTop Chain molded in Low Friction (LF) material.

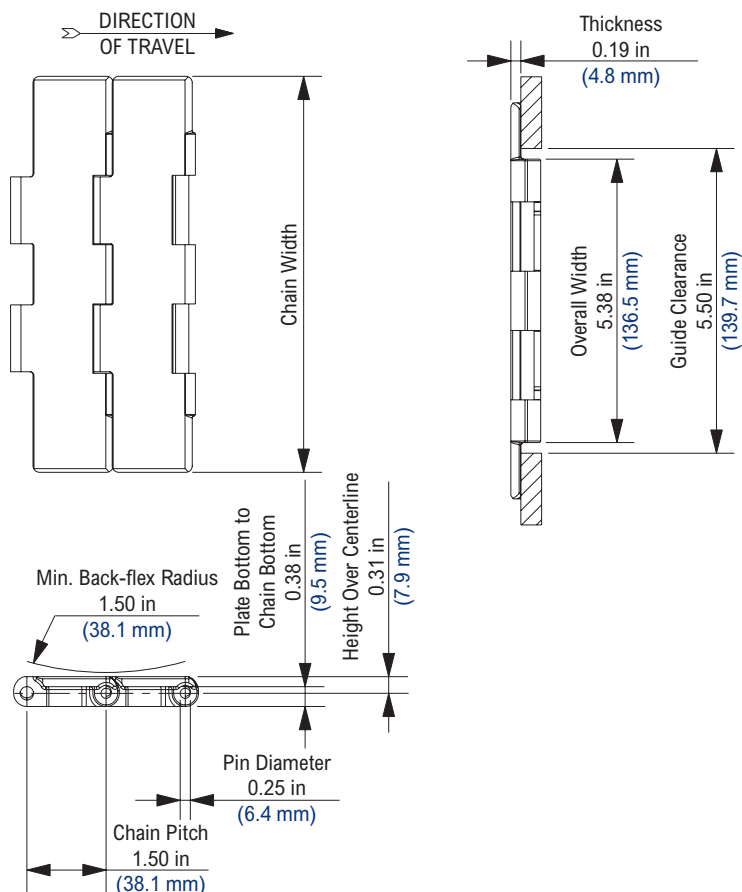

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
7 1/2	7.50	190.5	-	-	1.70	2.53
10	10.00	254.0	-	-	2.00	2.98
12	12.00	304.8	-	-	2.20	3.28

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
			dry	wet		dry	wet				
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
Non-Standard Materials											
AS	Anti-Static	Stainless Steel	0	180	NR	-18	82	NR	375	1,668	No
BWR	Black Wear Resistant	Stainless Steel	-40	180	NR	-40	82	NR	750	3,336	No
PSX™	Platinum Series X™	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
WHP	White High Performance	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
WX	Green Abrasion Resistant Polyamide	Stainless Steel	-40	220	NR	-40	104	NR	625	2,780	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, TableTop, Platinum Series X and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 80 pitch, 10 ft (3.048 m) length strands.

Thermoplastic pins are available on a made-to-order basis.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

821 SuperGrip


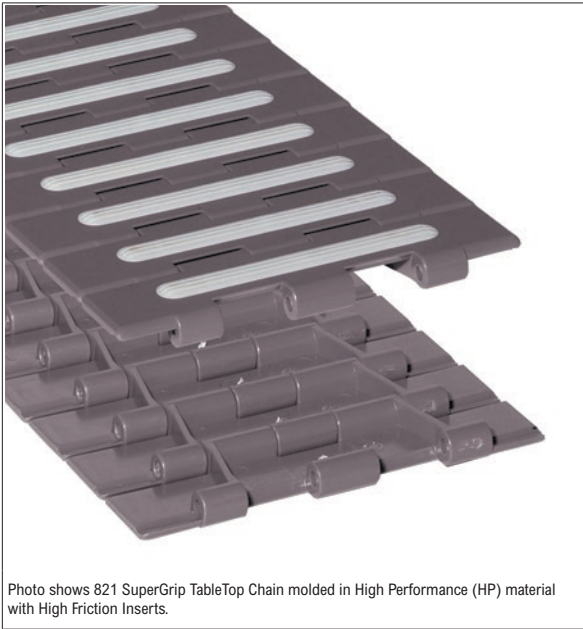


Photo shows 821 SuperGrip TableTop Chain molded in High Performance (HP) material with High Friction Inserts.

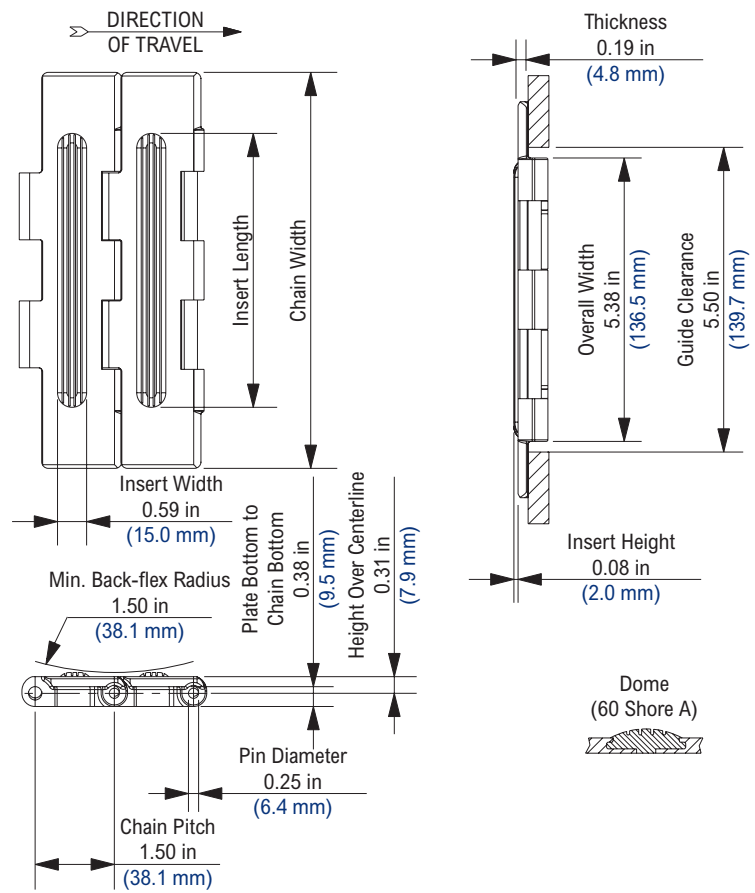

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
7 1/2	7.50	190.5	5.20	132.1	1.70	2.53
10	10.00	254.0	7.68	195.1	2.00	2.98
12	12.00	304.8	9.65	245.1	2.20	3.28

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 80 pitch, 10 ft (3.048 m) length strands.

Thermoplastic pins are available on a made-to-order basis.

Inserts may be spaced every pitch, every second pitch, etc.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

821 LBP


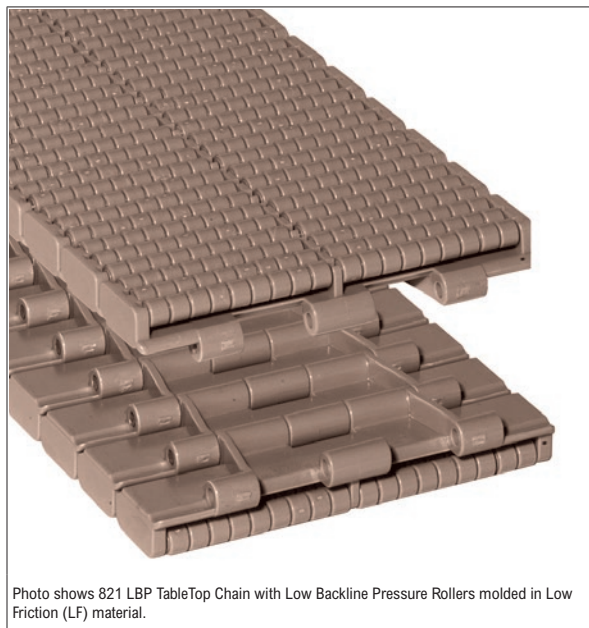


Photo shows 821 LBP TableTop Chain with Low Backline Pressure Rollers molded in Low Friction (LF) material.

Chain Information

Chain Width	Min. Side-flex Radius		Approximate Weight			
	desc	in	mm	lbs/ft	kg/m	
7 1/2	7.50	190.5	-	-	4.10	6.11

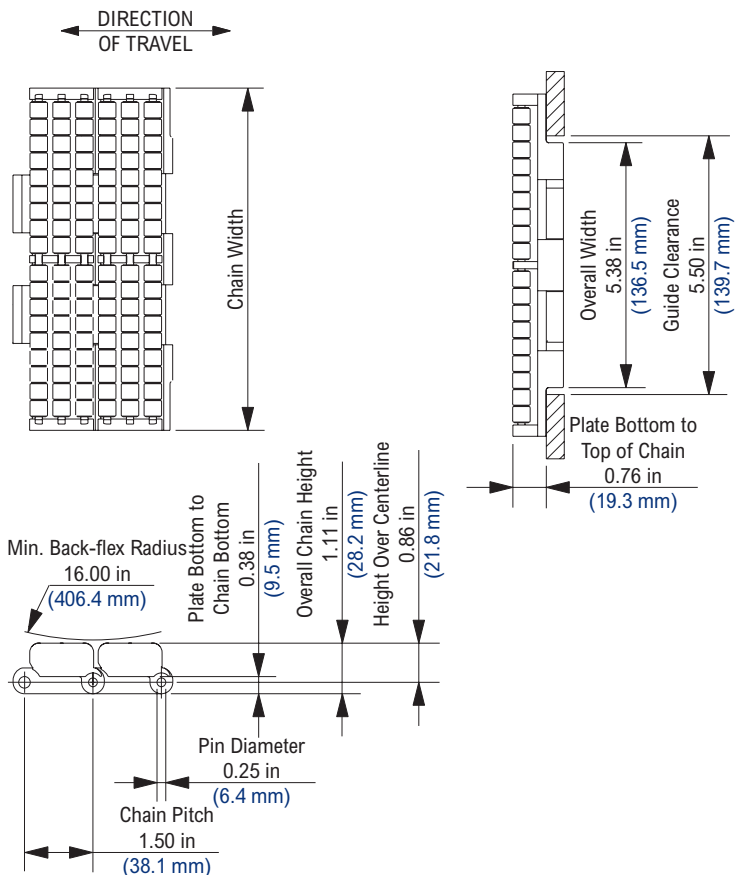

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
Non-Standard Materials											
CR	Extreme Chemical Resistant	Stainless Steel	40	240	212	4	116	100	500	2,224	Yes
P	Chemical Resistant	Stainless Steel	0	180	140	-18	82	60	500	2,224	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 4909380, 5096050, 533045, 4436200

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 80 pitch, 10 ft (3.048 m) length strands.

Low friction (LF) material is stocked in 7-1/2 (190.5 mm) width only.

Chemical resistant (P) and extreme chemical resistant (CR) materials are available for the 7-1/2 (190.5 mm) only.

Typical coefficient of friction between chain and product = 0.07.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

SWH LBP


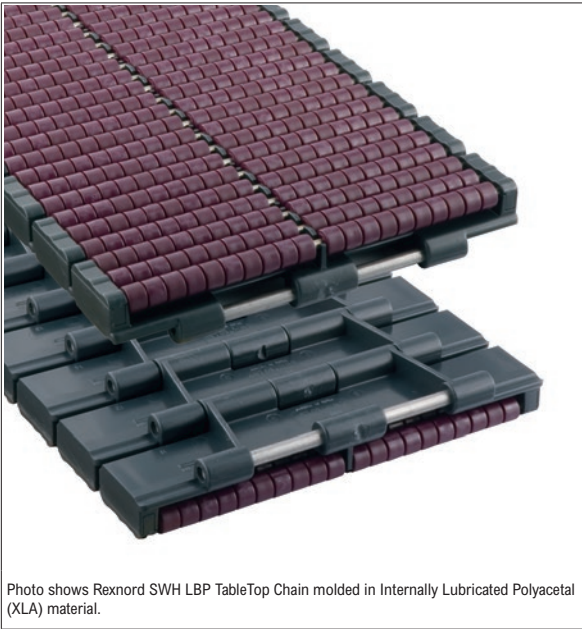


Photo shows Rexnord SWH LBP TableTop Chain molded in Internally Lubricated Polyacetal (XLA) material.

Chain Information

Chain Width	Min. Side-flex Radius		Approximate Weight			
	desc	in	mm	in	mm	lbs/ft
7 1/2	7.50	190.5	-	-	3.56	5.30
10	10.00	254.0	-	-	4.44	6.62
12	12.00	304.8	-	-	5.28	7.87

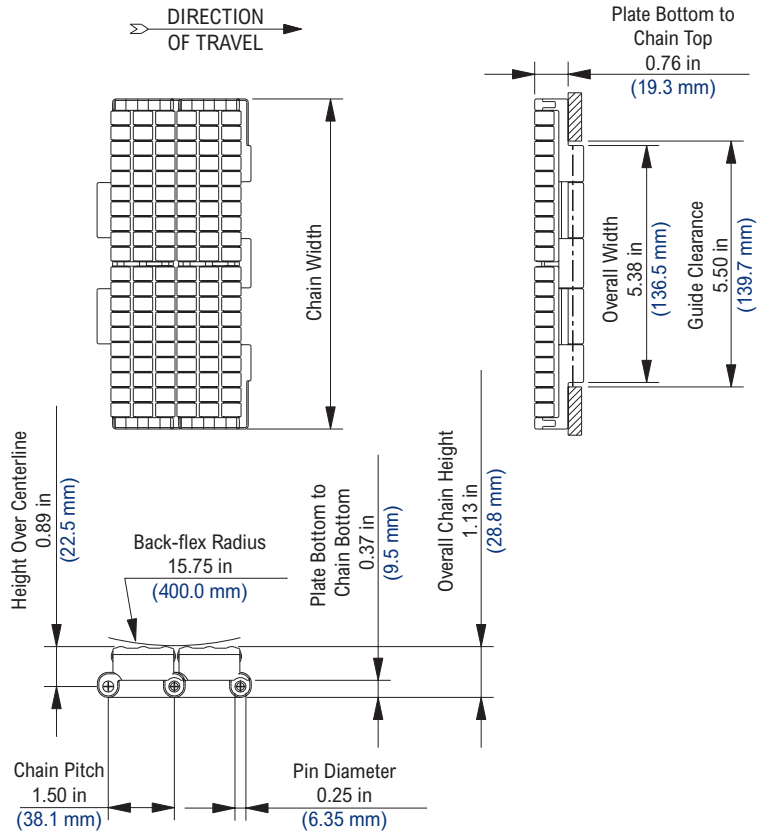

Available Materials



Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
	dry	wet		dry	wet		dry	wet			
Standard Materials											
XLA	Internally Lubricated Polyacetal	Stainless Steel	-40	180	150	-40	82	66	600	2,669	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Stocked in 40 pitch, 5 ft (1.524 m) length strands. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

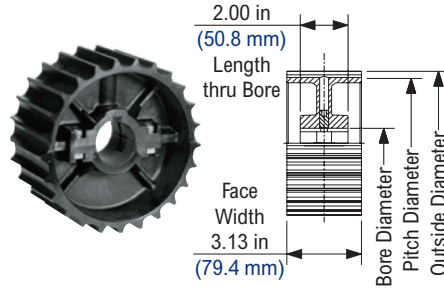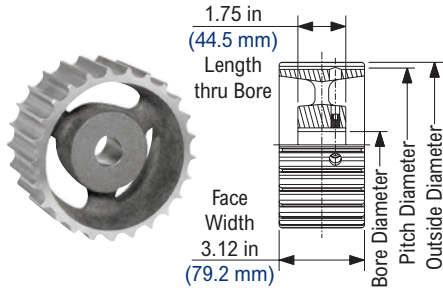

821 Cast Iron Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	in	mm	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
21	10 1/2	5.089	129.26	5.12	130.0	1	1 1/2	30	40	-	-	-	-	1	1 3/4	25	45	6.70	3.04
23	11 1/2	5.560	141.22	5.59	142.0	1	1 1/2	30	40	-	-	-	-	1	1 3/4	25	45	7.00	3.18
25	12 1/2	6.032	153.21	6.07	154.2	1	1 5/8	30	40	-	-	-	-	1	1 3/4	25	45	7.30	3.31
27	13 1/2	6.504	165.20	6.56	166.6	1	1 1/2	25	40	-	-	-	-	1	1 3/4	25	45	7.60	3.45

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

NS821 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	in	mm	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
21	10 1/2	5.089	129.26	5.12	130.0	1	1 1/2	25	40	-	-	-	-	1	1 5/8	25	40	2.27	1.03
25	12 1/2	6.032	153.21	6.07	154.2	1	1 1/2	25	40	-	-	-	-	1	1 5/8	25	40	3.22	1.46

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.


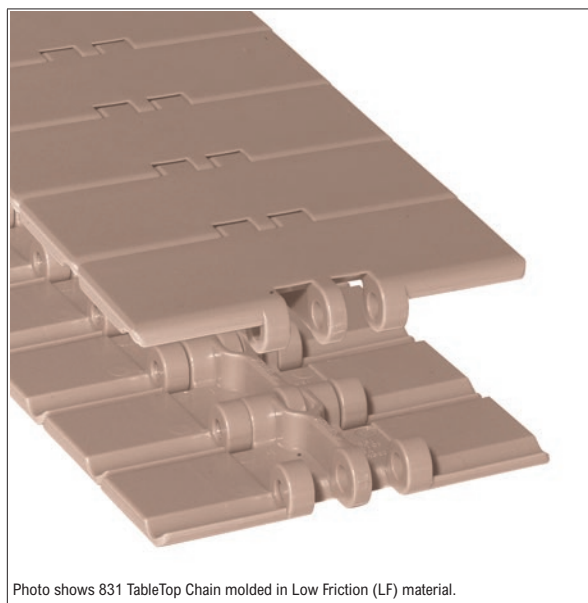


Photo shows 831 TableTop Chain molded in Low Friction (LF) material.

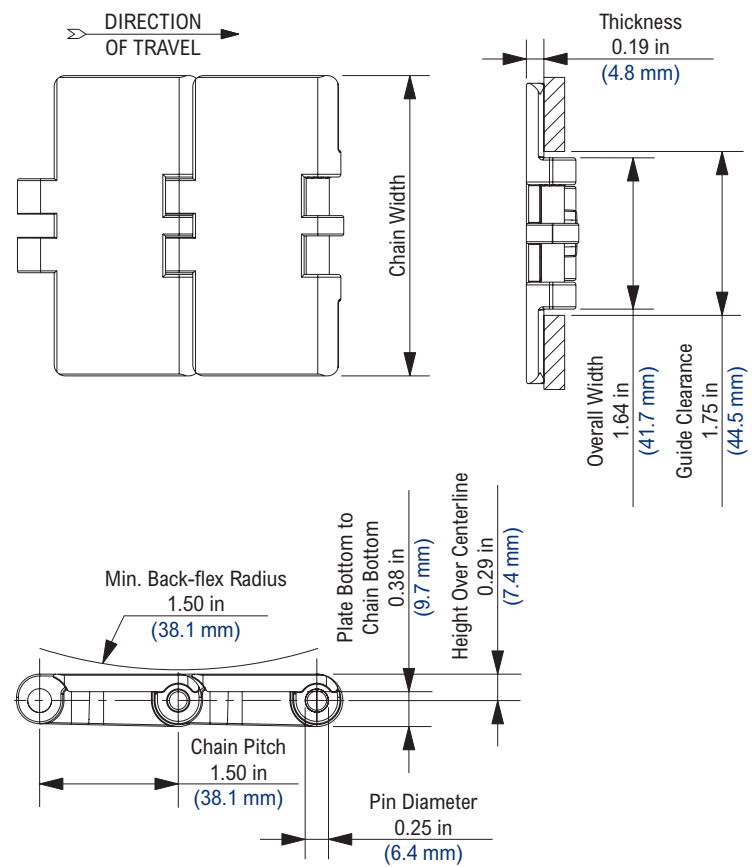

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	-	-	0.61	0.91
4 1/2	4.50	114.3	-	-	0.75	1.12
7 1/2	7.50	190.5	-	-	1.08	1.61

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	365	1,624	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	365	1,624	Yes
PSX™	Platinum Series X™	Stainless Steel	-40	180	150	-40	82	66	365	1,624	Yes
Non-Standard Materials											
AS	Anti-Static	Stainless Steel	0	180	NR	-18	82	NR	219	974	No
BWR	Black Wear Resistant	Stainless Steel	-40	180	NR	-40	82	NR	438	1,948	No
Dry-PT™	Dry PET Low Friction	Stainless Steel	-40	180	150	-40	82	66	365	1,624	Yes
P	Chemical Resistant	Stainless Steel	0	180	140	-18	82	60	292	1,299	Yes
PS®	Platinum Series™	Stainless Steel	-40	180	150	-40	82	66	365	1,624	Yes
WX	Green Abrasion Resistant Polyamide	Stainless Steel	-40	220	NR	-40	104	NR	365	1,624	No
HS	Heat Stabilized	Stainless Steel	-40	220	212	-40	104	100	365	1,624	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, Dry-PT, Platinum Series, Platinum Series X, PS and PSX are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 80 pitch, 10 ft (3.048 m) length strands. Thermoplastic pins are available on a made-to-order basis. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

SHD LBP


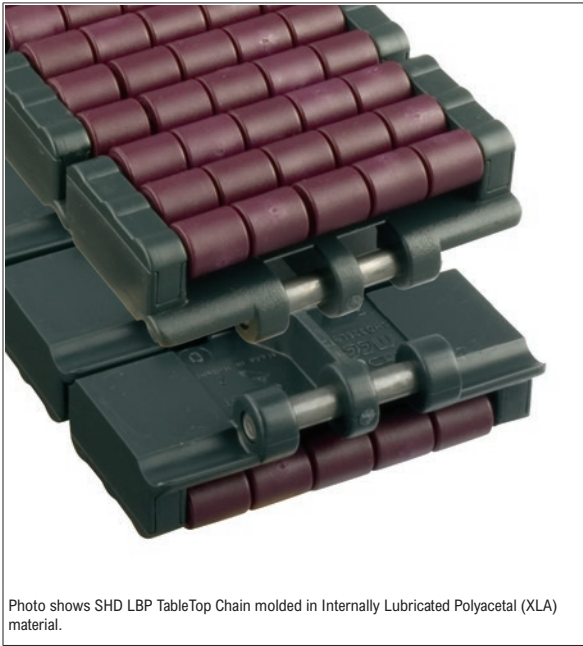


Photo shows SHD LBP TableTop Chain molded in Internally Lubricated Polyacetal (XLA) material.

Chain Information

Chain Width			Min. Side-flex Radius		Approximate Weight	
desc	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	-	-	1.48	2.21

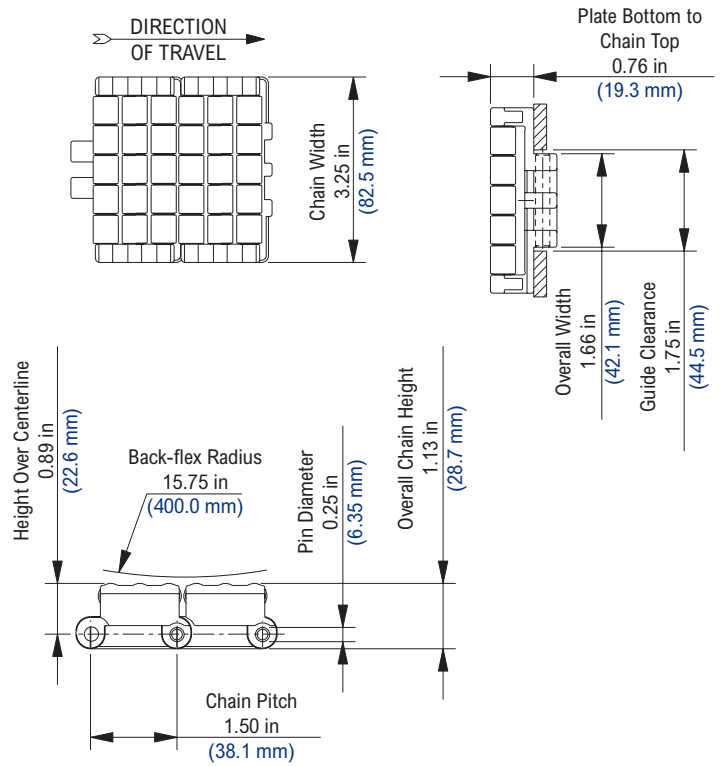

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
XLA	Internally Lubricated Polyacetal	Stainless Steel	-40	180	150	-40	82	66	365	1,624	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Regnord and TableTop are trademarks of Regal Regnord Corporation.

All rights reserved.

Additional Notes


Stocked in 40 pitch, 5 ft (1.524 m) length strands.

Thermoplastic pins are available on a made-to-order basis.

Chain strength is listed at room temperature. NR = Not Recommended.


For additional material information, see material portfolio.

820 Cast Iron Arm Body Sprocket

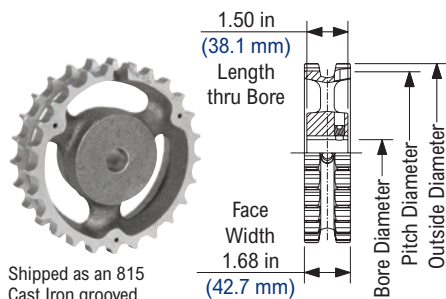


Shipped as an 815 Cast Iron grooved arm body sprocket

820 Cast Iron Block Body Sprocket

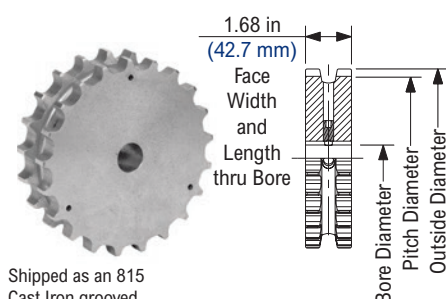

Shipped as an 815 Cast Iron grooved block body sprocket

NS820 Thermoplastic Split Sprocket

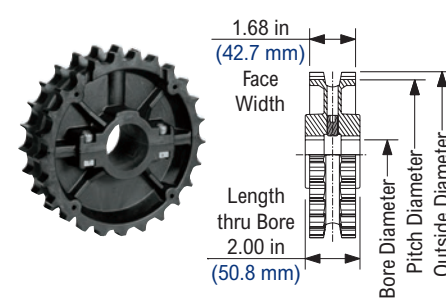

820 Cast Iron Arm Body Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)										Bore Diameter (Round)				Approximate Weight		
			Round				Square						in		mm				
			in		mm		in		mm		in		mm		min	max			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
19	9 1/2	4.622	117.40	4.61	117.1	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.28	1.49
20	10	4.854	123.29	4.86	123.4	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.81	1.73
21	10 1/2	5.089	129.26	5.12	130.0	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	4.63	2.10
22	11	5.324	135.23	5.35	135.9	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.12	2.32
23	11 1/2	5.560	141.22	5.59	142.0	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.31	2.41
24	12	5.796	147.22	5.83	148.1	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.41	2.45
25	12 1/2	6.032	153.21	6.07	154.2	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.57	2.53
27	13 1/2	6.504	165.20	6.56	166.6	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.50	2.95
29	14 1/2	6.978	177.24	7.05	179.1	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.72	3.05
31	15 1/2	7.452	189.28	7.53	191.3	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.86	3.11
41	20 1/2	9.826	249.58	9.93	252.2	1	2 1/2	20	65	-	-	-	-	1	2 1/2	20	65	16.23	7.36

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

820 Cast Iron Block Body Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)										Bore Diameter (Round)				Approximate Weight		
			Round				Square						in		mm				
			in		mm		in		mm		in		mm		min	max			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
13	6 1/2	3.228	81.99	3.11	79.0	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	2.45	1.11
15	7 1/2	3.688	93.68	3.63	92.2	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.57	1.62
17	8 1/2	4.152	105.46	4.12	104.6	1	1 11/16	20	40	-	-	-	-	1	1 11/16	20	40	4.83	2.19
21	10 1/2	5.089	129.26	5.12	130.0	1	2 11/16	20	70	-	-	-	-	1	2 11/16	20	70	4.63	2.10
25	12 1/2	6.032	153.21	6.07	154.2	1	3 7/16	20	90	-	-	-	-	1	3 7/16	20	90	5.57	2.53


Shaft-ready round bore sprockets are shipped with keyway and setscrew.

NS820 Thermoplastic Split Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)										Bore Diameter (Idler)				Approximate Weight		
			Round				Square						in		mm				
			in		mm		in		mm		in		mm		min	max			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
21	10 1/2	5.089	129.26	5.12	130.0	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.01	0.46
23	11 1/2	5.560	141.22	5.59	142.0	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.19	0.54
25	12 1/2	6.032	153.21	6.07	154.2	1	2	25	50	-	-	-	-	1	2	25	50	1.39	0.63
27	13 1/2	6.504	165.20	6.56	166.6	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.76	0.80

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

815/820 Idler Wheel

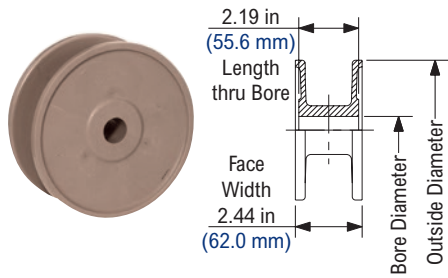

815/820 Idler Wheel Imperial Information

Equivalent Tooth Size	Outside Diameter		Imperial Bore Diameter (Idler)					Approximate Weight	
	in	mm	in					lbs	kg
21	5.11	129.8	7/8	1	1 3/16	1 1/4	1 1/2	0.49	0.22
23	5.60	142.2	7/8	1	1 3/16	1 1/4	1 1/2	0.59	0.27
25	6.09	154.7	7/8	1	1 3/16	1 1/4	1 1/2	0.66	0.30
27	6.56	166.6	-	-	-	1 1/4	-	0.70	0.32



Idler wheels are designed to spin freely on the shaft. 27 tooth idler wheel is available on a made-to-order basis and is subject to minimum order requirements.

815/820 Idler Wheel Metric Information

Equivalent Tooth Size	Outside Diameter		Metric Bore Diameter (Idler)				Approximate Weight	
	in	mm	mm				lbs	kg
21	5.11	129.8	25	30	35	40	0.49	0.22
23	5.60	142.2	25	30	35	40	0.59	0.27
25	6.09	154.7	25	30	35	40	0.66	0.30

Idler wheels are designed to spin freely on the shaft.

843 (S)

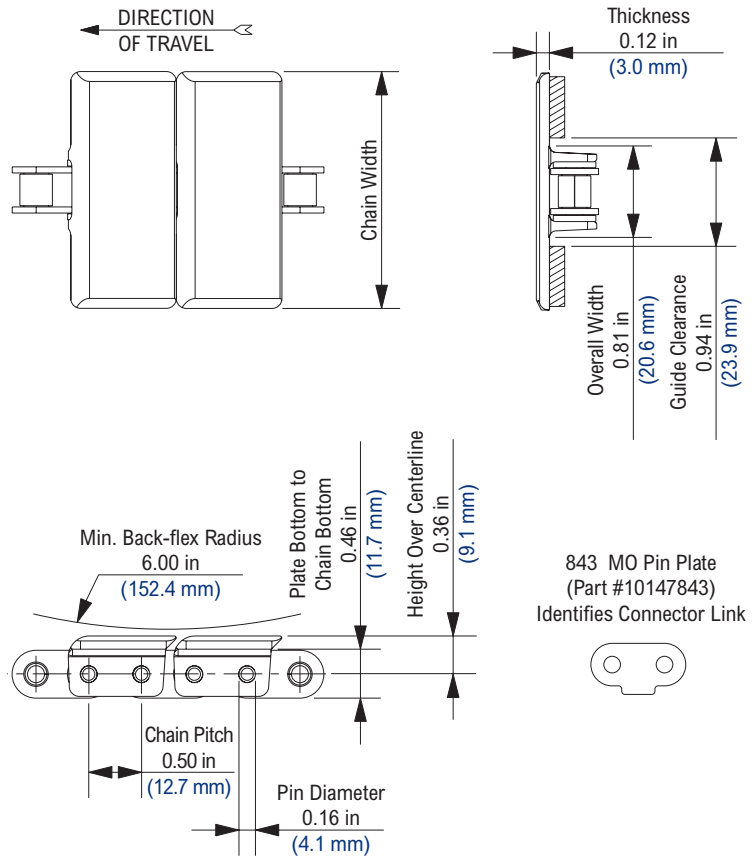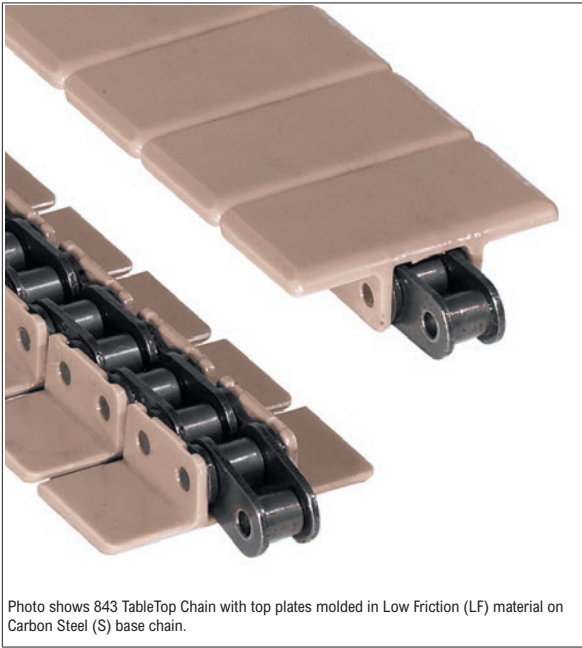

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
1 3/8	1.38	34.9	-	-	0.56	0.83
1 7/16	1.44	36.5	-	-	0.56	0.83
2	2.00	50.8	-	-	0.60	0.89
3 1/4	3.25	82.6	-	-	0.69	1.03

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
LF	Low Friction	Carbon Steel	-40	180	NR	-40	82	NR	800	3,559	No
Non-Standard Materials											
AS	Anti-Static	Carbon Steel	0	180	NR	-18	82	NR	800	3,559	No
BWR	Black Wear Resistant	Carbon Steel	-40	180	NR	-40	82	NR	800	3,559	No
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	800	3,559	Yes
MR	Melt Resistant	Carbon Steel	-80	220	NR	-62	104	NR	800	3,559	No



Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop and HP are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 240 pitch, 10 ft (3.048 m) length strands. Uses 843 carbon steel (S) base chain (Part #10147842). Chain runs on ANSI No. 40 sprockets. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

843 (SS)

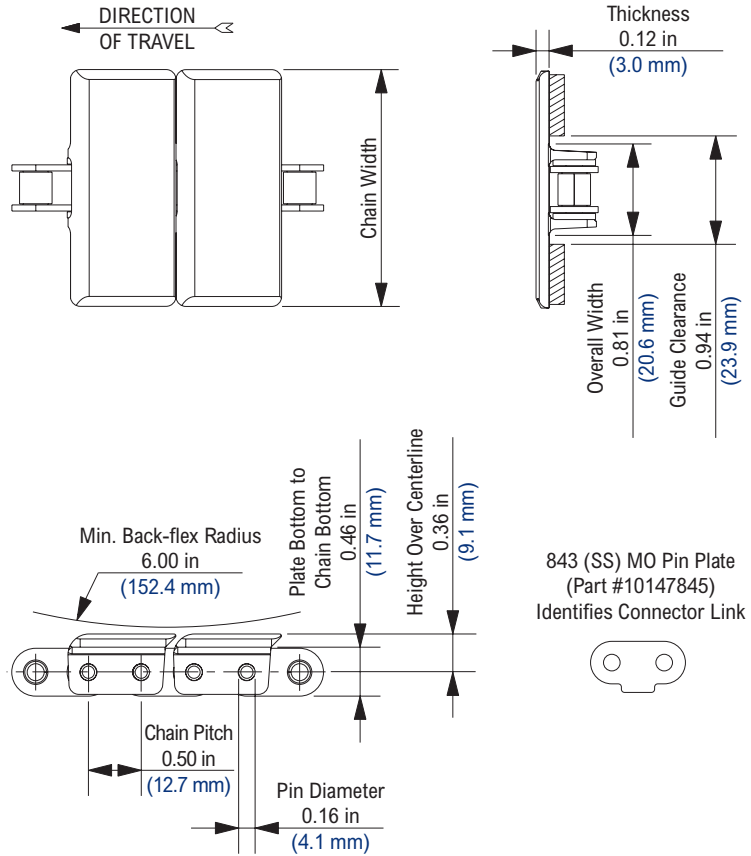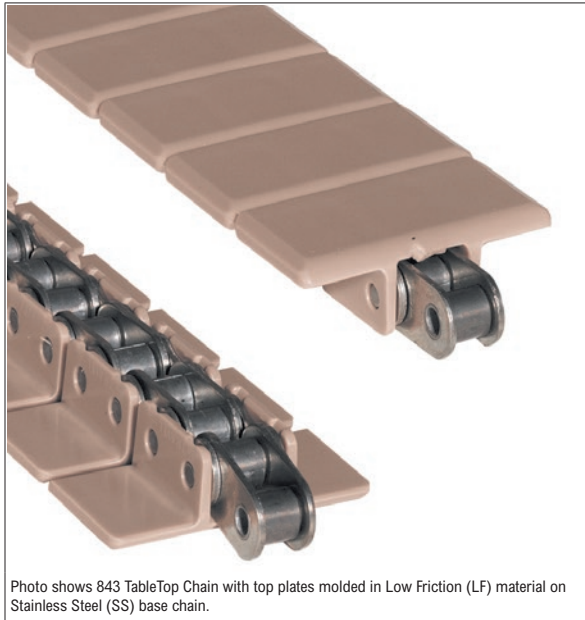

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
1 3/8	1.38	34.9	-	-	0.56	0.83
1 7/16	1.44	36.5	-	-	0.56	0.83
2	2.00	50.8	-	-	0.60	0.89
3 1/4	3.25	82.6	-	-	0.69	1.03

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	520	2,313	Yes
Non-Standard Materials											
AS	Anti-Static	Stainless Steel	0	180	NR	-18	82	NR	520	2,313	No
BWR	Black Wear Resistant	Stainless Steel	-40	180	NR	-40	82	NR	520	2,313	No
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	520	2,313	Yes
MR	Melt Resistant	Stainless Steel	-80	220	NR	-62	104	NR	520	2,313	No



Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 240 pitch, 10 ft (3.048 m) length strands. Uses 843 stainless steel (SS) base chain (Part #10147844). Chain runs on ANSI No. 40 sprockets. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

845 (S)

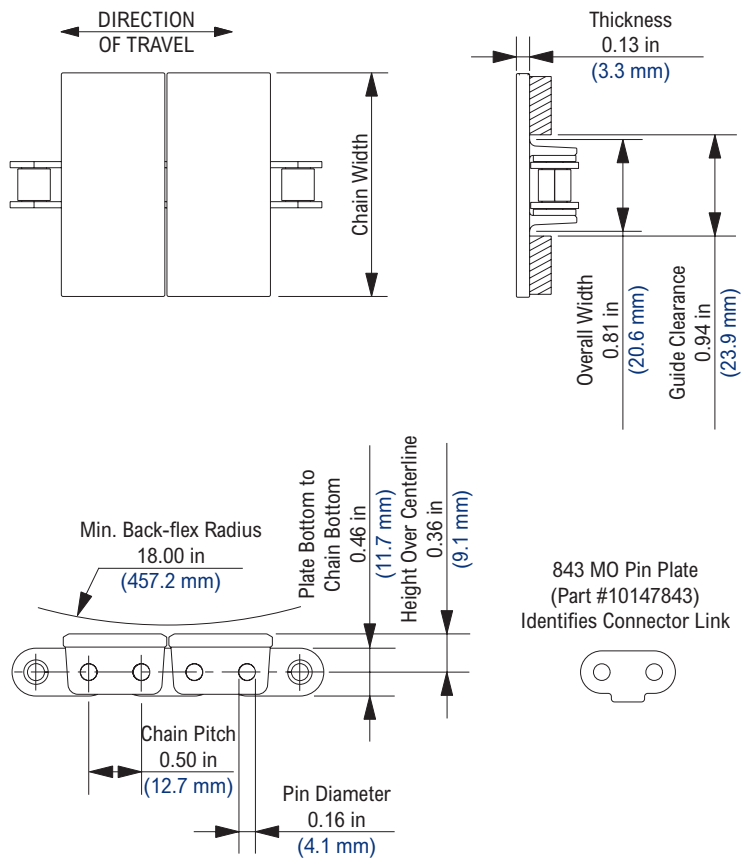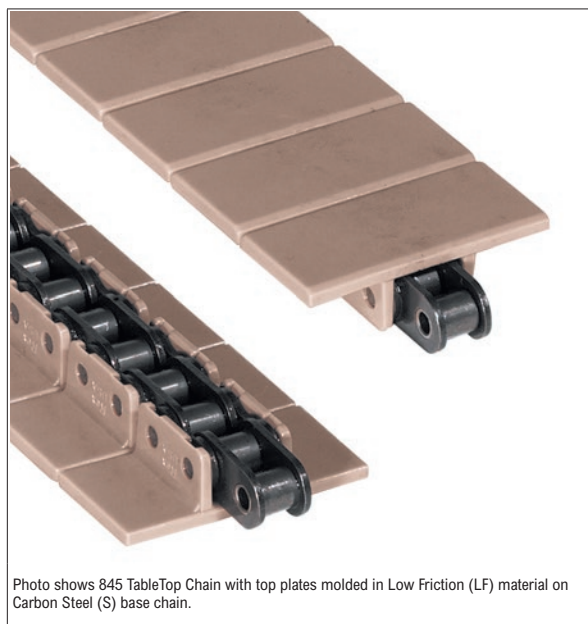

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
1 1/8	1.13	28.6	-	-	0.57	0.85
1 3/8	1.38	34.9	-	-	0.60	0.89
2	2.00	50.8	-	-	0.66	0.98

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
			dry	wet	NR	dry	wet				
Standard Materials											
LF	Low Friction	Carbon Steel	-40	180	NR	-40	82	NR	800	3,559	No


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes


Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 240 pitch, 10 ft (3.048 m) length strands. Uses 843 carbon steel (S) base chain (Part #10147842). Chain runs on ANSI No. 40 sprockets. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

845 (SS)

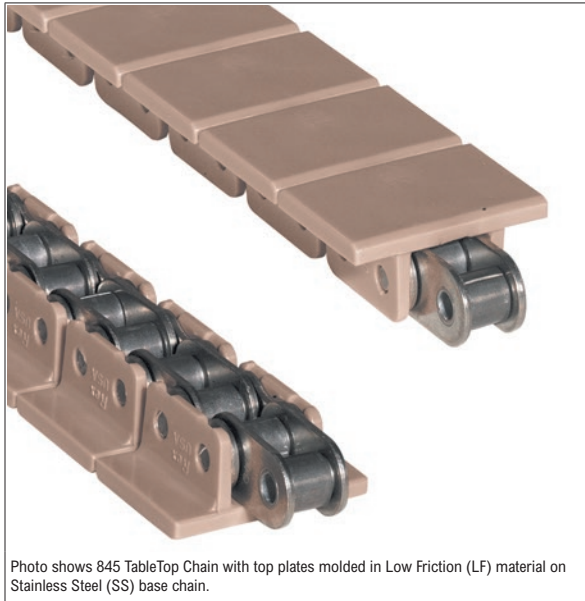

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
1 1/8	1.13	28.6	-	-	0.57	0.85
1 3/8	1.38	34.9	-	-	0.60	0.89
2	2.00	50.8	-	-	0.66	0.98

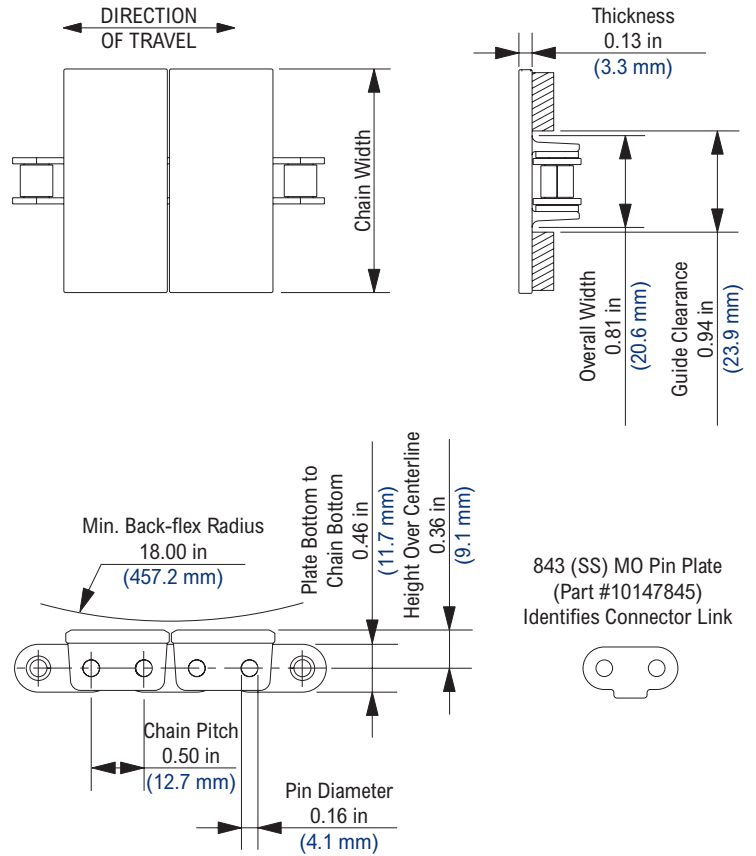

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max				
				dry	wet		dry	wet			
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	520	2,313	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.



Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.
 Stocked in 240 pitch, 10 ft (3.048 m) length strands.
 Uses 843 stainless steel (SS) base chain (Part #10147844).
 Chain runs on ANSI No. 40 sprockets.
 Chain breaker available.
 Chain strength is listed at room temperature.
 NR = Not Recommended.
 For additional material information, see material portfolio.



Part #10178826

863 TAB (S)

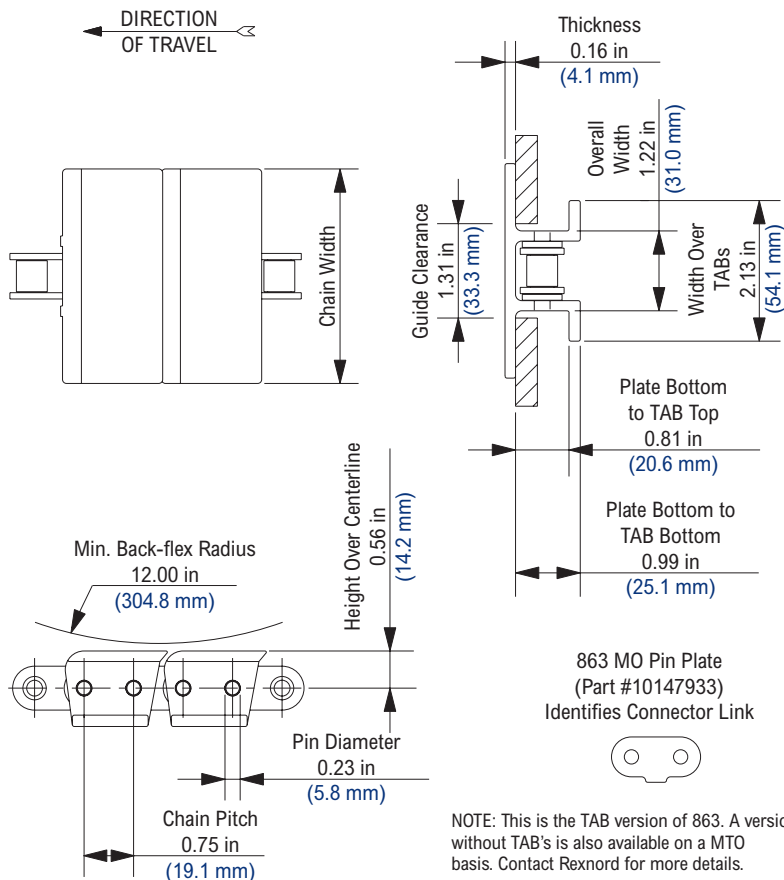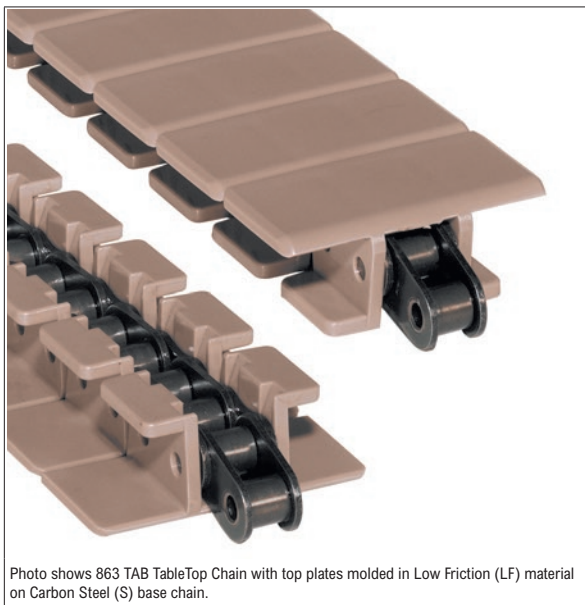

Chain Information

Chain Width	Chain Width		Min. Side-flex Radius		Approximate Weight	
	desc	in	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	-	-	1.41	2.10
4 1/2	4.50	114.3	-	-	1.50	2.24

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
			dry	wet	NR	min	dry	wet			
Standard Materials											
LF	Low Friction	Carbon Steel	-40	180	NR	-40	82	NR	1,400	6,228	Yes
Non-Standard Materials											
BWR	Black Wear Resistant	Carbon Steel	-40	180	NR	-40	82	NR	1,400	6,228	No
HP™	High Performance	Carbon Steel	-40	180	NR	-40	82	NR	1,400	6,228	No
WX	Green Abrasion Resistant Polyamide	Carbon Steel	-40	220	NR	-40	104	NR	1,400	6,228	No

Regulatory Information

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.
All rights reserved.

Additional Notes

- Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.
- Stocked in 160 pitch, 10 ft (3.048 m) length strands.
- Uses 863 carbon steel (S) base chain (Part #10147932).
- Chain runs on ANSI No. 60 sprockets.
- Chain breakers available.
- Chain strength is listed at room temperature.
- NR = Not Recommended.
- For additional material information, see material portfolio.



Part #10178826

863 TAB (SS)


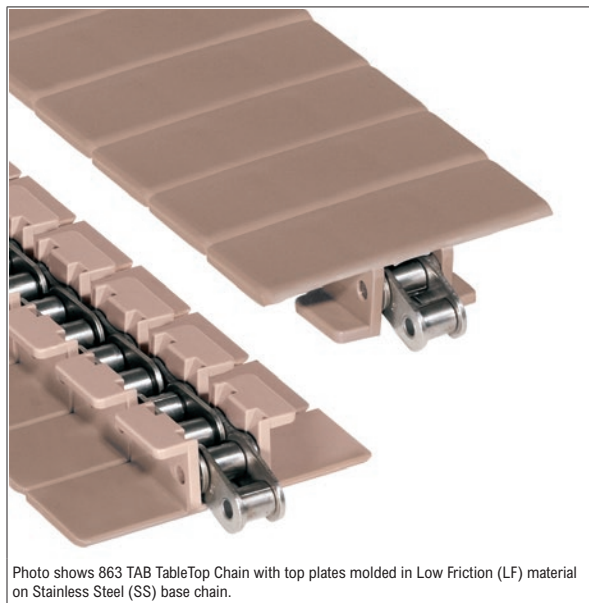


Photo shows 863 TAB TableTop Chain with top plates molded in Low Friction (LF) material on Stainless Steel (SS) base chain.

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	-	-	1.41	2.10
4 1/2	4.50	114.3	-	-	1.50	2.24

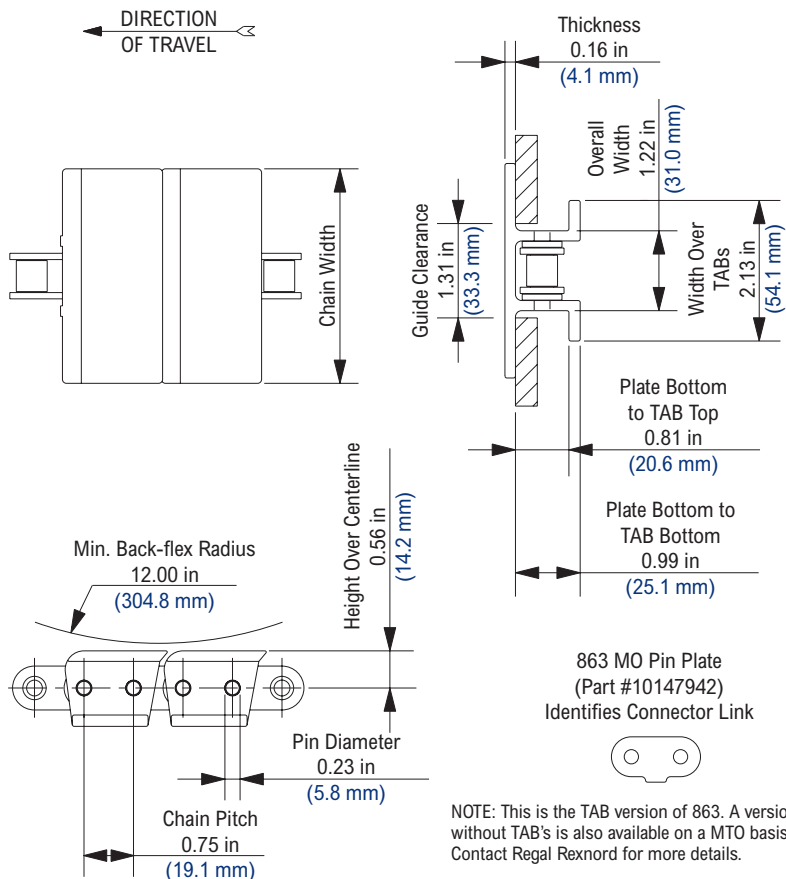

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	900	4,003	Yes
Non-Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	900	4,003	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 160 pitch, 10 ft (3.048 m) length strands. Uses 863 stainless steel (SS) base chain (Part #10147942). Chain runs on ANSI No. 60 sprockets. Chain breakers available. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.




Part #10495578



Part #10178826

NS63 Thermoplastic Split Sprocket

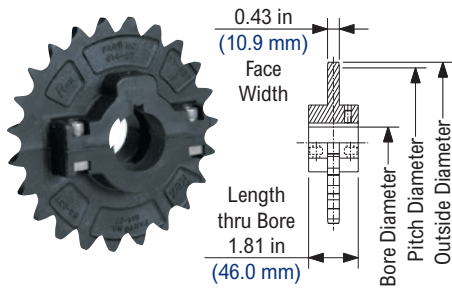

NS63 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight		
						Round				Square				in		mm				
						min	max	min	max	min	max	min	max	min	max	min	max			min
actual	effect	in	mm	in	mm														lbs	kg
23	11 1/2	5.508	139.90	5.91	150.1	1	1 5/8	30	40	-	-	-	-	1	1 5/8	30	40	0.75	0.34	

Shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with metric hardware but without set screws. Idler bores are designed to spin freely on the shaft without keyway or setscrews.

879 B



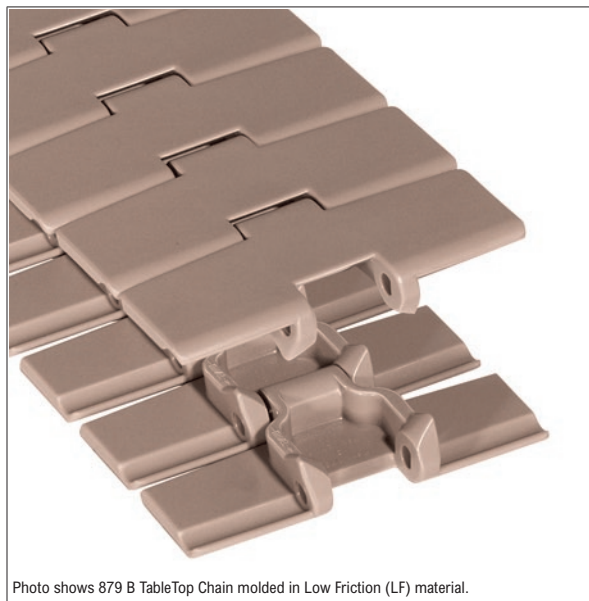


Photo shows 879 B TableTop Chain molded in Low Friction (LF) material.

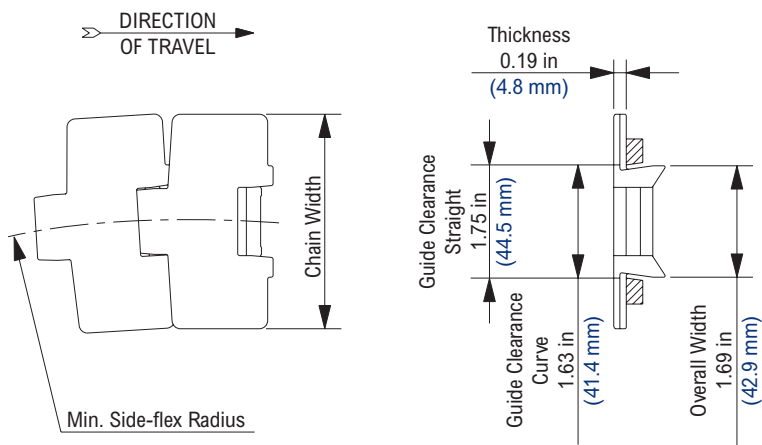

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	18.00	457.2	0.60	0.89
4 1/2	4.50	114.3	24.00	609.6	0.70	1.04

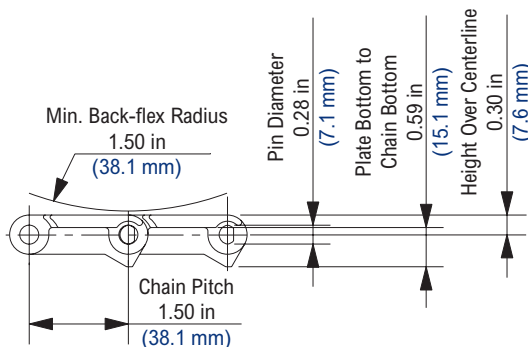

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
Non-Standard Materials											
MR	Melt Resistant	Stainless Steel	-80	220	NR	-62	104	NR	425	1,890	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 80 pitch, 10 ft (3.048 m) length strands.

Thermoplastic pins are available on a made-to-order basis.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

879 TAB


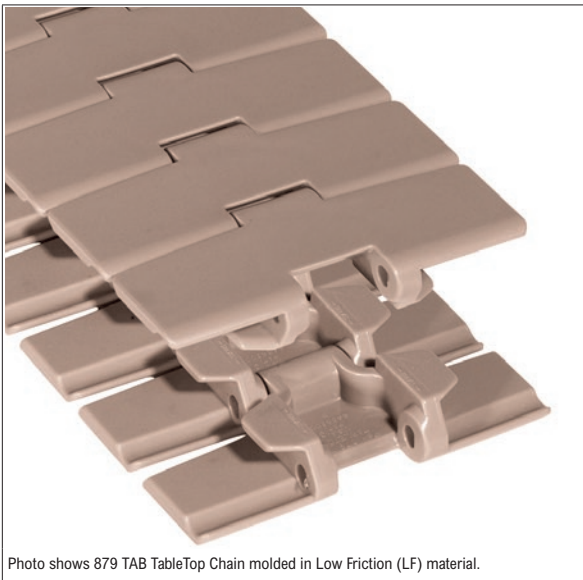


Photo shows 879 TAB TableTop Chain molded in Low Friction (LF) material.

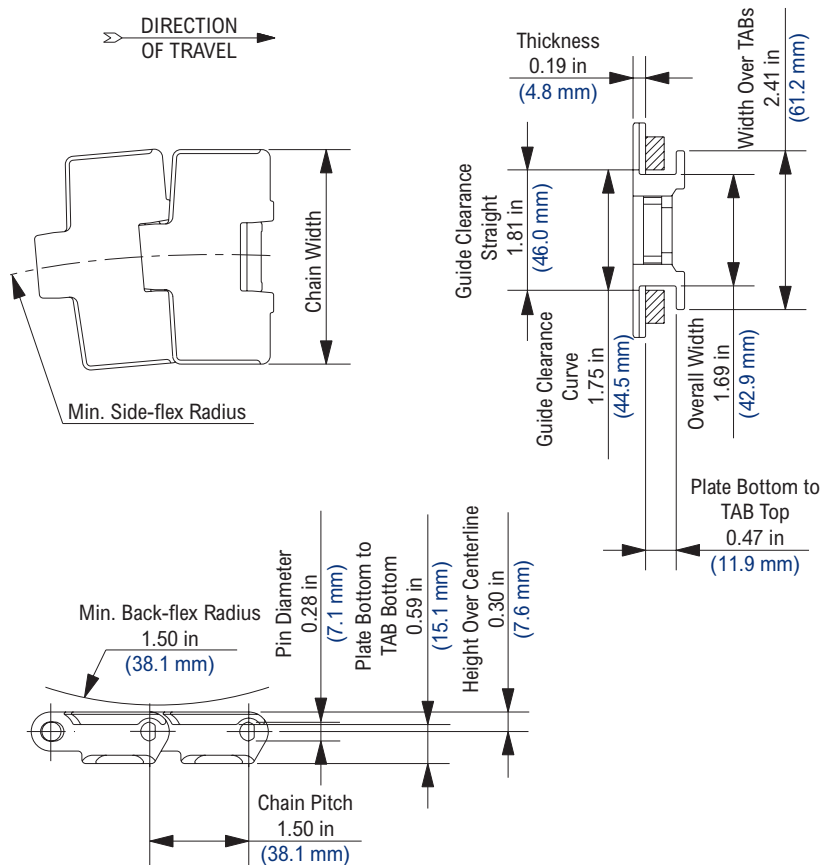

Chain Information

Chain Width		Min. Side-flex Radius		Approximate Weight		
desc	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	18.00	457.2	0.70	1.04
4 1/2	4.50	114.3	24.00	609.6	0.76	1.13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet	min	dry	wet				
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
Non-Standard Materials											
AS	Anti-Static	Stainless Steel	0	180	NR	-18	82	NR	255	1,134	No
BWR	Black Wear Resistant	Stainless Steel	-40	180	NR	-40	82	NR	510	2,269	No
Dry-PT™	Dry PET Low Friction	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
MR	Melt Resistant	Stainless Steel	-80	220	NR	-62	104	NR	425	1,890	No
P	Chemical Resistant	Stainless Steel	0	180	140	-18	82	60	340	1,512	Yes
PS™	Platinum Series™	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
PSX™	Platinum Series X™	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, TableTop, Dry-PT, Platinum Series, Platinum Series X, PS and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 80 pitch, 10 ft (3.048 m) length strands.

Thermoplastic pins are available on a made-to-order basis.


Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

880 Cast Iron Sprocket

NS880 Thermoplastic Split Sprocket

815/820 Idler Wheel

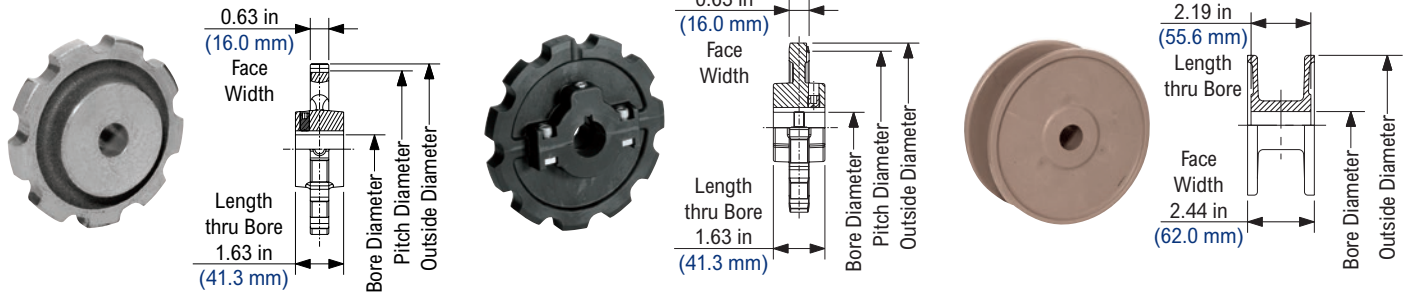

880 Cast Iron Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
9	9	4.386	111.40	4.33	110.0	3/4	1 3/8	20	35	-	-	-	-	3/4	2 1/4	20	55	2.87	1.30
10	10	4.854	123.29	4.82	122.4	3/4	1 1/4	20	30	-	-	-	-	3/4	1 3/4	20	40	3.09	1.40
11	11	5.324	135.23	5.31	134.9	3/4	1 3/8	20	35	-	-	-	-	3/4	2 1/4	20	55	3.31	1.50
12	12	5.796	147.22	5.80	147.3	3/4	1 3/8	20	35	-	-	-	-	3/4	2 1/4	20	55	3.53	1.60
15	15	7.215	183.26	7.26	184.4	3/4	1 3/8	20	35	-	-	-	-	3/4	2 1/4	20	55	4.19	1.90

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

NS880 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
11	11	5.324	135.23	5.30	134.6	1	1 5/8	25	40	-	-	-	-	1	1 3/4	25	45	0.66	0.30
12	12	5.796	147.22	5.80	147.3	1	1 3/4	25	45	-	-	-	-	1	1 3/4	25	45	0.82	0.37

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

815/820 Idler Wheel Imperial Information

Equivalent Tooth Size	Outside Diameter		Imperial Bore Diameter (Idler)					Approximate Weight	
	in	mm	in		in			lbs	kg
21	5.11	129.8	7/8	1	1 3/16	1 1/4	1 1/2	0.49	0.22
23	5.60	142.2	7/8	1	1 3/16	1 1/4	1 1/2	0.59	0.27
25	6.09	154.7	7/8	1	1 3/16	1 1/4	1 1/2	0.66	0.30
27	6.56	166.6	-	-	-	1 1/4	-	0.70	0.32

Idler wheels are designed to spin freely on the shaft. 27 tooth idler wheel is available on a made-to-order basis and is subject to minimum order requirements.

815/820 Idler Wheel Metric Information

Equivalent Tooth Size	Outside Diameter		Metric Bore Diameter (Idler)				Approximate Weight	
	in	mm	mm				lbs	kg
21	5.11	129.8	25	30	35	40	0.49	0.22
23	5.60	142.2	25	30	35	40	0.59	0.27
25	6.09	154.7	25	30	35	40	0.66	0.30
27	6.56	166.6	-	-	1 1/4	-	0.70	0.32

Idler wheels are designed to spin freely on the shaft.

880 B


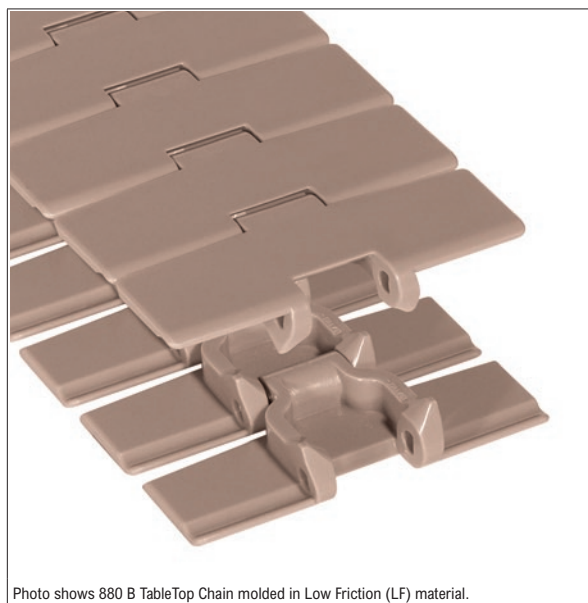


Photo shows 880 B TableTop Chain molded in Low Friction (LF) material.

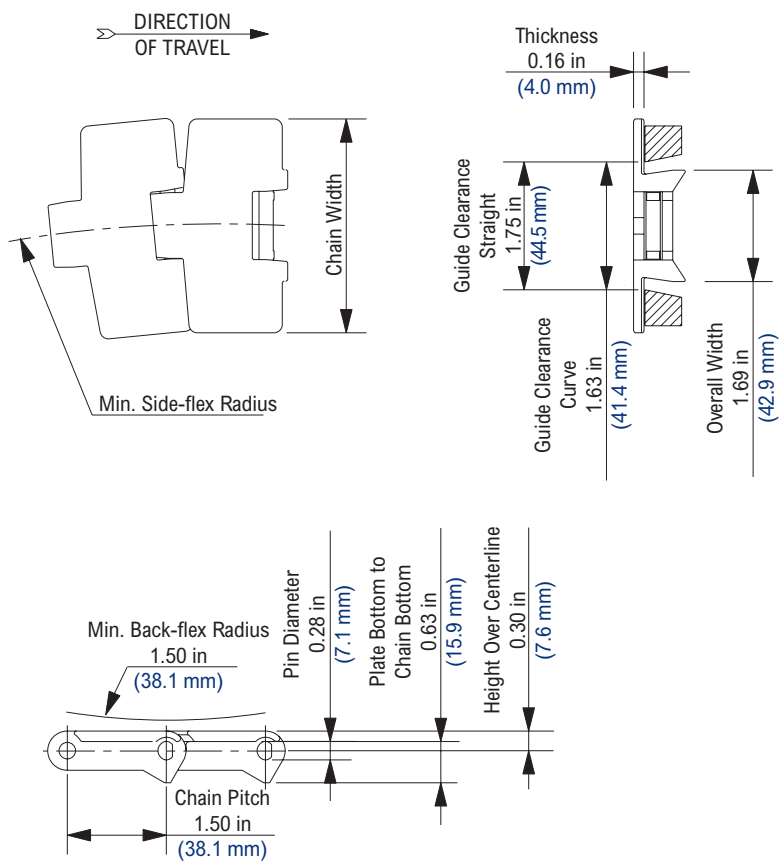

Chain Information

Chain Width		Min. Side-flex Radius		Approximate Weight		
desc	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	18.00	457.2	0.60	0.89
4 1/2	4.50	114.3	24.00	609.6	0.70	1.04

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
Non-Standard Materials											
AS	Anti-Static	Stainless Steel	0	180	NR	-18	82	NR	255	1,134	No
CR	Extreme Chemical Resistant	Stainless Steel	40	240	212	4	116	100	340	1,512	Yes
Dry-PT™	Dry PET Low Friction	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
MR	Melt Resistant	Stainless Steel	-80	220	NR	-62	104	NR	425	1,890	No
P	Chemical Resistant	Stainless Steel	0	180	140	-18	82	60	340	1,512	Yes

Regulatory Information

Based on the material chemistries, industry standards, and the documentation in the Federal Registry, it is the opinion of Rexnord that the MCC TableTop stainless steel chains can be considered GRAS for direct food contact. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 80 pitch, 10 ft (3.048 m) length strands. Thermoplastic pins are available on a made-to-order basis. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

880 TAB


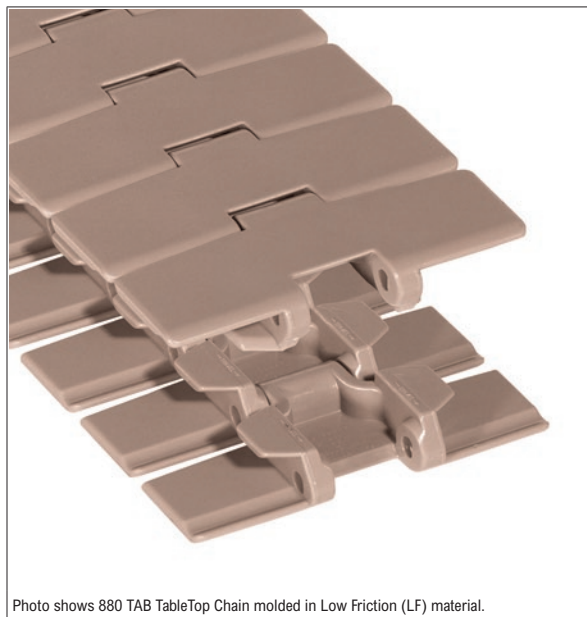


Photo shows 880 TAB TableTop Chain molded in Low Friction (LF) material.

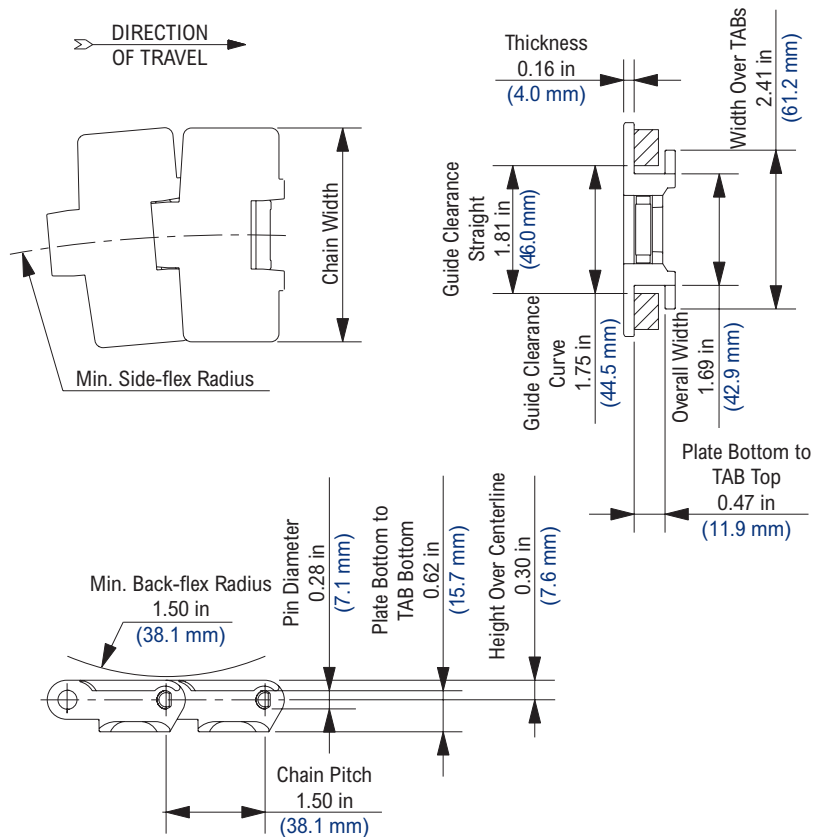

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	18.00	457.2	0.63	0.94
4 1/2	4.50	114.3	24.00	609.6	0.73	1.09

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
			dry	wet	NR	min	dry	wet			
Standard Materials											
AS	Anti-Static	Stainless Steel	0	180	NR	-18	82	NR	255	1,134	No
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
Non-Standard Materials											
BWR	Black Wear Resistant	Stainless Steel	-40	180	NR	-40	82	NR	510	2,269	No
CR	Extreme Chemical Resistant	Stainless Steel	40	240	212	4	116	100	340	1,512	Yes
Dry-PT™	Dry PET Low Friction	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
FR	Flame Retardant	Stainless Steel	0	180	140	-18	82	60	255	1,134	No
HS	Heat Stabilized	Stainless Steel	-40	220	212	-40	104	100	425	1,890	No
MR	Melt Resistant	Stainless Steel	-80	220	NR	-62	104	NR	425	1,890	No
P	Chemical Resistant	Stainless Steel	0	180	140	-18	82	60	340	1,512	Yes
PS™	Platinum Series™	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
PSX™	Platinum Series X™	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
WX	Green Abrasion Resistant Polyamide	Stainless Steel	-40	220	NR	-40	104	NR	425	1,890	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, TableTop, Dry-PT, Platinum Series, Platinum Series X, PS and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 80 pitch, 10 ft (3.048 m) length strands.

Thermoplastic pins are available on a made-to-order basis.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

880 TAB BO


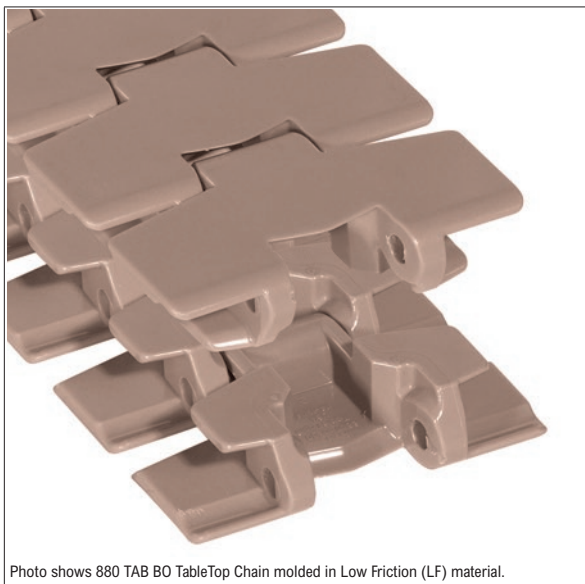


Photo shows 880 TAB BO TableTop Chain molded in Low Friction (LF) material.

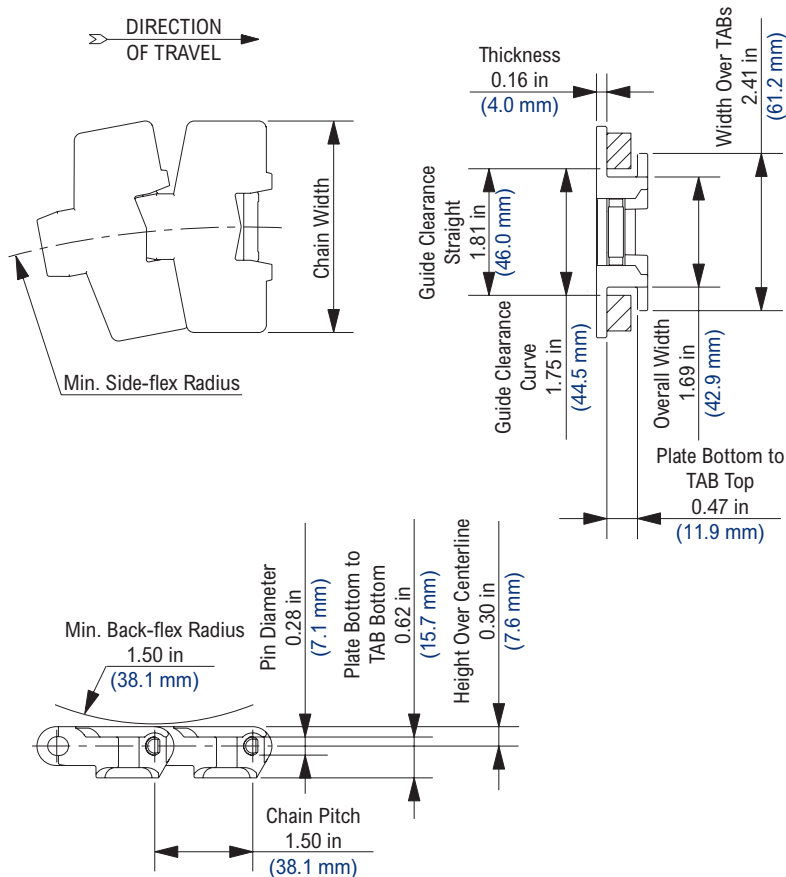

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	7.87	199.9	0.64	0.95
4 1/2	4.50	114.3	7.87	199.9	0.74	1.10

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
Non-Standard Materials											
AS	Anti-Static	Stainless Steel	0	180	NR	-18	82	NR	255	1,134	No
P	Chemical Resistant	Stainless Steel	0	180	140	-18	82	60	340	1,512	Yes
PS™	Platinum Series™	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, TableTop, Platinum Series and PS are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 80 pitch, 10 ft (3.048 m) length strands.

Thermoplastic pins are available on a made-to-order basis.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

880 TAB RubberTop™


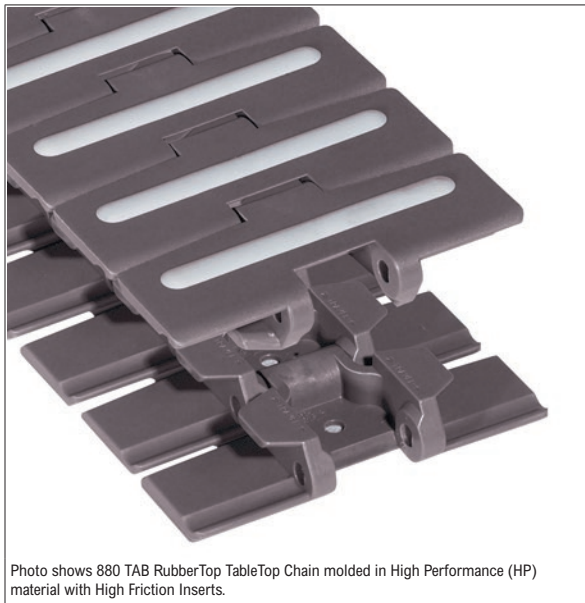


Photo shows 880 TAB RubberTop TableTop Chain molded in High Performance (HP) material with High Friction Inserts.

Chain Information

Chain Width	Chain Width		Min. Side-flex Radius		Approximate Weight	
	desc	in	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	18.00	457.2	0.63	0.94
4 1/2	4.50	114.3	24.00	609.6	0.73	1.09

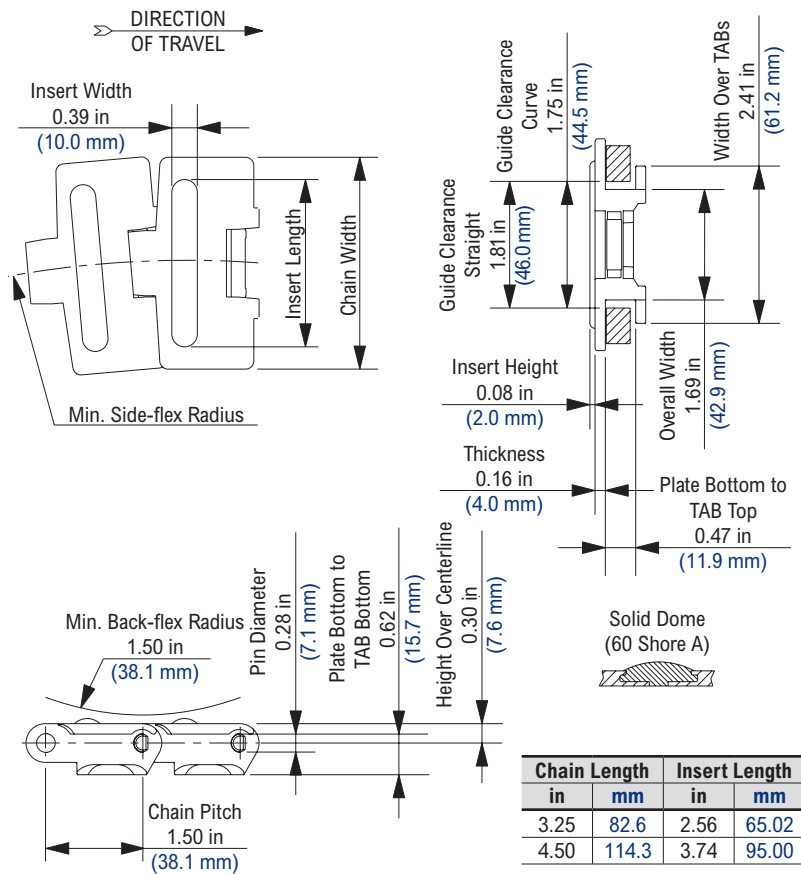

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.




Stocked in 80 pitch, 10 ft (3.048 m) length strands.

Thermoplastic pins are available on a made-to-order basis.

Inserts may be spaced every pitch, every second pitch, etc.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

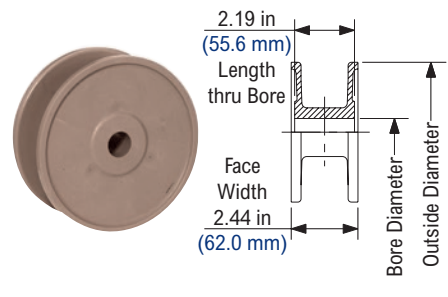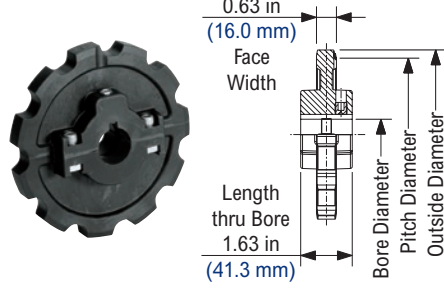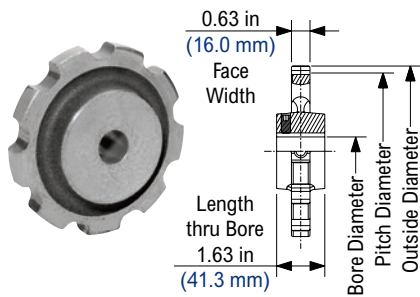

880 Cast Iron Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)										Bore Diameter (Round)				Approximate Weight		
			Round				Square						in		mm				
			in	mm	in	mm	min	max	min	max	min	max	min	max	min	max			min
9	9	4.386	111.40	4.33	110.0	3/4	1 3/8	20	35	-	-	-	-	3/4	2 1/4	20	55	2.87	1.30
10	10	4.854	123.29	4.82	122.4	3/4	1 1/4	20	30	-	-	-	-	3/4	1 3/4	20	40	3.09	1.40
11	11	5.324	135.23	5.31	134.9	3/4	1 3/8	20	35	-	-	-	-	3/4	2 1/4	20	55	3.31	1.50
12	12	5.796	147.22	5.80	147.3	3/4	1 3/8	20	35	-	-	-	-	3/4	2 1/4	20	55	3.53	1.60
15	15	7.215	183.26	7.26	184.4	3/4	1 3/8	20	35	-	-	-	-	3/4	2 1/4	20	55	4.19	1.90

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

NS880 Thermoplastic Split Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)										Bore Diameter (Round)				Approximate Weight		
			Round				Square						in		mm				
			in	mm	in	mm	min	max	min	max	min	max	min	max	min	max			min
11	11	5.324	135.23	5.30	134.6	1	1 5/8	25	40	-	-	-	-	1	1 3/4	25	45	0.66	0.30
12	12	5.796	147.22	5.80	147.3	1	1 3/4	25	45	-	-	-	-	1	1 3/4	25	45	0.82	0.37

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

815/820 Idler Wheel Imperial Information

Equivalent Tooth Size	Outside Diameter		Imperial Bore Diameter (Idler)					Approximate Weight	
	in	mm			in			lbs	kg
21	5.11	129.8	7/8	1	1 3/16	1 1/4	1 1/2	0.49	0.22
23	5.60	142.2	7/8	1	1 3/16	1 1/4	1 1/2	0.59	0.27
25	6.09	154.7	7/8	1	1 3/16	1 1/4	1 1/2	0.66	0.30
27	6.56	166.6	-	-	-	1 1/4	-	0.70	0.32

Idler wheels are designed to spin freely on the shaft. 27 tooth idler wheel is available on a made-to-order basis and is subject to minimum order requirements.

815/820 Idler Wheel Metric Information


Equivalent Tooth Size	Outside Diameter		Metric Bore Diameter (Idler)				Approximate Weight	
	in	mm			mm		lbs	kg
21	5.11	129.8	25	30	35	40	0.49	0.22
23	5.60	142.2	25	30	35	40	0.59	0.27
25	6.09	154.7	25	30	35	40	0.66	0.30

Idler wheels are designed to spin freely on the shaft.

881 B



Photo shows 881 B TableTop Chain made from Carbon Steel (S) material.

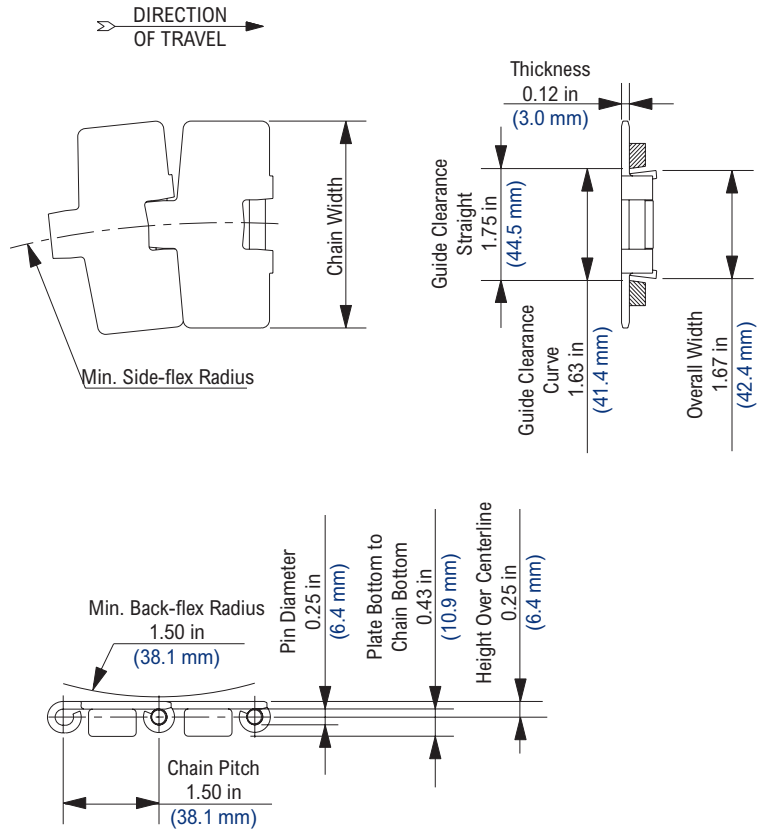

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	18.00	457.2	2.00	2.98
4 1/2	4.50	114.3	24.00	609.6	2.50	3.73
7 1/2	7.50	190.5	24.00	609.6	3.70	5.51

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
	dry	wet		dry	wet		dry	wet			
Standard Materials											
S	Carbon Steel	Carbon Steel	-40	350	NR	-40	177	NR	625	2,780	No
SSA	Stainless Steel Austenitic	Stainless Steel Austenitic	-100	800	212	-73	427	100	625	2,780	Yes

Regulatory Information

Based on the material chemistries, industry standards, and the documentation in the Federal Registry, it is the opinion of Rexnord that the Rexnord TableTop stainless steel chains can be considered GRAS for direct food contact. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.


Additional Notes

Stocked in 80 pitch, 10 ft (3.048 m) length strands. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

881 TAB



Photo shows 881 TAB TableTop Chain made from Stainless Steel Austenitic (SSA) material.

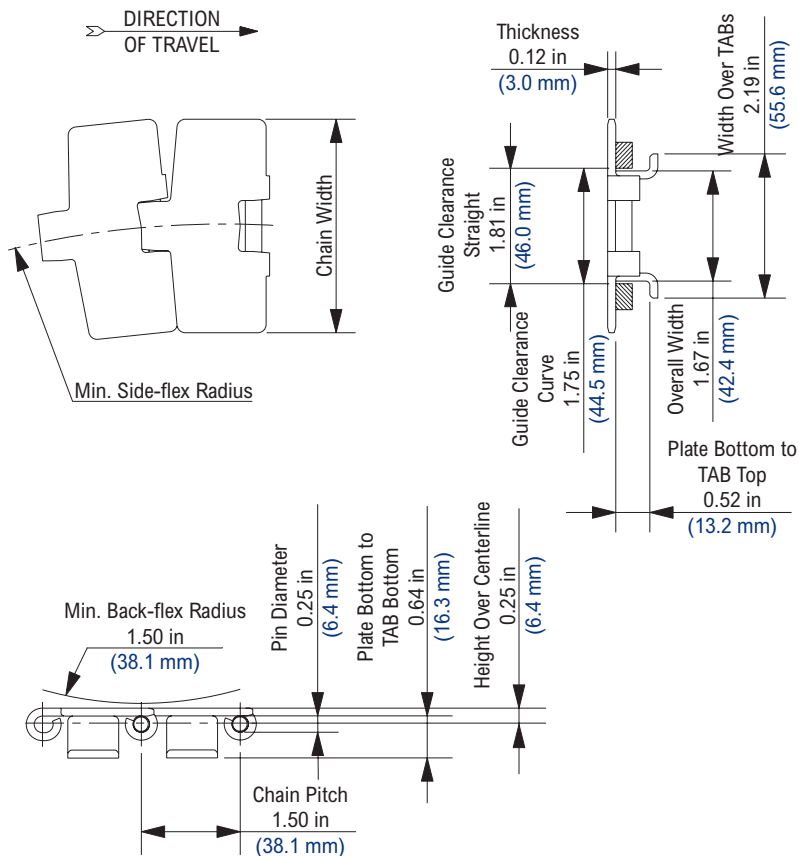

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	18.00	457.2	2.00	2.98
4 1/2	4.50	114.3	24.00	609.6	2.50	3.73
7 1/2	7.50	190.5	24.00	609.6	3.70	5.51

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
				dry	wet		dry	wet			
Standard Materials											
S	Carbon Steel	Carbon Steel	-40	350	NR	-40	177	NR	625	2,780	No
SSA	Stainless Steel Austenitic	Stainless Steel Austenitic	-100	800	212	-73	427	100	625	2,780	Yes

Regulatory Information

Based on the material chemistries, industry standards, and the documentation in the Federal Registry, it is the opinion of Rexnord that the Rexnord TableTop stainless steel chains can be considered GRAS for direct food contact.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Stocked in 80 pitch, 10 ft (3.048 m) length strands.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

881 TAB G


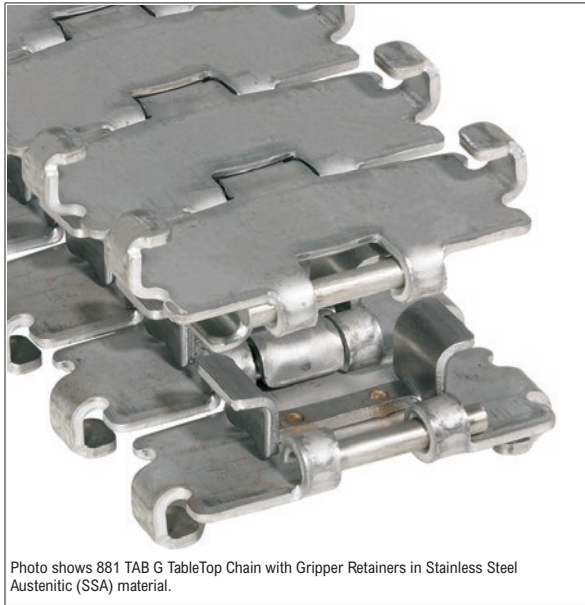


Photo shows 881 TAB G TableTop Chain with Gripper Retainers in Stainless Steel Austenitic (SSA) material.

Chain Information

Chain Width			Min. Side-flex Radius		Approximate Weight	
desc	in	mm	in	mm	lbs/ft	kg/m
3 5/8	3.63	92.1	18.00	457.2	3.75	5.59

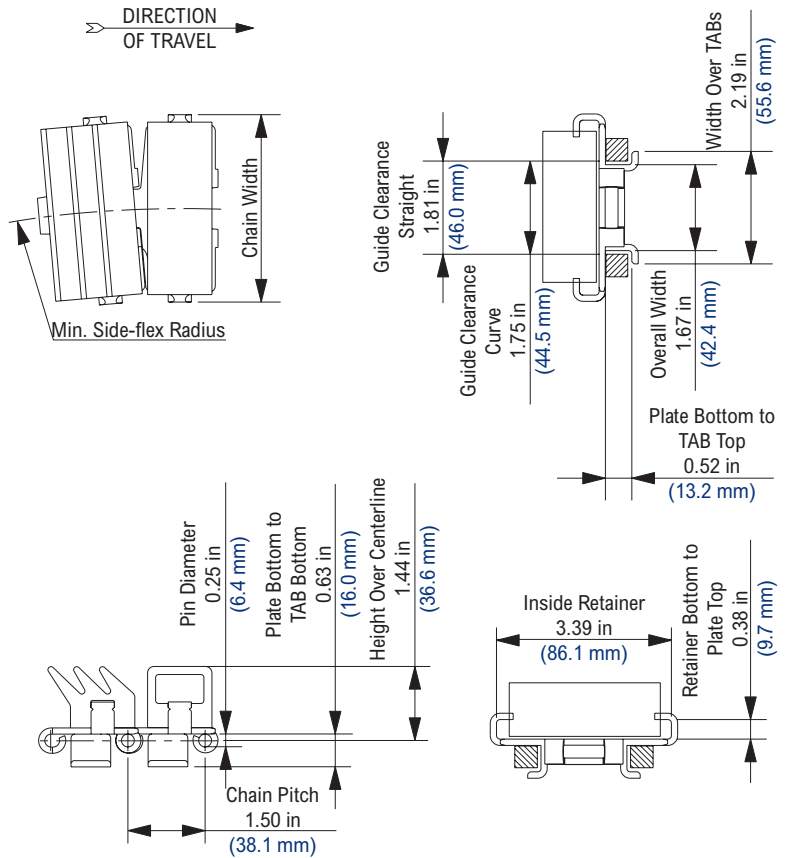

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
			dry	wet		dry	wet				
Standard Materials											
SSA	Stainless Steel Austenitic	Stainless Steel Austenitic	-100	800	212	-73	427	100	625	2,780	Yes

Regulatory Information



Based on the material chemistries, industry standards, and the documentation in the Federal Registry, it is the opinion of Rexnord that the Rexnord TableTop stainless steel chains can be considered GRAS for direct food contact. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Stocked in 80 pitch, 10 ft (3.048 m) length strands.
 Can be assembled with "J" or "D" style gripper attachments.
 Chain strength is listed at room temperature. NR = Not Recommended.
 For additional material information, see material portfolio.

881 Cast Iron Sprocket

NS881 Thermoplastic Split Sprocket

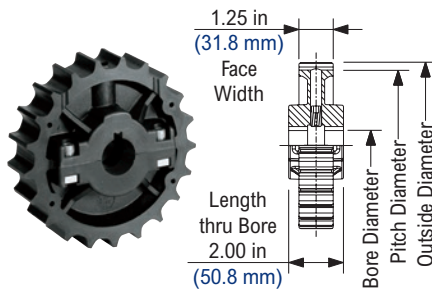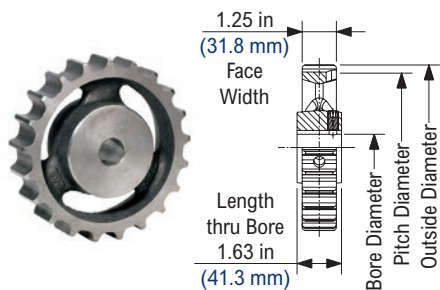

881 Cast Iron Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in		mm		in		mm		in		mm			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
21	10 1/2	5.089	129.26	5.12	130.0	1	1 3/4	20	45	-	-	-	-	1	1 3/4	25	45	4.20	1.91
23	11 1/2	5.560	141.22	5.59	142.0	1	1 3/4	20	45	-	-	-	-	1	1 3/4	25	45	4.60	2.09
25	12 1/2	6.032	153.21	6.07	154.2	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.00	2.27
27	13 1/2	6.504	165.20	6.56	166.6	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.50	2.95


Shaft-ready round bore sprockets are shipped with keyway and setscrew.

NS881 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in		mm		in		mm		in		mm			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
21	10 1/2	5.089	129.26	5.12	130.0	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	0.86	0.39
23	11 1/2	5.560	141.22	5.59	142.0	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	0.97	0.44
25	12 1/2	6.032	153.21	6.07	154.2	1	2	25	50	-	-	-	-	1	2	25	50	1.15	0.52
27	13 1/2	6.504	165.20	6.56	166.6	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.32	0.60

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

Rexnord™ 881 Series TableTop™ Chain Compatible Sprockets

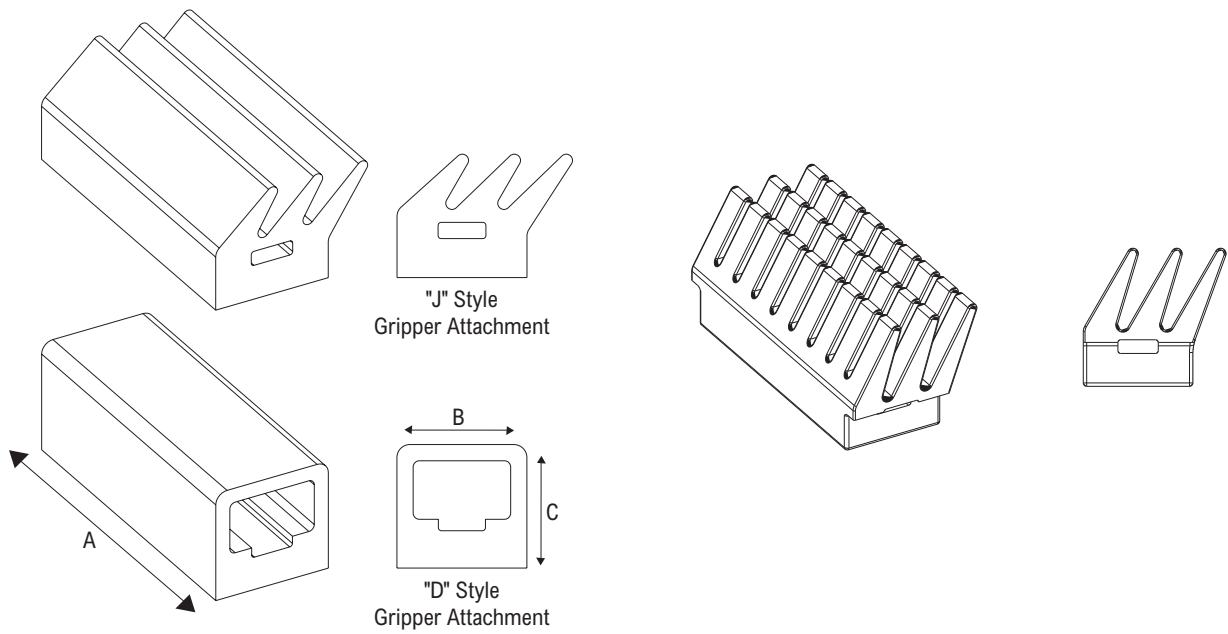

Gripper Attachments

Part Number	Style	Material	Color	Hardness (Shore A)	"A" Dimension		"B" Dimension		"C" Dimension	
					in	mm	in	mm	in	mm
Standard Grippers										
10074927	FJ	EPDM	White	50	3.68	93.5	1.69	42.9	1.58	40.1
10075338	D	Neoprene	Black	40	3.35	85.1	1.25	31.8	1.19	30.2
10075339	D	Neoprene	White	40	3.35	85.1	1.25	31.8	1.19	30.2
10075340	D	Neoprene	Black	60	3.35	85.1	1.25	31.8	1.19	30.2
10075341	D	EPDM	White	50	3.35	85.1	1.25	31.8	1.19	30.2
10075342	D	EPDM	White	80	3.35	85.1	1.25	31.8	1.19	30.2
10075343	D	EPDM	Black	50	3.35	85.1	1.25	31.8	1.19	30.2
10075608	J	Neoprene	Black	40	3.35	85.1	1.25	31.8	1.19	30.2
10075609	J	Neoprene	White	50	3.35	85.1	1.25	31.8	1.19	30.2
10075610	J	EPDM	White	80	3.35	85.1	1.25	31.8	1.19	30.2
10075611	J	EPDM	White	50	3.35	85.1	1.25	31.8	1.19	30.2
10074926	FJ	Neoprene	Black	40	3.68	93.5	1.69	42.9	1.58	40.1

Regulatory Information

U.S. Patent: 9840370

882 B



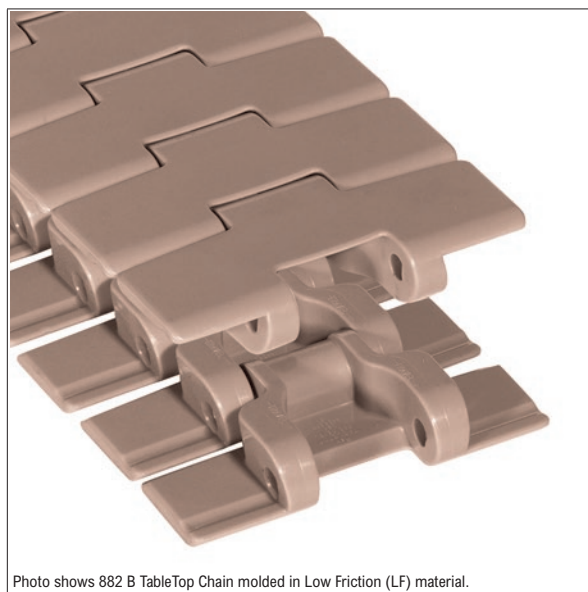


Photo shows 882 B TableTop Chain molded in Low Friction (LF) material.

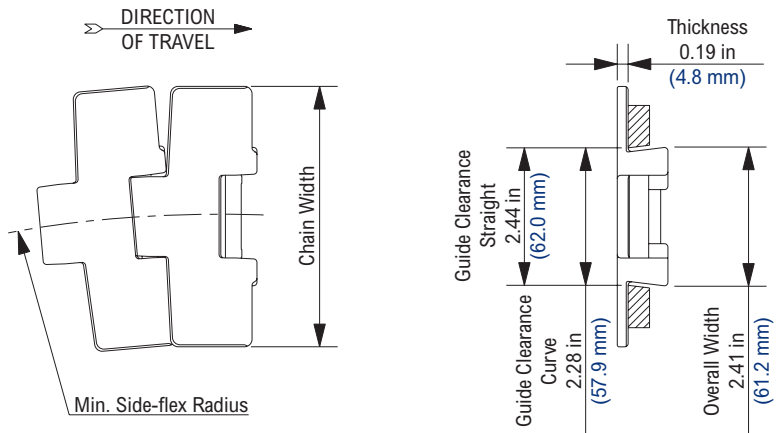

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
4 1/2	4.50	114.3	24.00	609.6	1.30	1.94
7 1/2	7.50	190.5	24.00	609.6	1.60	2.38
10	10.00	254.0	24.00	609.6	1.90	2.83

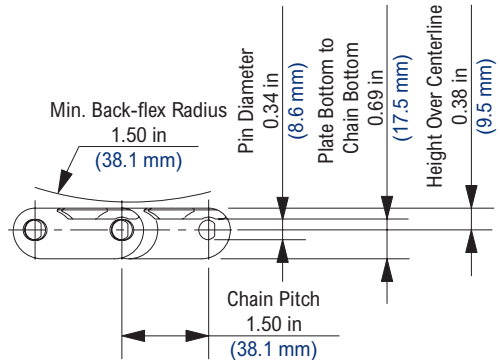

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
Non-Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
WX	Green Abrasion Resistant Polyamide	Stainless Steel	-40	220	NR	-40	104	NR	625	2,780	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 80 pitch, 10 ft (3.048 m) length strands. Thermoplastic pins are available on a made-to-order basis. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.


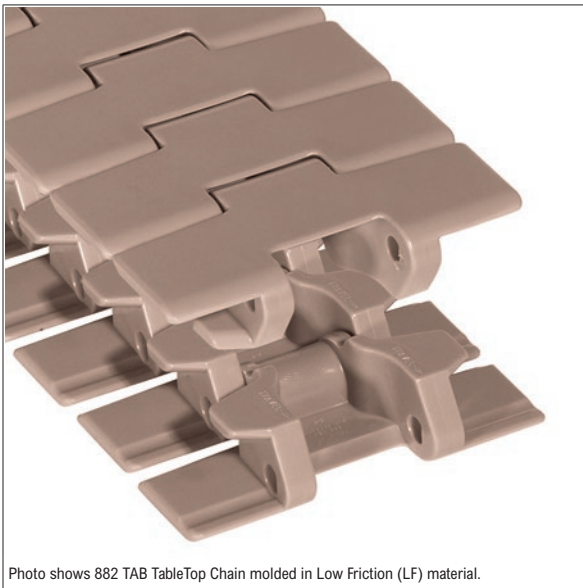


Photo shows 882 TAB TableTop Chain molded in Low Friction (LF) material.

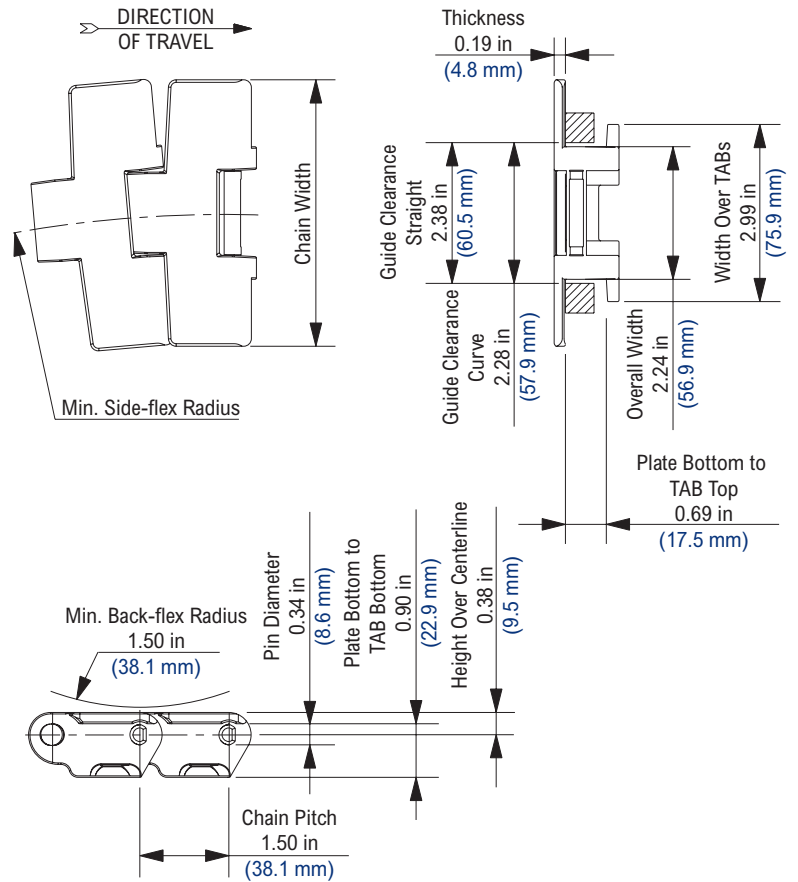

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	24.00	609.6	1.25	1.86
4 1/2	4.50	114.3	24.00	609.6	1.33	1.98
6	6.00	152.4	24.00	609.6	1.48	2.20
7 1/2	7.50	190.5	24.00	609.6	1.63	2.43
10	10.00	254.0	24.00	609.6	1.90	2.83
12	12.00	304.8	24.00	609.6	2.13	3.17

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
PSX™	Platinum Series X™	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
WX	Green Abrasion Resistant Polyamide	Stainless Steel	-40	220	NR	-40	104	NR	625	2,780	No
Non-Standard Materials											
AS	Anti-Static	Stainless Steel	0	180	NR	-18	82	NR	375	1,668	No
BSM	Black Cut Resistant	Stainless Steel	-40	180	150	-40	82	66	625	2,780	No
BWR	Black Wear Resistant	Stainless Steel	-40	180	NR	-40	82	NR	750	3,336	No
CR	Extreme Chemical Resistant	Stainless Steel	40	240	212	4	116	100	500	2,224	Yes
D	Plain Acetal	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
Dry-PT™	Dry PET Low Friction	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
DUV	Plain Acetal Ultraviolet Resistant	Stainless Steel	0	180	150	-18	82	66	625	2,780	No
HS	Heat Stabilized	Stainless Steel	-40	220	212	-40	104	100	625	2,780	No
P	Chemical Resistant	Stainless Steel	0	180	140	-18	82	60	500	2,224	Yes
PS™	Platinum Series™	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
WHP	White High Performance	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
WX	Green Abrasion Resistant Polyamide	Stainless Steel	-40	220	NR	-40	104	NR	625	2,780	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Regnord, TableTop, Dry-PT, Platinum Series, Platinum Series X, PS and PSX are trademarks of Regal Regnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 80 pitch, 10 ft (3.048 m) length strands.

Thermoplastic pins are available on a made-to-order basis.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

882 TAB G


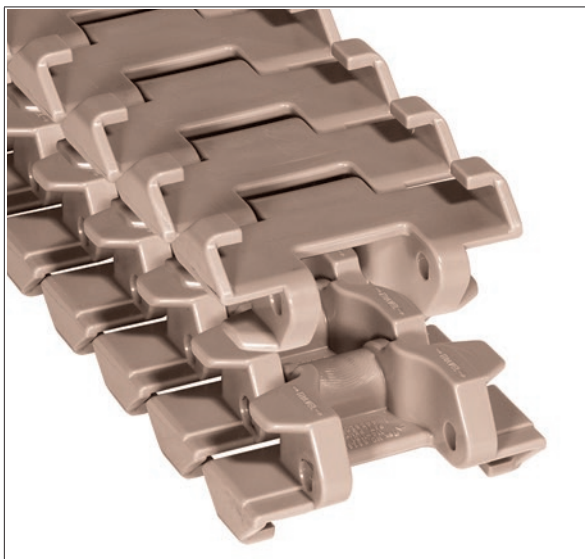


Photo shows 882 TAB G TableTop Chain molded in Low Friction (LF) material.

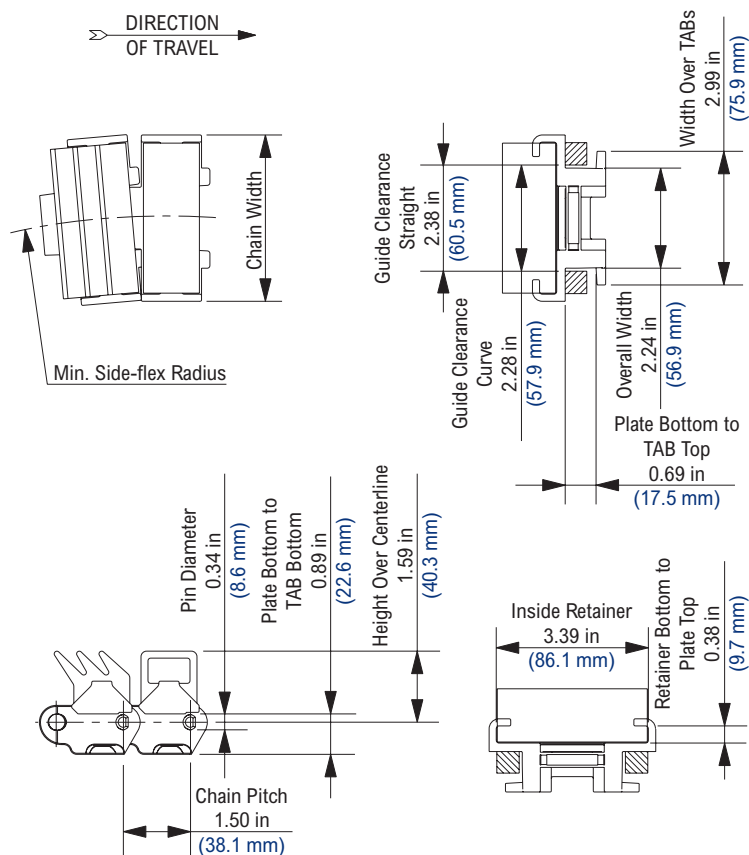

Chain Information

Chain Width	Chain Width		Min. Side-flex Radius		Approximate Weight	
	desc	in	mm	in	mm	lbs/ft
3 3/4	3.75	95.3	24.00	609.6	1.30	1.94

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
Non-Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patents: 4629063, 4809846, D332213, 5219065, 4436200

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 80 pitch, 10 ft (3.048 m) length strands. Can be assembled with “J” or “D” style gripper attachments; see accessories section for more information. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

882 TAB LBP


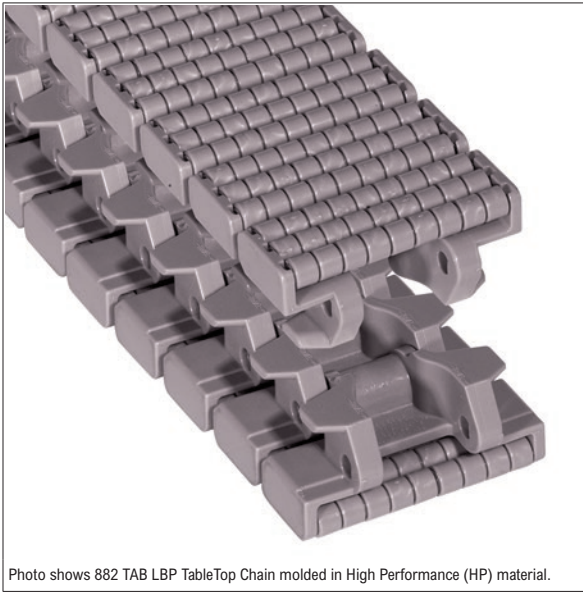


Photo shows 882 TAB LBP TableTop Chain molded in High Performance (HP) material.

Chain Information

Chain Width		Min. Side-flex Radius		Approximate Weight		
desc	in	mm	in	mm	lbs/ft	kg/m
3 3/4	3.75	95.3	24.00	609.6	2.50	3.73

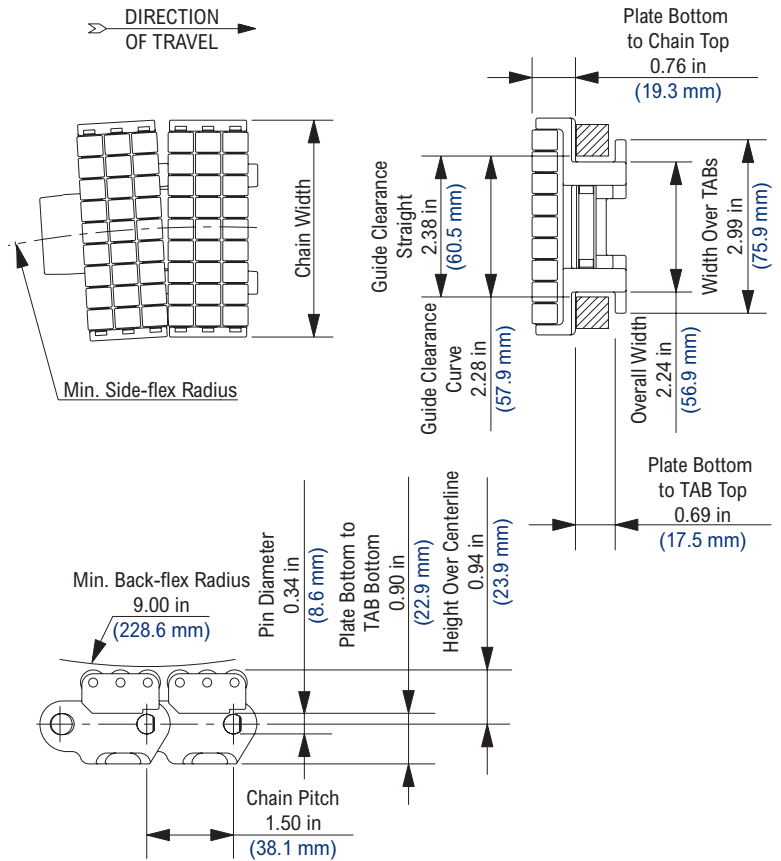

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patents: 4629063, 4809846, D332213, 5219065, 4436200

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 80 pitch, 10 ft (3.048 m) length strands. LBP882TK750 is only available in HP material. Typical coefficient of friction between chain and product = 0.07. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

882 TAB SuperGrip™


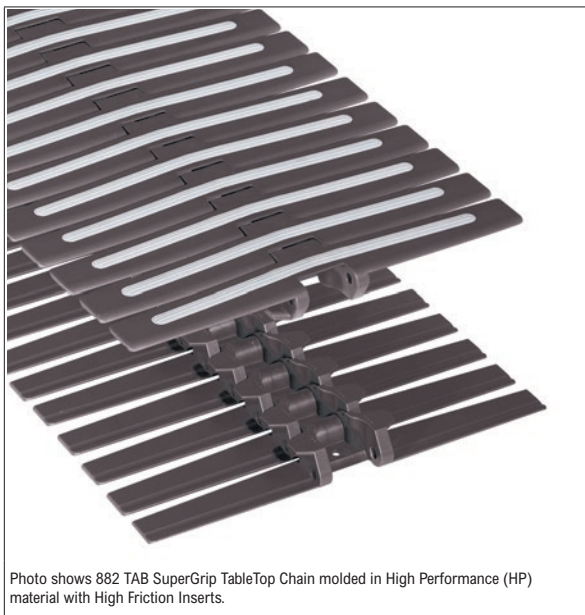


Photo shows 882 TAB SuperGrip TableTop Chain molded in High Performance (HP) material with High Friction Inserts.

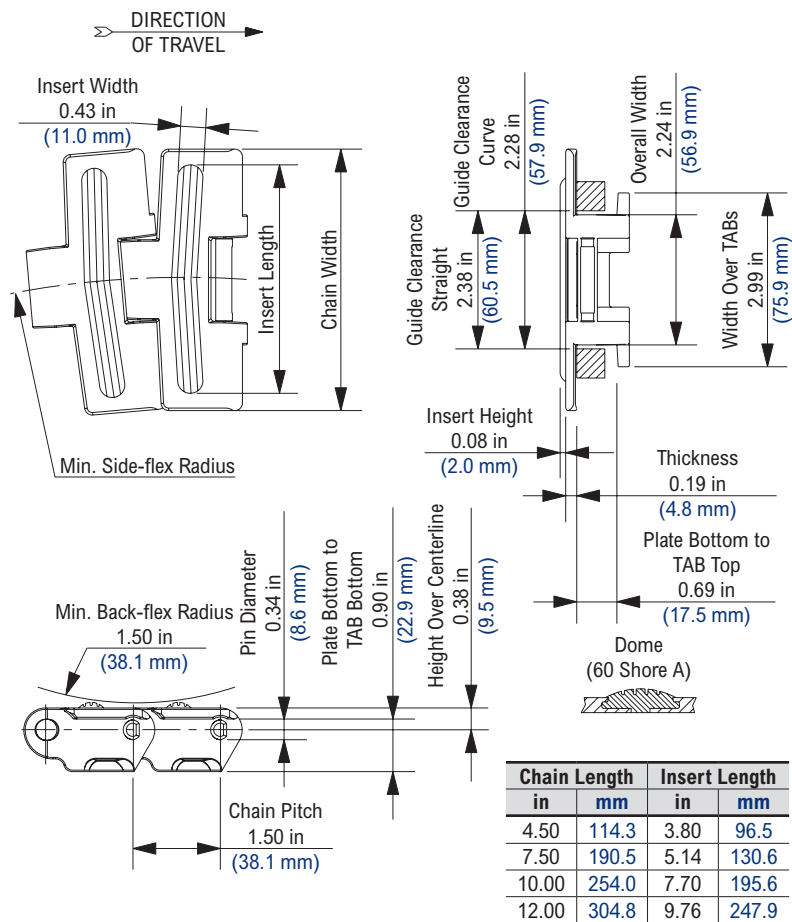

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
4 1/2	4.50	114.3	24.00	609.6	1.35	2.01
7 1/2	7.50	190.5	24.00	609.6	1.64	2.44
10	10.00	254.0	24.00	609.6	1.94	2.89
12	12.00	304.8	24.00	609.6	2.30	3.43

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max				
				dry	wet		dry	wet			
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Stocked in 80 pitch, 10 ft (3.048 m) length strands. Thermoplastic pins are available on a made-to-order basis. Inserts may be spaced at every pitch, every second pitch, etc. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

HDF LBP


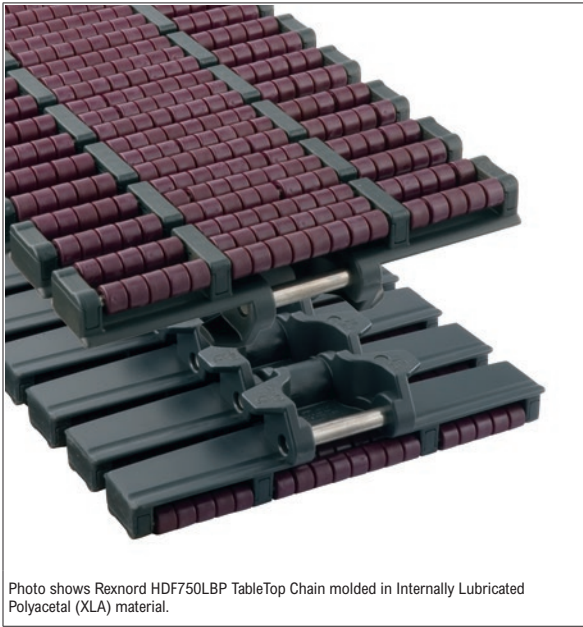


Photo shows Rexnord HDF750LBP TableTop Chain molded in Internally Lubricated Polyacetal (XLA) material.

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3 3/4	3.75	95.3	26.25	666.8	2.25	3.35
7 1/2	7.50	190.5	24.00	609.6	3.03	4.51
10	10.00	254.0	24.00	609.6	3.84	5.72
12	12.00	304.8	26.77	680.0	4.29	6.39

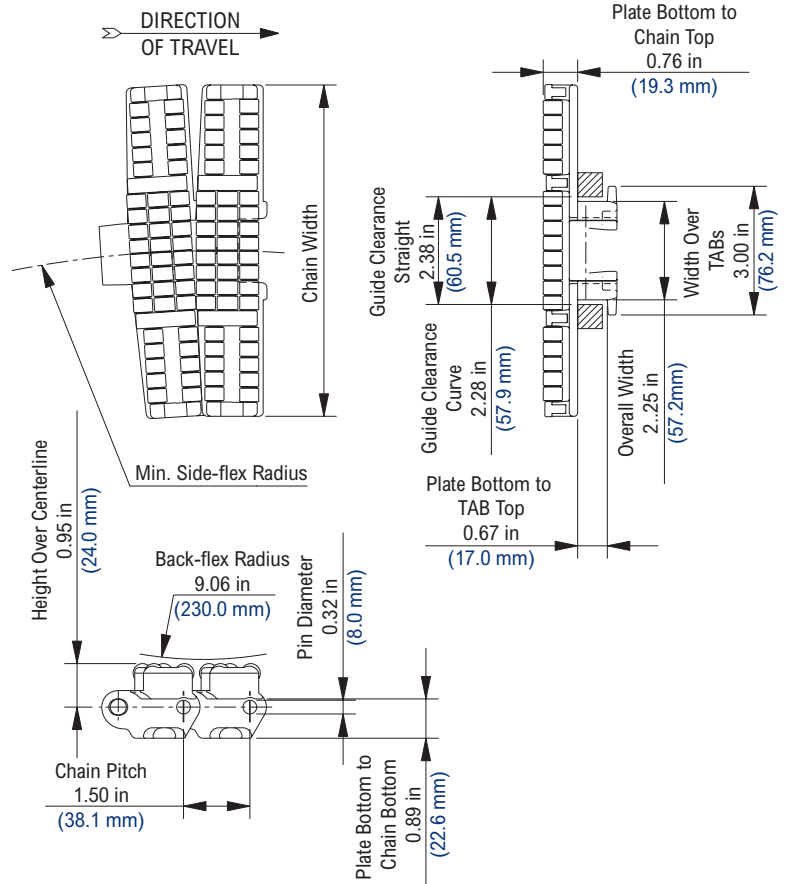

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
Standard Materials											
XLA	Internally Lubricated Polyacetal	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.


Additional Notes

Stocked in 40 pitch, 5 ft (1.524 m) length strands.
 Typical coefficient of friction between chain and product = 0.07.
 Chain strength is listed at room temperature. NR = Not Recommended.
 For additional material information, see material portfolio.

882 Cast Iron Sprocket

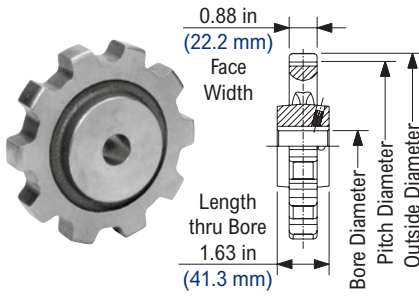

NS882 Thermoplastic Split Sprocket

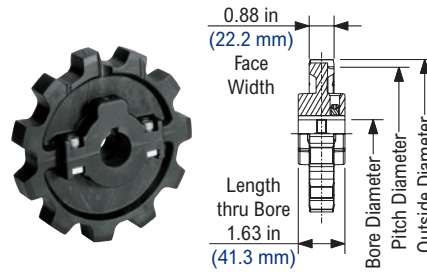

882 Cast Iron Sprocket Information


Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
9	9	4.386	111.40	4.43	112.5	3/4	1 3/8	20	35	-	-	-	-	3/4	2 1/4	20	55	3.75	1.70
10	10	4.854	123.29	4.92	125.0	3/4	1 3/8	20	35	-	-	-	-	3/4	2 1/4	20	55	4.19	1.90
11	11	5.325	135.26	5.41	137.4	3/4	1 1/2	20	40	-	-	-	-	3/4	2 1/4	20	55	4.41	2.00
12	12	5.796	147.22	5.90	149.9	3/4	1 3/8	20	35	-	-	-	-	3/4	2 1/4	20	55	4.63	2.10
15	15	7.215	183.26	7.36	186.9	3/4	1 3/4	20	45	-	-	-	-	3/4	2 3/4	20	65	6.24	2.83

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

NS882 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
11	11	5.325	135.26	5.41	137.4	1	1 3/4	25	45	-	-	-	-	1	1 3/4	25	45	0.66	0.30
12	12	5.796	147.22	5.90	149.9	1	1 3/4	25	45	-	-	-	-	1	1 3/4	25	45	0.82	0.37

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

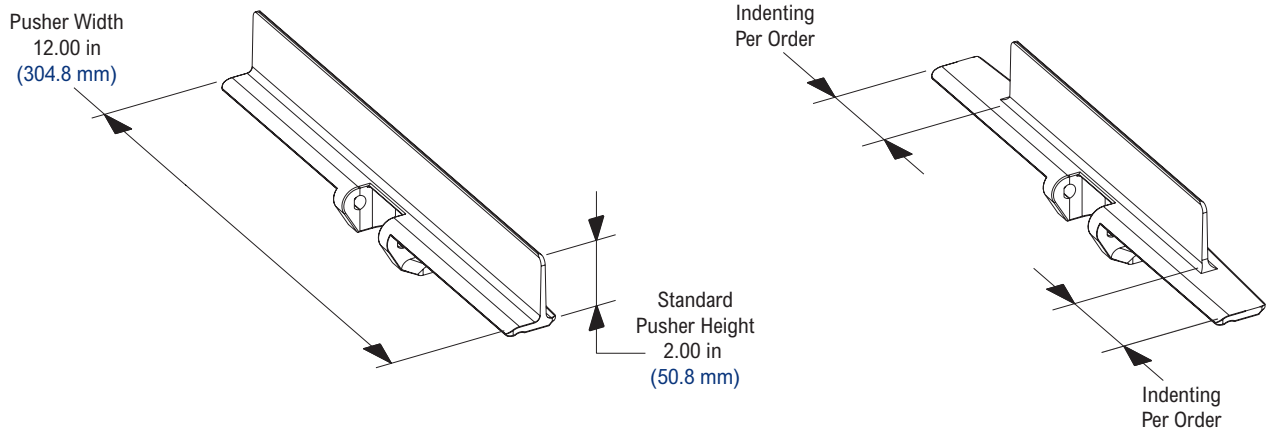


Pusher Attachment (F-Style)

All pusher attachments are molded 12 in (304.8 mm) wide and can be cut down to a minimum height of 1/4 in (6.35 mm). Pusher attachment width can be cut to match chain width.

The F2 designation represents an F-style pusher attachment at a height of 2 in (50.8 mm). For 882 TAB chain only.

Please indicate if pusher attachments are required every pitch, every second pitch, etc. when ordering. Also, indicate if indents are required in the center, on one or both sides of the chain.

For example. "I would like F2 pusher attachments every 8th pitch indented 3/4 in on both sides of the chain."

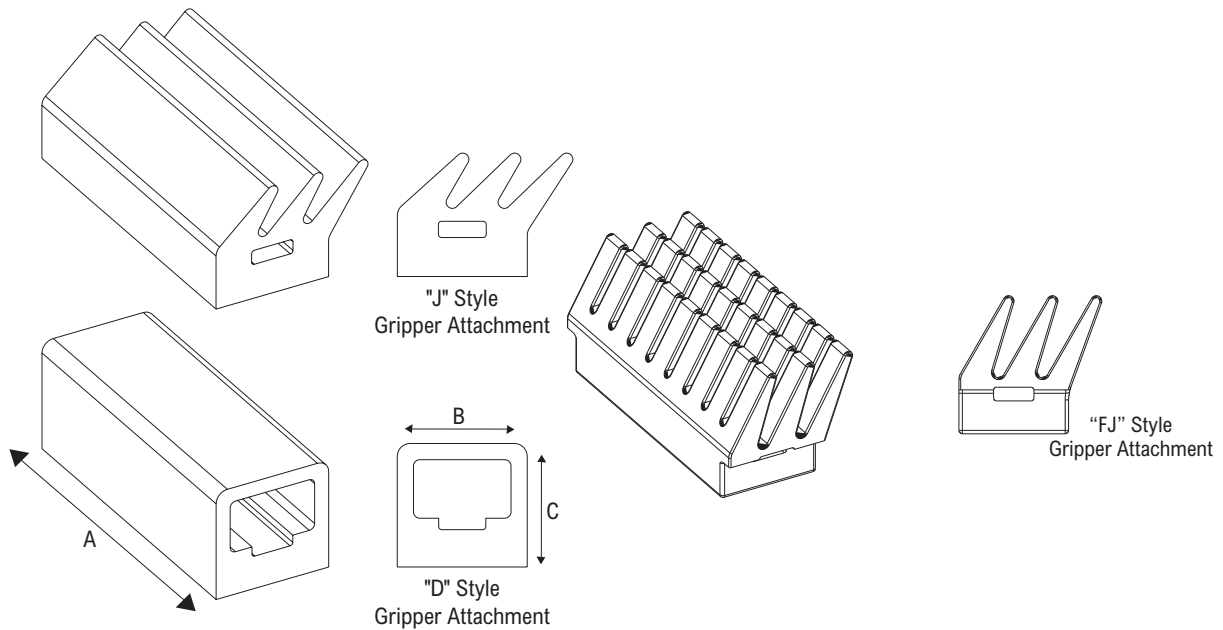

Gripper Attachments

Part Number	Style	Material	Color	Hardness (Shore A)	"A" Dimension		"B" Dimension		"C" Dimension	
					in	mm	in	mm	in	mm
Standard Grippers										
10075338	D	Neoprene	Black	40	3.35	85.1	1.25	31.8	1.19	30.2
10075339	D	Neoprene	White	40	3.35	85.1	1.25	31.8	1.19	30.2
10075340	D	Neoprene	Black	60	3.35	85.1	1.25	31.8	1.19	30.2
10075341	D	EPDM	White	50	3.35	85.1	1.25	31.8	1.19	30.2
10075342	D	EPDM	White	80	3.35	85.1	1.25	31.8	1.19	30.2
10075343	D	EPDM	Black	50	3.35	85.1	1.25	31.8	1.19	30.2
10075608	J	Neoprene	Black	40	3.35	85.1	1.25	31.8	1.19	30.2
10075609	J	Neoprene	White	50	3.35	85.1	1.25	31.8	1.19	30.2
10075611	J	EPDM	White	50	3.35	85.1	1.25	31.8	1.19	30.2
10074926	FJ	Neoprene	Black	40	3.68	93.5	1.69	42.9	1.58	40.1
10074927	FJ	EPDM	White	50	3.68	93.5	1.69	42.9	1.58	40.1

Regulatory Information

U.S. Patent: 9840370

883 TAB LBP


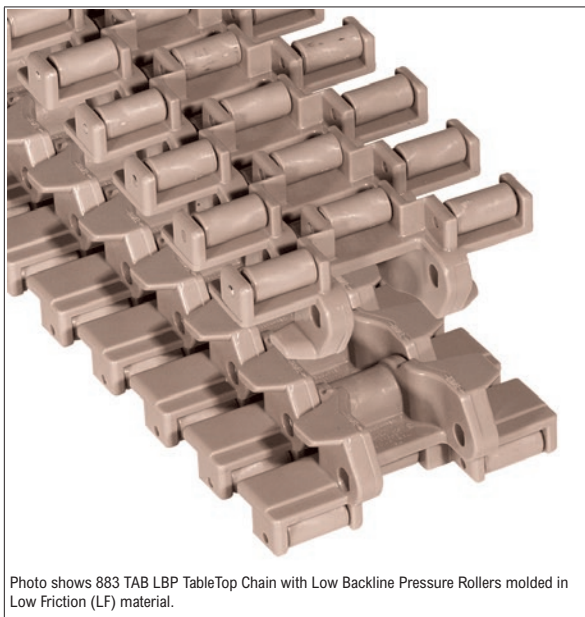


Photo shows 883 TAB LBP TableTop Chain with Low Backline Pressure Rollers molded in Low Friction (LF) material.

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
4 1/2	4.50	114.3	24.00	609.6	1.70	2.53
7 1/2	7.50	190.5	24.00	609.6	2.30	3.43

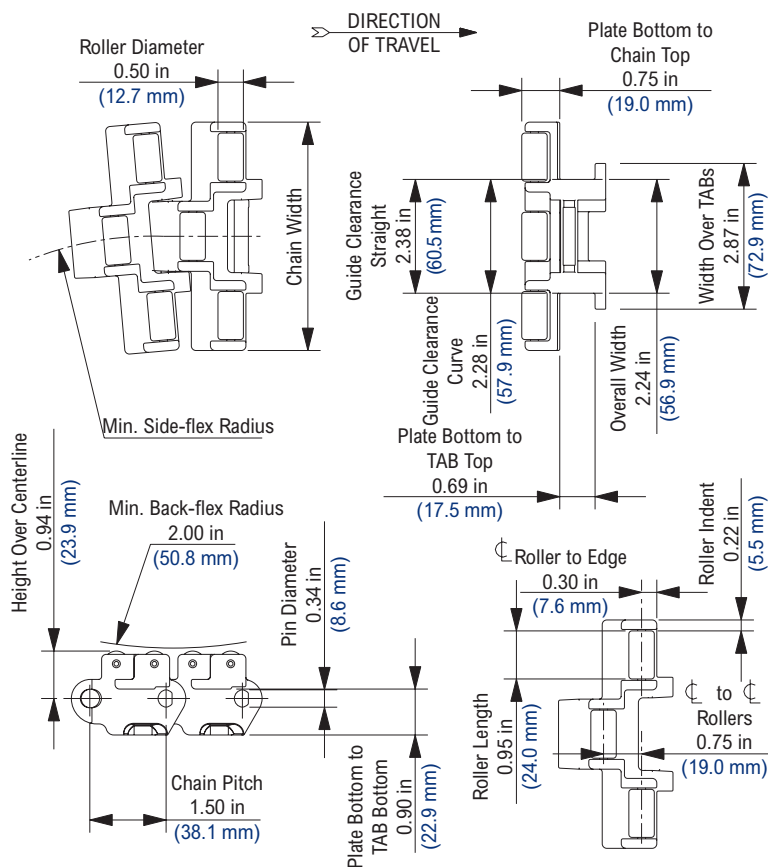

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes
Non-Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	625	2,780	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: D289497, D289606, 4436200


Additional Notes

Stocked in 80 pitch, 10 ft (3.048 m) length strands.

Typical coefficient of friction between chain and product = 0.07.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

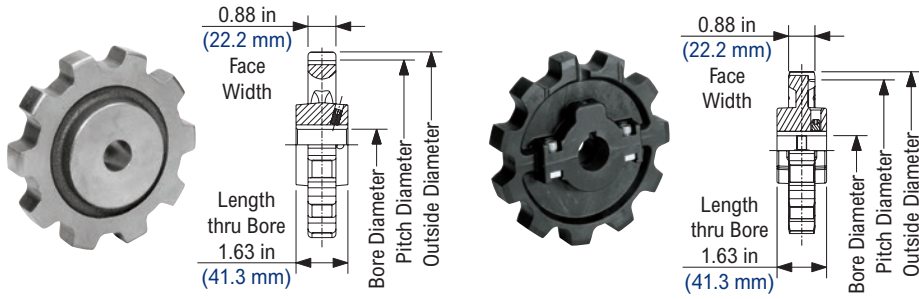

882 Cast Iron Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
9	9	4.386	111.40	4.43	112.5	3/4	1 3/8	20	35	-	-	-	-	3/4	2 1/4	20	55	3.75	1.70
10	10	4.854	123.29	4.92	125.0	3/4	1 3/8	20	35	-	-	-	-	3/4	2 1/4	20	55	4.19	1.90
11	11	5.325	135.26	5.41	137.4	3/4	1 1/2	20	40	-	-	-	-	3/4	2 1/4	20	55	4.41	2.00
12	12	5.796	147.22	5.90	149.9	3/4	1 3/8	20	35	-	-	-	-	3/4	2 1/4	20	55	4.63	2.10
15	15	7.215	183.26	7.36	186.9	3/4	1 3/4	20	45	-	-	-	-	3/4	2 3/4	20	65	6.24	2.83

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

NS882 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
11	11	5.325	135.26	5.41	137.4	1	1 3/4	25	45	-	-	-	-	1	1 3/4	25	45	0.66	0.30
12	12	5.796	147.22	5.90	149.9	1	1 3/4	25	45	-	-	-	-	1	1 3/4	25	45	0.82	0.37

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

963 (S)


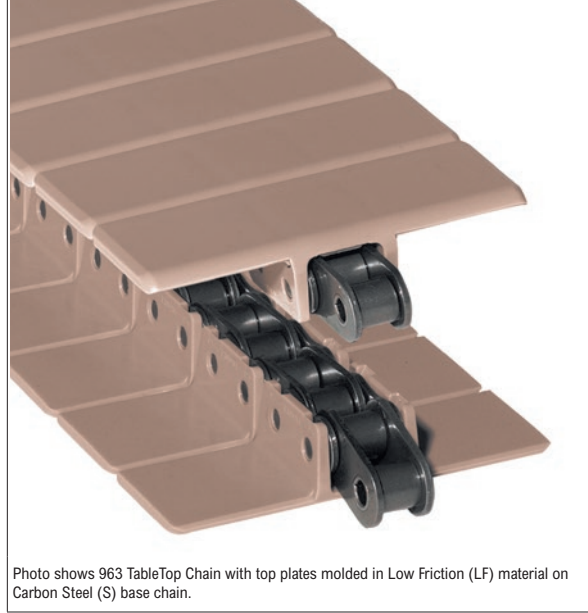


Photo shows 963 TableTop Chain with top plates molded in Low Friction (LF) material on Carbon Steel (S) base chain.

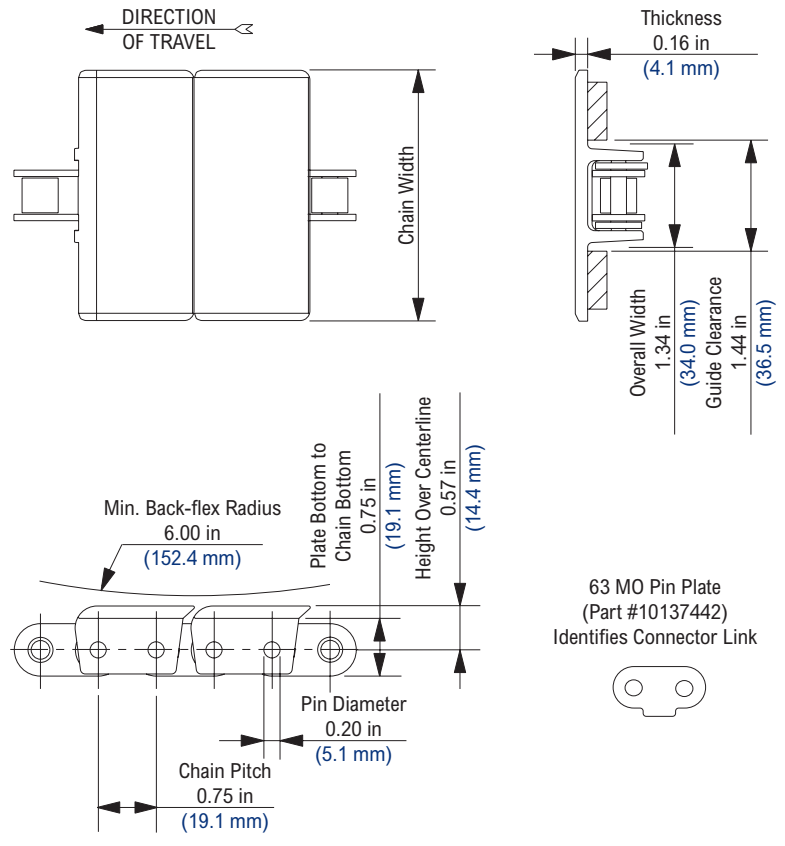

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	-	-	1.41	2.10
4 1/2	4.50	114.3	-	-	1.50	2.24
6	6.00	152.4	-	-	1.70	2.53
7 1/2	7.50	190.5	-	-	1.80	2.68

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
				dry	wet		dry	wet			
Standard Materials											
LF	Low Friction	Carbon Steel	-40	180	NR	-40	82	NR	1,000	4,448	No
Non-Standard Materials											
BWR	Black Wear Resistant	Carbon Steel	-40	180	NR	-40	82	NR	1,000	4,448	No
HP™	High Performance	Carbon Steel	-40	180	NR	-40	82	NR	1,000	4,448	No
P	Chemical Resistant	Carbon Steel	0	180	NR	-18	82	NR	1,000	4,448	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.


Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 160 pitch, 10 ft (3.048 m) length strands. Uses 63 carbon steel (S) base chain (Part #10137441). Chain runs on ANSI No. 60 sprockets. Chain breakers available. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.




Part #10178826

963 (SS)

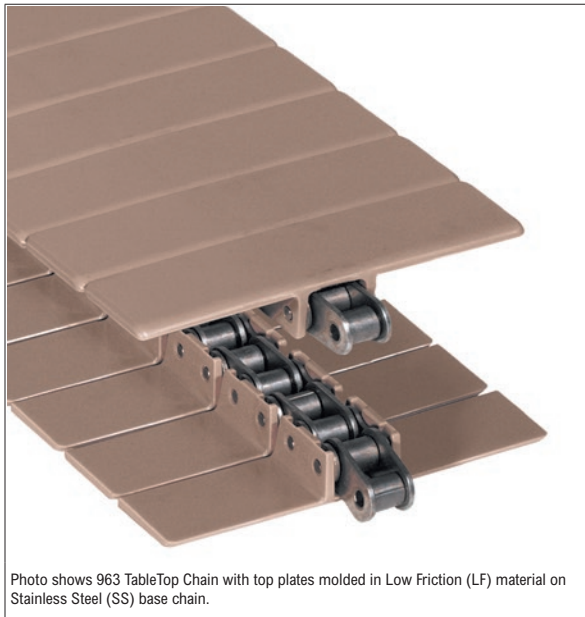

Chain Information

Chain Width	Chain Width		Min. Side-flex Radius		Approximate Weight	
	desc	in	mm	in	mm	lbs/ft
3 1/4	3.25	82.6	-	-	1.41	2.10
4 1/2	4.50	114.3	-	-	1.50	2.24
6	6.00	152.4	-	-	1.70	2.53
7 1/2	7.50	190.5	-	-	1.80	2.68

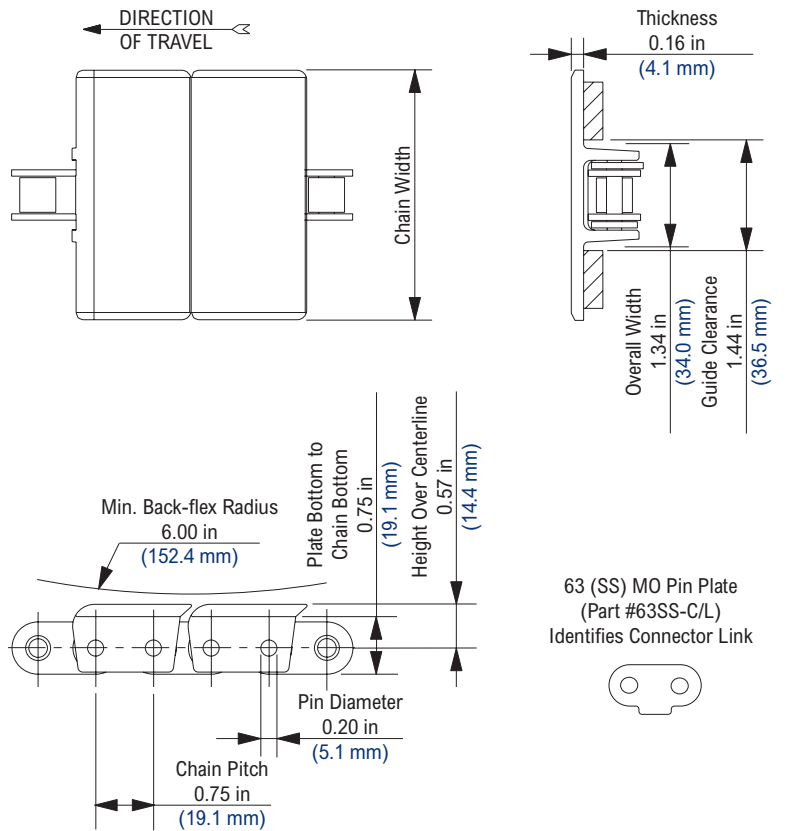

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	750	3,336	Yes
Non-Standard Materials											
BWR	Black Wear Resistant	Stainless Steel	-40	180	NR	-40	82	NR	750	3,336	No
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	750	3,336	Yes
P	Chemical Resistant	Stainless Steel	0	180	140	-18	82	60	750	3,336	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.


Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 160 pitch, 10 ft (3.048 m) length strands. Uses 63 stainless steel (SS) base chain (Part #10137636). Chain runs on ANSI No. 60 sprockets. Chain breakers available. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.



Part #10178826

NS63 Thermoplastic Split Sprocket

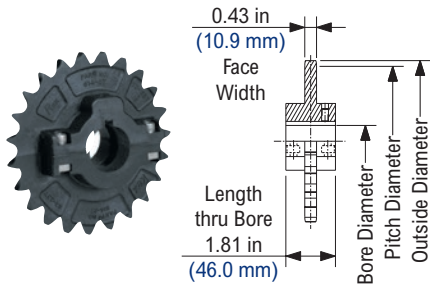

NS63 Thermoplastic Split Sprocket information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight			
						Round				Square				in		mm					
						in	mm	min	max	min	max	min	max	min	max	min	max			min	max
actual	effect	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
23	11 1/2	5.508	139.90	5.91	150.1	1	1 5/8	30	40	-	-	-	-	1	1 5/8	30	40	0.75	0.34		

Shaft-ready round bore sprockets are shipped with keyway and setscrews. Metric shaft-ready round bore sprockets are shipped with metric hardware but without setscrews. Idler bores are designed to spin freely on the shaft without keyway or setscrews.

1040 FGM


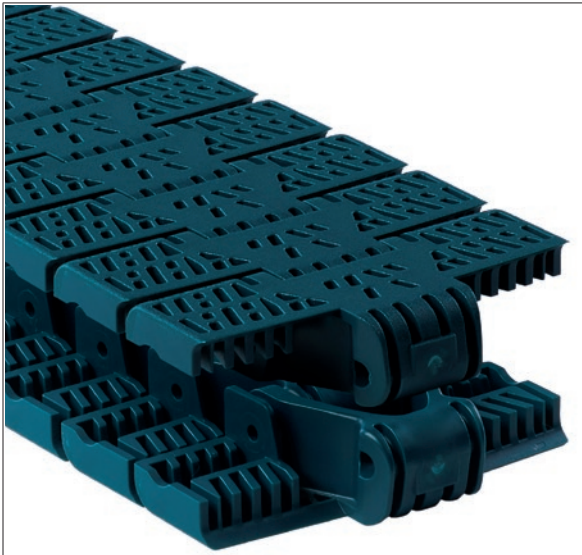


Photo shows 1040 FGM TableTop Chain with Magnetflex® Retention molded in XLG material.

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3.3IN	3.3	83.8	19.7	500	0.64	0.95

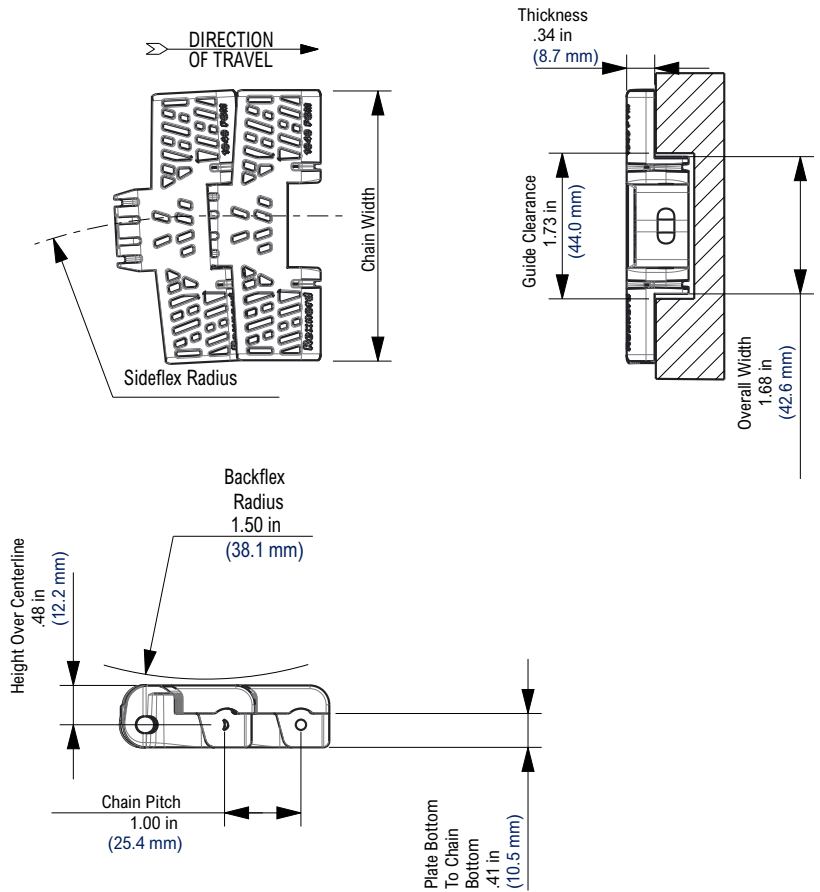

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
			dry	wet		dry	wet				
Standard Materials											
XLG	Low Friction Green	Stainless Steel	-40	+180	+150	-40	+82	+66	337	1,500	Yes
Non-Standard Materials											
Dry-PT™	Dry PET Low Friction	Stainless Steel	-40	+180	+150	-40	+82	+66	337	1,500	Yes
HP™	High Performance	Stainless Steel	-40	+180	+150	-40	+82	+66	337	1,500	Yes
PSX™	Platinum Series X™	Stainless Steel	-40	+180	+150	-40	+82	+66	337	1,500	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Regnord, TableTop and Magnetflex are trademarks of Regal Regnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Must be used with Magnetflex corner tracks for side-flexing applications. Open area = 35%.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

1040 FTM


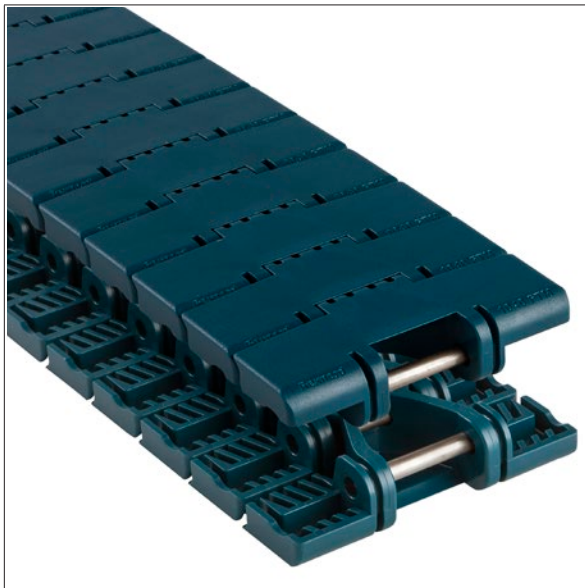


Photo shows 1040 FTM TableTop Chain with Mangetflex® Retention molded in XLG material.

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3.3IN	3.3	83.8	19.7	500	0.67	1.00

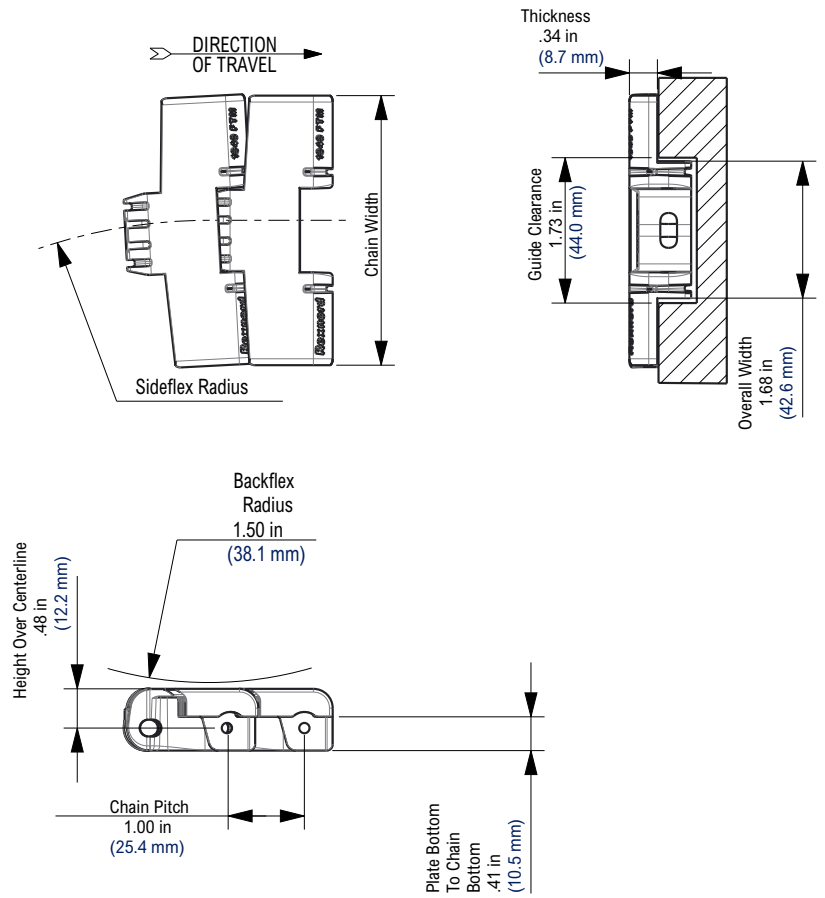

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
XLG	Low Friction Green	Stainless Steel	-40	+180	+150	-40	+82	+66	337	1,500	Yes
Dry-PT™	Dry PET Low Friction	Stainless Steel	-40	+180	+150	-40	+82	+66	337	1,500	Yes
MR	Melt Resistant	Stainless Steel	-80	+220	NR	-62	+104	NR	337	1,500	No
PSX™	Platinum Series X™	Stainless Steel	-40	+180	+150	-40	+82	+66	337	1,500	Yes
Non-Standard Materials											
HP™	High Performance	Stainless Steel	-40	+180	+150	-40	+82	+66	337	1,500	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, TableTop and Magnetflex are trademarks of Regal Rexnord Corporation.

All rights reserved.


Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.


Must be used with Magnetflex corner tracks for side-flexing applications. Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.


SSS7700 Stainless Steel Split Sprocket

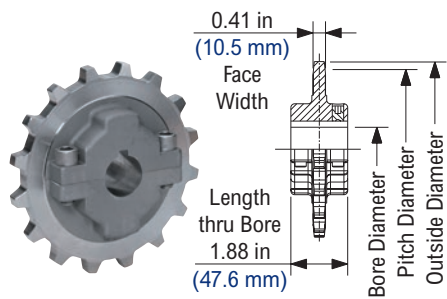

NS7700 Thermoplastic Split Sprocket

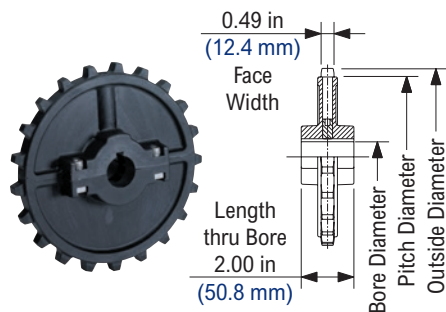

NS7700 Thermoplastic Split Sprocket with Adapter

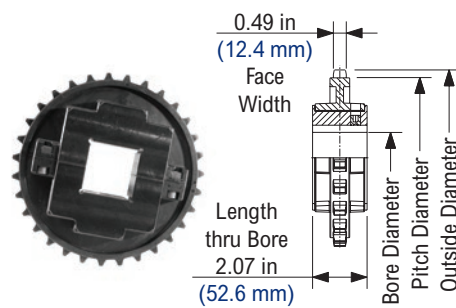

SSS7700 Stainless Steel Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight			
						Round				Square				in		mm					
						in	mm	min	max	min	max	min	max	min	max	min	max			min	max
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
16	16	5.126	130.20	5.14	130.6	1	2	25	50	1	1	25	25	1	2	25	50	3.50	1.59		
18	18	5.759	146.28	5.78	146.8	1	2	25	50	1	1	25	25	1	2	25	50	5.00	2.27		
21	21	6.710	170.43	6.72	170.7	1	2 1/2	25	60	1	3 1/2*	25	90*	1	3 1/2	25	60	6.00	2.72		

Shaft-ready round bore sprockets are shipped with keyway and no setscrew.

* The 3-1/2 in and 90 mm bores for the 21 tooth square bore sprocket and all round bore sprockets above 1-1/2 in (40 mm) are supplied as machined bores. All other bores are supplied with split bore adapters.

NS7700 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight			
						Round				Square				in		mm					
						in	mm	min	max	min	max	min	max	min	max	min	max			min	max
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
16	16	5.126	130.20	5.14	130.6	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	0.73	0.33		
18	18	5.759	146.28	5.78	146.8	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	0.84	0.38		
21	21	6.710	170.43	6.72	170.7	1	1 5/8	25	40	3 1/2	3 1/2	90	90	1	1 5/8	25	40	0.97	0.44		
31	31	9.885	251.08	9.93	252.2	2	4 1/2	50	120	2	4 1/2	50	120	2	4 1/2	50	120	3.72	1.69		

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

* The 3-1/2 in and 90 mm square bore are supplied with bore adapters. 1-1/2 in and 40 mm round bore are supplied with bore adapters.

NS7700 Thermoplastic Split Sprocket with Adapter Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight			
						Round				Square				in		mm					
						in	mm	min	max	min	max	min	max	min	max	min	max			min	max
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
21	21	6.710	170.43	6.72	170.7	1 11/16	2 1/2	25	65	1	3	25	75	1 11/16	3	25	75	0.97	0.44		
31	31	9.885	251.08	9.93	252.2	1	1 15/16	25	45	1	1 1/2	25	40	1	1 15/16	25	40	3.72	1.69		


Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

* The 3-1/2 in and 90 mm square bore are supplied with bore adapters. 1-1/2 in and 40 mm round bore are supplied with bore adapters.

1050 FT TAB



Photo shows 1050 FT TAB TableTop Chain molded in High Performance (HP) material.

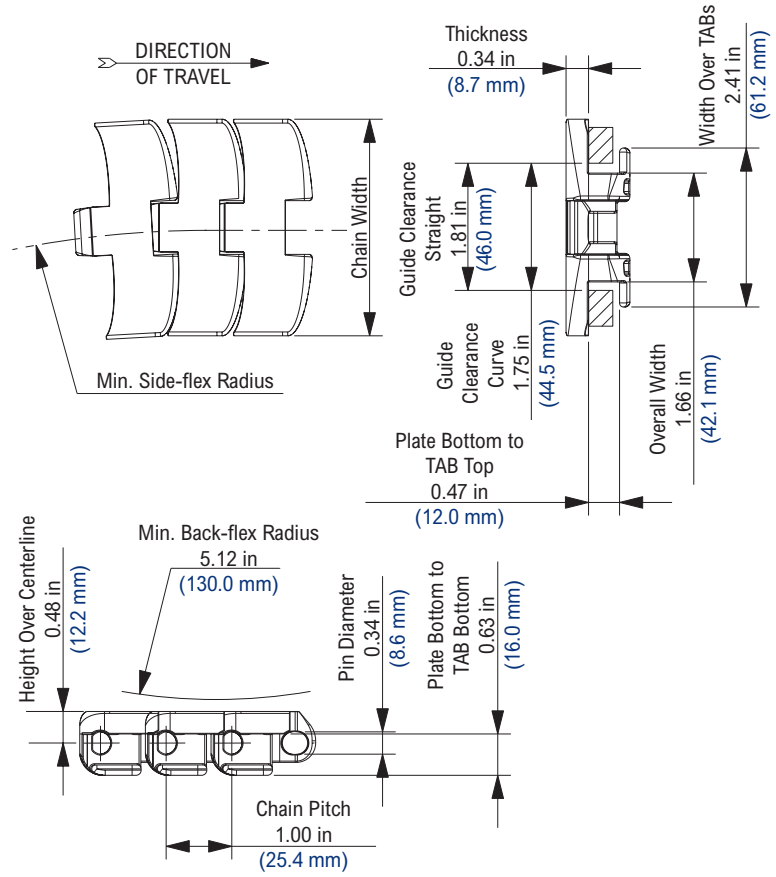

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
84MM	3.31	84.0	19.69	500.1	1.25	1.86

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
PSX™	Platinum Series X™	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
XLG	Low Friction Green	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
Non-Standard Materials											
PS™	Platinum Series™	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, TableTop, Platinum Series and PS are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 5678682, EP0700843

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 120 pitch, 10 ft (3.048 m) length strands.

Must be used with TAB corner tracks for side-flexing applications.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

1050 FT LPC®


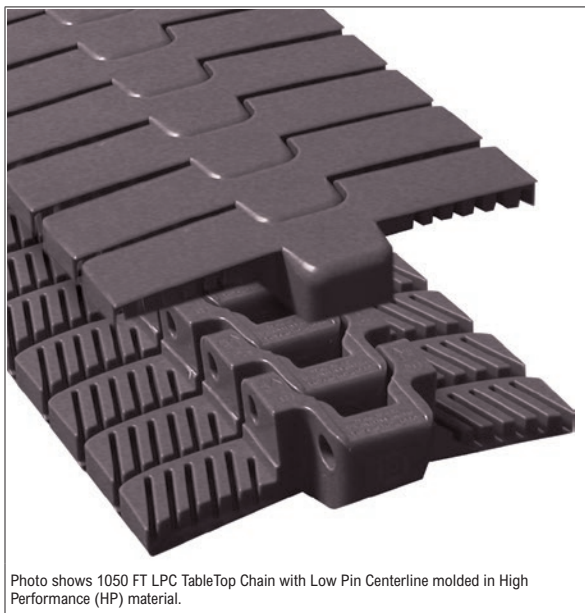


Photo shows 1050 FT LPC TableTop Chain with Low Pin Centerline molded in High Performance (HP) material.

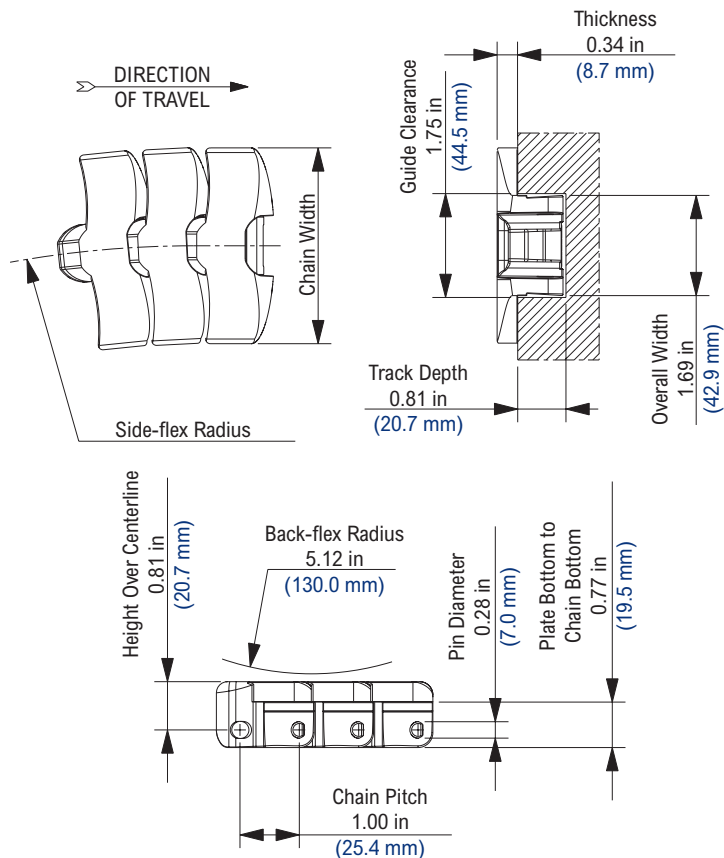

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	18.00	457.2	1.25	1.86
84MM	3.31	84.0	19.69	500.1	1.25	1.86
4 1/2	4.50	114.3	24.00	609.6	1.41	2.10
7 1/2	7.50	190.5	24.00	609.6	1.84	2.74

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
Non-Standard Materials											
Dry-PT™	Dry PET Low Friction	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
P	Chemical Resistant	Stainless Steel	0	180	140	-18	82	60	340	1,512	Yes
PS™	Platinum Series™	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, TableTop, Dry-PT, Platinum Series, PS and LPC are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 5678682, EP0700843, 5176247

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 120 pitch, 10 ft (3.048 m) length strands.


Must be used with LPC corner tracks for side-flexing applications. Rexnord curves are recommended for use with these chains because they have the proper profile to maintain chain hold-down.

Low Pin Centerline (LPC) chain is retained in the corners without the use of bevels, TAB's or magnets, and can be lifted vertically out of the corners for cleaning and/or maintenance.


Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.


SSS7700 Stainless Steel Split Sprocket

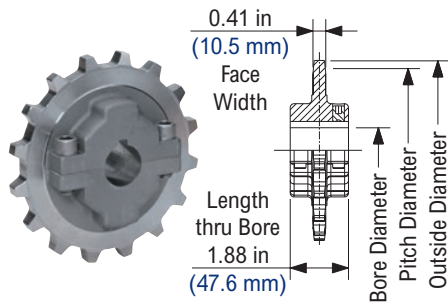

NS7700 Thermoplastic Split Sprocket

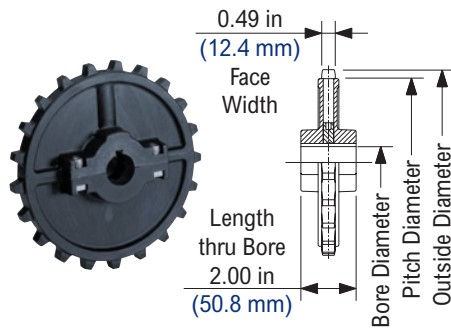

NS7700 Thermoplastic Split Sprocket with Adapter

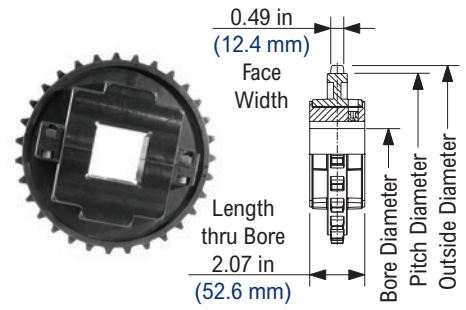

SSS7700 Stainless Steel Split Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)										Bore Diameter (Round)				Approximate Weight		
			Round				Square						in		mm				
			in		mm		in		mm		in		mm						
actual	effect	min	max	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
16	16	5.126	130.20	5.14	130.6	1	2	25	50	1	1	25	25	1	2	25	50	3.50	1.59
18	18	5.759	146.28	5.78	146.8	1	2	25	50	1	1	25	25	1	2	25	50	5.00	2.27
21	21	6.710	170.43	6.72	170.7	1	2 1/2	25	60	1	3 1/2*	25	90*	1	3 1/2	25	60	6.00	2.72

Shaft-ready round bore sprockets are shipped with keyway and no setscrew.

* The 3-1/2 in and 90 mm bores for the 21 tooth square bore sprocket and all round bore sprockets above 1-1/2 in (40 mm) are supplied as machined bores. All other bores are supplied with split bore adapters.

Photo shows part number 614-63-1, an NS7700 thermoplastic split sprocket with 21 teeth and 1 inch shaft-ready bore.

NS7700 Thermoplastic Split Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)										Bore Diameter (Round)				Approximate Weight		
			Round				Square						in		mm				
			in		mm		in		mm		in		mm						
actual	effect	min	max	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
16	16	5.126	130.20	5.14	130.6	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	0.73	0.33
18	18	5.759	146.28	5.78	146.8	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	0.84	0.38
21	21	6.710	170.43	6.72	170.7	1	1 5/8	25	40	3 1/2	3 1/2	90	90	1	1 5/8	25	40	0.97	0.44
31	31	9.885	251.08	9.93	252.2	2	4 1/2	50	120	2	4 1/2	50	120	2	4 1/2	50	120	3.72	1.69

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

* The 3-1/2 in and 90 mm square bore are supplied with bore adapters. 1-1/2 in and 40 mm round bore are supplied with bore adapters.

NS7700 Thermoplastic Split Sprocket with Adapter Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)										Bore Diameter (Idler)				Approximate Weight		
			Round				Square						in		mm				
			in		mm		in		mm		in		mm						
actual	effect	min	max	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
21	21	6.710	170.43	6.72	170.7	1 11/16	2 1/2	25	65	1	3	25	75	1 11/16	3	25	75	0.97	0.44
31	31	9.885	251.08	9.93	252.2	1	1 15/16	25	45	1	1 1/2	25	40	1	1 15/16	25	40	3.72	1.69

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

* The 3-1/2 in and 90 mm square bore are supplied with bore adapters. 1-1/2 in and 40 mm round bore are supplied with bore adapters.

1055 FT LPC™


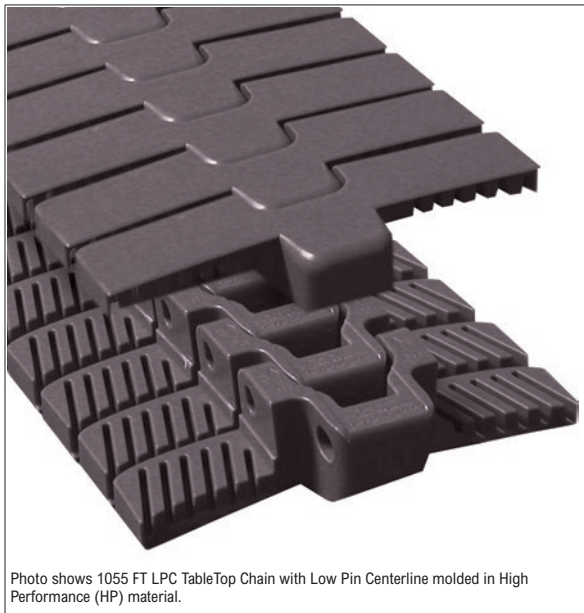


Photo shows 1055 FT LPC TableTop Chain with Low Pin Centerline molded in High Performance (HP) material.

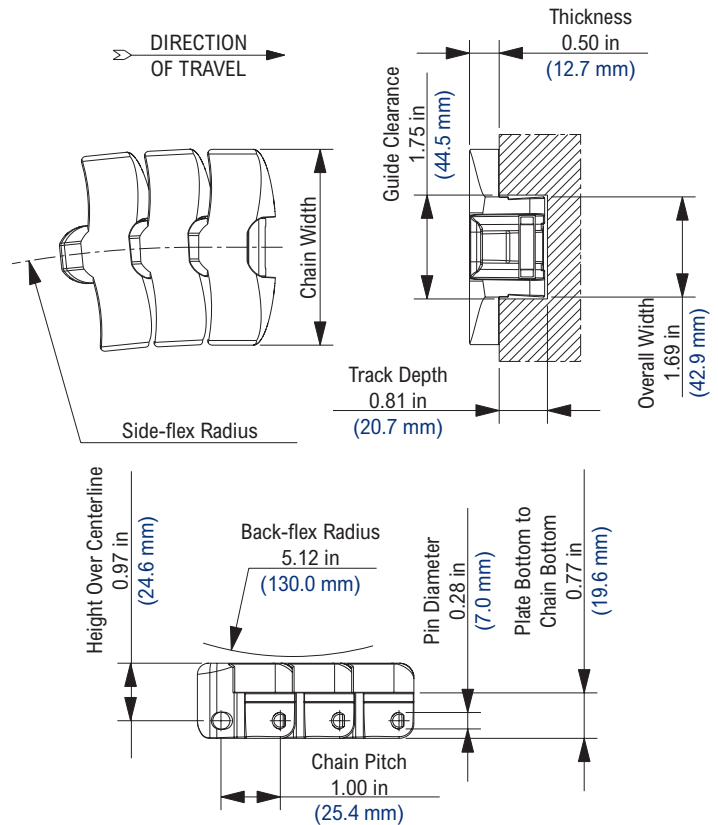

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	18.00	457.2	1.45	2.16
84MM	3.31	84.0	19.69	500.1	1.45	2.16
4 1/2	4.50	114.3	24.00	609.6	1.68	2.50
7 1/2	7.50	190.5	24.00	609.6	2.31	3.44

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
Non-Standard Materials											
Dry-PT™	Dry PET Low Friction	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
P	Chemical Resistant	Stainless Steel	0	180	140	-18	82	60	340	1,512	Yes
PS™	Platinum Series™	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
PSX™	Platinum Series X™	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
WX	Green Abrasion Resistant Polyamide	Stainless Steel	-40	220	NR	-40	104	NR	425	1,890	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, TableTop, Dry-PT, Platinum Series, Platinum Series X, PS, PSX and LPC are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 5678682, EP0700843, 5176247

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 120 pitch, 10 ft (3.048 m) length strands.

Must be used with LPC corner tracks for side-flexing applications. Rexnord curves are recommended for use with these chains because they have the proper profile to maintain chain hold-down.

Low Pin Centerline (LPC) chain is retained in the corners without the use of bevels, TAB's or magnets, and can be lifted vertically out of the corners for cleaning and/or maintenance.


Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

1055 FT TAB



Photo shows 1055 FT TAB TableTop Chain molded in High Performance (HP) material.

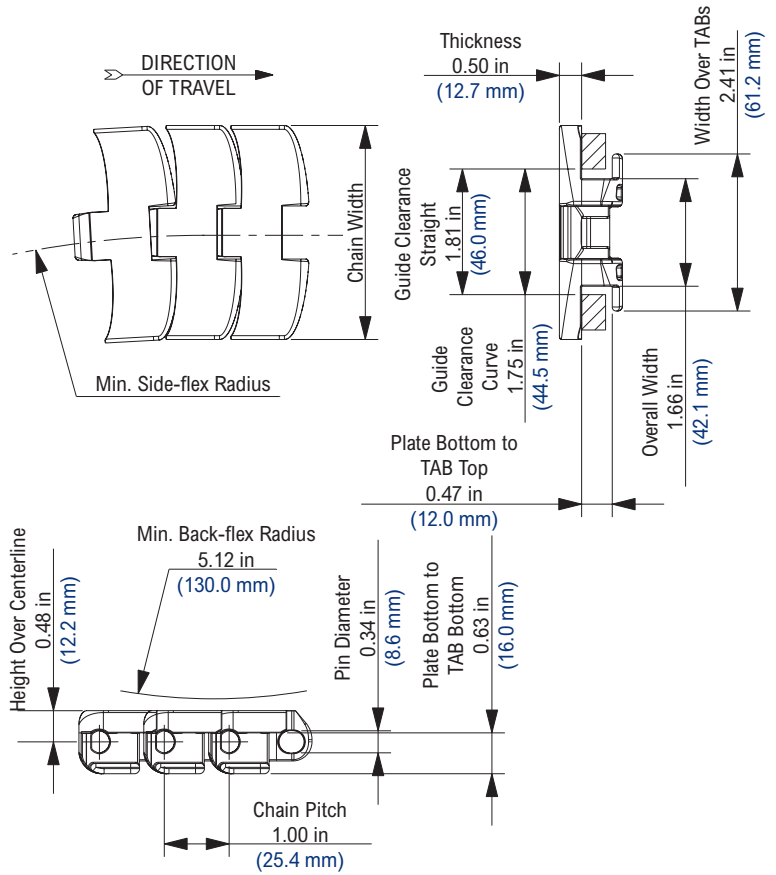

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
84MM	3.31	84.0	19.69	500.1	1.44	2.15
4 1/2	4.50	114.3	19.69	500.1	1.55	2.30

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
XLG	Low Friction Green	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patents: 5678682, EP0700843


Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 120 pitch, 10 ft (3.048 m) length strands. Must be used with TAB corner tracks for side-flexing applications. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

1055 FTM



Photo shows 1055 FTM TableTop Chain with Magnetflex Retention molded in High Performance (HP) material.

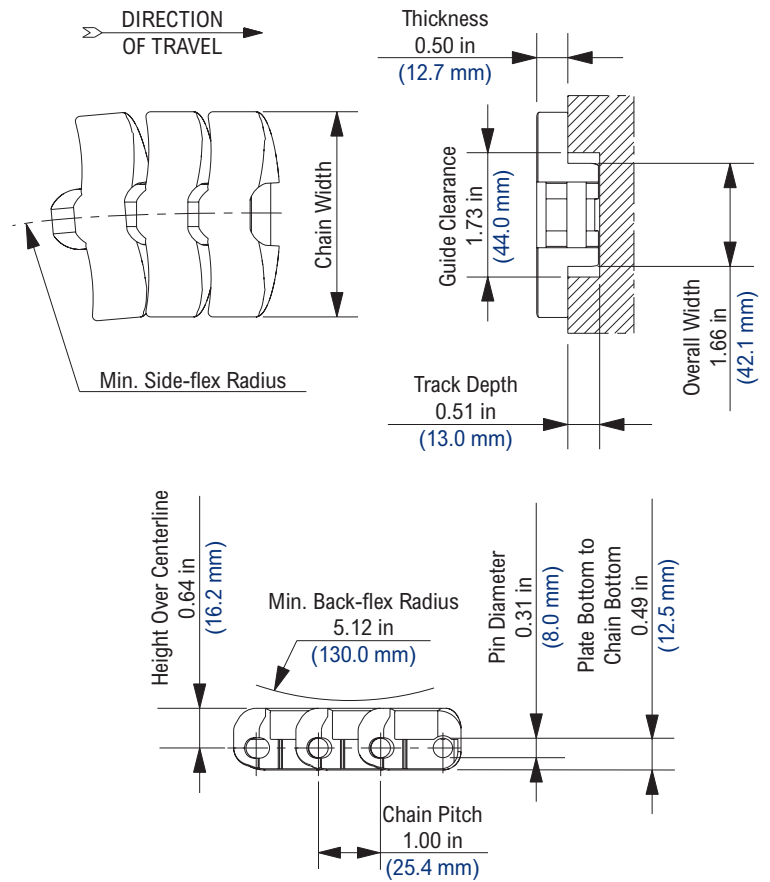

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
84MM	3.31	84.0	19.69	500.1	1.27	1.89
4 1/2	4.50	114.3	19.69	500.1	1.49	2.22

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
			dry	wet		dry	wet				
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes
XLG	Low Friction Green	Stainless Steel	-40	180	150	-40	82	66	425	1,890	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, TableTop and Magnetflex are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 5678682, EP0700843

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.


Stocked in 120 pitch, 10 ft (3.048 m) length strands.

Must be used with Magnetflex corner tracks for side-flexing applications.


Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.


SSS7700 Stainless Steel Split Sprocket

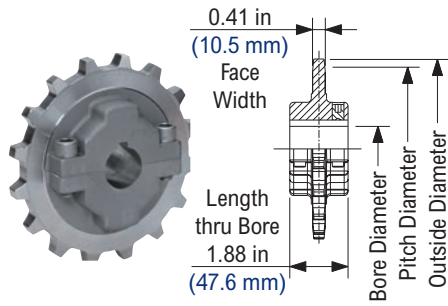

NS7700 Thermoplastic Split Sprocket

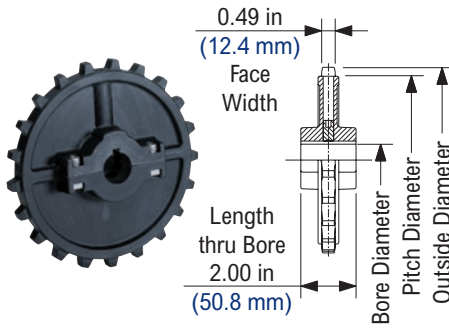

NS7700 Thermoplastic Split Sprocket with Adapter

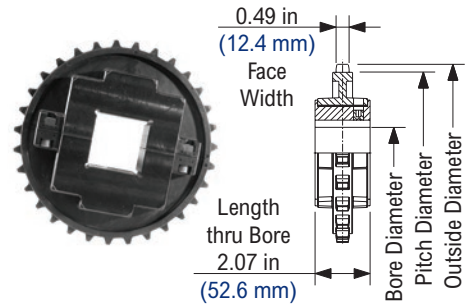

SSS7700 Stainless Steel Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
16	16	5.126	130.20	5.14	130.6	1	1 1/2	25	40	1	1	25	25	1	2	25	50	3.50	1.59
18	18	5.759	146.28	5.78	146.8	1	1 1/2	25	40	1	1	25	25	1	2	25	50	5.00	2.27
21*	21	6.710	170.43	6.72	170.7	1	2 1/2	25	60	1	3 1/2*	25	90*	1	3 1/2	25	60	6.00	2.72

Shaft-ready round bore sprockets are shipped with keyway and no setscrew.

* The 3-1/2 in and 90 mm bores for the 27 tooth square bore sprocket and all round bore sprockets above 1-1/2 in (40 mm) are supplied as machined bores. All other bores are supplied with split bore adapters.

NS7700 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
16	16	5.126	130.20	5.14	130.6	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	0.73	0.33
18	18	5.759	146.28	5.78	146.8	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	0.84	0.38
21	21	6.710	170.43	6.72	170.7	1	1 5/8	25	40	3 1/2	3 1/2	90	90	1	1 5/8	25	40	0.97	0.44
31	31	9.885	251.08	9.93	252.2	2	4 1/2	50	120	2	4 1/2	50	120	2	4 1/2	50	120	3.72	1.69

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

NS7700 Thermoplastic Split Sprocket with Adapter Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
21	21	6.710	170.43	6.72	170.7	1	2 1/2	25	65	1	3	25	75	1	3	25	75	0.97	0.44
31	31	9.885	251.08	9.93	252.2	1	1 15/16	25	45	1	1 3/4	25	45	1	1 15/16	25	45	3.72	1.69


Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft. Standard adapter is UHMWPE.

1673 SpiralTop™ (Single-Bearing)



Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
6	6.00	152.4	16.00	457.2	1.72	2.56

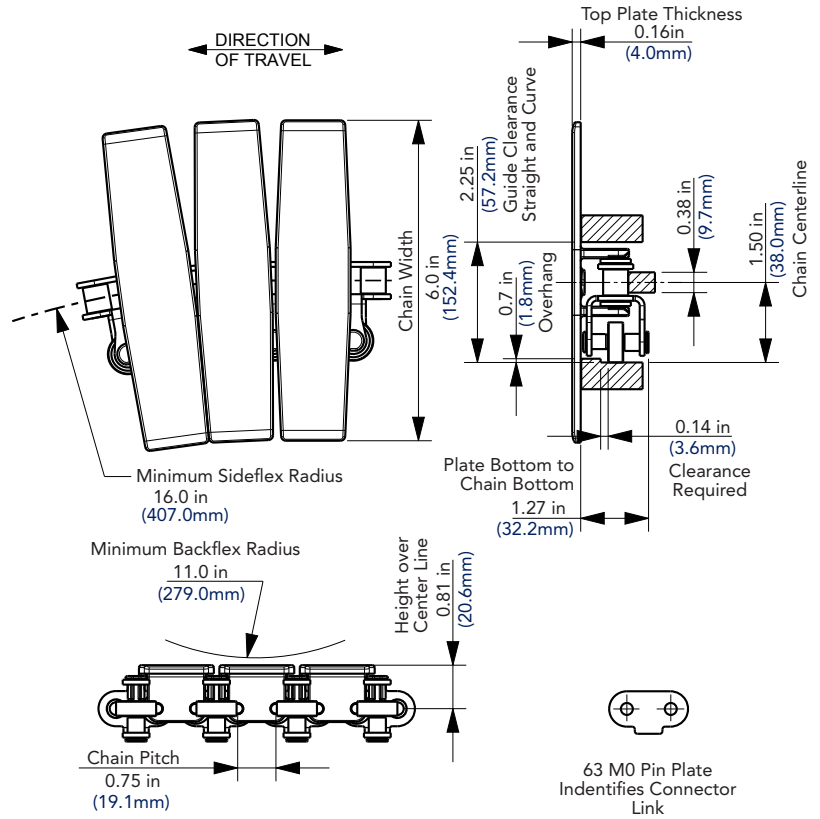

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
			dry	wet		dry	wet				
Non-Standard Materials											
HP™	High Performance	HiPro Carbon Steel	-40	180	150	-40	82	66	780	3,470	No

Regulatory Information

Rexnord, TableTop and SpiralTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Stocked in 160 pitch, 10 ft (3.048 m) length strands.
 Chain runs on ANSI No. 60 sprockets.
 Chain breakers available.
 Chain strength is listed at room temperature. NR = Not Recommended.
 For additional material information, see material portfolio.

1673 SpiralTop™ (Double-Bearing)


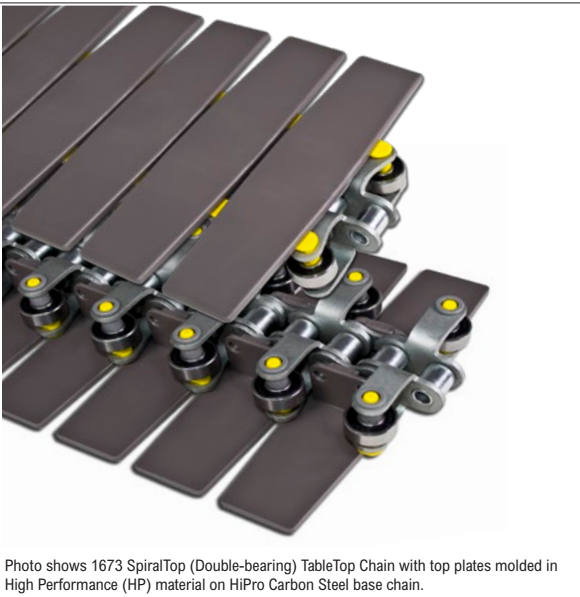


Photo shows 1673 SpiralTop (Double-bearing) TableTop Chain with top plates molded in High Performance (HP) material on HiPro Carbon Steel base chain.

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
6	6.00	152.4	16.00	457.2	1.72	2.56

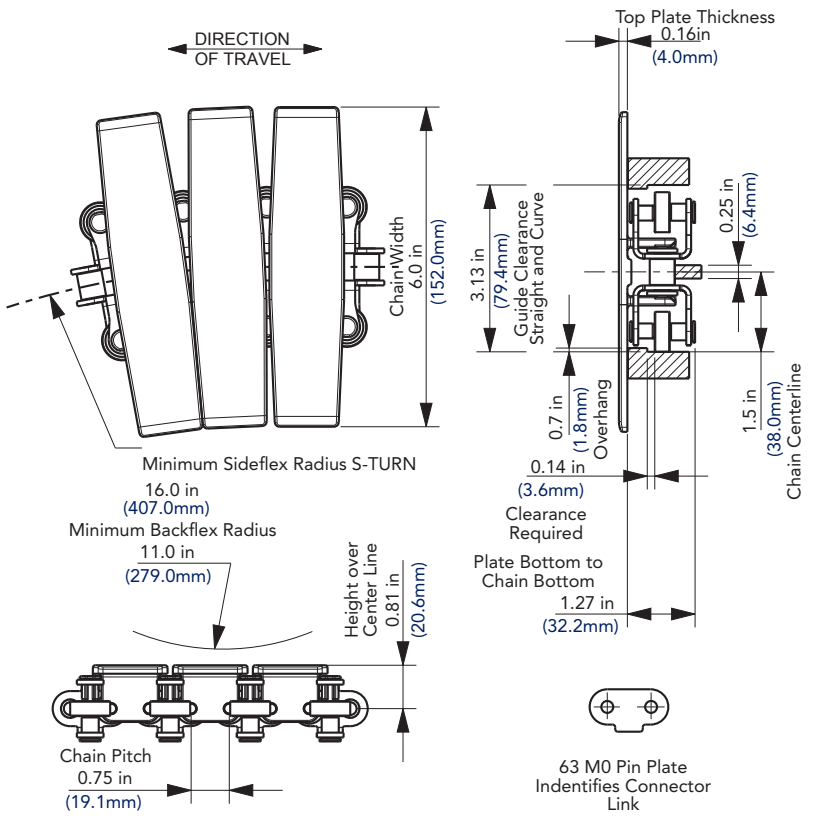

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
Non-Standard Materials											
HP™	High Performance	HiPro Carbon Steel	-40	180	150	-40	82	66	780	3,470	No


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, TableTop and SpiralTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Stocked in 160 pitch, 10 ft (3.048 m) length strands. Chain runs on ANSI No. 60 sprockets. Chain breakers available. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

NS63 Thermoplastic Split Sprocket

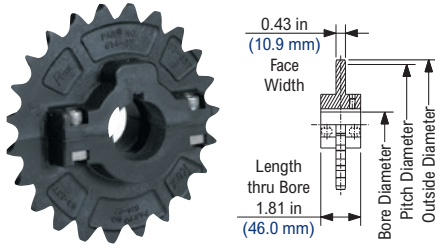

NS63 Thermoplastic Split Sprocket Information


Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						min	max	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
23	11 1/2	5.508	139.90	5.91	150.1	1	1 5/8	30	40	-	-	-	-	1	1 5/8	30	40	0.75	0.34

Shaft-ready round bore sprockets are shipped with keyway and setscrews. Metric shaft-ready round bore sprockets are shipped with metric hardware but without setscrews. Idler bores are designed to spin freely on the shaft without keyway or setscrews.

1700



Photo shows 1700 TableTop Chain molded in Low Friction (LF) material.

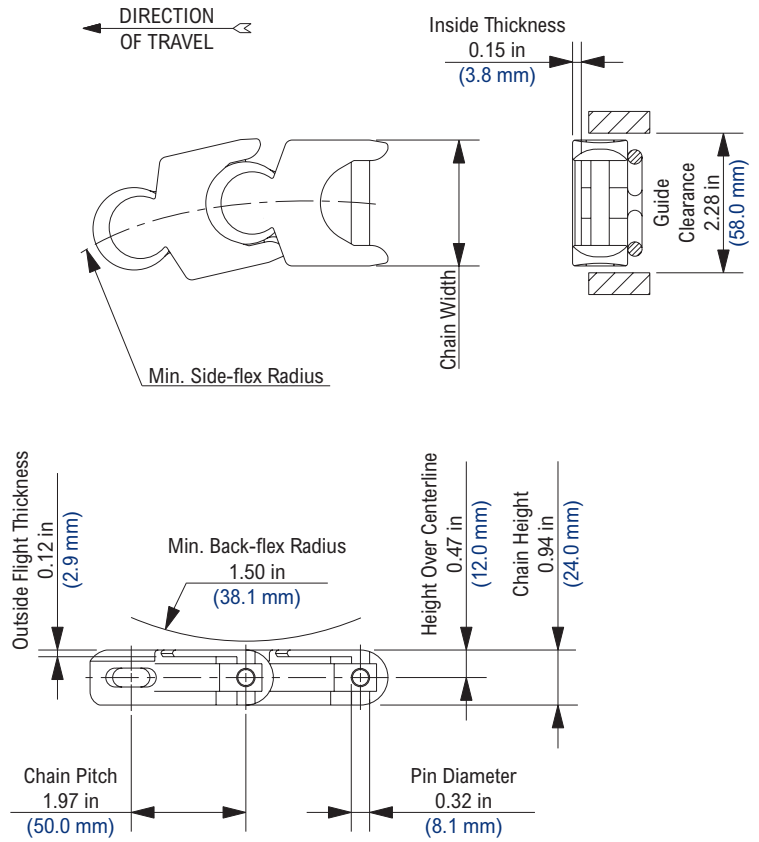

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
N/A	2.17	55.0	5.75	146.1	0.85	1.27

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	600	2,669	Yes
Non-Standard Materials											
BWR	Black Wear Resistant	Stainless Steel	-40	180	NR	-40	82	NR	720	3,203	No
P	Chemical Resistant	Stainless Steel	0	180	140	-18	82	60	480	2,135	Yes
WX	Green Abrasion Resistant Polyamide	Stainless Steel	-40	220	NR	-40	104	NR	600	2,669	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 61 pitch, 10 ft (3.048 m) length strands.

Zinc plated carbon steel pins are available on a made-to-order basis.

Pin material can be identified by pivot color; black pivots indicate stainless steel pins and tan pivots indicate zinc plated carbon steel pins.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.


1700 AC



Photo shows 1700 TableTop Chain with Armor-Clad (AC) surface molded in Low Friction (LF) material.

Chain Information

Chain Width	Chain Width		Min. Side-flex Radius		Approximate Weight	
	desc	in	mm	in	mm	lbs/ft
N/A	2.17	55.0	5.75	146.1	1.10	1.64

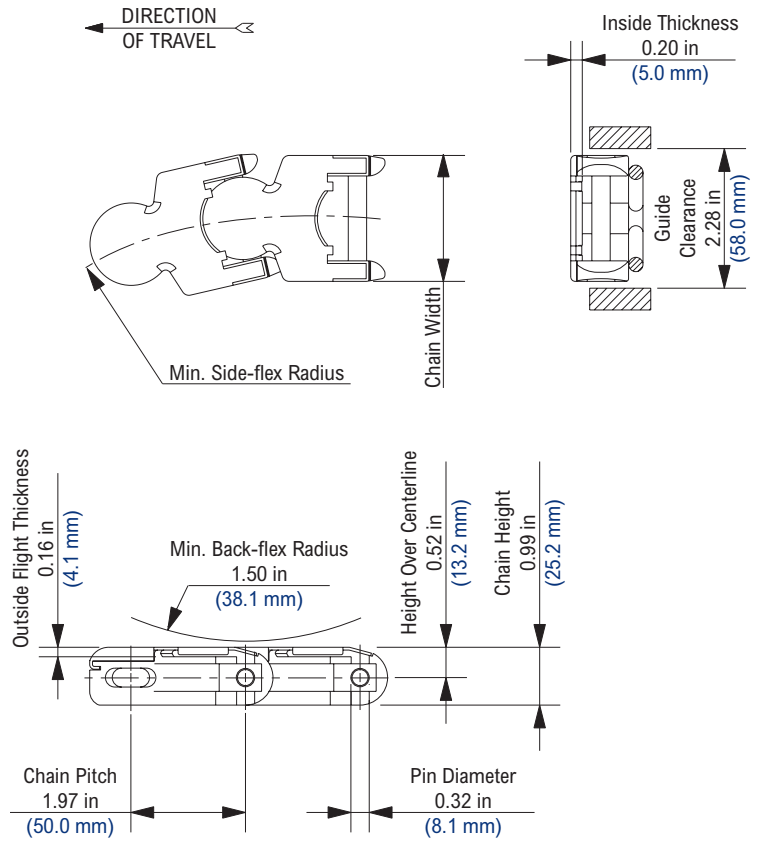

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
			dry	wet		dry	wet				
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	600	2,669	Yes


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.


Additional Notes

Stocked in 61 pitch, 10 ft (3.048 m) length strands.
 Zinc plated carbon steel pins are available on a made-to-order basis.
 Pin material can be identified by pivot color; black pivots indicate stainless steel pins and tan pivots indicate zinc plated carbon steel pins.
 Armor-clad cap material is stainless steel.
 Chain strength is listed at room temperature. NR = Not Recommended.
 For additional material information, see material portfolio.


1700 Cast Iron Sprocket

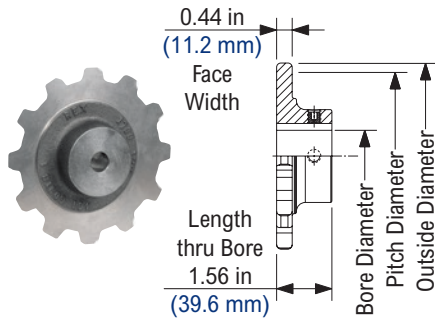

N1700 Thermoplastic Sprocket

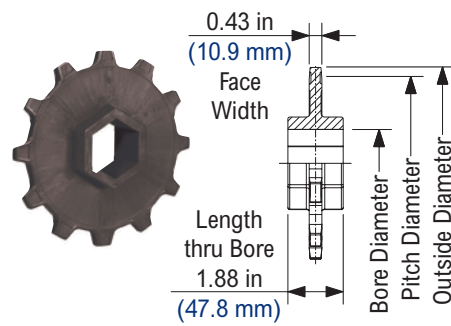

1700 Idler Wheel

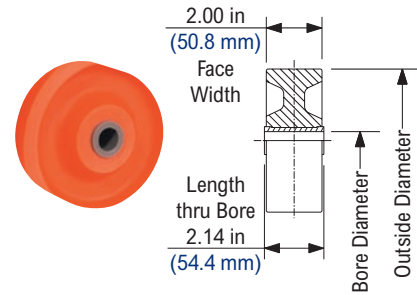

1700 Cast Iron Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
8	8	5.143	130.63	5.25	133.4	3/4	1 9/16	20	40	-	-	-	-	3/4	1 3/4	20	45	3.77	1.71
10	10	6.369	161.77	6.50	165.1	3/4	1 3/4	20	45	-	-	-	-	3/4	1 3/4	20	45	5.55	2.52
12	12	7.604	193.14	7.72	196.1	3/4	1 3/4	20	45	-	-	-	-	3/4	1 3/4	20	45	7.29	3.31

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

N1700 Thermoplastic Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)				Bore Diameter (Idler)		Approximate Weight	
						Round		Hex					
actual	effect	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
10	10	6.369	161.77	6.50	165.1	-	-	2	-	-	-	0.67	0.30
12	12	7.604	193.14	7.76	197.1	-	-	2	-	-	-	0.90	0.41

1700 Idler Wheel Imperial Information


Equivalent Tooth Size	Outside Diameter		Imperial Bore Diameter (Idler)				Approximate Weight	
	in	mm	in				lbs	kg
8	5.14	130.6	5/8				1.25	0.57

Idler wheels are designed to spin freely on the shaft.

1700 Idler Wheel Metric Information

Equivalent Tooth Size	Outside Diameter		Metric Bore Diameter (Idler)				Approximate Weight	
	in	mm	mm				lbs	kg
8	5.14	130.6	16				1.25	0.57


Idler wheels are designed to spin freely on the shaft.

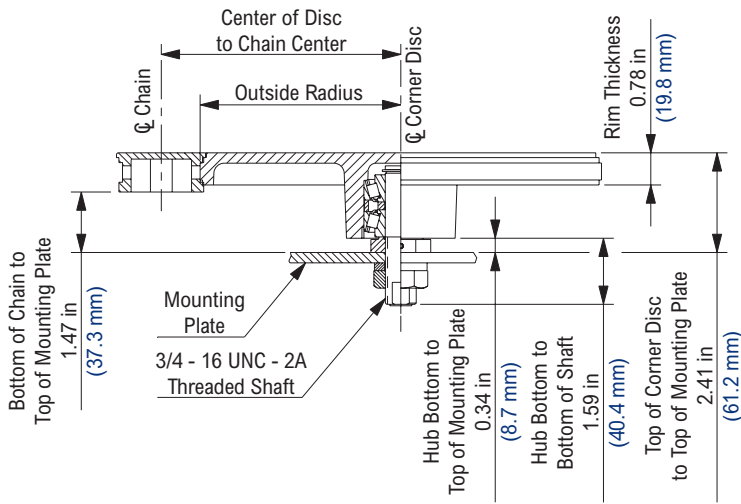

Corner Disc (Flat Top)

Corner Disc Number	Center of Disc to Chain Center		Outside Radius		Approximate Weight	
	in	mm	in	mm	lbs	kg
10131452	5.90	149.9	4.84	122.9	4.20	1.91
10131444	10.00	254.0	8.94	227.1	7.00	3.18


Corner Disc Material: Aluminum.

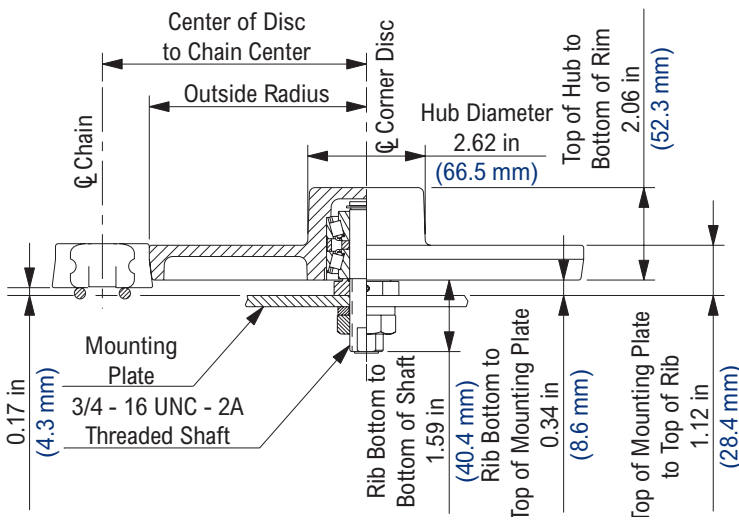

Corner Disc (Raised Hub)

Corner Disc Number	Center of Disc to Chain Center		Outside Radius		Approximate Weight	
	in	mm	in	mm	lbs	kg
10131439	5.90	149.9	4.84	122.9	4.20	1.91


Corner Disc Material: Aluminum.

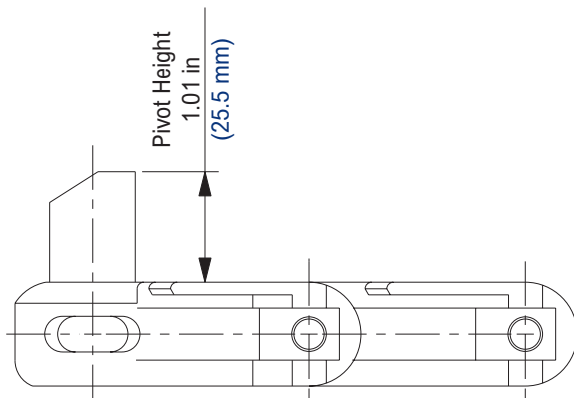

Extended Pivot

Please indicate if you require an extended pivot every pitch, every second pitch, etc. when ordering.

For 1700 chains only. Do not use with AC 1700 chain.

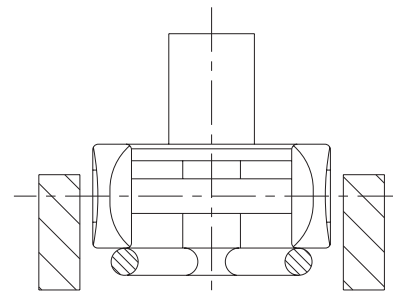

1701B


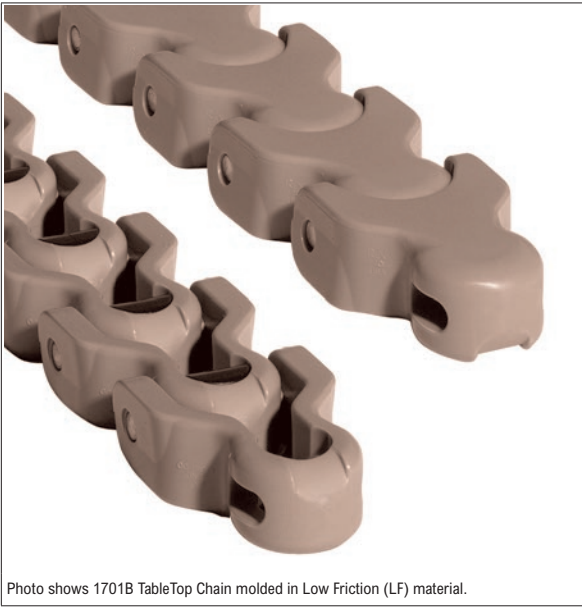


Photo shows 1701B TableTop Chain molded in Low Friction (LF) material.

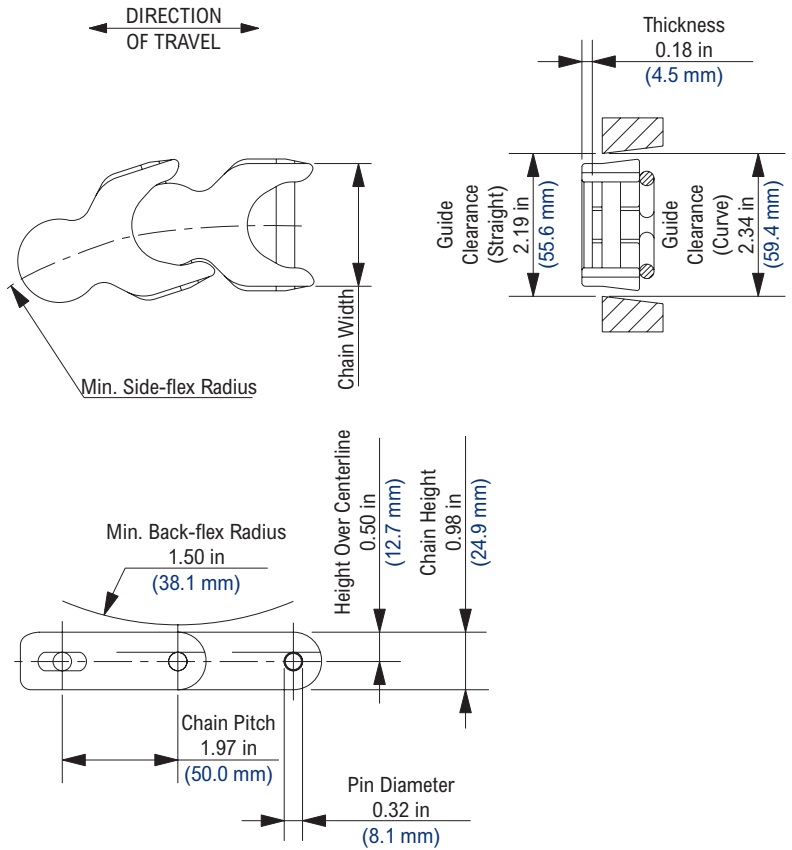

Chain Information

Chain Width	Min. Side-flex Radius		Approximate Weight			
	desc	in	mm	in	mm	lbs/ft
N/A	2.09	53.1	5.75	146.1	0.95	1.42

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
	dry	wet		dry	wet		dry	wet			
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	600	2,669	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patents: 5678682, EP0700843

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 61 pitch, 10 ft (3.048 m) length strands. Zinc plated carbon steel pins are available on a made-to-order basis. Pin material can be identified by pivot color; black pivots indicate stainless steel pins and tan pivots indicate zinc plated carbon steel pins. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

1701 TAB


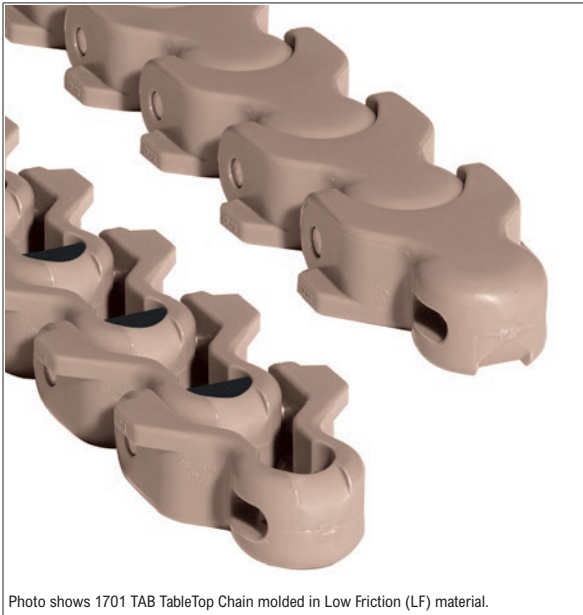


Photo shows 1701 TAB TableTop Chain molded in Low Friction (LF) material.

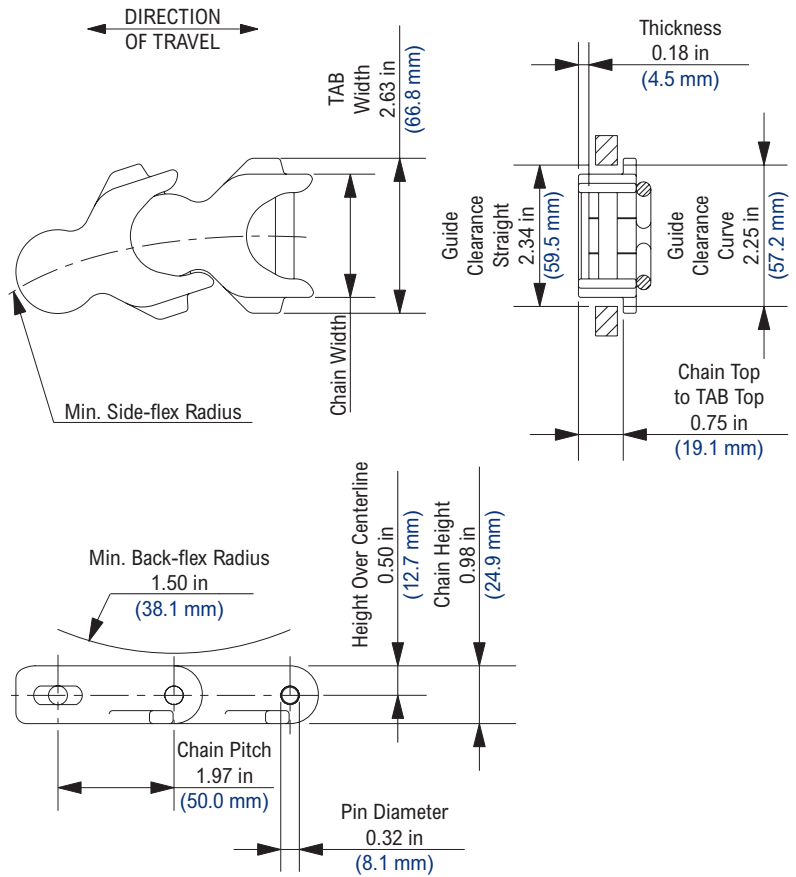

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
N/A	2.09	53.1	5.75	146.1	1.00	1.49

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
BWR	Black Wear Resistant	Stainless Steel	-40	180	NR	-40	82	NR	720	3,203	No
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	600	2,669	Yes
Non-Standard Materials											
PS™	Platinum Series™	Stainless Steel	-40	180	150	-40	82	66	600	2,669	Yes
WSM	White Cut Resistant	Stainless Steel	-40	180	150	-40	82	66	600	2,669	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, TableTop, Platinum Series and PS are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 5678682, EP0700843

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 61 pitch, 10 ft (3.048 m) length strands.

Zinc plated carbon steel pins are available on a made-to-order basis.

Pin material can be identified by pivot color; black pivots indicate stainless steel pins and tan pivots indicate zinc plated carbon steel pins.

HC1731 is BWR 1701TAB with special hardened carbon steel pins.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

1701 TAB AC


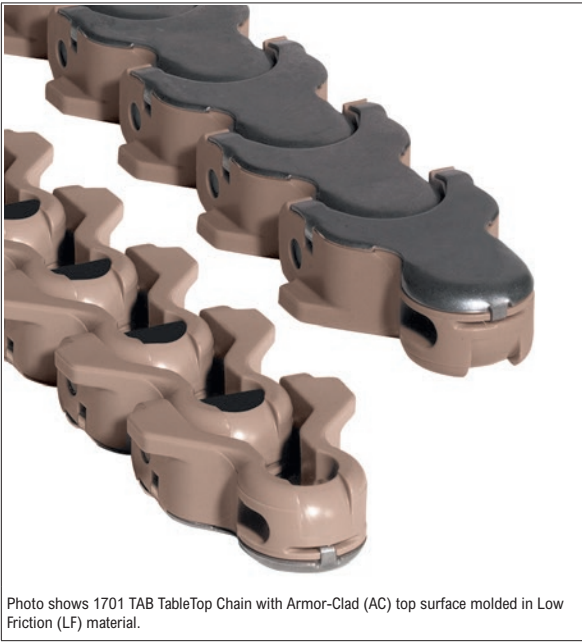


Photo shows 1701 TAB TableTop Chain with Armor-Clad (AC) top surface molded in Low Friction (LF) material.

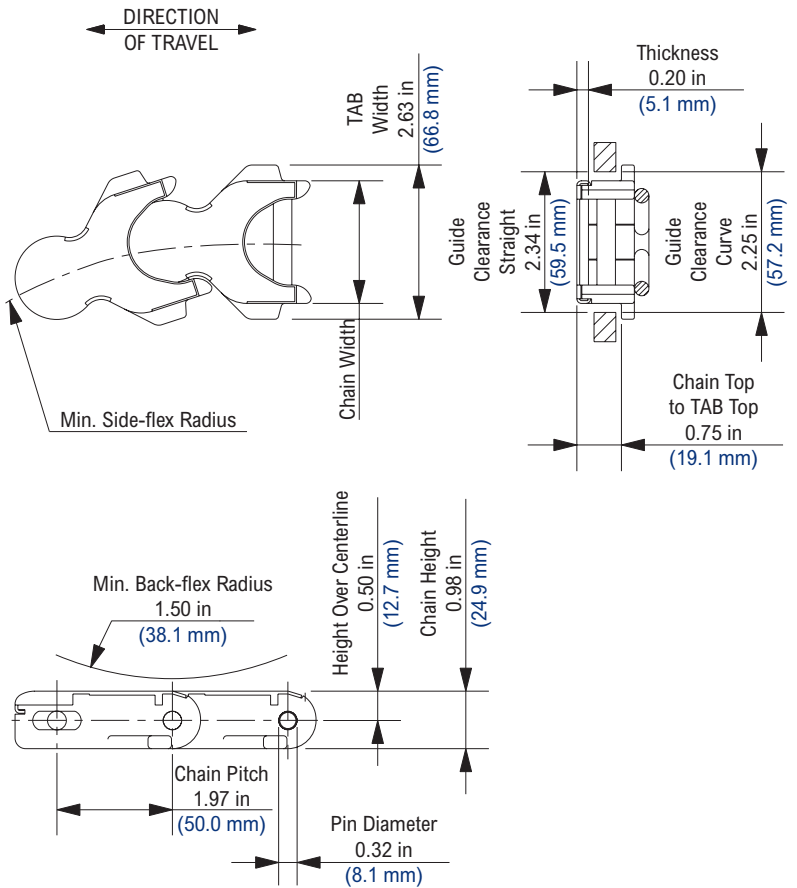

Chain Information

Chain Width	Min. Side-flex Radius		Approximate Weight			
	desc	in	mm	lbs/ft	kg/m	
N/A	2.09	53.1	5.75	146.1	1.20	1.79

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	600	2,669	Yes


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.


Additional Notes

Stocked in 61 pitch, 10 ft (3.048 m) length strands.
 Zinc plated carbon steel pins are available on a made-to-order basis.
 Pin material can be identified by pivot color; black pivots indicate stainless steel pins and tan pivots indicate zinc plated carbon steel pins.
 Armor-clad cap material is stainless steel.
 Chain strength is listed at room temperature. NR = Not Recommended.
 For additional material information, see material portfolio.


1700 Cast Iron Sprocket

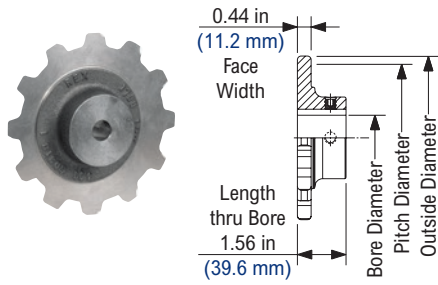

N1700 Thermoplastic Sprocket

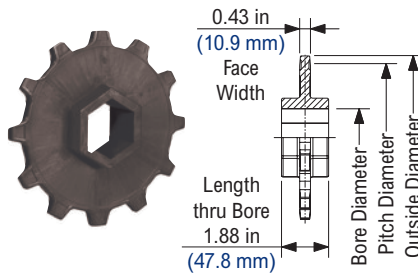

1700 Idler Wheel

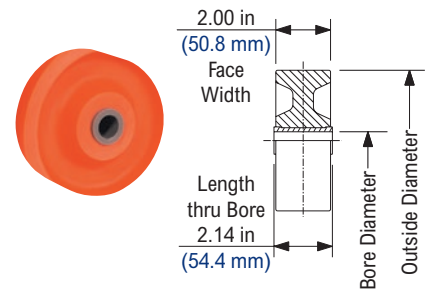

1700 Cast Iron Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
8	8	5.143	130.63	5.25	133.4	3/4	1 9/16	20	40	-	-	-	-	3/4	1 3/4	20	45	3.77	1.71
10	10	6.369	161.77	6.50	165.1	3/4	1 3/4	20	45	-	-	-	-	3/4	1 3/4	20	45	5.55	2.52
12	12	7.604	193.14	7.72	196.1	3/4	1 3/4	20	45	-	-	-	-	3/4	1 3/4	20	45	7.29	3.31

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

N1700 Thermoplastic Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)				Bore Diameter (Idler)		Approximate Weight	
						Round		Hex					
actual	effect	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
10	10	6.369	161.77	6.50	165.1	-	-	2	-	-	-	0.70	0.32
12	12	7.604	193.14	7.76	197.1	-	-	2	-	-	-	0.90	0.41

1700 Idler Wheel Imperial Information


Equivalent Tooth Size	Outside Diameter		Imperial Bore Diameter (Idler)				Approximate Weight		
	in	mm	in				lbs	kg	
8	5.14	130.6	5/8 in	1.25	0.57	1 1/4	1 1/2	0.49	0.22

Idler wheels are designed to spin freely on the shaft. 27 tooth idler wheel is available on a made-to-order basis and is subject to minimum order requirements.

1700 Idler Wheel Metric Information

Equivalent Tooth Size	Outside Diameter		Metric Bore Diameter (Idler)				Approximate Weight	
	in	mm	mm				lbs	kg
8	5.14	130.6	16 mm	1.25	0.57	40	0.49	0.22

Idler wheels are designed to spin freely on the shaft.

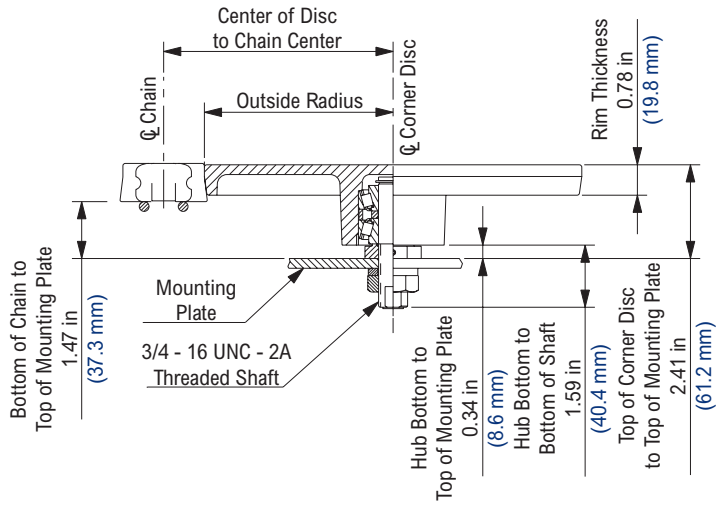


Corner Disc (Flat Top)

Corner Disc Number	Center of Disc to Chain Center		Outside Radius		Approximate Weight	
	in	mm	in	mm	lbs	kg
10131454	5.90	149.9	4.86	123.4	4.20	1.91
10131446	10.00	254.0	8.94	227.1	7.00	3.18

Corner Disc Material: Aluminum.

For 1701B chain only.

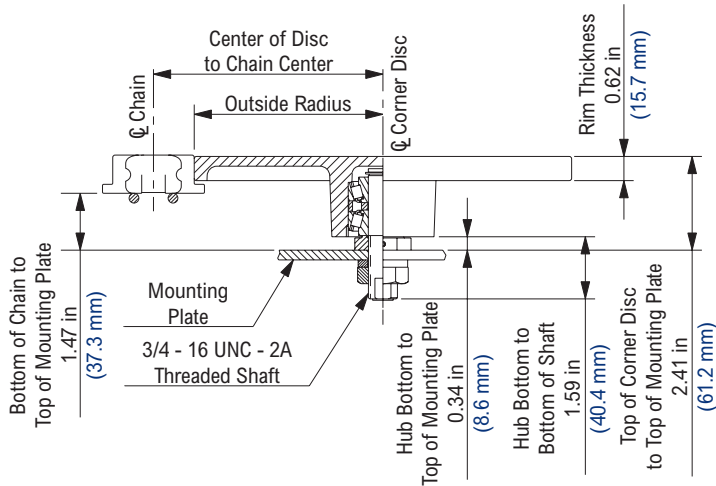


Corner Disc (Flat Top)

Corner Disc Number	Center of Disc to Chain Center		Outside Radius		Approximate Weight	
	in	mm	in	mm	lbs	kg
10131453	5.90	149.9	4.86	123.4	4.20	1.91
10131445	10.00	254.0	8.94	227.1	7.00	3.18

Corner Disc Material: Aluminum.

For 1701 TAB chain only.

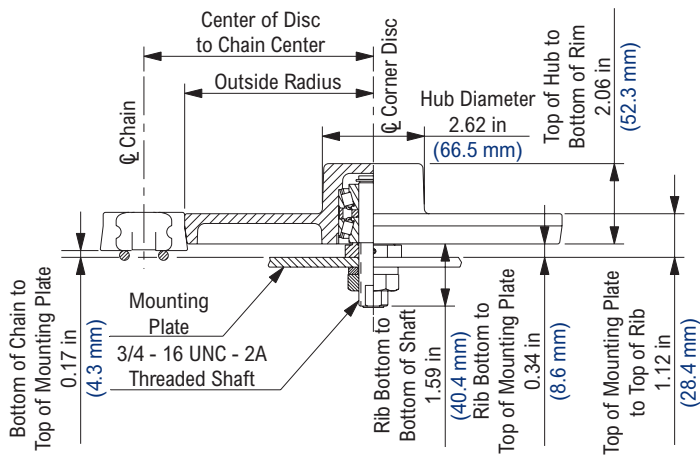


Corner Disc (Raised Hub)

Corner Disc Number	Center of Disc to Chain Center		Outside Radius		Approximate Weight	
	in	mm	in	mm	lbs	kg
10131441	5.90	149.9	4.86	123.4	4.20	1.91

Corner Disc Material: Aluminum.


For 1701B chain only.

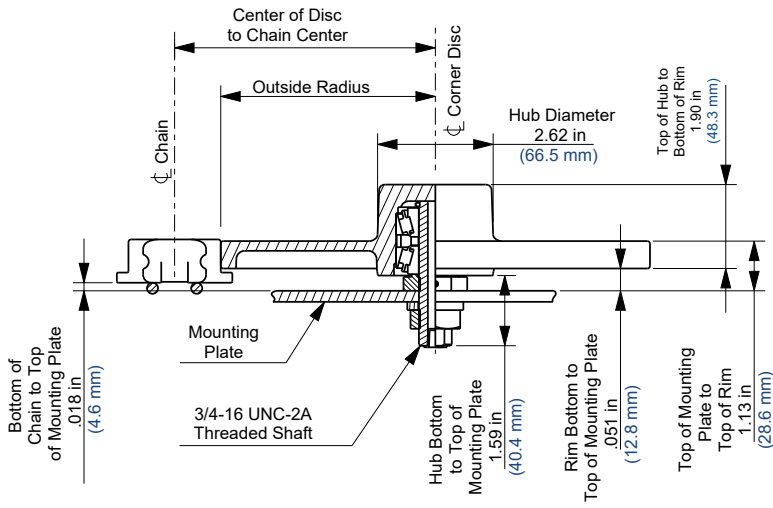

Corner Disc (Raised Hub)

Corner Disc Number	Center of Disc to Chain Center		Outside Radius		Approximate Weight	
	in	mm	in	mm	lbs	kg
10131440	5.90	149.9	4.86	123.4	4.20	1.91


Corner Disc Material: Aluminum.
For 1701 TAB chain only.

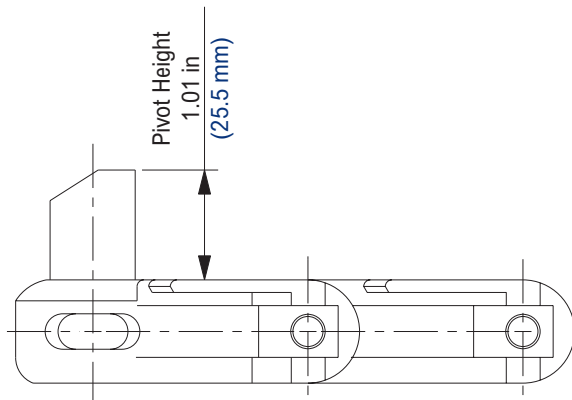

Extended Pivot

Please indicate if you require an extended pivot every pitch, every second pitch, etc. when ordering.

For 1701B and 1701 TAB chains only. Not available with 1701 TAB AC chain.

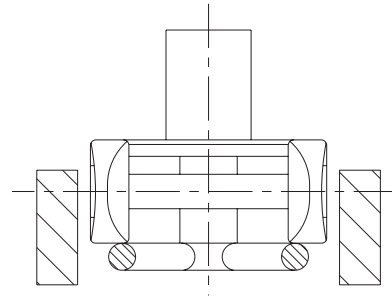

1702


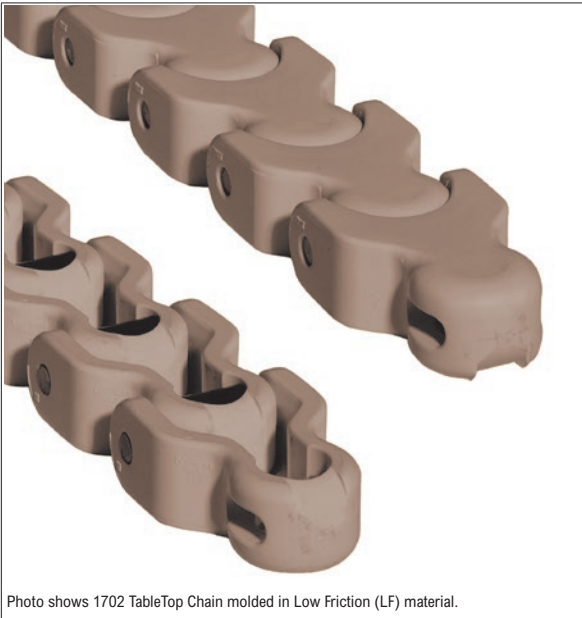


Photo shows 1702 TableTop Chain molded in Low Friction (LF) material.

Chain Information

Chain Width		Min. Side-flex Radius		Approximate Weight		
desc	in	mm	in	mm	lbs/ft	kg/m
N/A	2.09	53.1	5.75	16.1	0.90	1.34

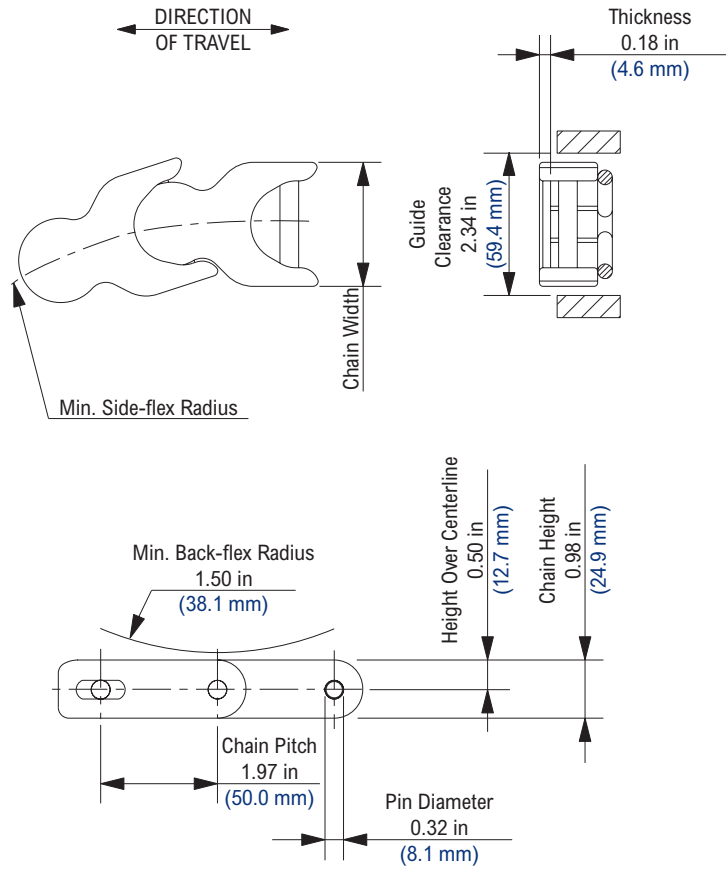

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	600	2,669	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 61 pitch, 10 ft (3.048 m) length strands.


Zinc plated carbon steel pins are available on a made-to-order basis.

Pin material can be identified by pivot color; black pivots indicate stainless steel pins and tan pivots indicate zinc plated carbon steel pins.


Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.


1700 Cast Iron Sprocket

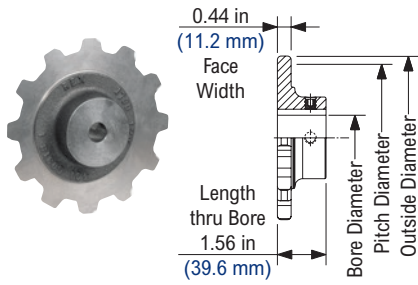

N1700 Thermoplastic Sprocket

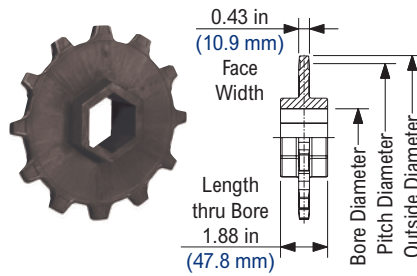

1700 Idler Wheel

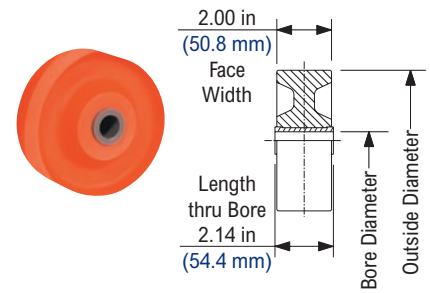

1700 Cast Iron Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
8	8	5.143	130.63	5.25	133.4	3/4	1 9/16	20	40	-	-	-	-	3/4	1 3/4	20	45	3.77	1.71
10	10	6.369	161.77	6.50	165.1	3/4	1 3/4	20	45	-	-	-	-	3/4	1 3/4	20	45	5.55	2.52
12	12	7.604	193.14	7.72	196.1	3/4	1 3/4	20	45	-	-	-	-	3/4	1 3/4	20	45	7.29	3.31

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

N1700 Thermoplastic Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)				Bore Diameter (Idler)		Approximate Weight	
						Round		Hex					
actual	effect	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
10	10	6.369	161.77	6.50	165.1	-	-	2	-	-	-	0.70	0.32
12	12	7.604	193.14	7.76	197.1	-	-	2	-	-	-	0.90	0.41

1700 Idler Wheel Imperial Information


Equivalent Tooth Size	Outside Diameter		Imperial Bore Diameter (Idler)		Approximate Weight	
	in	mm	in		lbs	kg
8	5.14	130.6	5/8 in		1.25	0.57

Idler wheels are designed to spin freely on the shaft.

1700 Idler Wheel Metric Information

Equivalent Tooth Size	Outside Diameter		Metric Bore Diameter (Idler)		Approximate Weight	
	in	mm	mm		lbs	kg
8	5.14	130.6	16 mm		1.25	0.57


Idler wheels are designed to spin freely on the shaft.

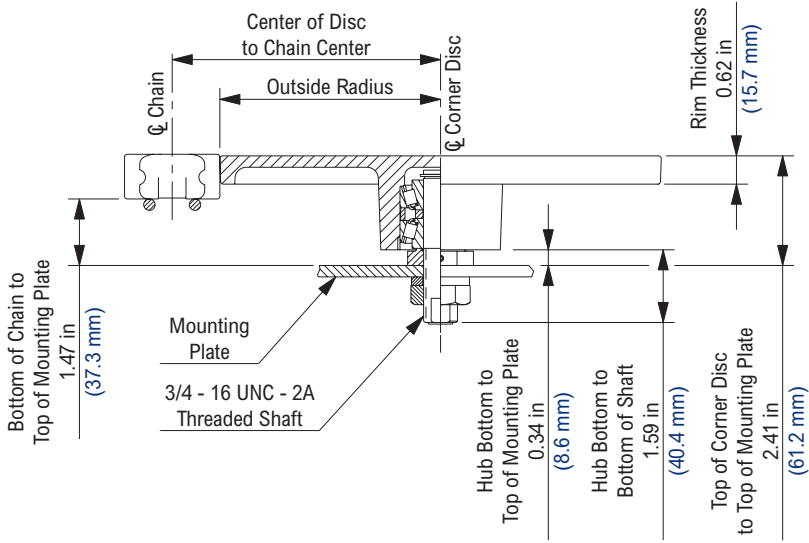

Corner Disc (Flat Top)

Corner Disc Number	Center of Disc to Chain Center		Outside Radius		Approximate Weight	
	in	mm	in	mm	lbs	kg
10131455	5.90	149.9	4.86	123.4	4.20	1.91


Corner Disc Material: Aluminum.

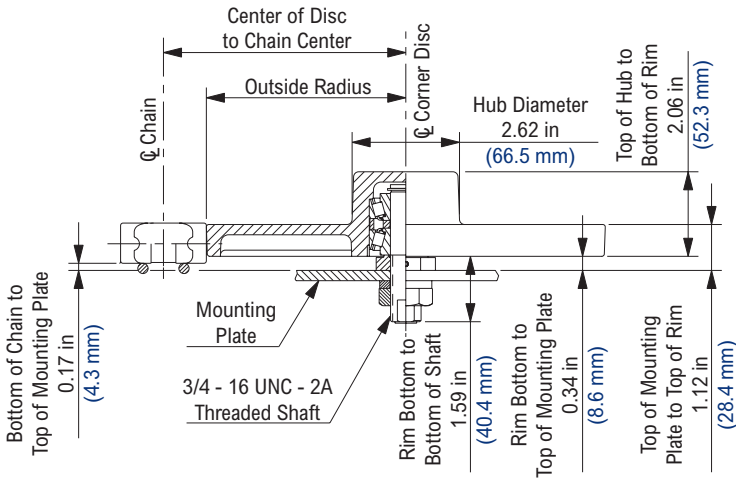

Corner Disc (Raised Hub)


Corner Disc Number	Center of Disc to Chain Center		Outside Radius		Approximate Weight	
	in	mm	in	mm	lbs	kg
10355672	5.90	149.9	4.86	123.4	4.20	1.91

Corner Disc Material: Aluminum.

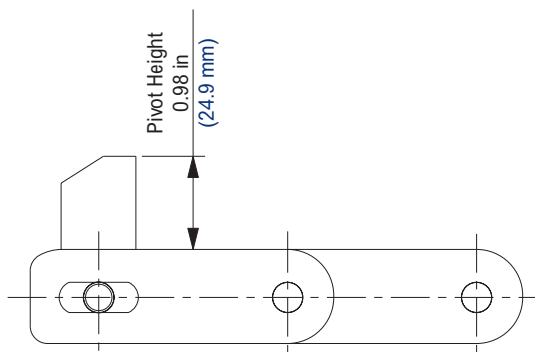

Extended Pivot

Please indicate if you require an extended pivot every pitch, every second pitch, etc. when ordering.




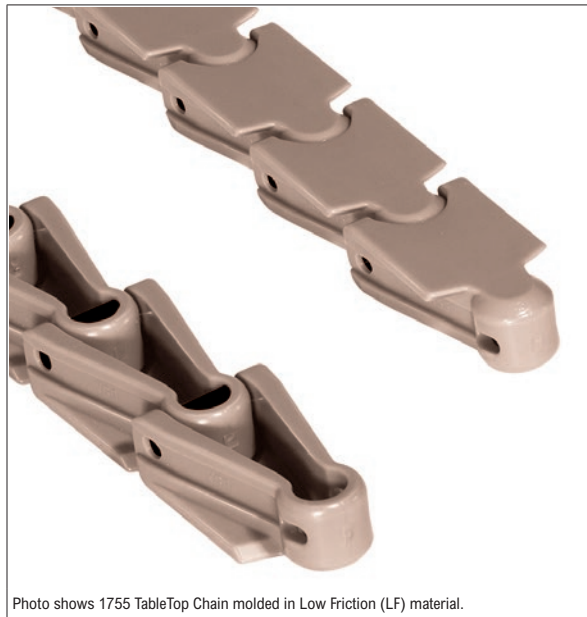


Photo shows 1755 TableTop Chain molded in Low Friction (LF) material.

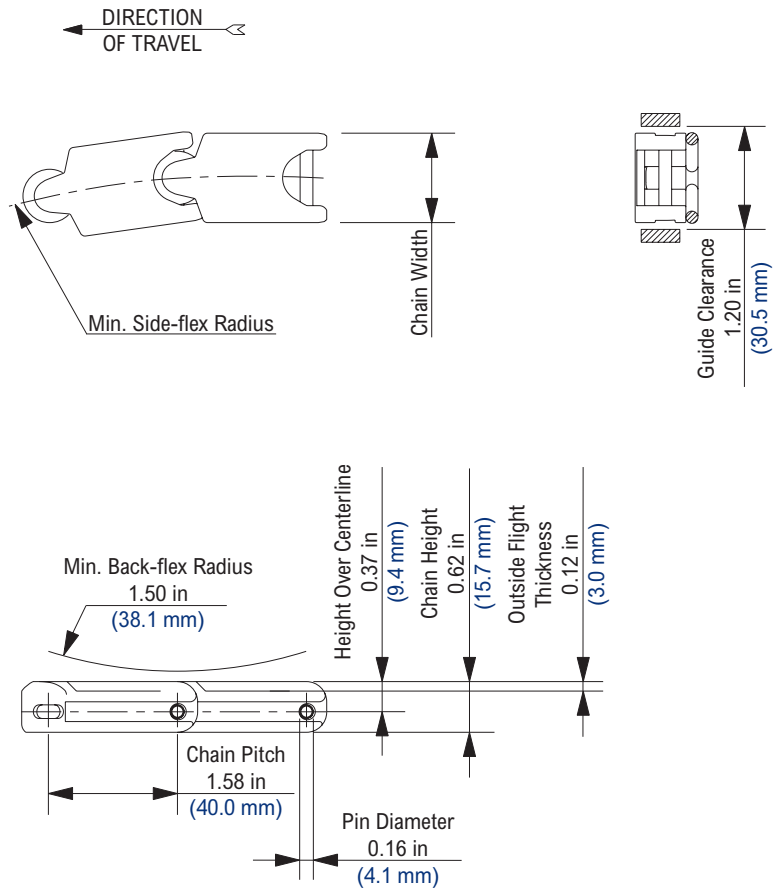

Chain Information

Chain Width		Min. Side-flex Radius		Approximate Weight		
desc	in	mm	in	mm	lbs/ft	kg/m
N/A	1.09	27.7	5.38	136.7	0.25	0.37

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
			dry	wet		dry	wet				
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	200	890	Yes


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are a trademark of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Stocked in 76 pitch, 10 ft (6.096 m) length strands. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

1755 Semi-Steel Sprocket

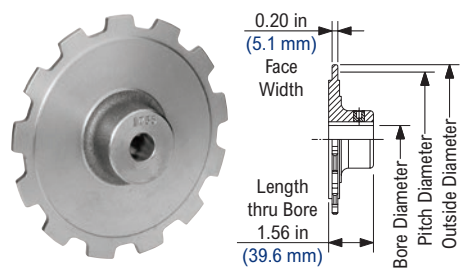


1755 Semi-Steel Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	in	mm	in	mm	in	mm	in	mm	in	mm		
actual	effect					min	max	min	max	min	max	min	max	min	max	min	max		
13	13	6.581	167.16	6.78	172.2	3/4	1 1/4	20	35	-	-	-	-	3/4	1 3/4	20	40	5.73	2.60
16	16	8.072	205.03	8.28	210.3	3/4	1 1/4	20	35	-	-	-	-	3/4	1 3/4	20	40	7.72	3.50

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

Accessories

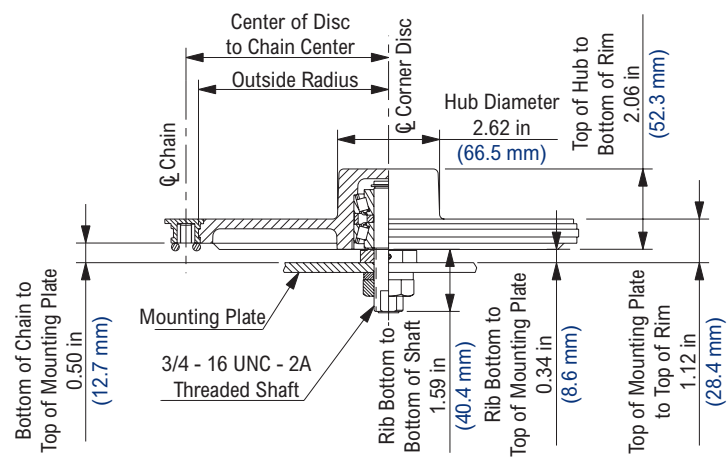

Corner Disc (Raised Hub)

Corner Disc Number	Center of Disc to Chain Center		Outside Radius		Approximate Weight	
	in	mm	in	mm	lbs	kg
10131442	5.40	137.2	4.88	124.0	4.20	1.91

Corner Disc Material: Aluminum.

1757 TAB



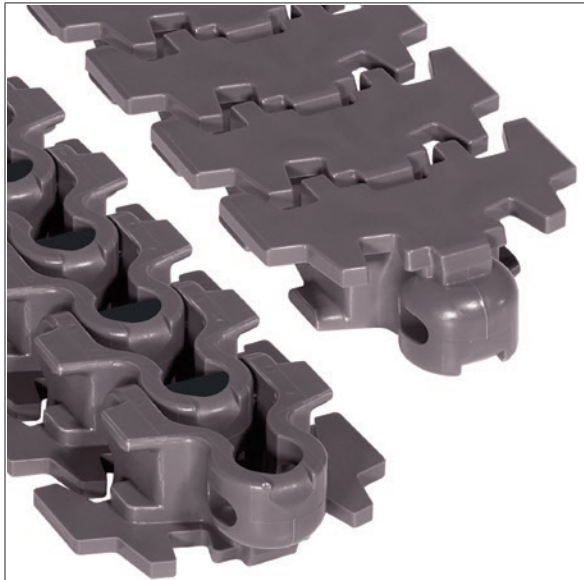


Photo shows 1757 TAB TableTop Chain molded in High Performance (HP) material.

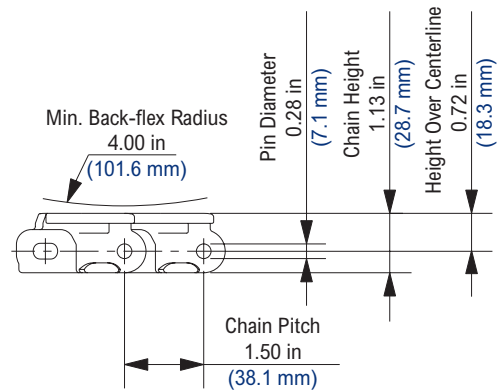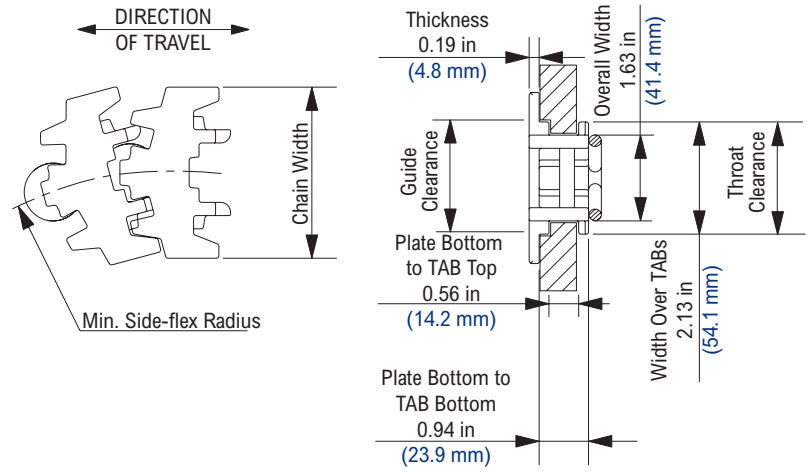

Guide Clearance

Straight		Curve	
in	mm	in	mm
2.185	55.5	2.27	57.66

Throat Clearance

Straight		Curve	
in	mm	in	mm
1.685	42.8	1.78	45.2

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
N/A	3.25	82.6	6.00	152.4	1.00	1.49

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet	min	dry	wet				
Non-Standard Materials											
ESD	Electrostatic Dissipative	Stainless Steel	0	180	180	-18	82	82	234	1,041	No
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	390	1,735	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	390	1,735	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patents: 4893709, D289607, 4909380, 5096050, 533045, 4436200

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 80 pitch, 10 ft (3.048 m) length strands. Zinc plated carbon steel pins are available on a made-to-order basis. Pin material can be identified by pivot color; black pivots indicate stainless steel pins and tan pivots indicate zinc plated carbon steel pins. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

1757 TAB G


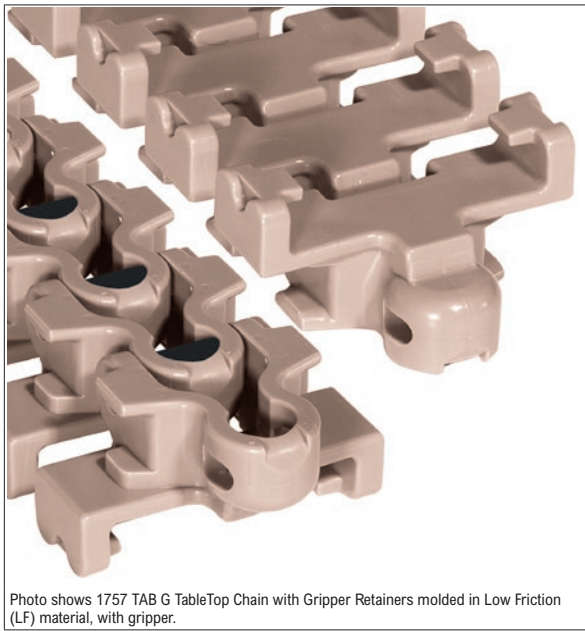


Photo shows 1757 TAB G TableTop Chain with Gripper Retainers molded in Low Friction (LF) material, with gripper.

Chain Information

Chain Width		Min. Side-flex Radius		Approximate Weight		
desc	in	mm	in	mm	lbs/ft	kg/m
N/A	3.25	82.6	8.00	203.2	1.15	1.71

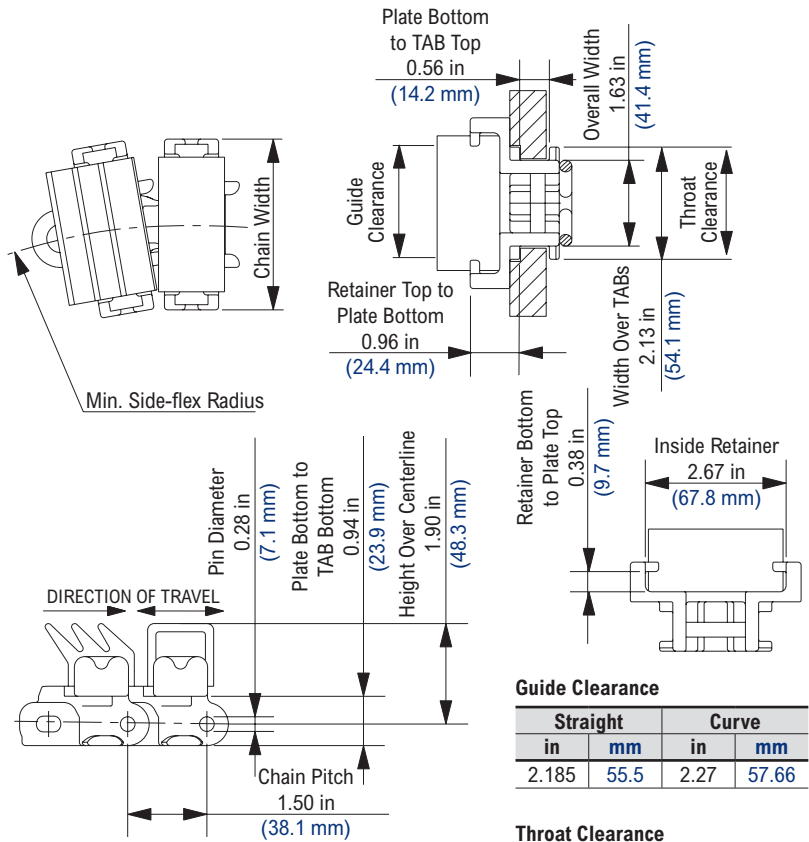

Guide Clearance

Straight		Curve	
in	mm	in	mm
2.185	55.5	2.27	57.66

Throat Clearance

Straight		Curve	
in	mm	in	mm
1.685	42.8	1.78	45.2

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Non-Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	390	1,735	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	390	1,735	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 4629062, 4809846

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 80 pitch, 10 ft (3.048 m) length strands.

Zinc plated carbon steel pins are available on a made-to-order basis.

Pin material can be identified by pivot color; black pivots indicate stainless steel pins and tan pivots indicate zinc plated carbon steel pins.

Can be assembled with "J" or "D" style gripper attachments; see accessories section for more information.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

1757 TAB LBP


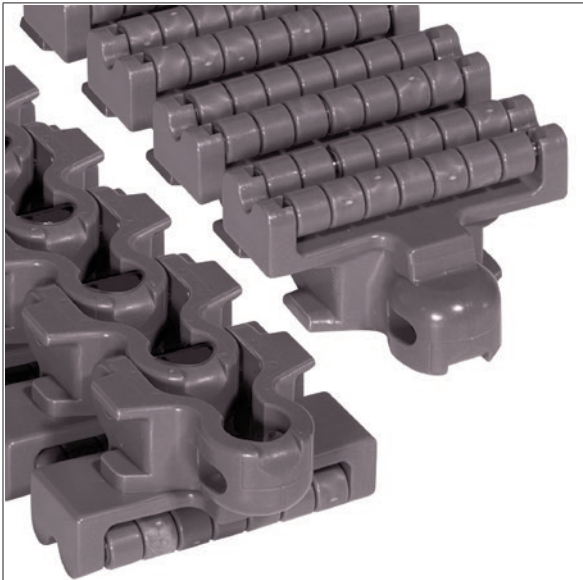


Photo shows 1757 TAB LBP TableTop Chain with Low Backline Pressure Rollers molded in High Performance (HP) material.

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
N/A	3.25	82.6	6.00	152.4	1.60	2.38

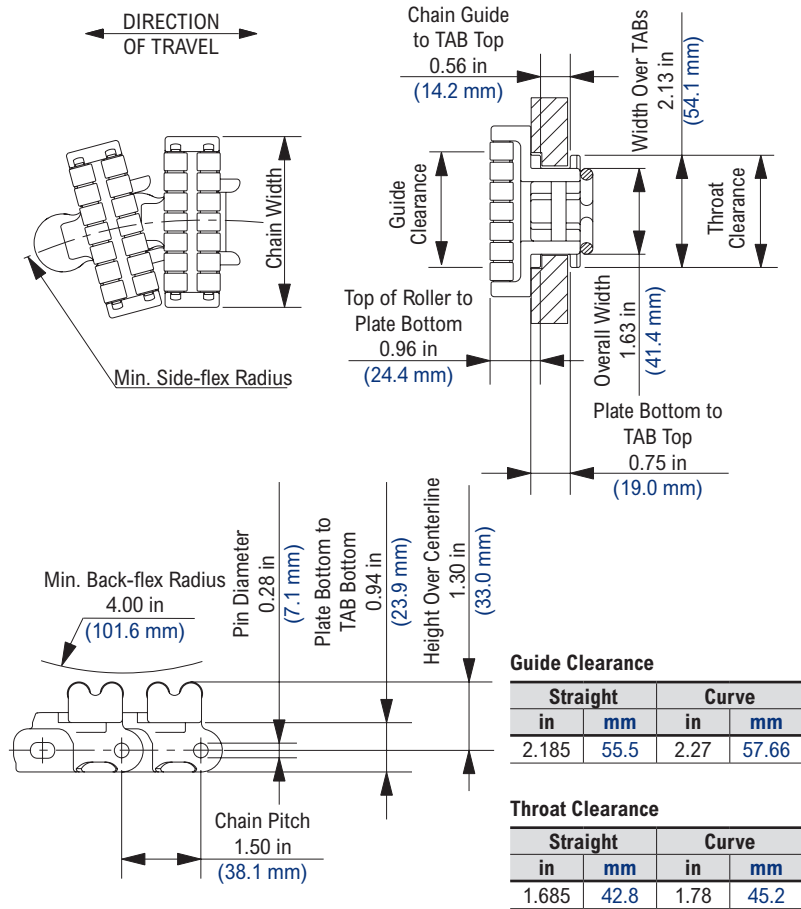

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet	min	dry	wet				
Non-Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	390	1,735	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	390	1,735	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patents: 4893709, 4909380, 5096050, 5330045


Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 80 pitch, 10 ft (3.048 m) length strands. Zinc plated carbon steel pins are available on a made-to-order basis. Pin material can be identified by pivot color; black pivots indicate stainless steel pins and tan pivots indicate zinc plated carbon steel pins. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

1757 TAB SuperGrip™



Photo shows 1757 TAB SuperGrip TableTop Chain with High Friction Inserts molded in High Performance (HP) material.

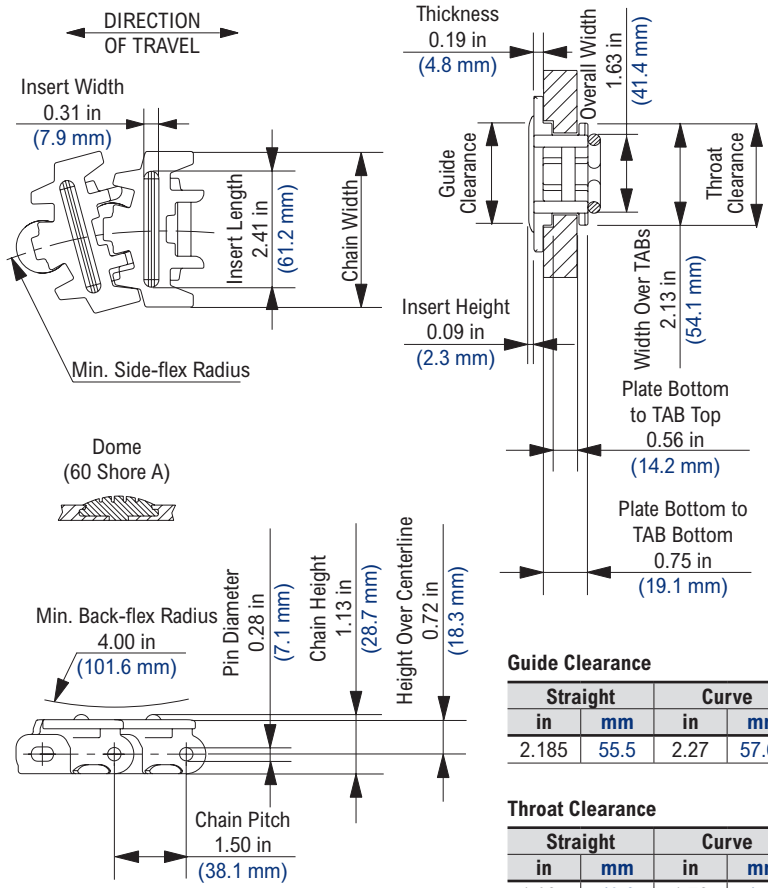

Chain Information

Chain Width	Min. Side-flex Radius		Approximate Weight			
	desc	in	mm	lbs/ft	kg/m	
N/A	3.25	82.6	6.00	152.4	1.00	1.49

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max				
				dry	wet		dry	wet			
Non-Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	390	1,735	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	390	1,735	Yes


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patents: 4893709, D289607, 4909380, 5096050, 5330045, 4436200


Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 80 pitch, 10 ft (3.048 m) length strands. Zinc plated carbon steel pins are available on a made-to-order basis. Pin material can be identified by pivot color; black pivots indicate stainless steel pins and tan pivots indicate zinc plated carbon steel pins. Inserts may be spaced every pitch, every second pitch, etc. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

1757 Cast Iron Sprocket

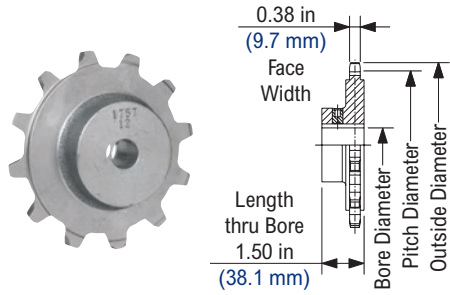

1757 Idler Wheel

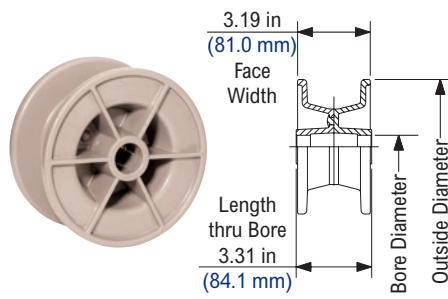

1757 Cast Iron Sprocket Information


Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
12	12	5.796	147.22	6.00	152.4	3/4	1 1/2	20	40	-	-	-	-	3/4	1 3/4	20	45	5.07	2.30

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

1757 Idler Wheel Imperial Information

Equivalent Tooth Size	Outside Diameter		Imperial Bore Diameter (Idler)				Approximate Weight	
	in	mm	in				lbs	kg
10.5	5.90	149.9	1				1.05	0.48


Idler wheels are designed to spin freely on the shaft.

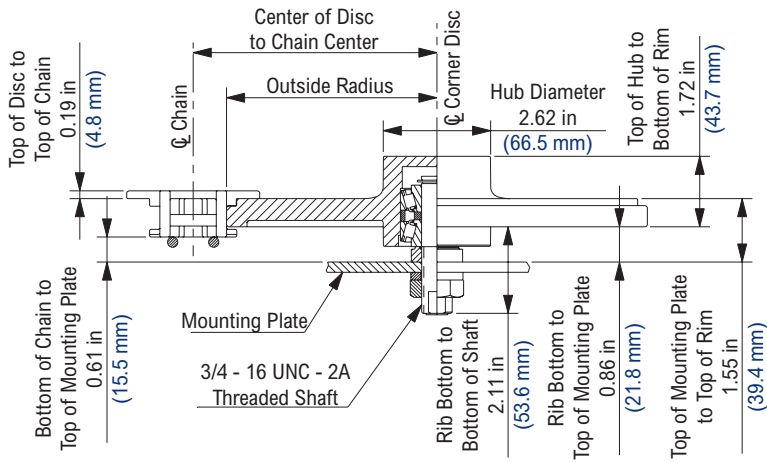

Corner Disc (Raised Hub)

Corner Disc Number	Center of Disc to Chain Center		Outside Radius		Approximate Weight	
	in	mm	in	mm	lbs	kg
10131491	6.00	152.4	5.12	130.0	4.20	1.91

Corner Disc Material: Aluminum.

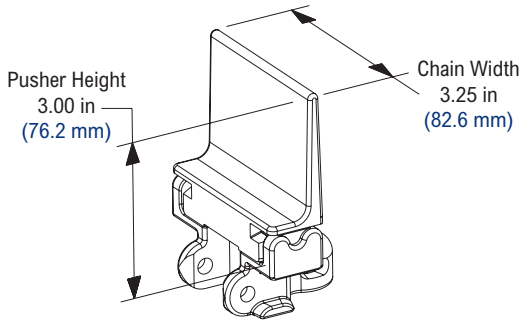


Pusher Attachment (F-Style)

The F3 designation represents an F-style pusher attachment at a height of 3 in (76.2 mm).

Please indicate if pusher attachments are required every pitch, every second pitch, etc. when ordering.




For example, "I would like F3 pusher attachments every 8th pitch".

U.S. Patent 5429226

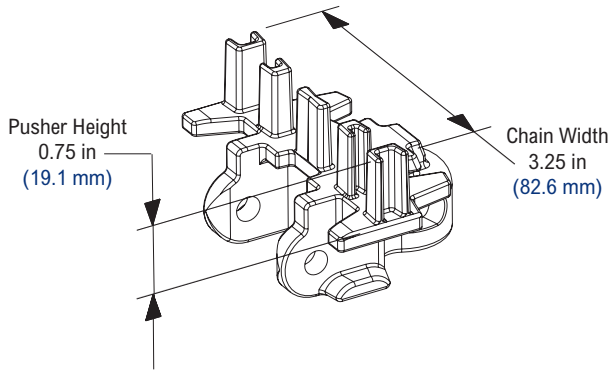

Pusher Attachment (Finger Style)

Please indicate if pusher attachments are required every pitch, every second pitch, etc. when ordering.



Gripper Attachments

Part Number	Style	Material	Color	Hardness (Shore A)	"A" Dimension		"B" Dimension		"C" Dimension	
					in	mm	in	mm	in	mm
Standard Grippers										
10070851	D	EPDM	White	50	2.55	64.8	1.25	31.8	1.19	30.2
10070919	J	EPDM	White	50	2.55	64.8	1.25	31.8	1.19	30.2

1765 ZeroGap™


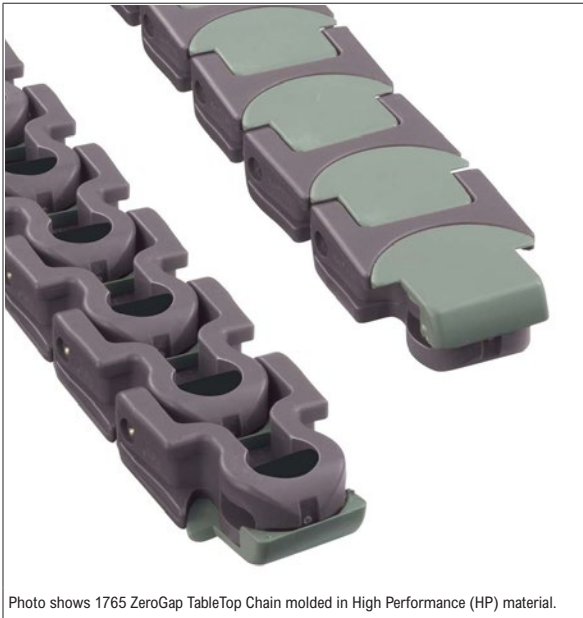


Photo shows 1765 ZeroGap TableTop Chain molded in High Performance (HP) material.

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
N/A	2.17	55.0	4.92	125.0	0.98	1.46

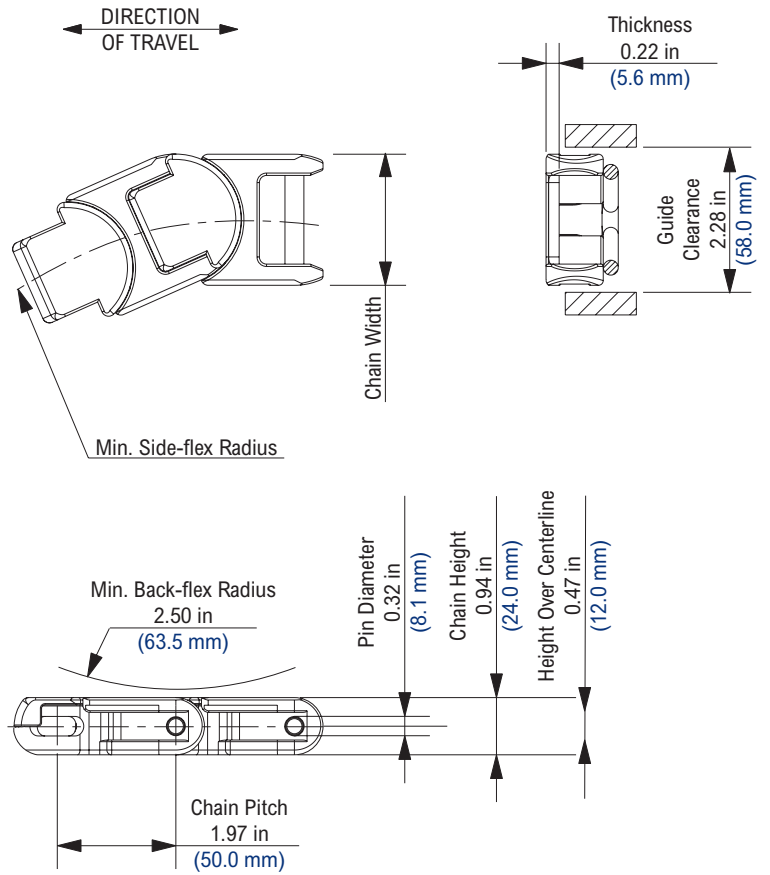

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet	min	dry	wet				
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	600	2,669	No


Regulatory Information

Licensed under U.S. Patent: 6173832, European Patent: 910540 and German Patent: 69702857.7.
 Rexnord, TableTop and ZeroGap are trademarks of Regal Rexnord Corporation.
 All rights reserved.


Additional Notes

Stocked in 61 pitch, 10 ft (3.048 m) length strands.
 Chain strength is listed at room temperature. NR = Not Recommended.
 For additional material information, see material portfolio.


1700 Cast Iron Sprocket

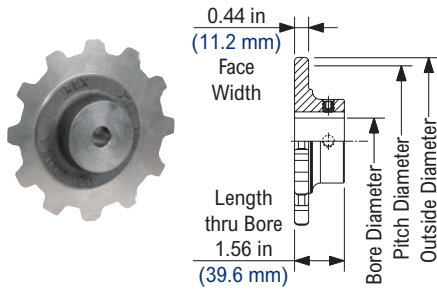

N1700 Thermoplastic Sprocket

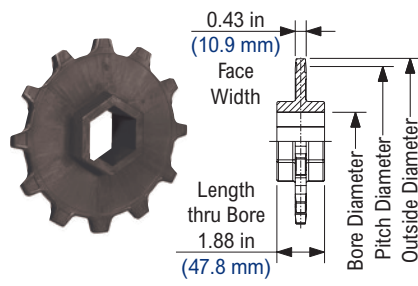

1700 Idler Wheel

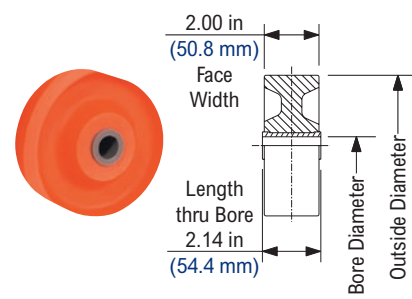

1700 Cast Iron Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)										Bore Diameter (Round)				Approximate Weight		
			Round				Square						in		mm				
			in	mm	min	max	min	max	min	max	min	max	min	max	min	max			
8	8	5.143	130.63	5.25	133.4	3/4	1 9/16	20	40	-	-	-	-	3/4	1 3/4	20	45	3.77	1.71
10	10	6.369	161.77	6.50	165.1	3/4	1 3/4	20	45	-	-	-	-	3/4	1 3/4	20	45	5.55	2.52
12	12	7.604	193.14	7.72	196.1	3/4	1 3/4	20	45	-	-	-	-	3/4	1 3/4	20	45	7.29	3.31

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

N1700 Thermoplastic Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)				Bore Diameter (Idler)				Approximate Weight		
			Round		Hex		in		mm				
actual	effect	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
10	10	6.369	161.77	6.50	165.1	-	-	2	-	-	-	0.67	0.30
12	12	7.604	193.14	7.76	197.1	-	-	2	-	-	-	0.90	0.41

1700 Idler Wheel Imperial Information


Equivalent Tooth Size	Outside Diameter		Imperial Bore Diameter (Idler)				Approximate Weight	
	in	mm	in				lbs	kg
8	5.14	130.6	5/8				1.25	0.57

Idler wheels are designed to spin freely on the shaft.

1700 Idler Wheel Metric Information

Equivalent Tooth Size	Outside Diameter		Metric Bore Diameter (Idler)				Approximate Weight	
	in	mm	mm				lbs	kg
8	5.14	130.6	16				1.25	0.57


Idler wheels are designed to spin freely on the shaft.

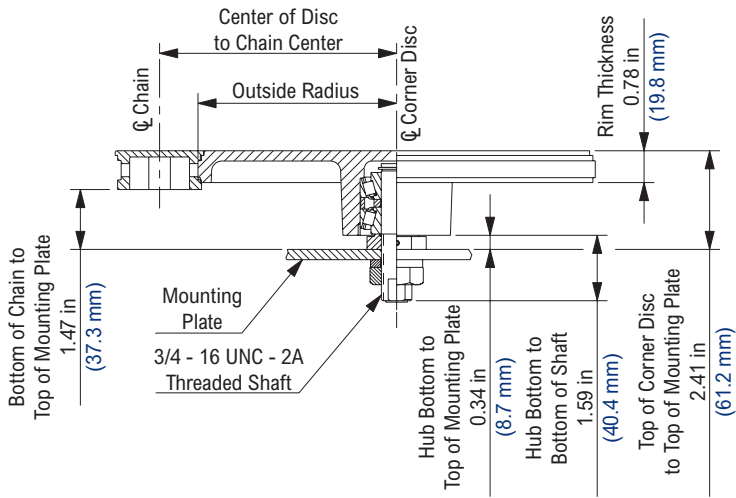

Corner Disc (Flat Top)

Corner Disc Number	Center of Disc to Chain Center		Outside Radius		Approximate Weight	
	in	mm	in	mm	lbs	kg
10131452	5.90	149.9	4.84	122.9	4.20	1.91
10131444	10.00	254.0	8.94	227.1	7.00	3.18

Corner Disc Material: Aluminum.

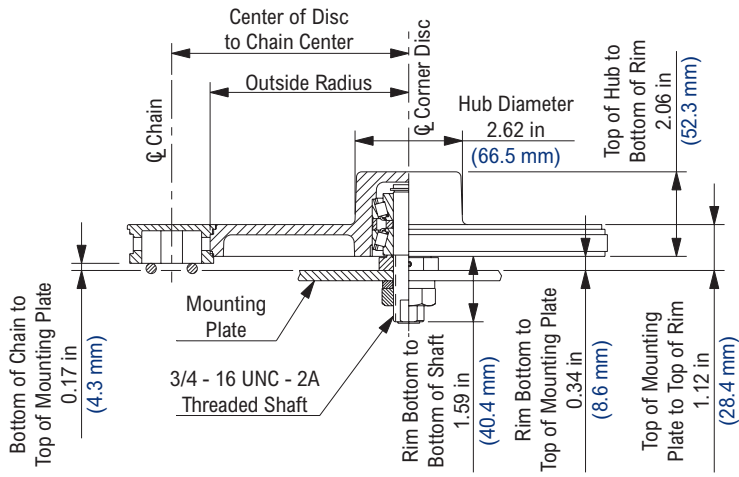

Corner Disc (Raised Hub)

Corner Disc Number	Center of Disc to Chain Center		Outside Radius		Approximate Weight	
	in	mm	in	mm	lbs	kg
10131439	5.90	149.9	4.84	122.9	4.20	1.91

Corner Disc Material: Aluminum.

1843 TAB (S)


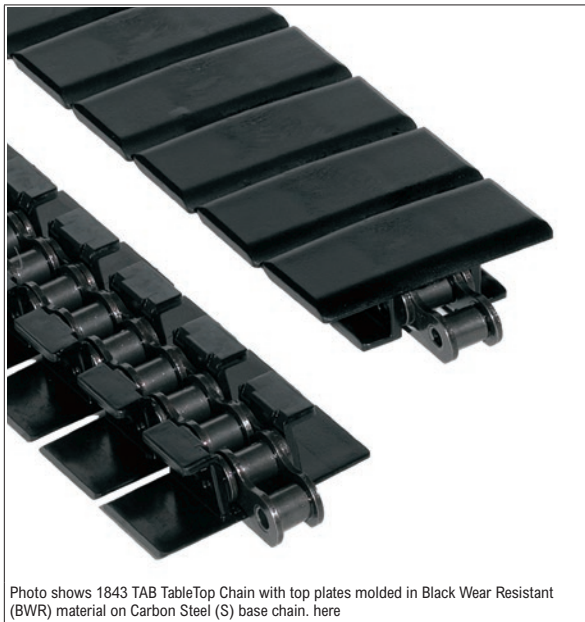


Photo shows 1843 TAB TableTop Chain with top plates molded in Black Wear Resistant (BWR) material on Carbon Steel (S) base chain. here



1843 MO Pin Plate
(Part #10084585)
Identifies Connector Link

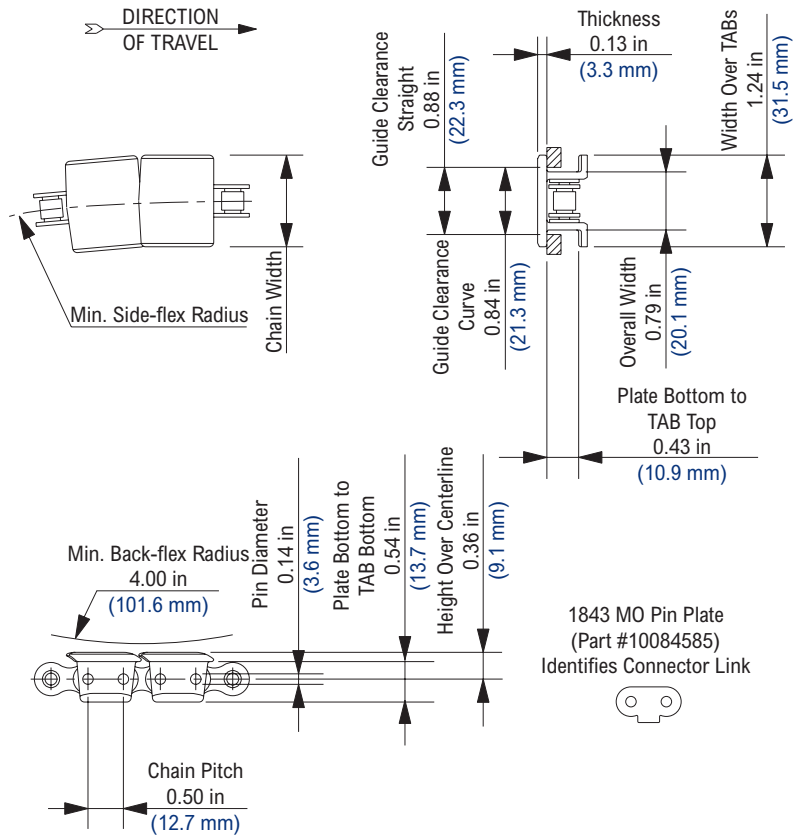

Chain Information

Chain Width	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
1 1/4	1.25	31.8	10.00	254.0	0.54	0.80
1 1/2	1.50	38.1	10.00	254.0	0.56	0.83
2	2.00	50.8	10.00	254.0	0.59	0.88
2 1/4	2.25	57.2	10.00	254.0	0.61	0.91
2 5/8	2.63	66.8	10.00	254.0	0.64	0.95

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
Standard Materials											
BWR	Black Wear Resistant	Carbon Steel	-40	180	NR	-40	82	NR	600	2,669	No
LF	Low Friction	Carbon Steel	-40	180	NR	-40	82	NR	600	2,669	No
Non-Standard Materials											
AS	Anti-Static	Carbon Steel	0	180	NR	-18	82	NR	600	2,669	No
BIR	Black Impact Resistant	Carbon Steel	-40	220	NR	-40	104	NR	600	2,669	No
FR	Flame Retardant	Carbon Steel	0	180	NR	-18	82	NR	600	2,669	No
HP™	High Performance	Carbon Steel	-40	180	NR	-40	82	NR	600	2,669	No
P	Chemical Resistant	Carbon Steel	0	180	NR	-18	82	NR	600	2,669	No

Regulatory Information

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.
All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.
Stocked in 240 pitch, 10 ft (3.048 m) length strands.
Uses 1843 carbon steel (S) base chain (Part #10084584).
Chain runs on ANSI No. 40 sprockets.
Chain strength is listed at room temperature. NR = Not Recommended.
For additional material information, see material portfolio.

1843 TAB (SS)


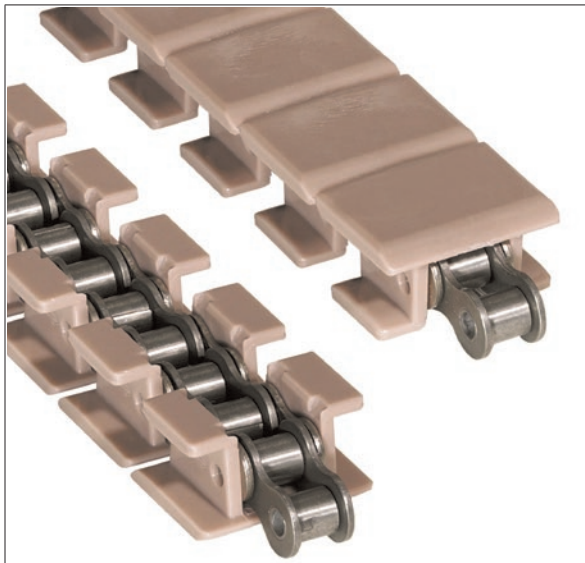


Photo shows 1843 TAB TableTop Chain with top plates molded in Low Friction (LF) material on Stainless Steel (SS) base chain.

Chain Information

Chain Width	Chain Width		Min. Side-flex Radius		Approximate Weight	
	desc	in	mm	in	mm	lbs/ft
1 1/4	1.25	31.8	10.00	254.0	0.54	0.80
1 1/2	1.50	38.1	10.00	254.0	0.56	0.83
2	2.00	50.8	10.00	254.0	0.59	0.88
2 1/4	2.25	57.2	10.00	254.0	0.61	0.91
2 5/8	2.63	66.7	10.00	254.0	0.64	0.95

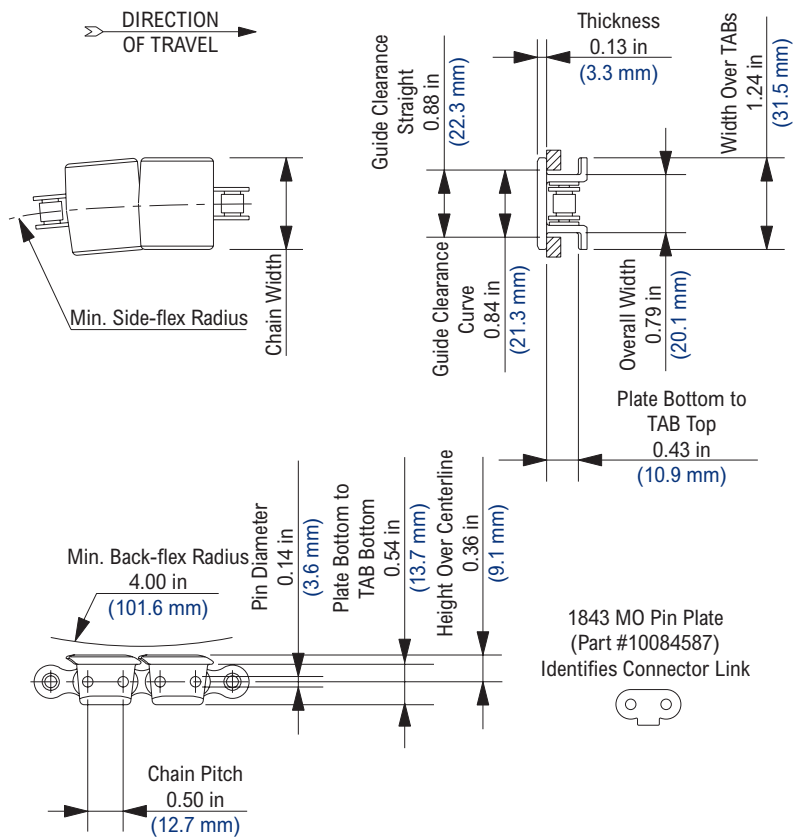

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
Standard Materials											
BWR	Black Wear Resistant	Stainless Steel	-40	180	NR	-40	82	NR	420	1,868	No
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	420	1,868	Yes
Non-Standard Materials											
AS	Anti-Static	Stainless Steel	0	180	NR	-18	82	NR	420	1,868	No
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	420	1,868	Yes
P	Chemical Resistant	Stainless Steel	0	180	140	-18	82	60	420	1,868	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 240 pitch, 10 ft (3.048 m) length strands.

Uses 1843 stainless steel (SS) base chain (Part #10084586).

Chain runs on ANSI No. 40 sprockets.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

1843 TAB G (S)


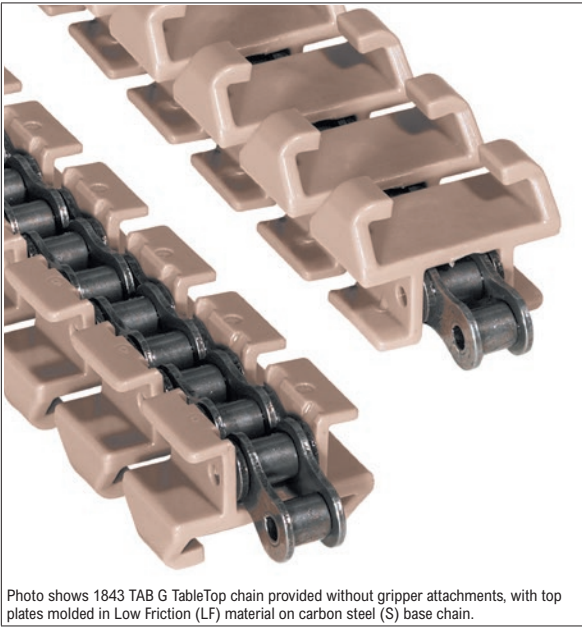


Photo shows 1843 TAB G TableTop chain provided without gripper attachments, with top plates molded in Low Friction (LF) material on carbon steel (S) base chain.

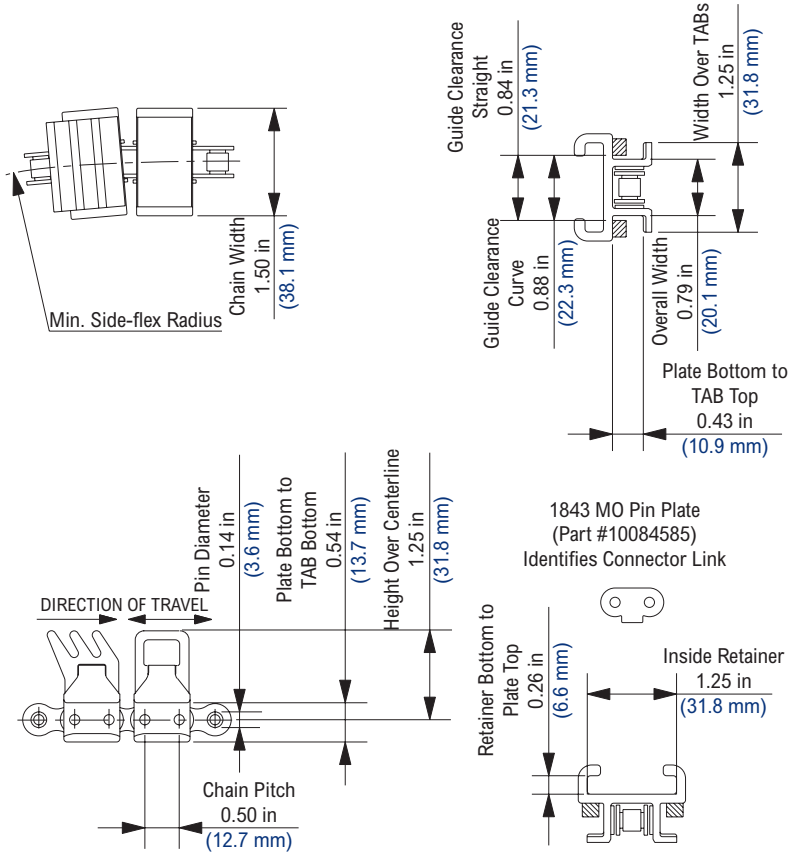

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
1 1/2	1.50	38.1	10.00	254.0	0.82	1.22

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
				dry	wet		dry	wet			
Standard Materials											
LF	Low Friction	Carbon Steel	-40	180	NR	-40	82	NR	600	2,669	No

Regulatory Information

Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

- Stocked in 240 pitch, 10 ft (3.048 m) length strands.
- Uses 1843 carbon steel (S) base chain (Part #10084584).
- Chain runs on ANSI No. 40 sprockets.
- Can be assembled with "J" or "D" style gripper attachments; see accessories section for more information.
- Chain breakers available.
- Chain strength is listed at room temperature. NR = Not Recommended.
- For additional material information, see material portfolio.

1843 TAB G (SS)


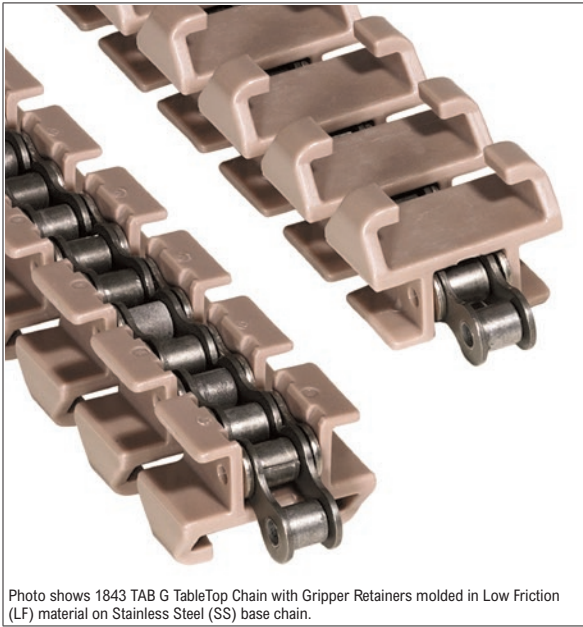


Photo shows 1843 TAB G TableTop Chain with Gripper Retainers molded in Low Friction (LF) material on Stainless Steel (SS) base chain.

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
1 1/2	1.50	38.1	10.00	254.0	0.85	1.27

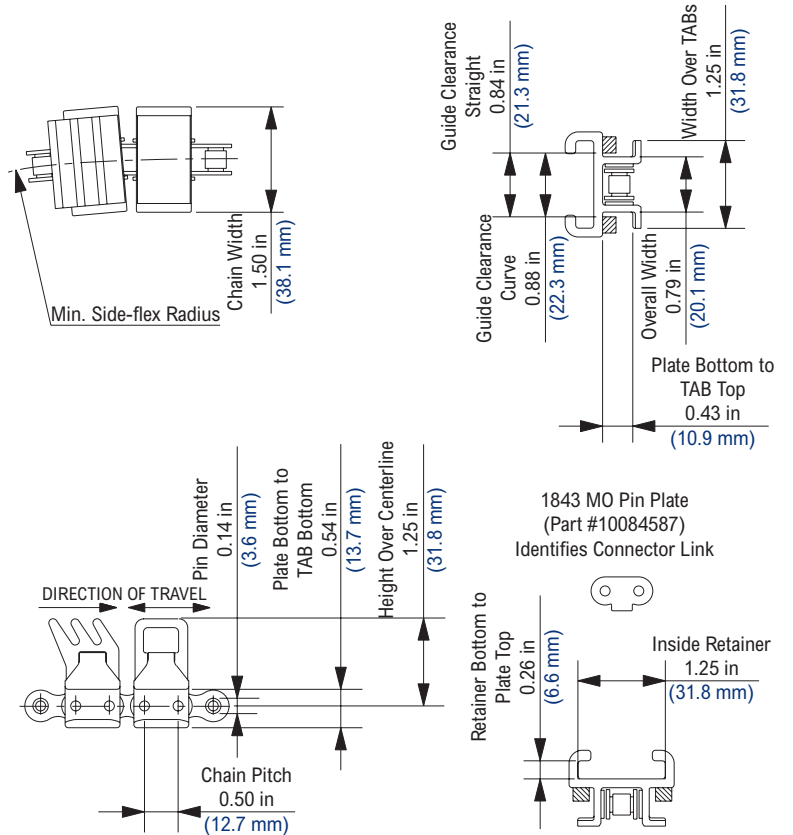

Available Materials


Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	420	1,868	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes


- Stocked in 240 pitch, 10 ft (3.048 m) length strands.
- Uses 1843 stainless steel (SS) base chain (Part #10084586).
- Chain runs on ANSI No. 40 sprockets.
- Can be assembled with "J" or "D" style gripper attachments; see accessories section for more information.
- Chain strength is listed at room temperature. NR = Not Recommended.
- For additional material information, see material portfolio.

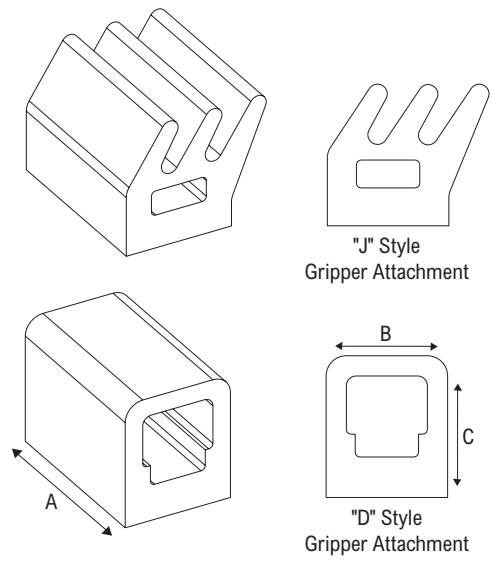

Gripper Attachments


Part Number	Style	Material	Color	Hardness (Shore A)	"A" Dimension		"B" Dimension		"C" Dimension	
					in	mm	in	mm	in	mm
Standard Grippers										
10075975	D	Neoprene	Black	40	1.23	31.2	0.75	19.1	0.88	22.4
10075977	J	Neoprene	White	40	1.23	31.2	0.75	19.1	0.88	22.4
Made-to-Order Grippers										
10075976	J	Neoprene	Black	40	1.23	31.2	0.75	19.1	0.88	22.4

1844 (SS)

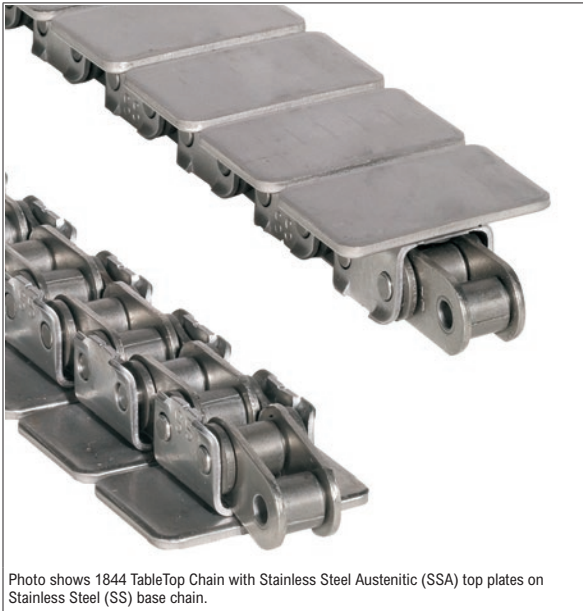

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
1	1.00	25.4	-	-	0.90	1.34
1 1/4	1.25	31.8	-	-	0.93	1.39
1 1/2	1.50	38.1	-	-	0.96	1.43
2	2.00	50.8	-	-	1.10	1.64

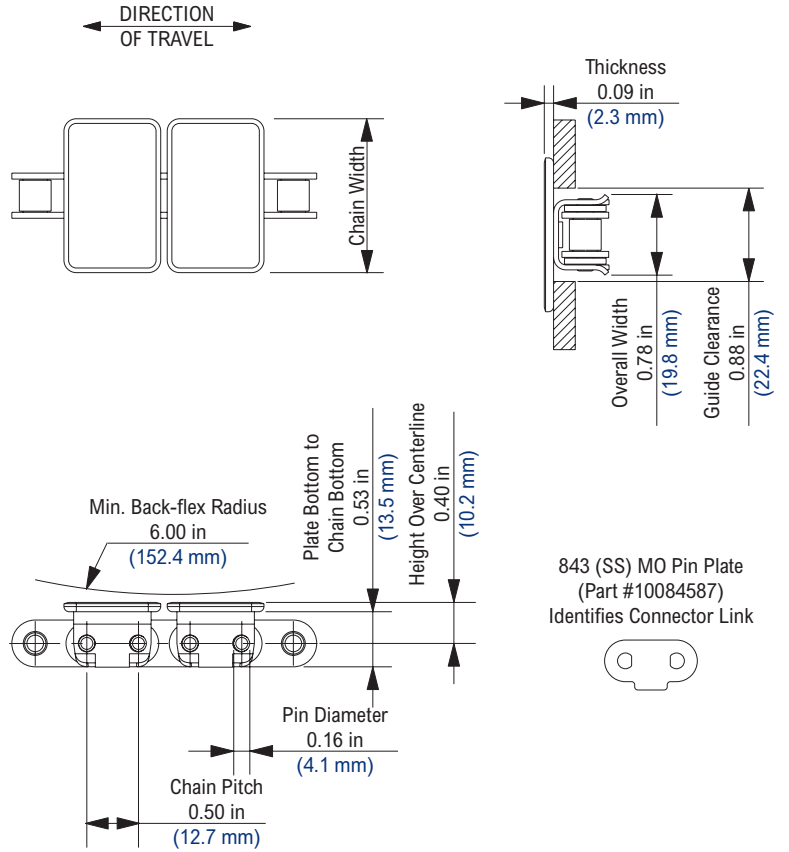

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature				Chain Strength		FDA Approval		
			Fahrenheit		Celsius		lbs	N			
			min	max	min	max					
Standard Materials											
SSA	Stainless Steel Austenitic	Stainless Steel	-100	800	212	-73	427	100	520	2,313	Yes

Regulatory Information

Based on the material chemistries, industry standards, and the documentation in the Federal Registry, it is the opinion of Rexnord that the Rexnord TableTop stainless steel chains can be considered GRAS for direct food contact.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patent: 4096943

Additional Notes

Stocked in 240 pitch, 10 ft (3.048 m) length strands.

Uses 843 stainless steel (SS) base chain (Part #10147844).

Chain runs on ANSI No. 40 sprockets.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

1863 TAB (S)


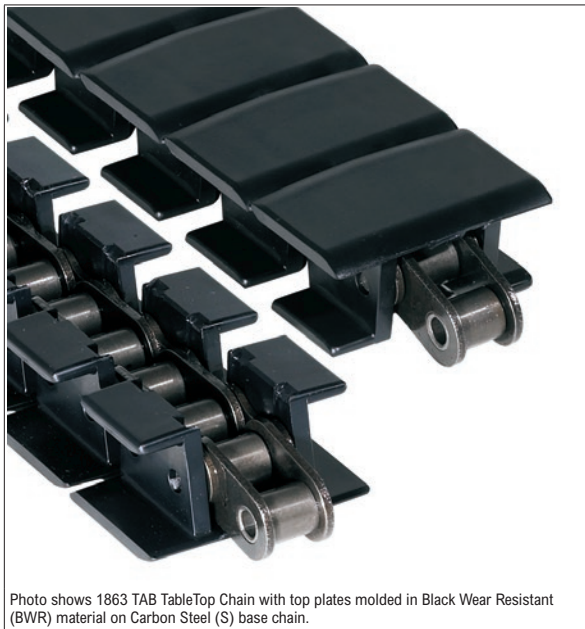


Photo shows 1863 TAB TableTop Chain with top plates molded in Black Wear Resistant (BWR) material on Carbon Steel (S) base chain.

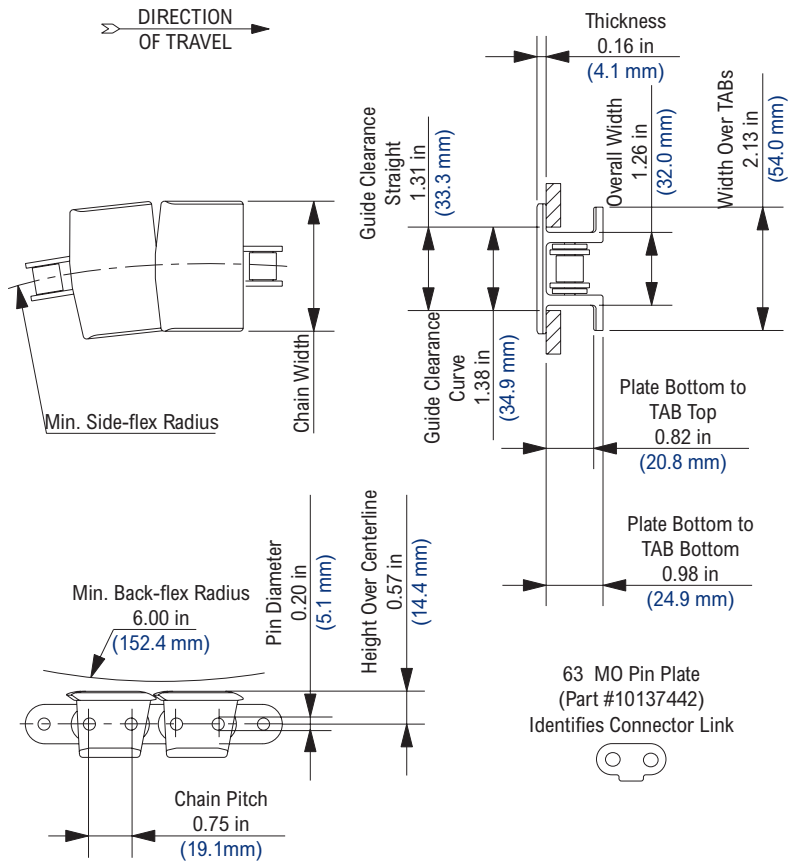

Chain Information

Chain Width		Min. Side-flex Radius		Approximate Weight		
desc	in	mm	in	mm	lbs/ft	kg/m
2 1/4	2.25	57.2	14.00	355.6	1.34	2.00

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
LF	Low Friction	Carbon Steel	-40	180	NR	-40	82	NR	1,000	4,448	No
Non-Standard Materials											
AS	Anti-Static	Carbon Steel	0	180	NR	-18	82	NR	1,000	4,448	No
BWR	Black Wear Resistant	Carbon Steel	-40	180	NR	-40	82	NR	1,000	4,448	No

Regulatory Information

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.
All rights reserved.


Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.
Stocked in 160 pitch, 10 ft (3.048 m) length strands.
Uses 63 carbon steel (S) base chain (Part #10137441).
Chain runs on ANSI No. 60 sprockets.
Chain breakers available.
For additional material information, see material portfolio.



Part #10178826

NS63 Thermoplastic Split Sprocket

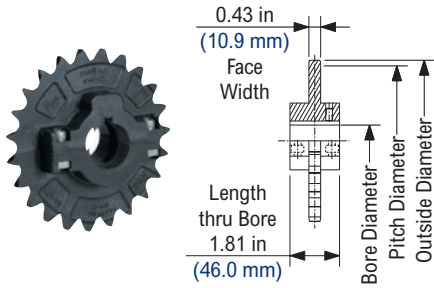

NS63 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						min	max	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
23	11 1/2	5.508	139.90	5.91	150.1	1	1 5/8	30	40	-	-	-	-	1	1 5/8	30	40	0.75	0.34

Shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with metric hardware but without set screws. Idler bores are designed to spin freely on the shaft without keyway or setscrews.

1864 (S)


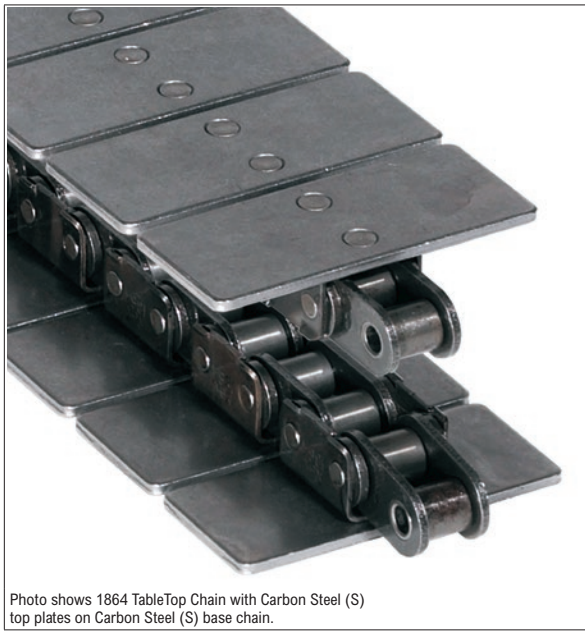


Photo shows 1864 TableTop Chain with Carbon Steel (S) top plates on Carbon Steel (S) base chain.

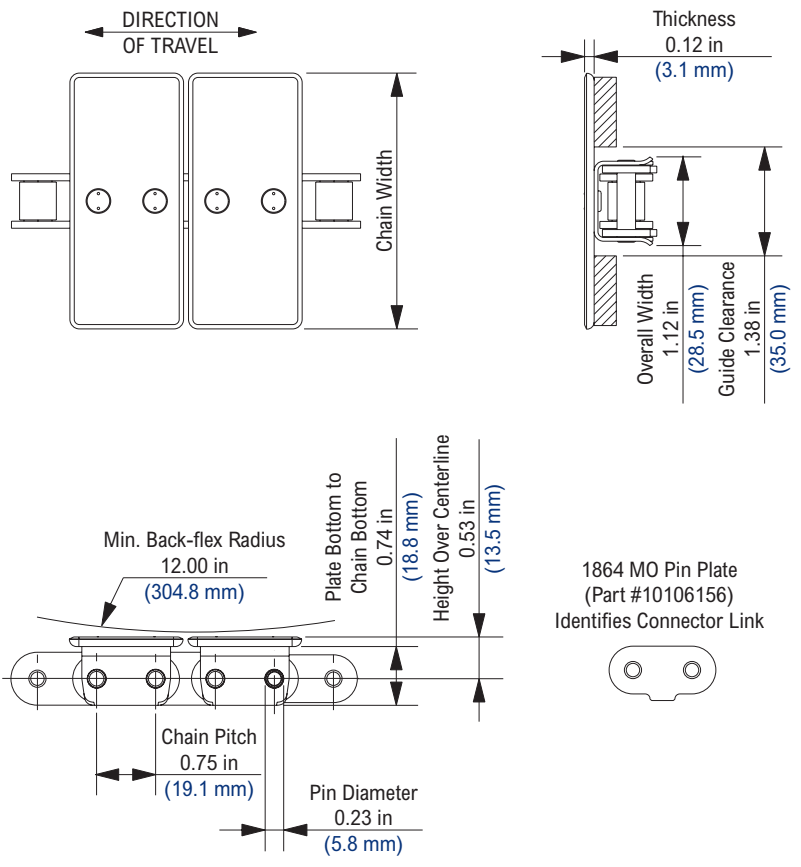

Chain Information

Chain Width	Chain Width		Min. Side-flex Radius		Approximate Weight	
	desc	in	mm	in	mm	lbs/ft
2 1/4	2.25	57.2	-	-	2.20	3.28
3 1/4	3.25	82.6	-	-	2.50	3.73
4 1/2	4.50	114.3	-	-	2.90	4.32
6	6.00	152.4	-	-	3.50	5.22
7 1/2	7.50	190.5	-	-	4.10	6.11

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
				dry	wet		dry	wet			
Standard Materials											
SSA	Stainless Steel Austenitic	Carbon Steel	-100	800	NR	-73	427	NR	1,200	5,338	No
S	Carbon Steel	Carbon Steel	-40	350	NR	-40	177	NR	1,200	5,338	No

Regulatory Information

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.
 All rights reserved.
 U.S. Patent: 4096943

Additional Notes

Stocked in 160 pitch, 10 ft (3.048 m) length strands.
 Uses 1864 carbon steel (S) base chain (Part #10131982).
 Chain runs on ANSI No. 60 sprockets.
 Chain breakers available.
 Chain strength is listed at room temperature.
 NR = Not Recommended.
 For additional material information, see material portfolio.



Part #10178826

1864 (SS)


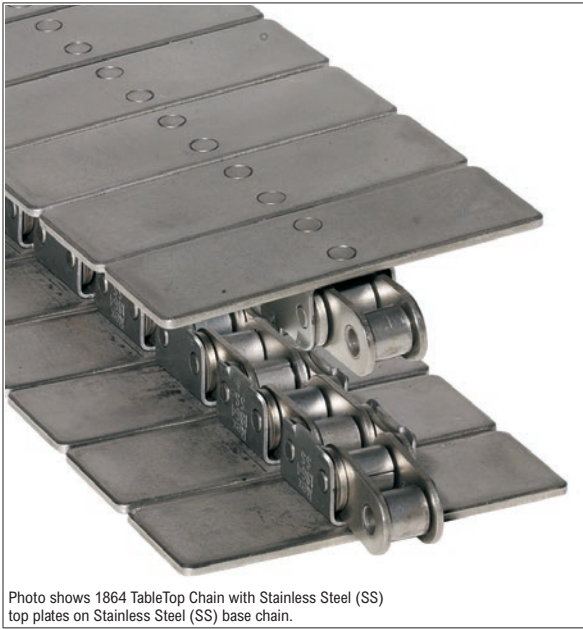


Photo shows 1864 TableTop Chain with Stainless Steel (SS) top plates on Stainless Steel (SS) base chain.

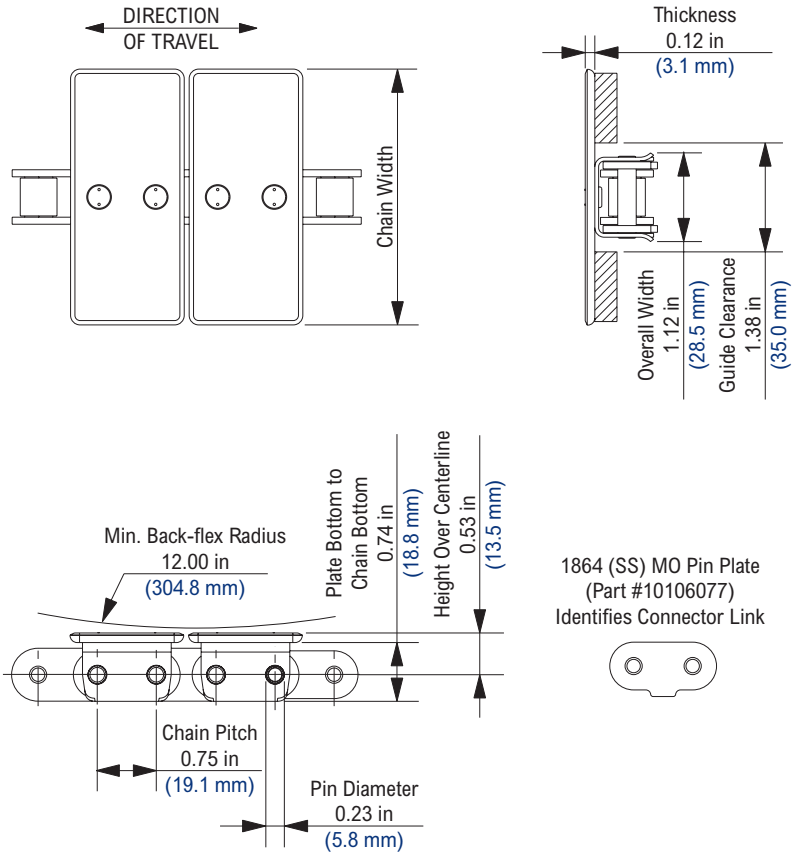

1864 (SS) MO Pin Plate (Part #10106077) Identifies Connector Link

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
2 1/4	2.25	57.2	-	-	2.20	3.28
3 1/4	3.25	82.6	-	-	2.50	3.73
4 1/2	4.50	114.3	-	-	2.90	4.32
6	6.00	152.4	-	-	3.50	5.22
7 1/2	7.50	190.5	-	-	4.10	6.11

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max				
				dry	wet		dry	wet			
Standard Materials											
SSA	Stainless Steel Austenitic	Stainless Steel	-100	800	212	-73	427	100	900	4,003	Yes

Regulatory Information

Based on the material chemistries, industry standards, and the documentation in the Federal Registry, it is the opinion of Rexnord that the Rexnord TableTop stainless steel chains can be considered GRAS for direct food contact.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patent: 4096943

Additional Notes

Stocked in 160 pitch, 10 ft (3.048 m) length strands.

Uses 1864 stainless steel (SS) base chain (Part #10131994).

Chain runs on ANSI No. 60 sprockets.

Chain breakers available.

Chain strength is listed at room temperature.


NR = Not Recommended.

For additional material information, see material portfolio.



Part #10178826

NS63 Thermoplastic Split Sprocket

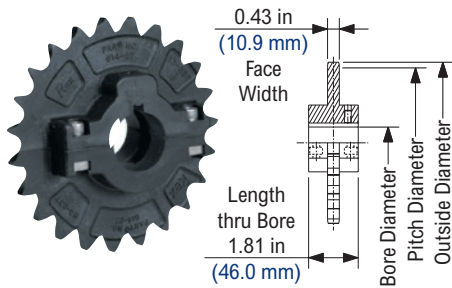

NS63 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight		
						Round				Square				in		mm				
						min	max	min	max	min	max	min	max	min	max	min	max			min
actual	effect	in	mm	in	mm														lbs	kg
23	11 1/2	5.508	139.90	5.91	150.1	1	1 5/8	30	40	-	-	-	-	1	1 5/8	30	40	0.75	0.34	

Shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with metric hardware but without set screws. Idler bores are designed to spin freely on the shaft without keyway or setscrews.

1873 TAB (S)


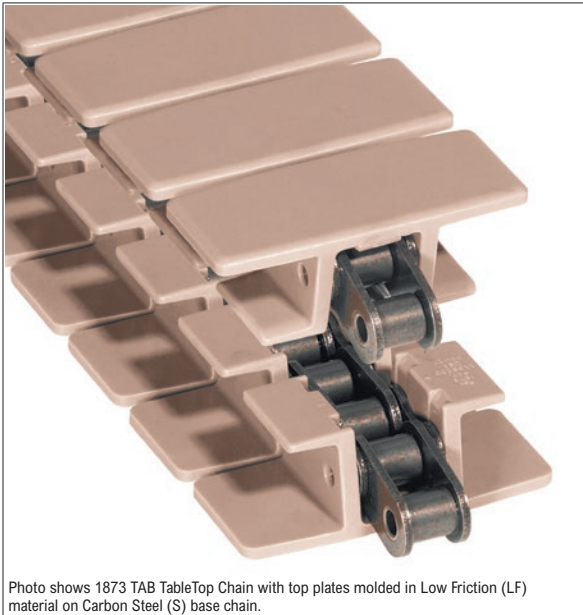


Photo shows 1873 TAB TableTop Chain with top plates molded in Low Friction (LF) material on Carbon Steel (S) base chain.

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
2 1/4	2.25	57.2	14.00	355.6	1.34	2.00
3 1/4	3.25	82.6	14.00	355.6	1.41	2.10
4 1/2	4.50	114.3	14.00	355.6	1.52	2.26
6	6.00	152.4	18.00	457.2	1.62	2.41
7 1/2	7.50	190.5	18.00	457.2	1.72	2.56
10	10.00	254.0	18.00	457.2	1.87	2.79
12	12.00	304.8	24.00	609.6	2.02	3.01

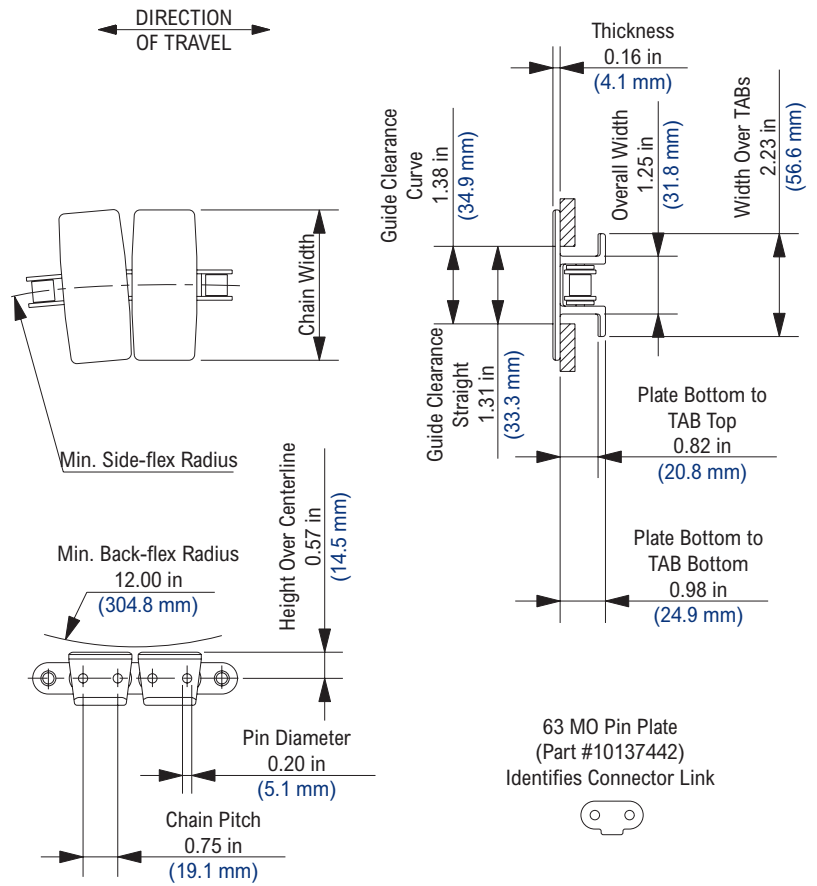

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
	dry	wet		dry	wet		dry	wet			
Standard Materials											
HP™	High Performance	Carbon Steel	-40	180	NR	-40	82	NR	1,000	4,448	No
LF	Low Friction	Carbon Steel	-40	180	NR	-40	82	NR	1,000	4,448	No
Non-Standard Materials											
HS	Heat Stabilized	Carbon Steel	-40	220	NR	-40	104	NR	1,000	4,448	No
PS™	Platinum Series™	Carbon Steel	-40	180	NR	-40	82	NR	1,000	4,448	No

Regulatory Information

Rexnord, TableTop, Platinum Series and PS are trademarks of Regal Rexnord Corporation.
All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.
Stocked in 160 pitch, 10 ft (3.048 m) length strands.
Uses 63 carbon steel (S) base chain (Part #10137441).
Chain runs on ANSI No. 60 sprockets.
Chain breakers available.
Chain strength is listed at room temperature.
NR = Not Recommended.
For additional material information, see material portfolio.



Part #10178826

1873 TAB (SS)


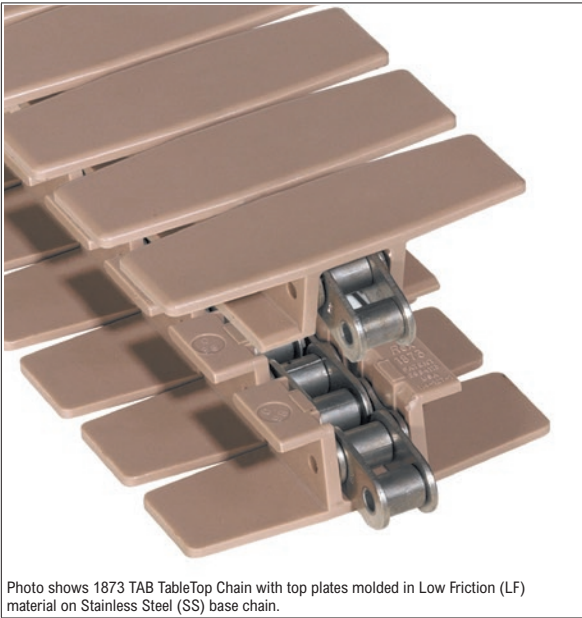


Photo shows 1873 TAB TableTop Chain with top plates molded in Low Friction (LF) material on Stainless Steel (SS) base chain.

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
2 1/4	2.25	57.2	14.00	355.6	1.34	2.00
3 1/4	3.25	82.6	14.00	355.6	1.41	2.10
4 1/2	4.50	114.3	14.00	355.6	1.52	2.26
6	6.00	152.4	18.00	457.2	1.62	2.41
7 1/2	7.50	190.5	18.00	457.2	1.72	2.56
10	10.00	254.0	18.00	457.2	1.87	2.79
12	12.00	304.8	24.00	609.6	2.02	3.01

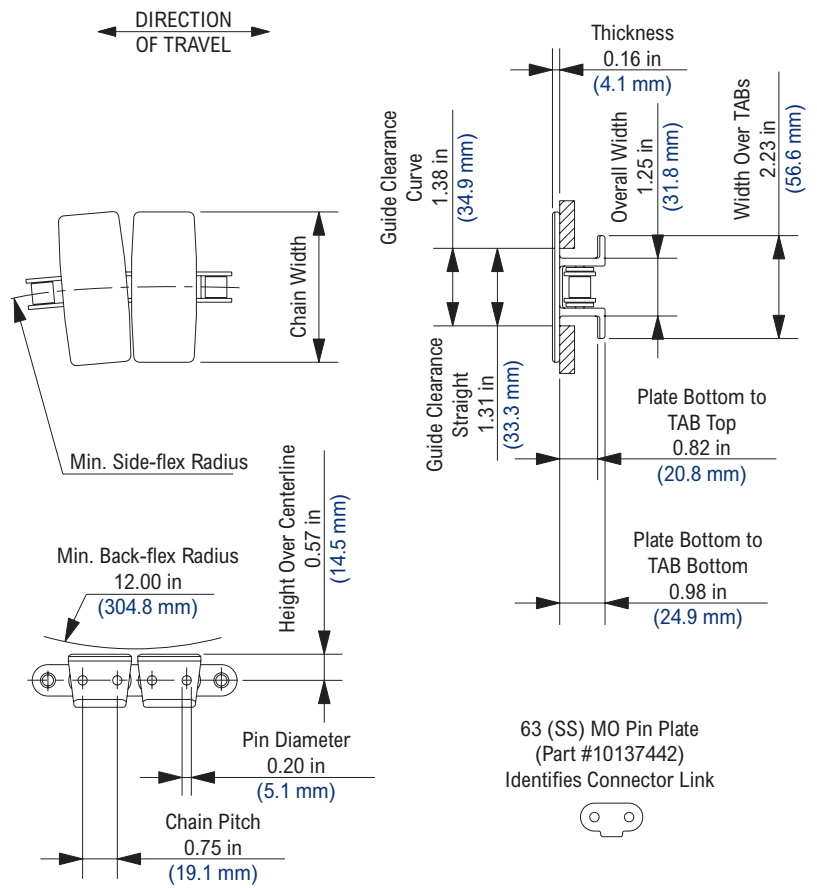

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
				dry	wet		dry	wet			
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	750	3,336	Yes
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	750	3,336	Yes
Non-Standard Materials											
HS	Heat Stabilized	Stainless Steel	-40	220	212	-40	104	100	750	3,336	No
PS™	Platinum Series™	Stainless Steel	-40	180	150	-40	82	66	750	3,336	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, TableTop, Platinum Series and PS are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 160 pitch, 10 ft (3.048 m) length strands. Uses 63 stainless steel (SS) base chain (Part #10727230). Chain runs on ANSI No. 60 sprockets. Chain breakers available. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.



Part #10178826

1873 TAB G (S)


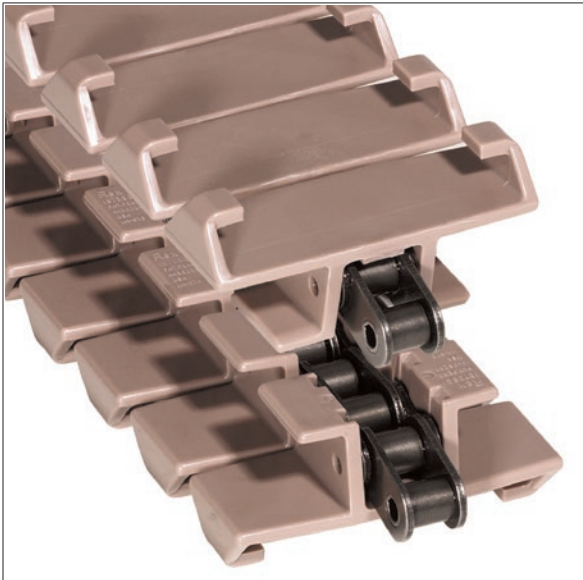


Photo shows 1873 TAB G TableTop Chain with Gripper Retainers molded in Low Friction (LF) material on Carbon Steel (S) base chain.

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3 3/4	3.75	95.3	15.00	381.0	1.50	2.24

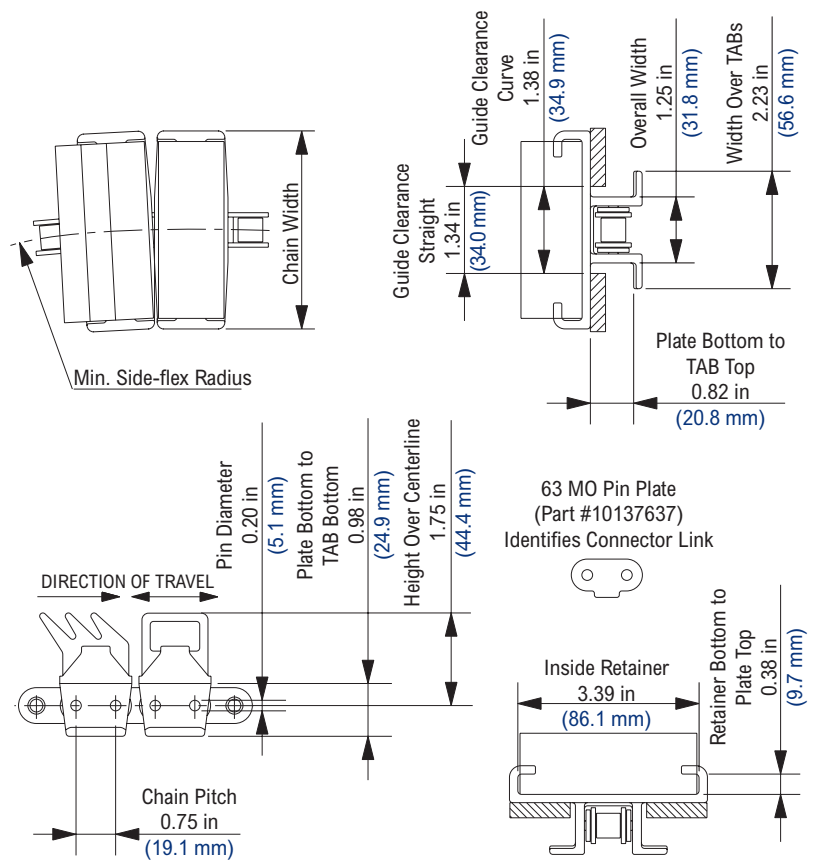

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
				dry	wet		dry	wet			
Standard Materials											
HP™	High Performance	Carbon Steel	-40	180	NR	-40	82	NR	1,000	4,448	No
HS	Heat Stabilized	Carbon Steel	-40	220	NR	-40	104	NR	1,000	4,448	No
LF	Low Friction	Carbon Steel	-40	180	150	-40	82	66	1,000	4,448	No
PS™	Platinum Series™	Carbon Steel	-40	180	NR	-40	82	NR	1,000	4,448	No
Non-Standard Materials											
WX	Green Abrasion Resistant Polyamide	Carbon Steel	-40	220	NR	-40	104	NR	1,000	4,448	No

Regulatory Information

Rexnord, TableTop, Platinum Series and PS are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 4629063, 4809846, 5219065

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 160 pitch, 10 ft (3.048 m) length strands.

Uses 63 carbon steel (S) base chain (Part #10137441).

Chain runs on ANSI No. 60 sprockets.

Chain breakers available.

Chain strength is listed at room temperature.

NR = Not Recommended.

For additional material information, see material portfolio.



Part #10178826

1873 TAB G (SS)


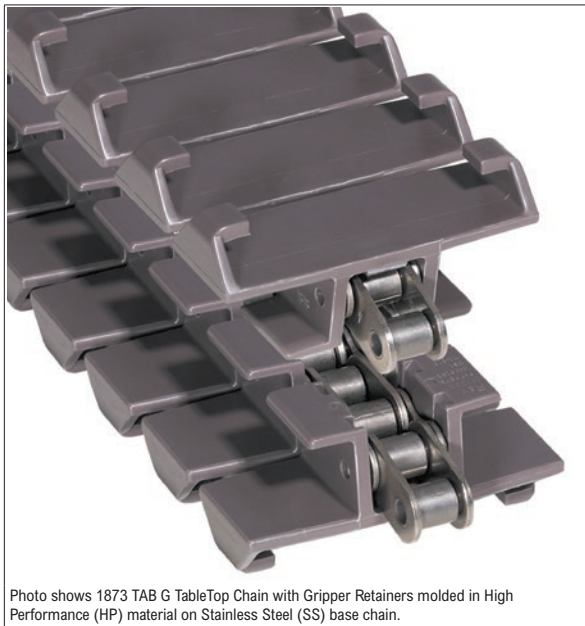


Photo shows 1873 TAB G TableTop Chain with Gripper Retainers molded in High Performance (HP) material on Stainless Steel (SS) base chain.

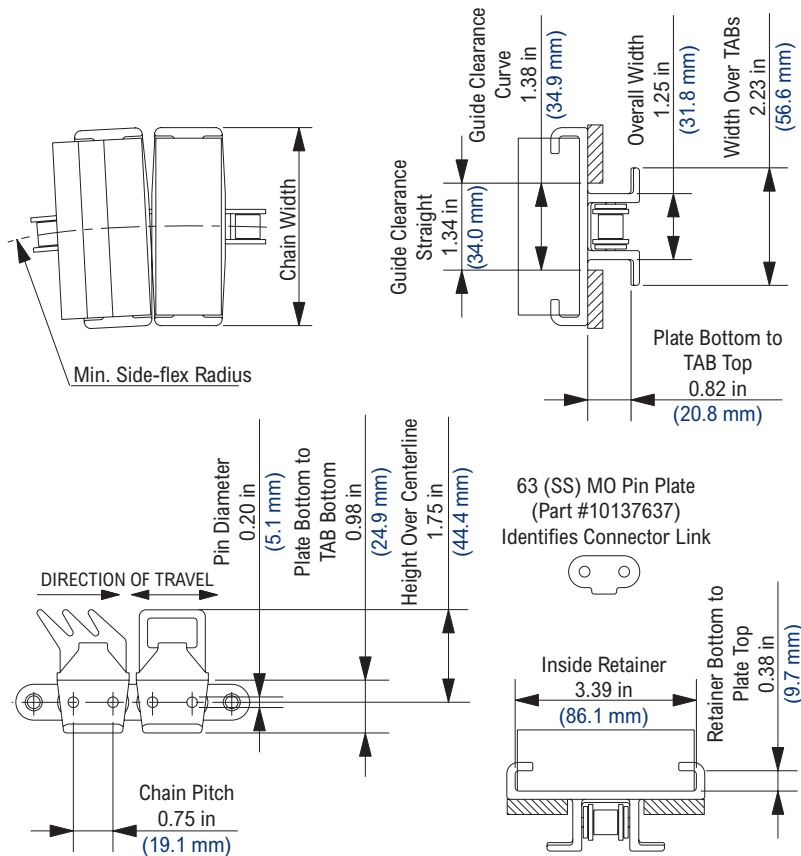

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3 3/4	3.75	95.3	15.00	381.0	1.50	2.24

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	750	3,336	Yes
HS	Heat Stabilized	Stainless Steel	-40	220	212	-40	104	100	750	3,336	No
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	750	3,336	Yes
PS™	Platinum Series™	Stainless Steel	-40	180	150	-40	82	66	750	3,336	Yes
Non-Standard Materials											
WX	Green Abrasion Resistant Polyamide	Stainless Steel	-40	220	NR	-40	104	NR	750	3,336	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, TableTop, Platinum Series and PS are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 4629063, 4809846, 5219065

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 160 pitch, 10 ft (3.048 m) length strands.

Uses 63 stainless steel (SS) base chain (Part #10727230).

Chain runs on ANSI No. 60 sprockets.

Chain breakers available.

Chain strength is listed at room temperature.

NR = Not Recommended.

For additional material information, see material portfolio.



Part #10178826


1873 TAB (S) SuperGrip™



Photo shows 1873 TAB SuperGrip TableTop Chain with High Friction Inserts and top plates molded in Low Friction (LF) material on Carbon Steel (S) base chain.

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
7 1/2	7.50	190.5	18.00	457.2	1.72	2.56
10	10.00	254.0	18.00	457.2	1.87	2.79
12	12.00	304.8	24.00	609.6	2.02	3.01

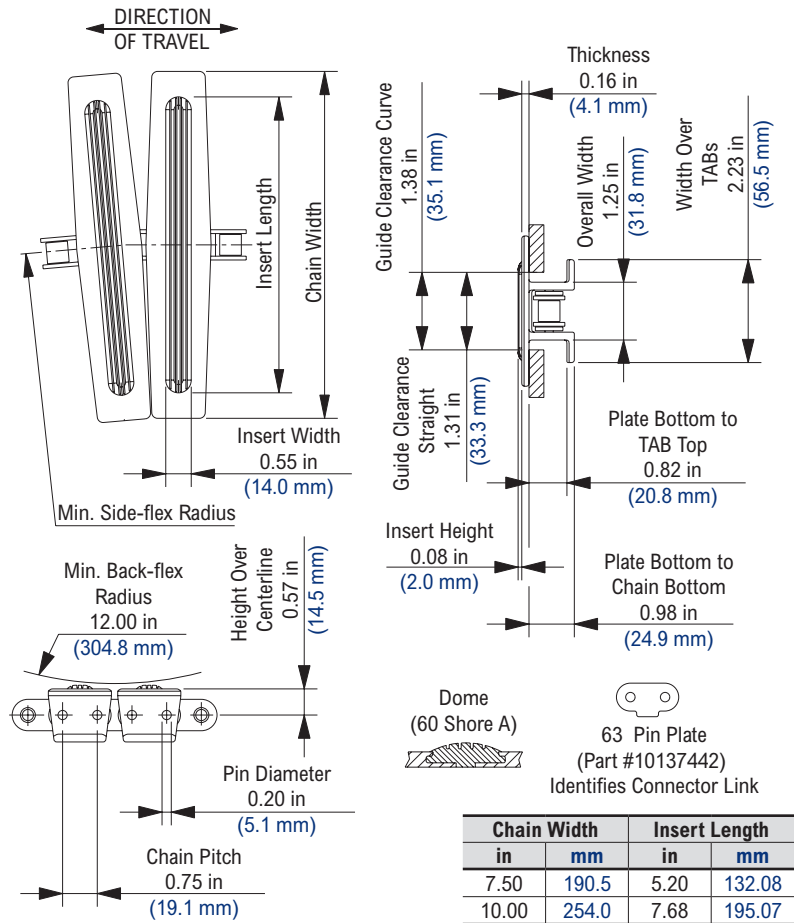

Chain Width		Insert Length	
in	mm	in	mm
7.50	190.5	5.20	132.08
10.00	254.0	7.68	195.07
12.00	304.8	9.65	245.11

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
LF	Low Friction	Carbon Steel	-40	180	NR	-40	82	NR	1,000	4,448	No
Non-Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	1,000	4,448	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, TableTop and SuperGrip are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

- Stocked in 160 pitch, 10 ft (3.048 m) length strands.
- Uses 63 carbon steel (S) base chain (Part #10137441).
- Chain runs on ANSI No. 60 sprockets.
- Chain breakers available.
- 3.25 in (82.6 mm) and 4.50 in (114.3 mm) widths are available by cutting 7.50 in (190.5 mm) links.
- Thermoplastic pins are available upon request.
- Chain Load Ratings are listed at room temperature.
- NR = Not Recommended.




Part #10178826

1873 TAB (SS) SuperGrip™



Photo shows 1873 TAB SuperGrip TableTop Chain with High Friction Inserts and top plates molded in Low Friction (LF) material on Stainless Steel (SS) base chain.

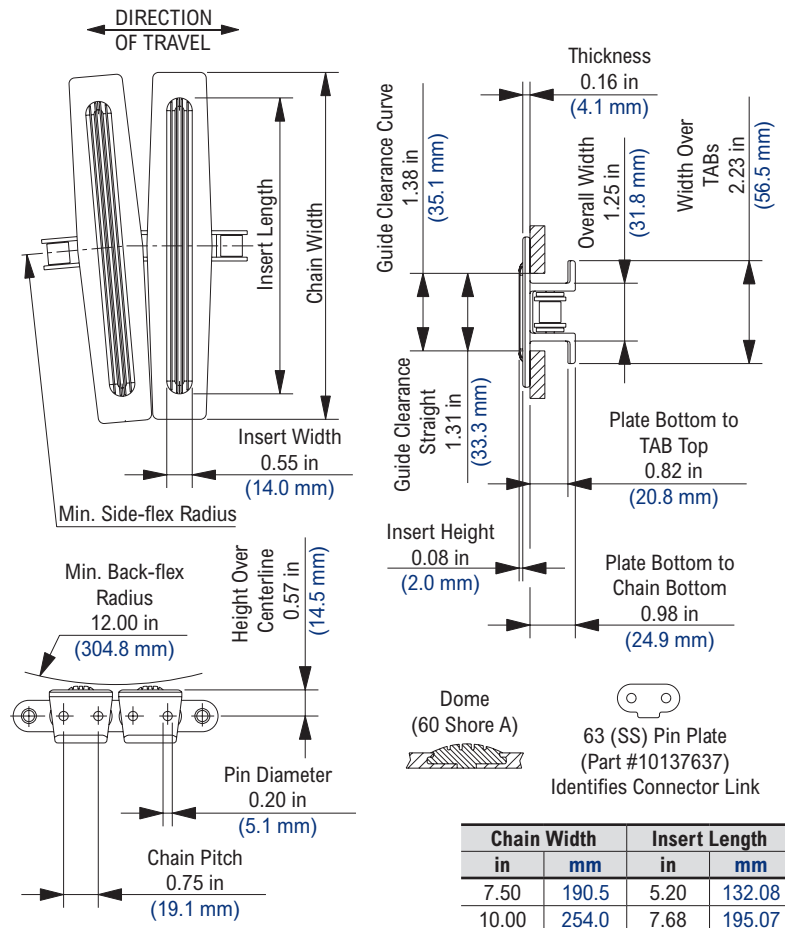

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
7 1/2	7.50	190.5	18.00	457.2	1.72	2.56
10	10.00	254.0	18.00	457.2	1.72	2.56
12	12.00	304.8	24.00	609.6	2.02	3.01

Chain Width		Insert Length	
in	mm	in	mm
7.50	190.5	5.20	132.08
10.00	254.0	7.68	195.07
12.00	304.8	9.65	245.11

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	750	3,336	Yes
Non-Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	750	3,336	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Stocked in 160 pitch, 10 ft (3.048 m) length strands.
 Uses 63 stainless steel (SS) base chain (Part #10727230).
 Chain runs on ANSI No. 60 sprockets.
 Chain breakers available.
 3.25 in (82.6 mm) and 4.50 in (114.3 mm) widths are available by cutting 7.50 in (190.5 mm) links.
 Chain strength is listed at room temperature.
 NR = Not Recommended.
 For additional material information, see material portfolio.



Part #10178826


1873 TAB (SS) RubberTop™



Photo shows 1873 TAB RubberTop TableTop Chain with High Friction Inserts and top plates molded in Low Friction (LF) material on Stainless Steel (SS) base chain.

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
7 1/2	7.50	190.5	18.00	457.2	1.72	2.56

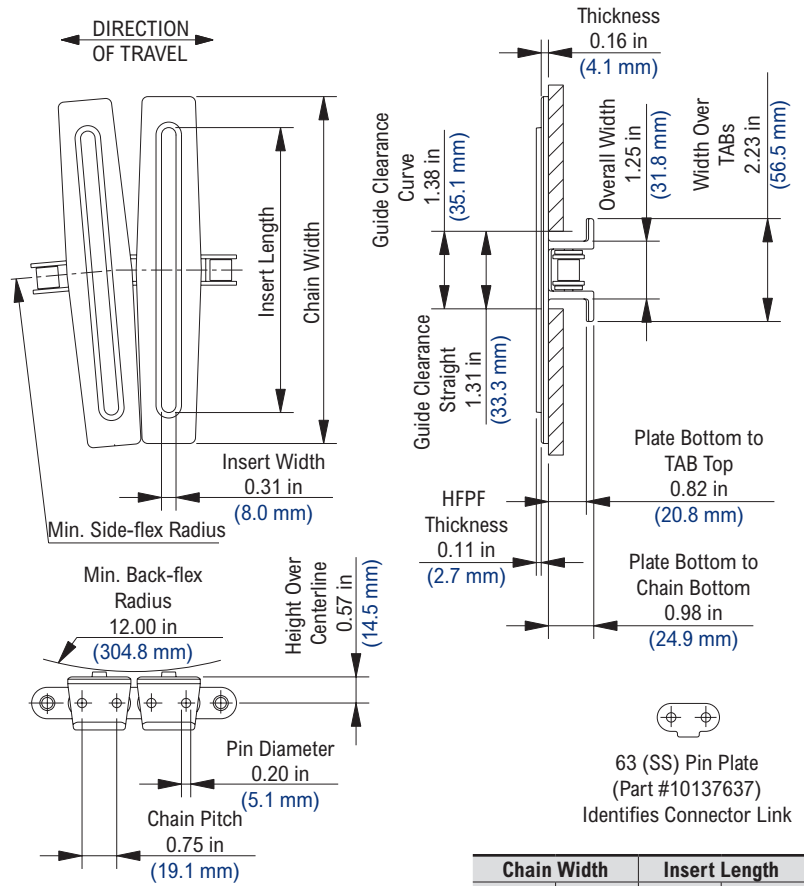

Chain Width		Insert Length	
in	mm	in	mm
7.50	190.5	7.05	179.07

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet	min	dry	wet				
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	750	3,336	Yes
Non-Standard Materials											
HP™	High Performance	Stainless Steel	-40	180	150	-40	82	66	750	3,336	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Regnord, TableTop and RubberTop are trademarks of Regal Regnord Corporation.

All rights reserved.

Additional Notes

Stocked in 160 pitch, 10 ft (3.048 m) length strands.

Uses 63 stainless steel (SS) base chain (Part #10727230).

Chain runs on ANSI No. 60 sprockets.

Chain breakers available.

Chain strength is listed at room temperature.


NR = Not Recommended.

For additional material information, see material portfolio.



Part #10178826


NS63 Thermoplastic Split Sprocket

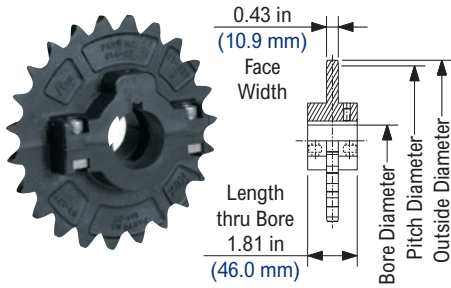

NS63 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight		
						Round				Square				in		mm				
						min	max	min	max	min	max	min	max	min	max	min	max			min
actual	effect	in	mm	in	mm														lbs	kg
23	11 1/2	5.508	139.90	5.91	150.1	1	1 5/8	30	40	-	-	-	-	1	1 5/8	30	40	0.75	0.34	

Shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with metric hardware but without set screws. Idler bores are designed to spin freely on the shaft without keyway or setscrews.

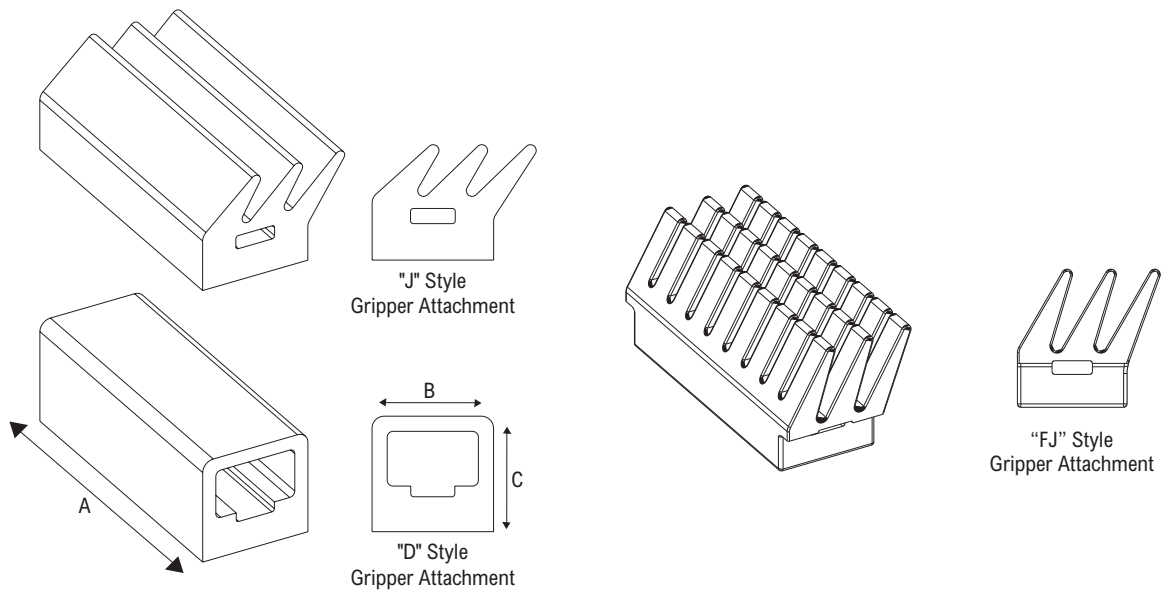

Gripper Attachments

Part Number	Style	Material	Color	Hardness (Shore A)	"A" Dimension		"B" Dimension		"C" Dimension	
					in	mm	in	mm	in	mm
Standard Grippers										
10075338	D	Neoprene	Black	40	3.35	85.1	1.25	31.8	1.19	30.2
10075339	D	Neoprene	White	40	3.35	85.1	1.25	31.8	1.19	30.2
10075340	D	Neoprene	Black	60	3.35	85.1	1.25	31.8	1.19	30.2
10075341	D	EPDM	White	50	3.35	85.1	1.25	31.8	1.19	30.2
10075342	D	EPDM	White	80	3.35	85.1	1.25	31.8	1.19	30.2
10075343	D	EPDM	Black	50	3.35	85.1	1.25	31.8	1.19	30.2
10075608	J	Neoprene	Black	40	3.35	85.1	1.25	31.8	1.19	30.2
10075609	J	Neoprene	White	50	3.35	85.1	1.25	31.8	1.19	30.2
10075610	J	EPDM	White	80	3.35	85.1	1.25	31.8	1.19	30.2
10075611	J	EPDM	White	50	3.35	85.1	1.25	31.8	1.19	30.2
10074926	FJ	Neoprene	Black	40	3.68	93.5	1.69	42.9	1.58	40.1
10074927	FJ	EPDM	White	50	3.68	93.5	1.69	42.9	1.58	40.1

Regulatory Information

U.S. Patent: 9840370


1874 TAB (S)



Photo shows 1874 TAB TableTop Chain with Carbon Steel (S) top plates on Carbon Steel (S) base chain.

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
2 1/4	2.25	57.2	15.00	381.0	1.94	2.89
3 1/4	3.25	82.6	15.00	381.0	2.80	4.17
4 1/2	4.50	114.3	15.00	381.0	3.20	4.77
6	6.00	152.4	18.00	457.2	3.80	5.66
7 1/2	7.50	190.5	24.00	609.6	4.30	6.41

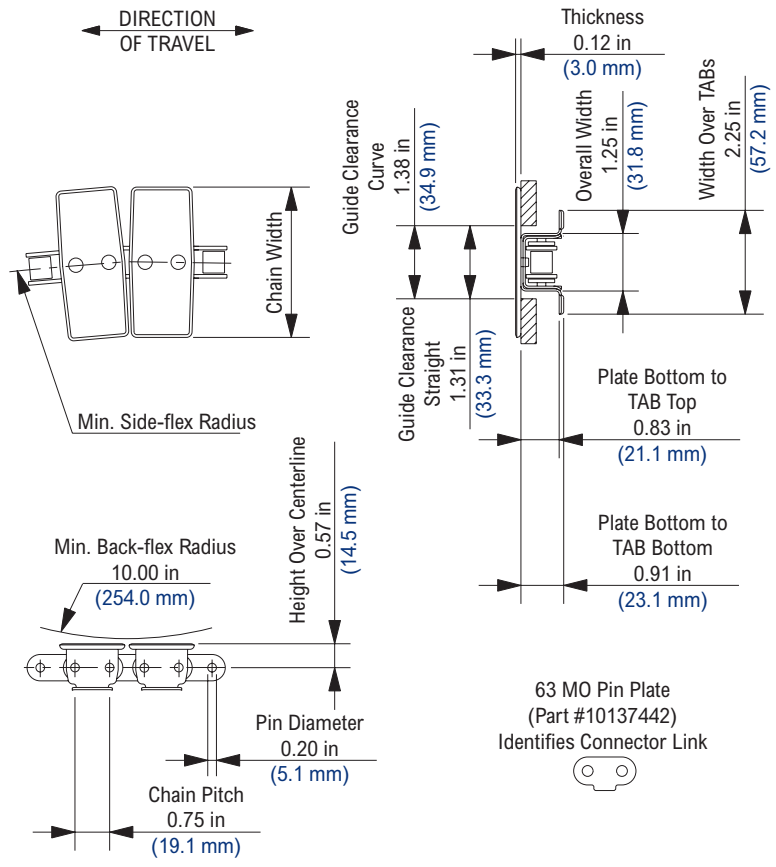

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
	dry	wet		dry	wet		dry	wet			
Standard Materials											
S	Carbon Steel	Carbon Steel	-40	350	NR	-40	177	NR	1,000	4,448	No
Non-Standard Material											
SS	Stainless Steel Austenitic	Carbon Steel	-100	800	NR	-73	177	NR	1,200	5,338	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patent: 4096943

Additional Notes

Stocked in 160 pitch, 10 ft (3.048 m) length strands. Uses 63 stainless steel (SS) base chain (Part #10137441). Chain runs on ANSI No. 60 sprockets. Chain breakers available. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.



Part #10178826


1874 TAB (SS)



Photo shows 1874 TAB TableTop Chain with Stainless Steel Austenitic (SSA) top plates on Stainless Steel (SS) base chain.

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
2 1/4	2.25*	57.2	15.00	381.0	1.94	2.89
3 1/4	3.25	82.6	15.00	381.0	2.80	4.17
4 1/2	4.50	114.3	15.00	381.0	3.20	4.77
6	6.00	152.4	18.00	457.2	3.80	5.66
7 1/2	7.50	190.5	24.00	609.6	4.30	6.41

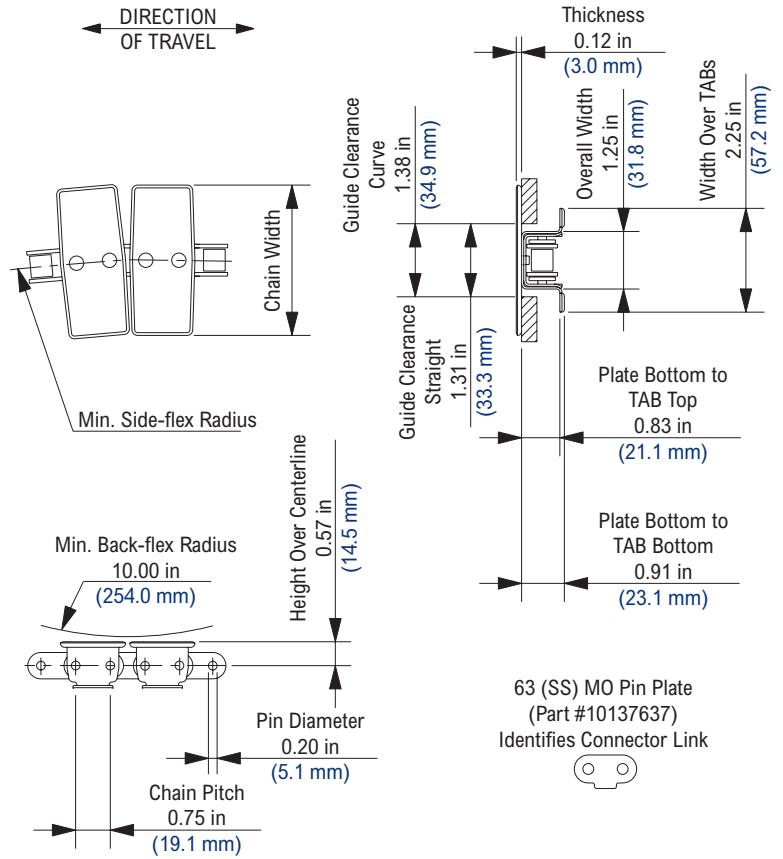

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
Standard Materials											
SSA	Stainless Steel Austenitic	Stainless Steel	-100	800	212	-73	427	100	750	3,336	Yes

Regulatory Information

Based on the material chemistries, industry standards, and the documentation in the Federal Registry, it is the opinion of Rexnord that the Rexnord TableTop stainless steel chains can be considered GRAS for direct food contact.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patent: 4096943

Additional Notes

Stocked in 160 pitch, 10 ft (3.048 m) length strands.

Uses 63 stainless steel (SS) base chain (Part #10727230).

Chain runs on ANSI No. 60 sprockets.

Chain breakers available.

* SS1874TAB SS-2.25IN is available on a made-to-order basis.

Chain strength is listed at room temperature.

NR = Not Recommended.

For additional material information, see material portfolio.



Part #10178826

1874 TAB G (S)


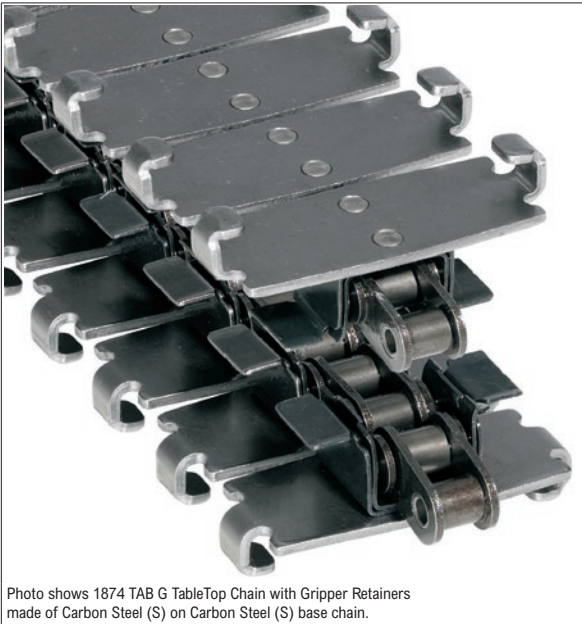


Photo shows 1874 TAB G TableTop Chain with Gripper Retainers made of Carbon Steel (S) on Carbon Steel (S) base chain.

Chain Information

Chain Width		Min. Side-flex Radius		Approximate Weight		
desc	in	mm	in	mm	lbs/ft	kg/m
3 5/8	3.63	92.1	15.00	381.0	3.00	4.47

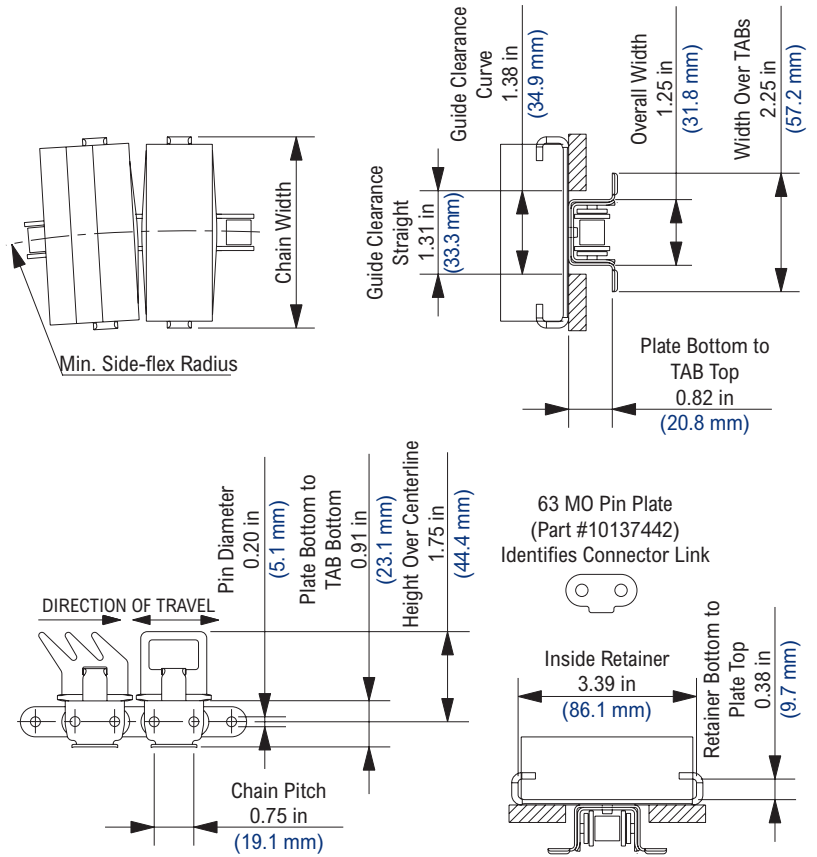

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet	NR	dry	wet				
Standard Materials											
SSA	Stainless Steel Austenitic	Carbon Steel	-40	350	NR	-40	177	NR	1,000	4,448	No
S	Carbon Steel	Carbon Steel	-40	350	NR	-40	177	NR	1,000	4,448	No

Regulatory Information

Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

- Stocked in 160 pitch, 10 ft (3.048 m) length strands.
- Uses 63 carbon steel (S) base chain (Part #10137441).
- Chain runs on ANSI No. 60 sprockets.
- Can be assembled with “J” or “D” style gripper attachments; see accessories section for more information.
- Chain strength is listed at room temperature. NR = Not Recommended.
- For additional material information, see material portfolio.



Part #10178826

1874 TAB G (SS)


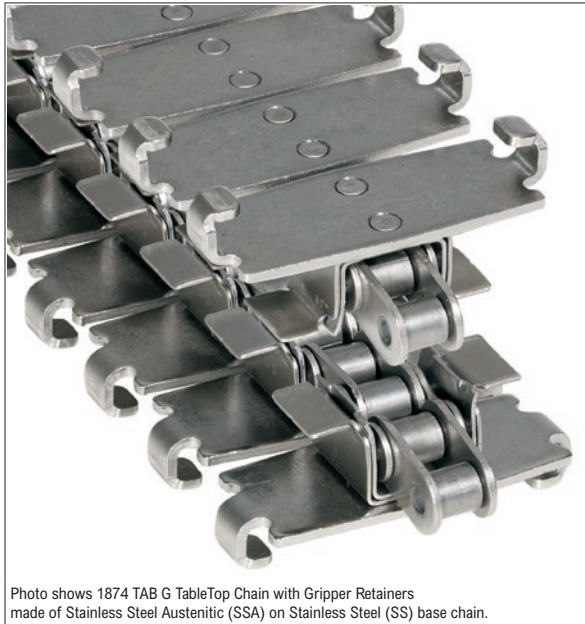


Photo shows 1874 TAB G TableTop Chain with Gripper Retainers made of Stainless Steel Austenitic (SSA) on Stainless Steel (SS) base chain.

Chain Information

Chain Width		Min. Side-flex Radius		Approximate Weight		
desc	in	mm	in	mm	lbs/ft	kg/m
3 5/8	3.63	92.1	15.00	381.0	3.00	4.47

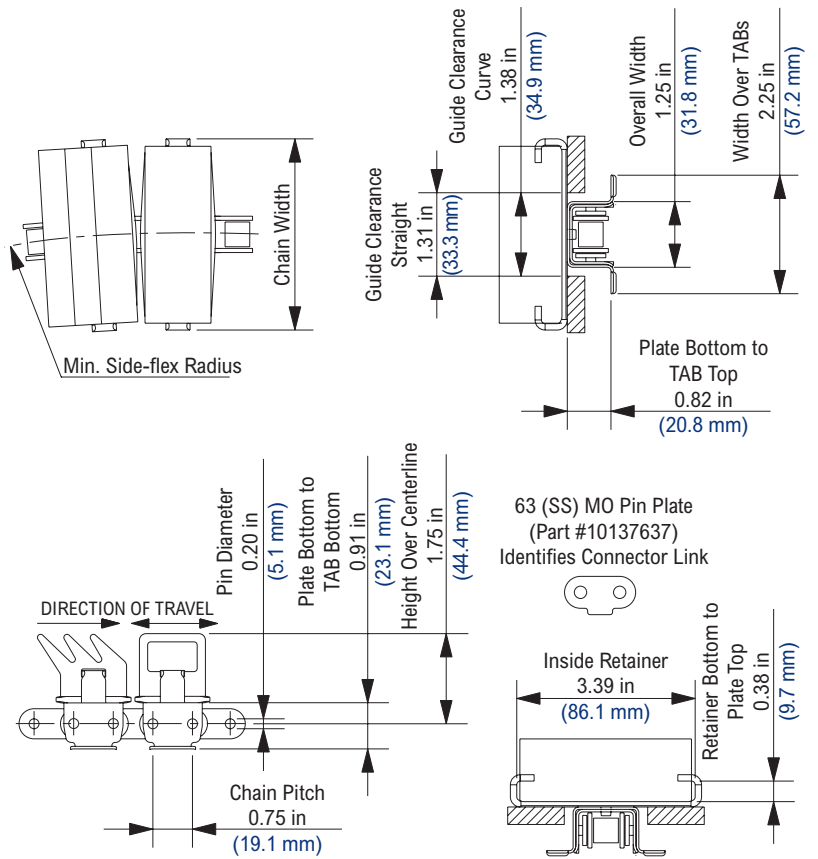

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
	dry	wet		dry	wet		dry	wet			
Standard Materials											
SSA	Stainless Steel Austenitic	Stainless Steel	-100	800	212	-73	427	100	750	3,336	Yes

Regulatory Information

Based on the material chemistries, industry standards, and the documentation in the Federal Registry, it is the opinion of Rexnord that the Rexnord TableTop stainless steel chains can be considered GRAS for direct food contact.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patent: 4096943

Additional Notes

Stocked in 160 pitch, 10 ft (3.048 m) length strands.

Uses 63 stainless steel (SS) base chain (Part #10727230).

Chain runs on ANSI No. 60 sprockets.

Chain breakers available.

Chain strength is listed at room temperature.


NR = Not Recommended.

For additional material information, see material portfolio.



Part #10178826


NS63 Thermoplastic Split Sprocket

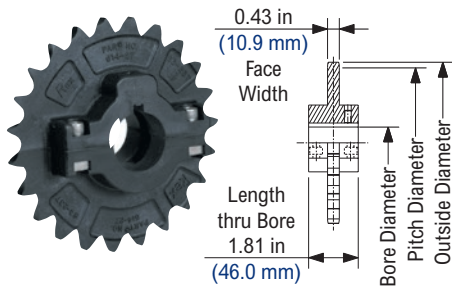

NS63 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight		
						Round				Square				in		mm				
						min	max	min	max	min	max	min	max	min	max	min	max			min
actual	effect	in	mm	in	mm														lbs	kg
23	11 1/2	5.508	139.90	5.91	150.1	1	1 5/8	30	40	-	-	-	-	1	1 5/8	30	40	0.75	0.34	

Shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with metric hardware but without set screws. Idler bores are designed to spin freely on the shaft without keyway or setscrews.

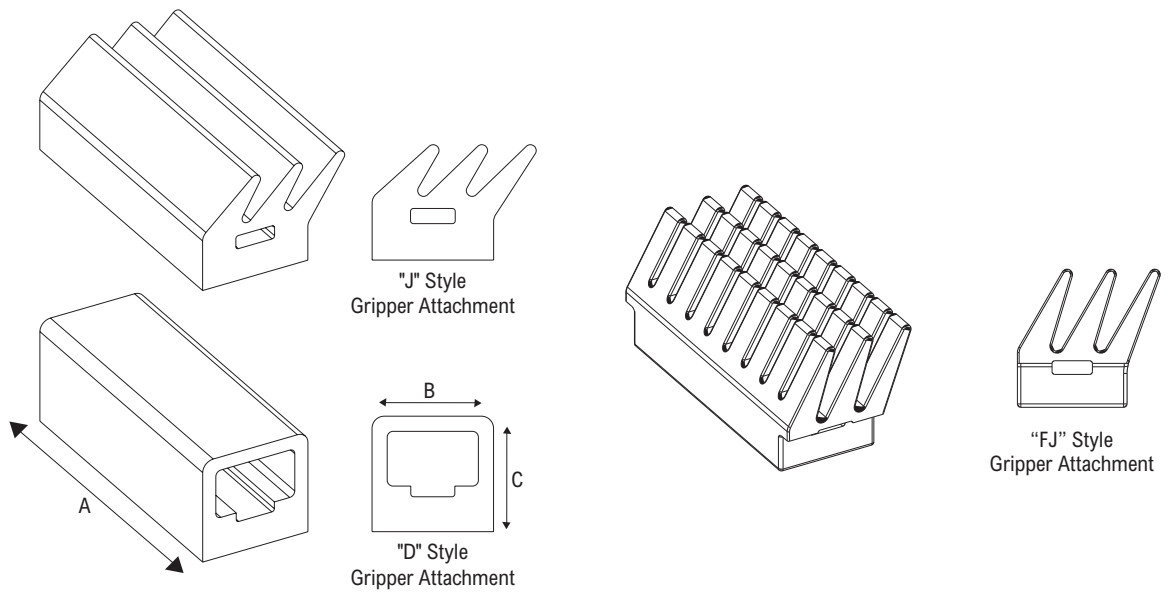

Gripper Attachments

Part Number	Style	Material	Color	Hardness (Shore A)	"A" Dimension		"B" Dimension		"C" Dimension	
					in	mm	in	mm	in	mm
Standard Grippers										
10075338	D	Neoprene	Black	40	3.35	85.1	1.25	31.8	1.19	30.2
10075339	D	Neoprene	White	40	3.35	85.1	1.25	31.8	1.19	30.2
10075340	D	Neoprene	Black	60	3.35	85.1	1.25	31.8	1.19	30.2
10075341	D	EPDM	White	50	3.35	85.1	1.25	31.8	1.19	30.2
10075342	D	EPDM	White	80	3.35	85.1	1.25	31.8	1.19	30.2
10075343	D	EPDM	Black	50	3.35	85.1	1.25	31.8	1.19	30.2
10075608	J	Neoprene	Black	40	3.35	85.1	1.25	31.8	1.19	30.2
10075609	J	Neoprene	White	50	3.35	85.1	1.25	31.8	1.19	30.2
10075610	J	EPDM	White	80	3.35	85.1	1.25	31.8	1.19	30.2
10075611	J	EPDM	White	50	3.35	85.1	1.25	31.8	1.19	30.2
10074926	FJ	Neoprene	Black	40	3.68	93.5	1.69	42.9	1.58	40.1
10074927	FJ	EPDM	White	50	3.68	93.5	1.69	42.9	1.58	40.1


Regulatory Information

U.S. Patent: 9840370

2500 TAB



Photo shows 2500 TAB chain, molded in Low Friction (LF) material.

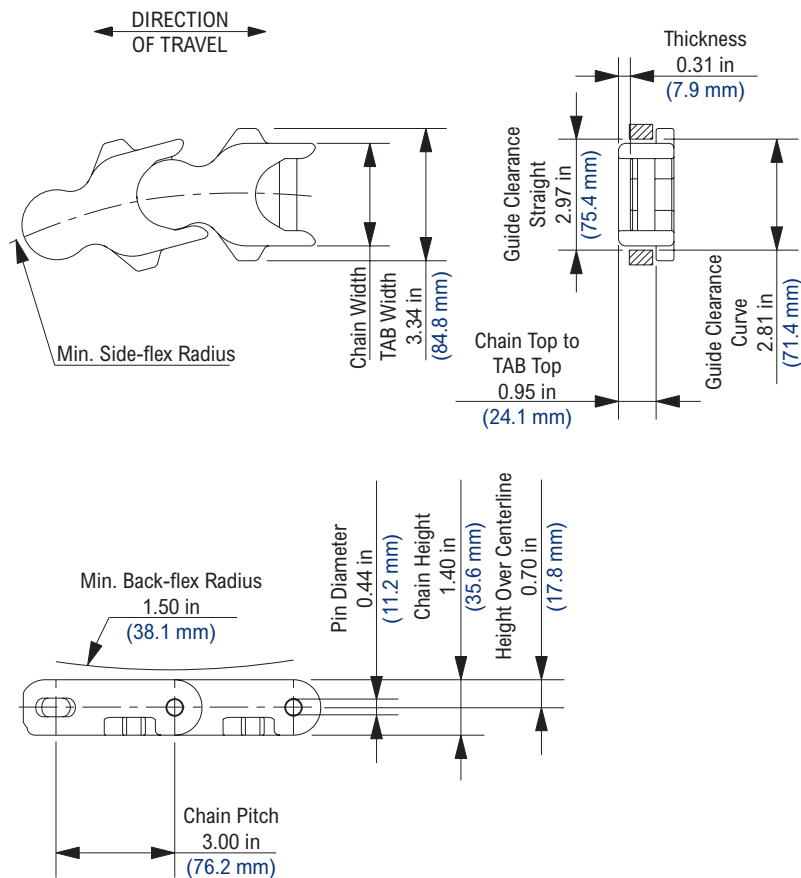

Chain Information

Chain Width		Min. Side-flex Radius		Approximate Weight		
desc	in	mm	in	mm	lbs/ft	kg/m
N/A	2.63	66.8	9.50	241.3	1.80	2.68

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	2,000	8,896	Yes
Non-Standard Materials											
BWR	Black Wear Resistant	Zinc-plated Carbon Steel	-40	180	NR	-40	82	NR	2,400	10,676	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 40 pitch, 10 ft (3.048 m) length strands.

Zinc plated carbon steel pins are available on a made-to-order basis.



Pin material can be identified by pivot color; black pivots indicate stainless steel pins and tan pivots indicate zinc plated carbon steel pins.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

2500 Cast Iron Sprocket

N2500 Thermoplastic Sprocket

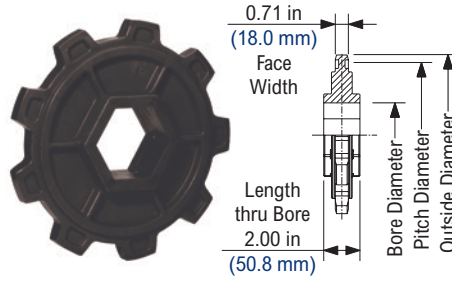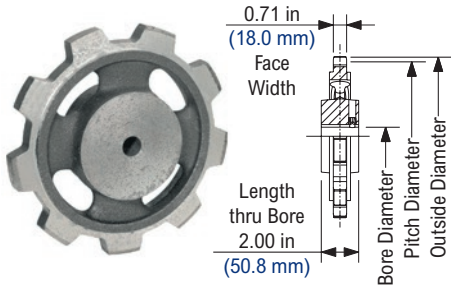

2500 Cast Iron Sprocket Information


Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	in	mm	in	mm	in	mm	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
9	9	8.771	222.78	8.71	221.2	3/4	2 1/4	20	60	-	-	-	-	3/4	2 1/4	20	55	16.09	7.30

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

N2500 Thermoplastic Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)		Approximate Weight			
						Round				Square				in				mm	
						in	mm	in	mm	in	mm	in	mm	in	mm			in	mm
actual	effect	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg		
9	9	8.771	222.78	8.71	221.2	-	-	2 1/2, 3	-	-	-	-	-	-	-	1.63	0.74		

Accessories

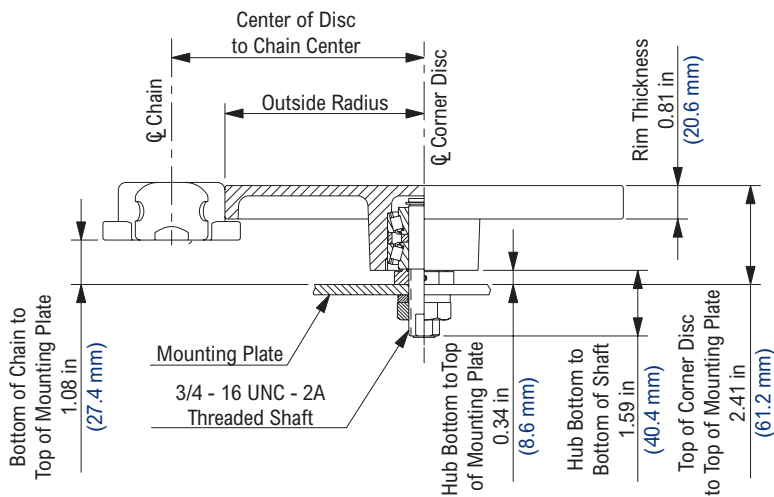

Corner Disc (Flat Top)


Corner Disc Number	Center of Disc to Chain Center		Outside Radius		Approximate Weight	
	in	mm	in	mm	lbs	kg
10131485	10.00	254.0	8.72	221.5	7.00	3.18

Corner Disc Material: Aluminum.

2550 TAB



Photo shows 2550 TAB TableTop Chain molded in Low Friction (LF) material.

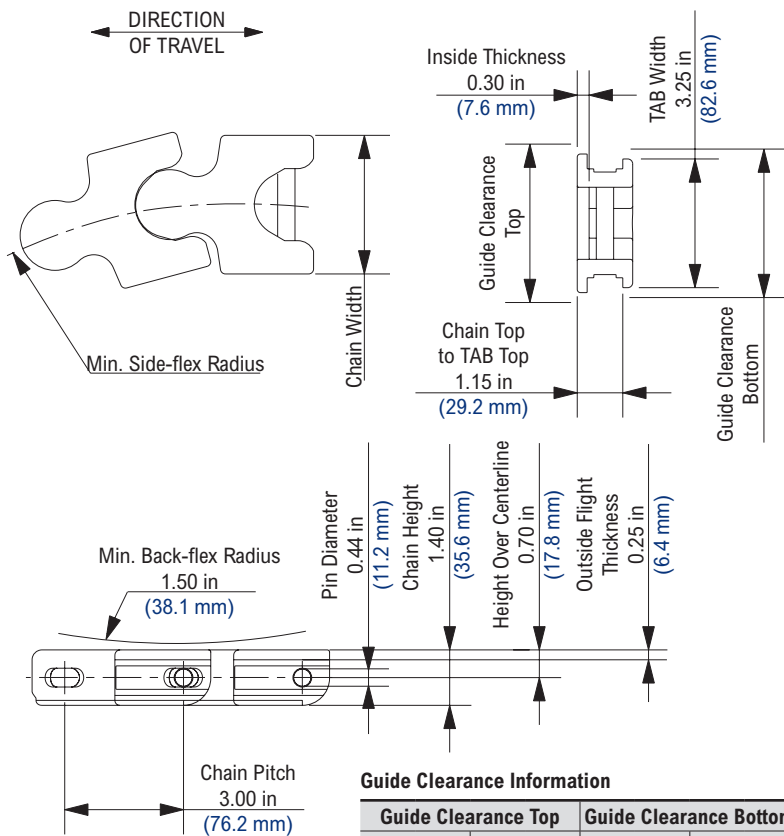

Chain Information

Chain Width			Min. Side-flex Radius		Approximate Weight	
desc	in	mm	in	mm	lbs/ft	kg/m
N/A	3.50	88.9	9.50	241.3	1.80	2.68

Guide Clearance Information

Guide Clearance Top				Guide Clearance Bottom			
Straight		Curve		Straight		Curve	
in	mm	in	mm	in	mm	in	mm
3.63	92.20	3.83	97.28	3.38	85.85	3.58	90.93

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Non-Standard Materials											
BWR	Black Wear Resistant	Stainless Steel	-40	180	NR	-40	82	NR	2,400	10,676	No
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	2,000	8,896	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes


Stocked in 40 pitch, 10 ft (3.048 m) length strands.

Zinc plated carbon steel pins are available on a made-to-order basis.

Pin material can be identified by pivot color; black pivots indicate stainless steel pins and tan pivots indicate zinc plated carbon steel pins.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

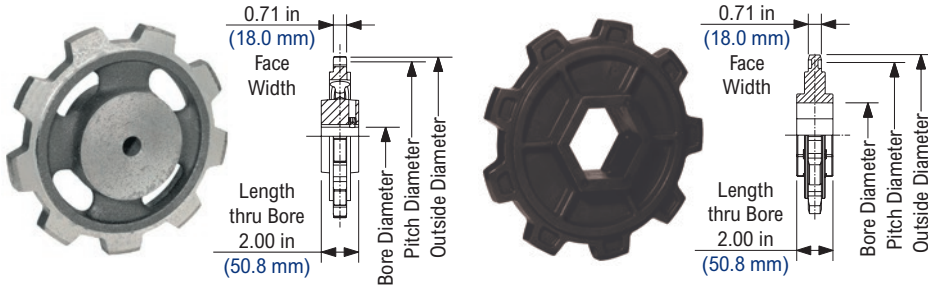

2500 Cast Iron Sprocket Information


Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight				
			Round				Square				in		mm						
			in	mm	in	mm	in	mm	in	mm	min	max	min	max					
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
9	9	8.771	222.78	8.71	221.2	3/4	2 1/4	20	60	-	-	-	-	3/4	2 1/4	20	55	16.09	7.30

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

N2500 Thermoplastic Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)		Approximate Weight		
			Round				Square				in	mm	lbs	kg	
			in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg	
actual	effect	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
9	9	8.771	222.78	8.71	221.2	-	-	2 1/2, 3	-	-	-	-	-	1.63	0.74

Accessories

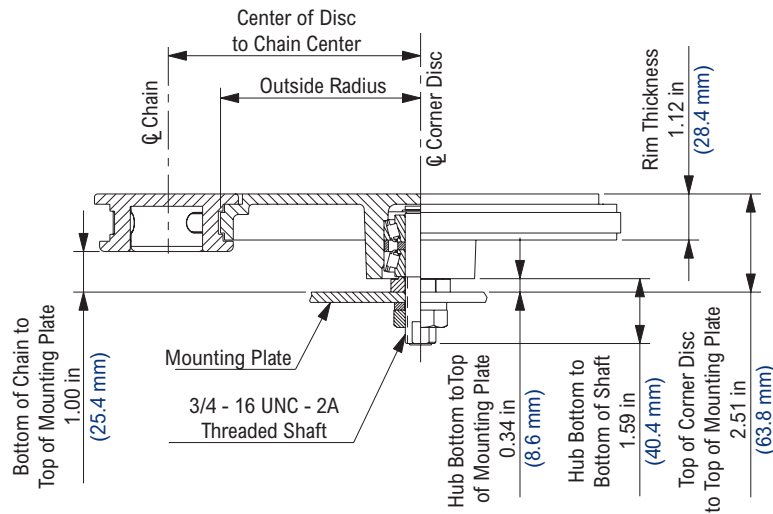

Corner Disc (Flat Top)


Corner Disc Number	Center of Disc to Chain Center		Outside Radius		Approximate Weight	
	in	mm	in	mm	lbs	kg
10131461	10.00	254.0	8.69	220.7	7.00	3.18

Corner Disc Material: Aluminum.

2565 ZeroGap™



Photo shows 2565 TableTop Chain molded in Black Wear Resistant (BWR) material.

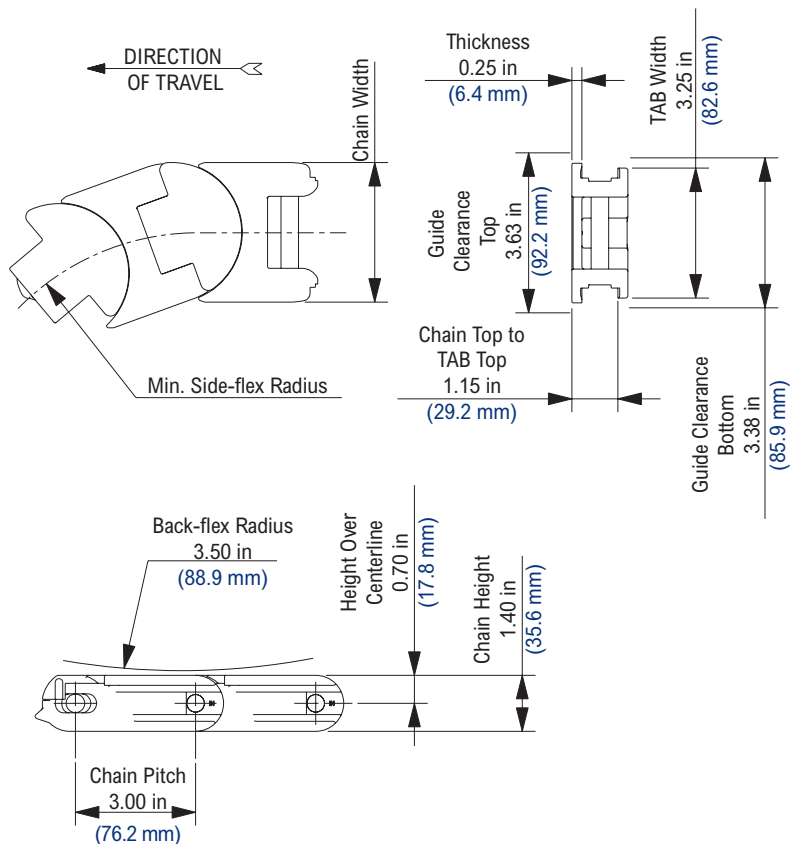

Chain Information

Chain Width	Chain Width		Min. Side-flex Radius		Approximate Weight	
	desc	in	mm	in	mm	lbs/ft
N/A	3.50	88.9	9.50	241.3	1.80	2.68

Available Materials



Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
BWR	Black Wear Resistant	Stainless Steel	-40	180	NR	-40	82	NR	2,400	10,676	No
Non-Standard Materials											
HS	Heat Stabilized	Stainless Steel	-40	220	212	-40	104	100	2,400	10,676	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, TableTop and ZeroGap are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Stocked in 40 pitch, 10 ft (3.048 m) length strands. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

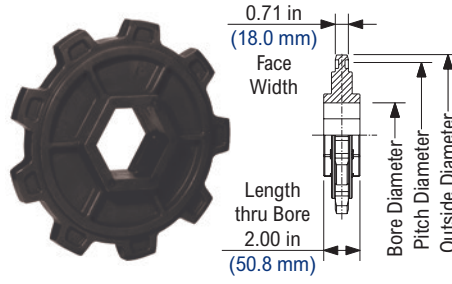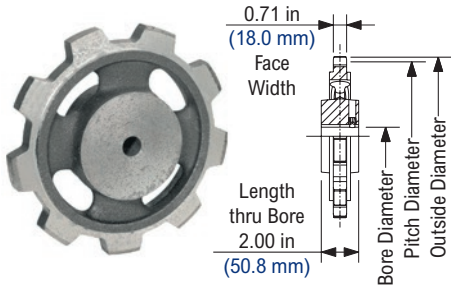

2500 Cast Iron Sprocket Information


Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	in	mm	in	mm	in	mm	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
9	9	8.771	222.78	8.71	221.2	3/4	2 1/4	20	60	-	-	-	-	3/4	2 1/4	20	55	16.09	7.30

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

N2500 Thermoplastic Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)		Approximate Weight			
						Round				Square				in				mm	
						in	mm	in	mm	in	mm	in	mm	in	mm			in	mm
actual	effect	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg		
9	9	8.771	222.78	8.71	221.2	-	-	2 1/2, 3	-	-	-	-	-	-	-	1.63	0.74		

Accessories

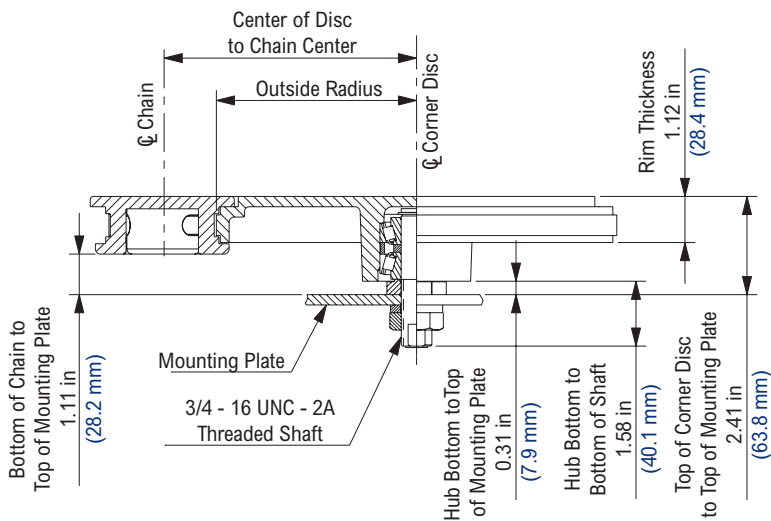

Corner Disc (Flat Top)

Corner Disc Number	Center of Disc to Chain Center		Outside Radius		Approximate Weight	
	in	mm	in	mm	lbs	kg
10131461	10.00	254.0	8.69	220.7	7.00	3.18

Corner Disc Material: Aluminum.

3873 TAB (S)


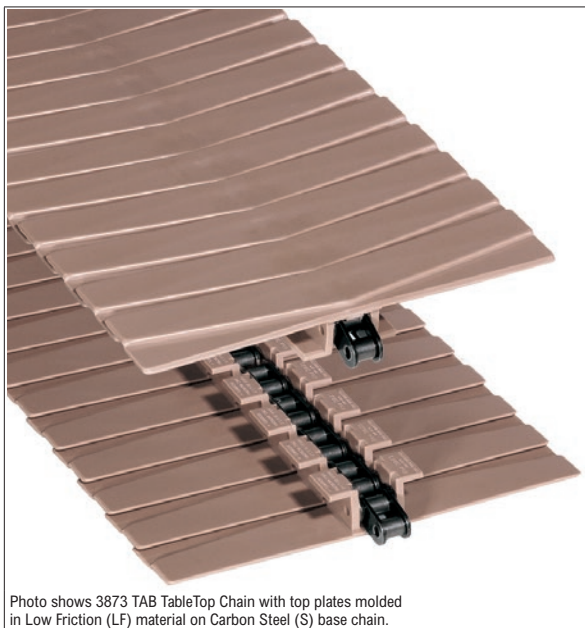


Photo shows 3873 TAB TableTop Chain with top plates molded in Low Friction (LF) material on Carbon Steel (S) base chain.

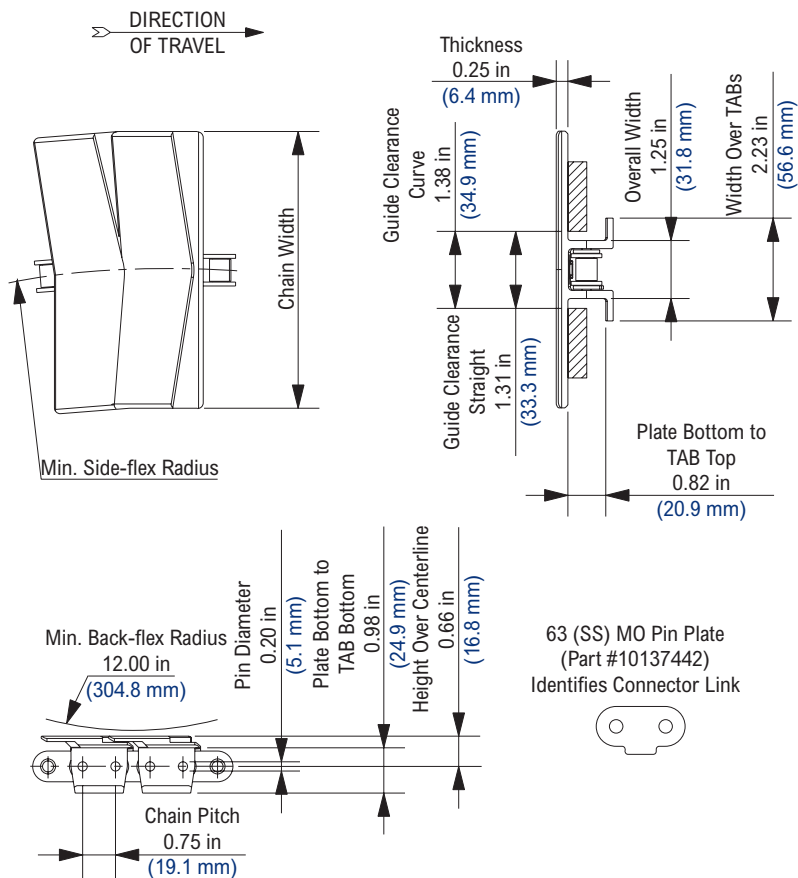

63 (SS) MO Pin Plate
(Part #10137442)
Identifies Connector Link

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
10	10.00	254.0	18.00	457.2	2.10	3.13
12	12.00	304.8	24.00	609.6	2.30	3.43

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
			dry	wet	NR	min	dry	wet			
Standard Materials											
LF	Low Friction	Carbon Steel	-40	180	NR	-40	82	NR	1,000	4,448	No
Non-Standard Materials											
W	White Alloy Plastic	Carbon Steel	0	180	NR	-18	82	NR	1,000	4,448	No

Regulatory Information

Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

- Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.
- Stocked in 160 pitch, 10 ft (3.048 m) length strands.
- Uses 63 carbon steel (S) base chain (Part #10137441).
- Chain runs on ANSI No. 60 sprockets.
- The 12 in (304.8 mm) chain is only available in white alloy plastic (W) material which is the standard material.
- Chain breakers available.
- Chain strength is listed at room temperature.
- NR = Not Recommended.
- For additional material information, see material portfolio.



Part #10178826

3873 TAB (SS)


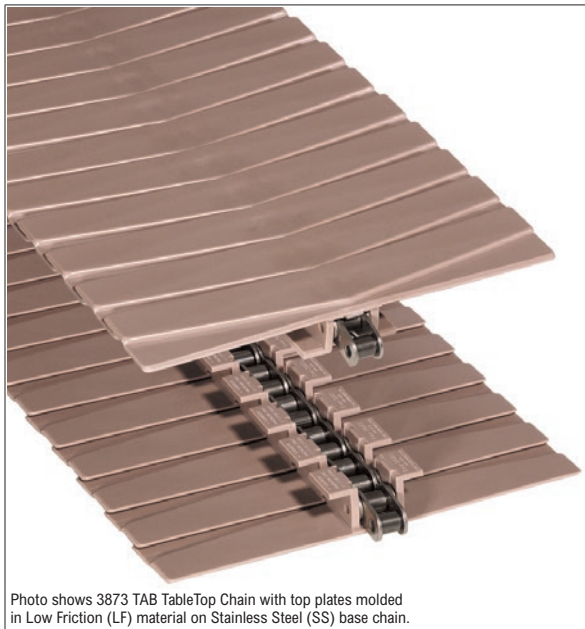


Photo shows 3873 TAB TableTop Chain with top plates molded in Low Friction (LF) material on Stainless Steel (SS) base chain.

Chain Information

desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
10	10.00	254.0	18.00	457.2	2.10	3.13
12	12.00	304.8	24.00	609.6	2.30	3.43

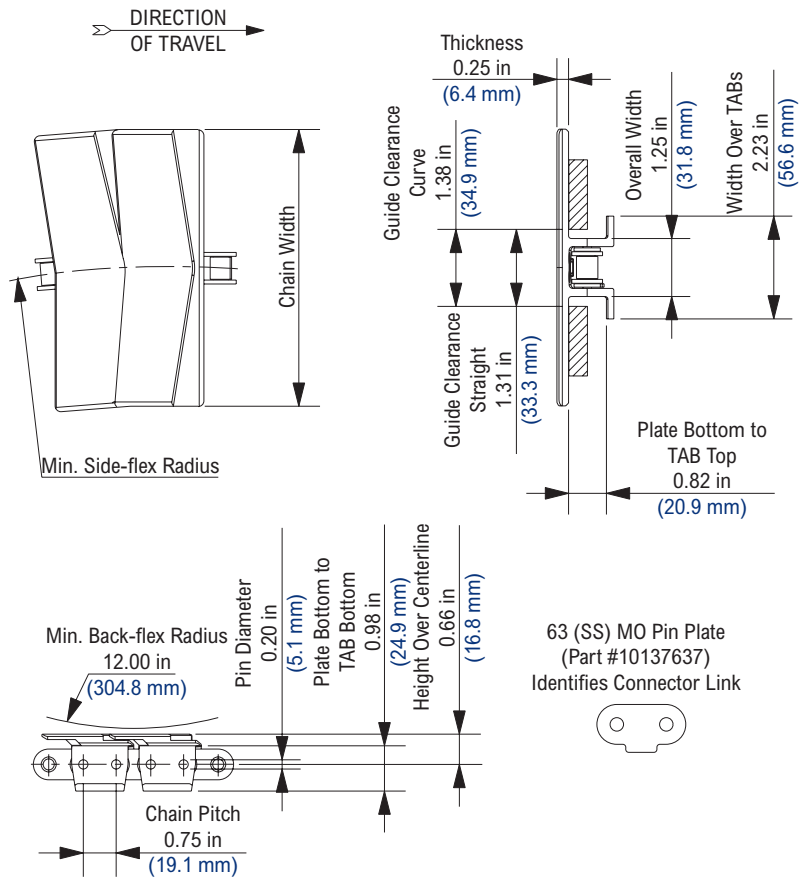

Available Materials

Prefix	Top Plate Material	Base Chain Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius			lbs	N	
			min	max		min	max				
Standard Materials											
LF	Low Friction	Stainless Steel	-40	180	150	-40	82	66	750	3,336	Yes
Non-Standard Materials											
W	White Alloy Plastic	Stainless Steel	0	180	140	-18	82	60	750	3,336	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.


Additional Notes

- Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.
- Stocked in 160 pitch, 10 ft (3.048 m) length strands.
- Uses 63 stainless steel (SS) base chain (Part #10727230).
- Chain runs on ANSI No. 60 sprockets.
- The 12 in (304.8 mm) chain is only available in white alloy plastic (W) material which is the standard material.
- Chain breakers available.
- Chain strength is listed at room temperature.
- NR = Not Recommended.
- For additional material information, see material portfolio.



Part #10178826

NS63 Thermoplastic Split Sprocket

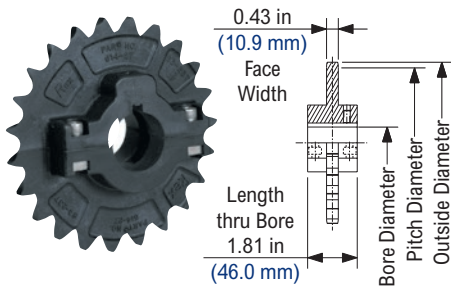

NS63 Thermoplastic Split Sprocket Information


Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight		
						Round				Square				in		mm				
						min	max	min	max	min	max	min	max	min	max	min	max			min
actual	effect	in	mm	in	mm														lbs	kg
23	11 1/2	5.508	139.90	5.91	150.1	1	1 5/8	30	40	-	-	-	-	1	1 5/8	30	40	0.75	0.34	

Shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with metric hardware but without set screws. Idler bores are designed to spin freely on the shaft without keyway or setscrews.

8811X-M Side-Flexing



Photo shows SSC8811X-M TableTop Chain in Stainless Steel Ferritic material.

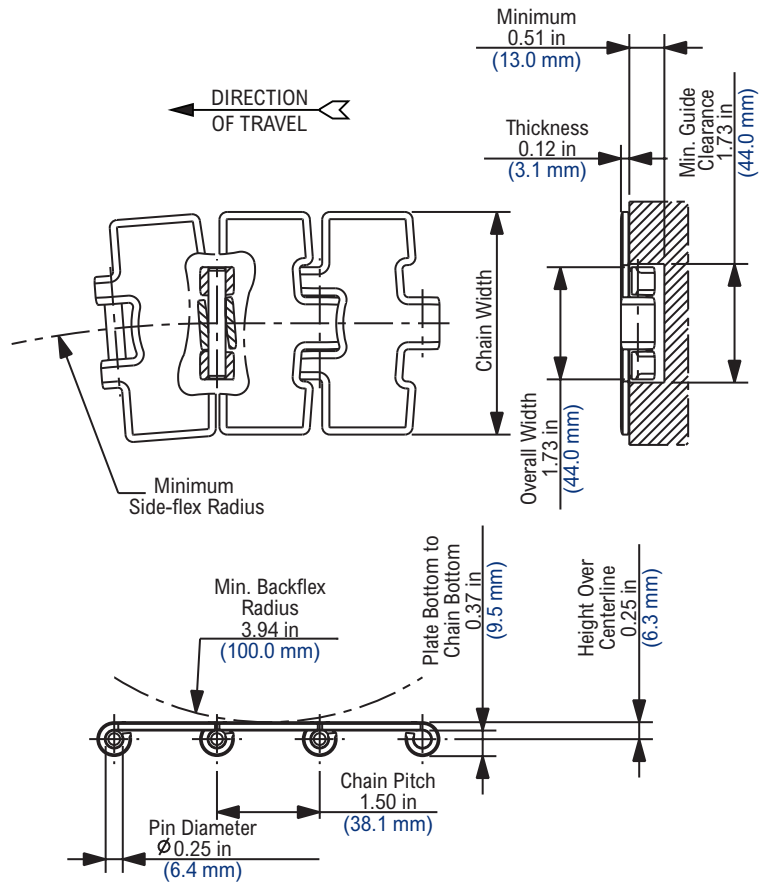

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3 1/4	3.25	82.6	19.69	500.0	1.84	2.74

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet	min	dry	wet				
Standard Materials											
SSC	Stainless Steel Ferritic	Stainless Steel	-100	800	212	-73	427	100	625	2,780	Yes

Regulatory Information


Based on the material chemistries, industry standards, and the documentation in the Federal Registry, it is the opinion of Rexnord that the Rexnord TableTop stainless steel chains can be considered GRAS for direct food contact.

Rexnord, TableTop and Magnetflex are trademarks of Regal Rexnord Corporation. All rights reserved.


Additional Notes

Stocked in 80 pitch, 10 ft (3.048 m) length strands.
 Chain strength is listed at room temperature. NR = Not Recommended.
 For additional material information, see material portfolio.
 60M31XM is Part No. 10139438


815 Cast Iron Arm Body Sprocket

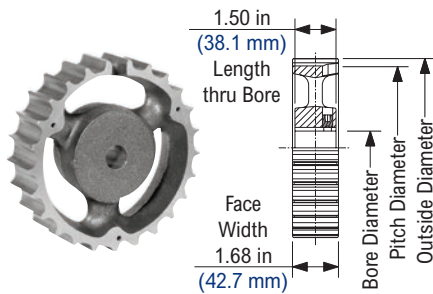

815 Cast Iron Block Body Sprocket

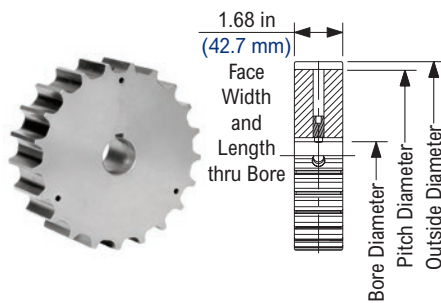

NS815 Thermoplastic Split Sprocket

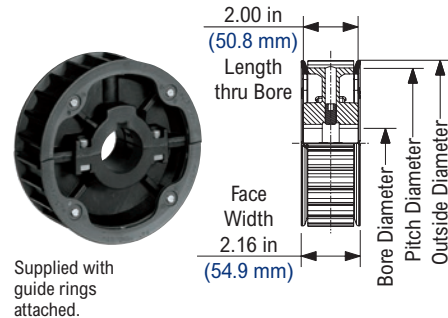

815 Cast Iron Arm Body Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)										Bore Diameter (Round)				Approximate Weight		
			Round				Square						in		mm				
			in		mm		in		mm		in		mm		min	max			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
19	9 1/2	4.620	117.35	4.61	117.1	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.28	1.49
20	10	4.854	123.29	4.86	123.4	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.81	1.73
21	10 1/2	5.089	129.26	5.12	130.0	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	4.63	2.10
22	11	5.324	135.23	5.35	135.9	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.12	2.32
23	11 1/2	5.560	141.22	5.59	142.0	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.31	2.41
24	12	5.796	147.22	5.83	148.1	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.41	2.45
25	12 1/2	6.032	153.21	6.07	154.2	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.57	2.53
27	13 1/2	6.504	165.20	6.56	166.6	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.50	2.95
29	14 1/2	6.978	177.24	7.05	179.1	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.72	3.05
31	15 1/2	7.452	189.28	7.53	191.3	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.86	3.11
41	20 1/2	9.826	249.58	9.93	252.2	1	2 1/2	20	65	-	-	-	-	1	2 1/2	20	65	16.23	7.36

Shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bores are shipped with metric hardware, but without setscrews.

815 Cast Iron Block Body Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)										Bore Diameter (Round)				Approximate Weight		
			Round				Square						in		mm				
			in		mm		in		mm		in		mm		min	max			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
13	6 1/2	3.228	81.99	3.11	79.0	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	2.45	1.11
15	7 1/2	3.688	93.68	3.63	92.2	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.57	1.62
17	8 1/2	4.152	105.46	4.12	104.6	1	1 11/16	20	40	-	-	-	-	1	1 11/16	20	40	4.83	2.19
21	10 1/2	5.089	129.26	5.12	130.0	1	2 11/16	20	70	-	-	-	-	1	2 11/16	20	70	4.63	2.10
25	12 1/2	6.032	153.21	6.07	154.2	1	3 7/16	20	90	-	-	-	-	1	3 7/16	20	90	5.57	2.53


Shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bores are shipped with metric hardware, but without setscrews.

NS815 Thermoplastic Split Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)										Bore Diameter (Idler)				Approximate Weight		
			Round				Square						in		mm				
			in		mm		in		mm		in		mm		min	max			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
21	10 1/2	5.089	129.26	5.12	130.0	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.01	0.46
23	11 1/2	5.560	141.22	5.59	142.0	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.19	0.54
25	12 1/2	6.032	153.21	6.07	154.2	1	2	25	50	-	-	-	-	1	2	25	50	1.39	0.63
27	13 1/2	6.504	165.20	6.56	166.6	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.76	0.80


Shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with metric hardware but without setscrews. Idler bores are designed to spin freely on the shaft without keyway or setscrews.

820 Cast Iron Arm Body Sprocket

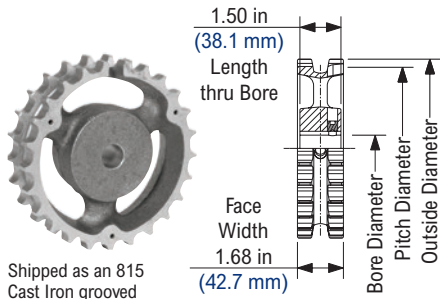


Shipped as an 815 Cast Iron grooved arm body sprocket.

820 Cast Iron Block Body Sprocket

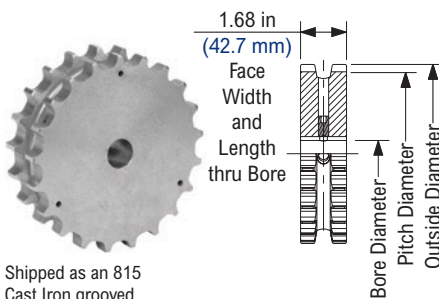

Shipped as an 815 Cast Iron grooved block body sprocket.

NS820 Thermoplastic Split Sprocket

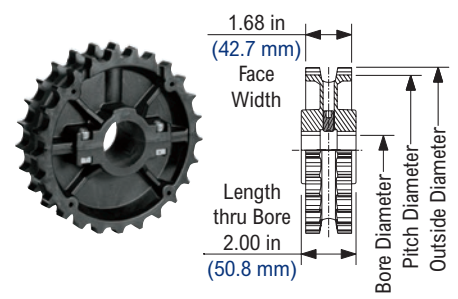

820 Cast Iron Arm Body Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
19	9 1/2	4.620	117.35	4.61	117.1	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.28	1.49
20	10	4.854	123.29	4.86	123.4	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.81	1.73
21	10 1/2	5.089	129.26	5.12	130.0	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	4.63	2.10
22	11	5.324	135.23	5.35	135.9	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.12	2.32
23	11 1/2	5.560	141.22	5.59	142.0	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.31	2.41
24	12	5.796	147.22	5.83	148.1	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.41	2.45
25	12 1/2	6.032	153.21	6.07	154.2	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.57	2.53
27	13 1/2	6.504	165.20	6.56	166.6	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.50	2.95
29	14 1/2	6.978	177.24	7.05	179.1	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.72	3.05
31	15 1/2	7.452	189.28	7.53	191.3	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.86	3.11
41	20 1/2	9.826	249.58	9.93	252.2	1	2 1/2	20	65	-	-	-	-	1	2 1/2	20	65	16.23	7.36

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

820 Cast Iron Block Body Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
13	6 1/2	3.228	81.99	3.11	79.0	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	2.45	1.11
15	7 1/2	3.688	93.68	3.63	92.2	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.57	1.62
17	8 1/2	4.152	105.46	4.12	104.6	1	1 11/16	20	40	-	-	-	-	1	1 11/16	20	40	4.83	2.19
21	10 1/2	5.089	129.26	5.12	130.0	1	2 11/16	20	70	-	-	-	-	1	2 11/16	20	70	4.63	2.10
25	12 1/2	6.032	153.21	6.07	154.2	1	3 7/16	20	90	-	-	-	-	1	3 7/16	20	90	5.57	2.53


Shaft-ready round bore sprockets are shipped with keyway and setscrew.

NS820 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
21	10 1/2	5.089	129.26	5.12	130.0	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.01	0.46
23	11 1/2	5.560	141.22	5.59	142.0	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.19	0.54
25	12 1/2	6.032	153.21	6.07	154.2	1	2	25	50	-	-	-	-	1	2	25	50	1.39	0.63
27	13 1/2	6.504	165.20	6.56	166.6	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.76	0.80

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

815/820 Idler Wheel

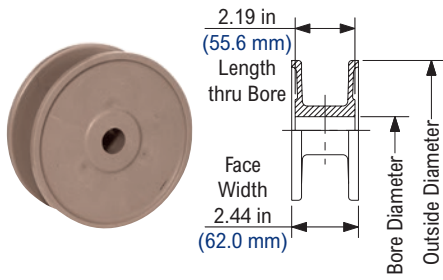

815/820 Idler Wheel Imperial Information



Equivalent Tooth Size	Outside Diameter		Imperial Bore Diameter (Idler)					Approximate Weight	
	in	mm	in					lbs	kg
21	5.11	129.8	7/8	1	1 3/16	1 1/4	1 1/2	0.49	0.22
23	5.60	142.2	7/8	1	1 3/16	1 1/4	1 1/2	0.59	0.27
25	6.09	154.7	7/8	1	1 3/16	1 1/4	1 1/2	0.66	0.30
27	6.56	166.6	-	-	-	1 1/4	-	0.70	0.32

Idler wheels are designed to spin freely on the shaft. 27 tooth idler wheel is available on a made-to-order basis and is subject to minimum order requirements.

815/820 Idler Wheel Metric Information

Equivalent Tooth Size	Outside Diameter		Metric Bore Diameter (Idler)				Approximate Weight	
	in	mm	mm				lbs	kg
21	5.11	129.8	25	30	35	40	0.49	0.22
23	5.60	142.2	25	30	35	40	0.59	0.27
25	6.09	154.7	25	30	35	40	0.66	0.30
27	6.56	166.6	-	-	1 1/4	-	0.70	0.32

Idler wheels are designed to spin freely on the shaft.

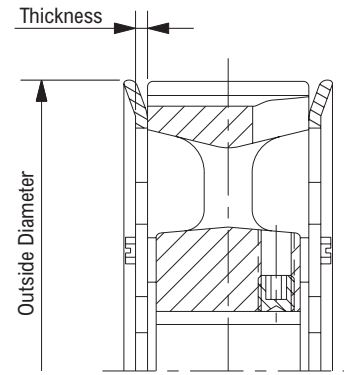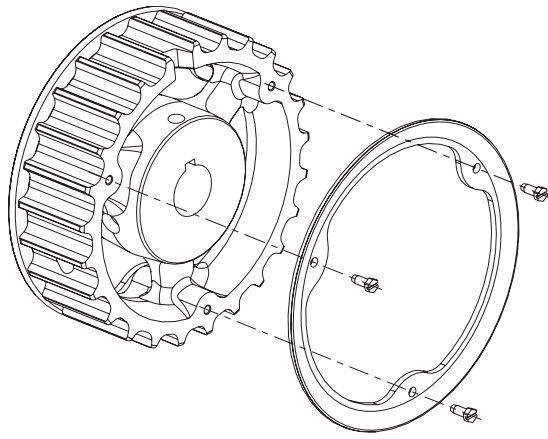

Guide Rings

Part Number		Sprocket Teeth	Outside Diameter		Thickness		Approximate Weight	
Carbon Steel	Stainless Steel		in	mm	in	mm	lbs	kg
10182845	10182847	15-16	3.62	91.9	0.06	1.5	0.23	0.10
10182849	—	17-18	4.11	104.4	0.06	1.5	0.26	0.12
10182877	10182879	19-20	4.58	116.3	0.13	3.3	0.37	0.17
10182861	10182863	21-22	5.09	129.3	0.13	3.3	0.44	0.20
10182857	10182859	23-24	5.56	141.2	0.13	3.3	0.46	0.21
10182865	10182867	25-26	6.04	153.4	0.13	3.3	0.47	0.21
10182869	10182871	27-28	6.53	165.9	0.13	3.3	0.53	0.24
10182873	10182875	29-30	7.02	178.3	0.13	3.3	0.56	0.25
10182853	10182855	31-32	7.50	190.5	0.13	3.3	0.67	0.30
10182881	10182883	41-42	9.89	251.2	0.13	3.3	0.92	0.42

One set = two guide rings and six assembly screws (Part #10025012).

For 815 and 820 Cast Iron sprockets only.



Rexnord™ MatTop™ Chain

Rexnord MatTop Chain provides a continuous conveying surface for applications demanding greater width requirements. Available in assembled-to-width and molded-to-width configurations, Rexnord MatTop Chain is engineered to satisfy a wide range of conveyor applications for virtually any product size. Pins extend the full width of the chain to ensure maximum strength and provide smoother conveying surfaces. Smaller pitch chains minimize the size of dead plates when transferring products over head or tail shafts, reducing chordal action which helps eliminate container tipping and jam-ups at transfer points.

Description	Format	Example 1	Example 2	Example 3	Explanation
Chains					
Material Prefix	...	HT	HP	WHA	Chain material from chain page
Chain Description	...	8505	1505DTS	2015	Chain description from chain page
Width Description	- ...	-6	-4.5	-21.33IN	Chain width from chain page
Pusher Attachments					
Height	F...IN (MM)	-	-	F4IN	Height of pusher
Pitches Between Pushers	T...P	-	-	T5P	1 = every row, 2 = every other row, etc
Side-Indent	N...IN (MM)	-	-	N2IN	Distance from edge of chain to side of pusher
Sideguard Attachments					
Sideguard Height	ISR, S...IN (MM)	-	-	S4IN	Height of sideguard
Side-Indent	N...IN (MM)	-	-	N2IN	Distance from edge of chain to side of sideguard
Sprockets					
Sprocket Description	...	SSS8500	NS7700	N1500	Sprocket description
Number Of Actual Teeth	-...T	-25T	-21T	-7T	Actual number of teeth
Bore Diameter	...IN (...MM)	1-1/2IN	2-1/2IN	3/4IN	Bore diameter
No. of Keyways	...KW	1KW	-	-	Number of keyways required
No. of Setscrews	...SS	1SS	-	-	Number of setscrews required
Bore Type	...Bore	Idler	Square	Shaft-Ready	Bore type

When ordering, please use the guidelines outlined in the chart above to ensure accuracy.

Chain Guideline Examples:

- HT8505-6IN MTW** is HT8505; 6in wide chain molded-to-width.
- HP1505-4.5 DTS PT RH** is HP1505 DTS™ chain; 4.5in wide; with Positrac™ tracking guides; for RH transfers.
- WHA2015-21.33 F4IN T5P N2IN** is WHA2015; 21.33in wide; F4in high pushers every 5th pitch; indented 2in on each side.
- HP1505 RT-12IN RT T1P** is HP1505 RT (RubberTop) chain 12in wide with RubberTop links every pitch.
- HP7705 RT-24IN SG T1P** is HP7705 SG (SuperGrip) chain 24in wide with SuperGrip links every pitch.
- Non-Standard materials require a 100 ft² minimum order quantity for ATW chains.
- Non-Standard materials require a 50 ft minimum order quantity for MTW chains.

Sprocket Guideline Examples:

- SSS8500-25T 1-1/2IN 1KW1SS** is a steel split 8500 series sprocket with 25 teeth; a 1-1/2in diameter bore with a keyway and setscrew.
- NS7700-21T 2-1/2IN S** is a thermoplastic split 7700 series sprocket with 21 teeth and a 2-1/2in square bore.
- N1500-7T 20MM KW** is a thermoplastic 1500 series sprocket with 7 teeth and a 20mm round bore with a keyway.

Split Sprocket Round Bore Nomenclature:

- Shaft-Ready** — Tight fit on the shaft with a keyway and setscrew.
- Plain Bore** — Same tight fit bore as a shaft-ready bore, but without keyway and setscrew.
- Idler Bore** — Round bore with a clearance fit (no keyway or setscrew). Designed to spin freely on the shaft.
- Rough Stock Bore** — Wide tolerance bore used for work in process. Not for use on any shaft. Must be further machined for actual use.
- Overbore** — Round bore with a slightly loose fit on the shaft with keyway but no setscrew. Designed to move laterally on the shaft during setup and still transmit torque through the keyway as a drive sprocket in the actual application. Not recommended for axial float in thermal applications.

Accessory Guideline Examples:

For corner tracks, please indicate the number of sets (quantity) and note the corner track number listed.

If the chain, sprocket or accessory you require is not described within these guidelines, please contact Regal Rexnord for more information.

Material Prefix

Chain Description


Width Description



Photo shows 395 MatTop Chain molded in HP material.

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 100%	6	19.7

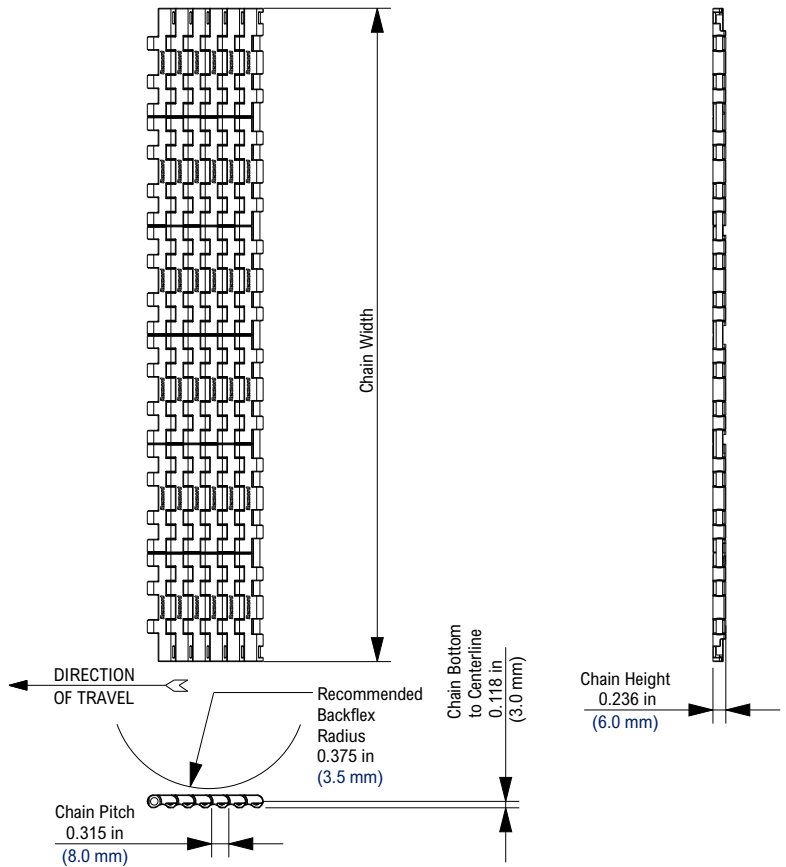

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HP™	High Performance	Polyester	-40	180	150	-40	82	65	500	7,300	1.16	5.7	Yes


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved Patent Pending.

Additional Notes

For chain width information see Rexnord Chain Width Table on page 300. Open area = 2%. Metric width version is available through special order with extended lead times. Chain strength is listed at room temperature. For additional material information, see material portfolio.

KU390 Series Thermoplastic Sprocket Information

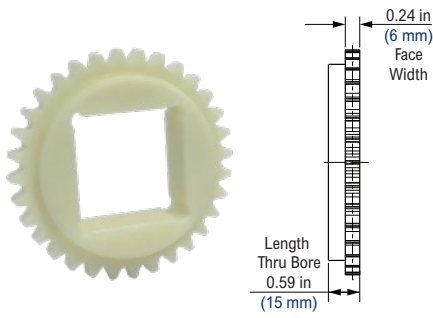

KU390 Series Thermoplastic Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
24T	24T	2.4	61	2.48	63.0	3/4	1	20	30	1.0	1	25	30	1	1	25	30	0.05	0.02
32T	32T	3.2	83	3.28	83.3	3/4	1 1/2	20	50	1.0	1 1/2	25	45	1	2	25	50	0.10	0.05
36T	36T	3.6	92	3.67	93.2	3/4	2	20	60	1.0	2	25	55	1	2	25	60	0.15	0.07


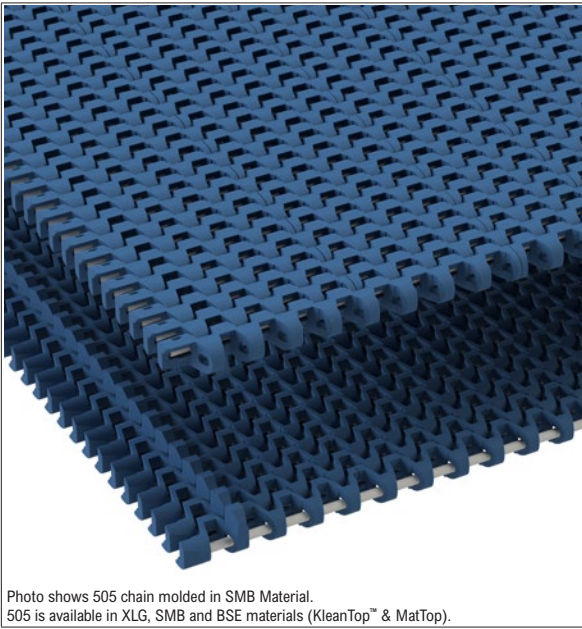


Photo shows 505 chain molded in SMB Material. 505 is available in XLG, SMB and BSE materials (KleanTop™ & MatTop).

Chain Information

Chain Capacity	Number of Sprockets per	
	ft of chain width	mm of chain width
Drive Shaft	8 per ft	4 per 170 mm
Idler Shaft	4 per ft	1 per 170 mm

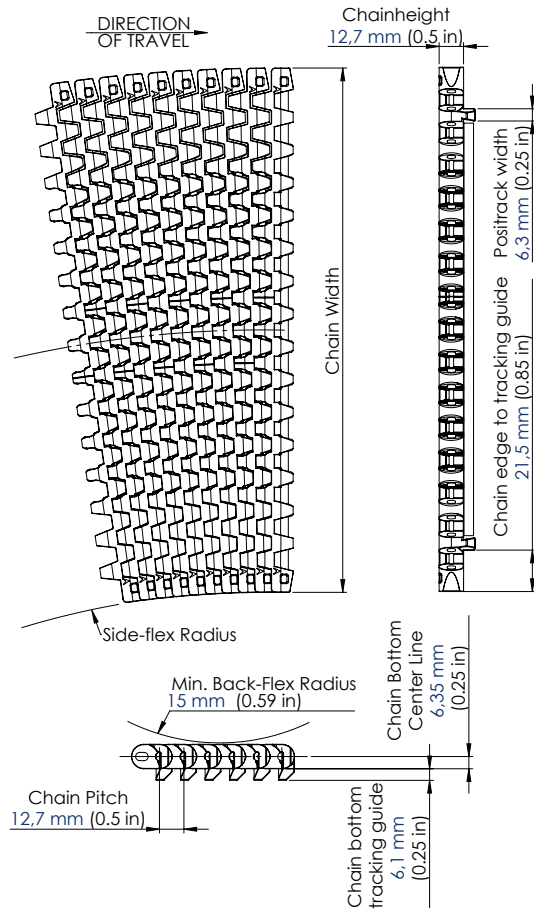

Available Materials

Available Widths	Prefix	Chain Material	Rod Material	Temperature Range						Working Load (max)				Approximate Weight		FDA/EU Approved Material
				Fahrenheit			Celsius			Straight		Max Curve Load		lbs/ft²	kg/m²	
				min	max dry	max wet	min	max dry	max wet	lbs/ft	N/m	lbs/ft	N/m			
Standard Materials																
85 mm up to 680 mm with standard increments of 17 mm	XLG	Low Friction Acetal (Green)	GVK	-40	180	150	-40	82	66	1028	15000	293	1300	2.04	9.94	FDA
	SMB	Blue Cut Resistant	GVK	-40	180	150	-40	82	66	1028	15000	293	1300	2.04	9.94	FDA/EU
	BSE (V-2)	Blue Self Extinguishing	GVK	-40	220	212	-40	104	100	1028	15000	293	1300	1.69	8.24	FDA/EU


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For chain width information see Rexnord Chain Width Table on page 300. Open area = 10%. Nose over diameter = 0.75 inches (19.05 mm). Minimum Side-flex radius = Two times the chain width. Chain strength is listed at room temperature. NR = Not Recommended. 7526 numeric nomenclature changed to 505 to align with global Regal Rexnord™ standards. (7526 is a North America product only.) Available in KleanTop™ 505 in food-grade materials. For additional material information, see material portfolio.

KU505 Thermoplastic Solid Sprocket

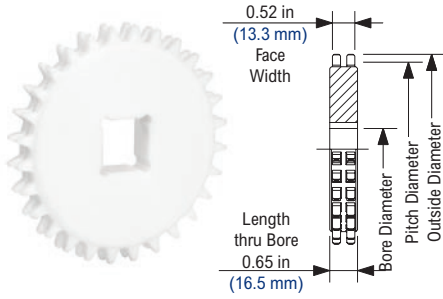

KU505 Thermoplastic Solid Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						min	max	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
28	28	4.46	113.28	4.46	113.3	1	2 1/2	25	65	1	2	25	50	1	2 1/2	25	65	0.31	0.14

All sprocket bores are oversized for a sliding fit. Shaft-ready round bores are shipped with one keyway and no setscrews.

1000FT



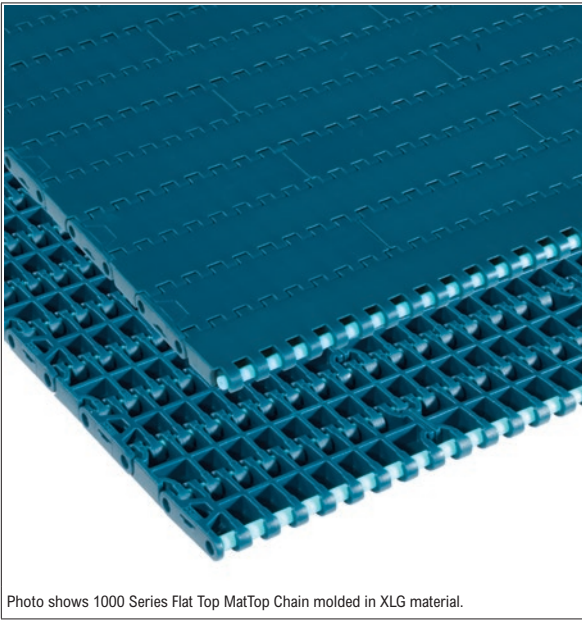


Photo shows 1000 Series Flat Top MatTop Chain molded in XLG material.

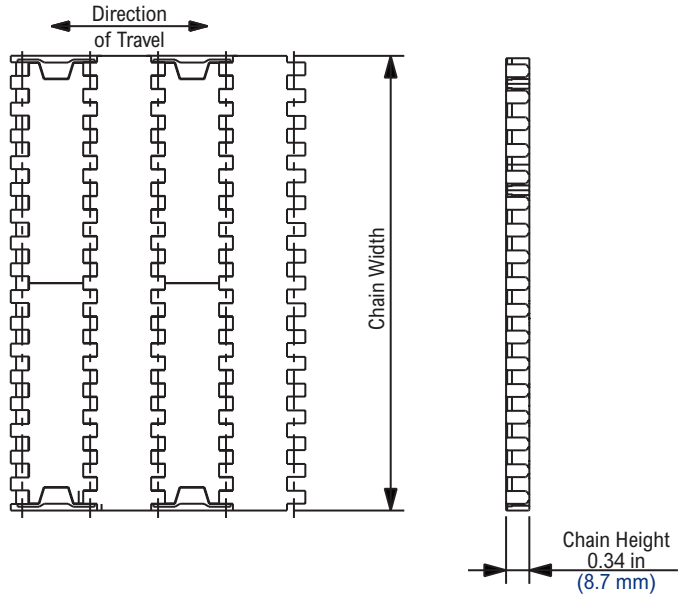

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 25%	-	9
25% - 50%	-	11
50% - 75%	-	13
75% - 100%	-	17

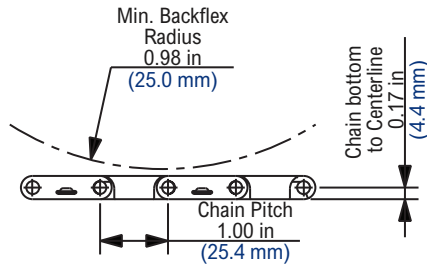

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
Dry-PT™	Dry PET Low Friction	Polyester	-40	180	150	-40	82	66	1,500	21,885	1.33	6.49	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	1,500	21,885	1.33	6.49	Yes
XLG	Low Friction Green	Polypropylene	-40	180	150	-40	82	66	1,500	21,885	1.33	6.49	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

For chain width information see Rexnord Chain Width Table on page 300.

Open area = 0.0%.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

1000FT DP


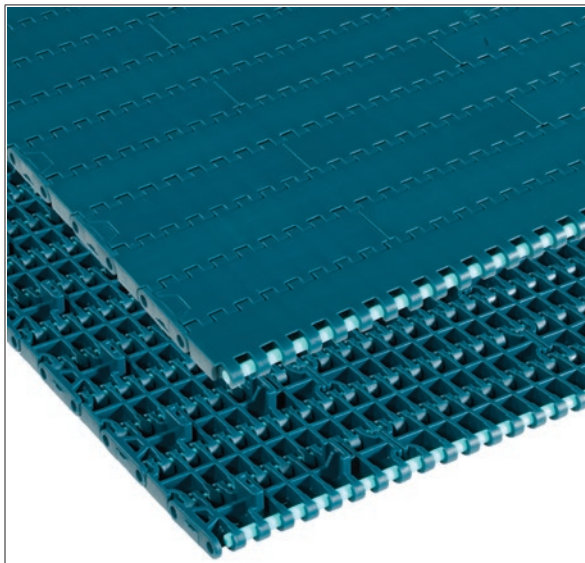


Photo shows 1000 Flat Top Series MatTop Chain with Positrack™ (DP) Tracking Guides molded in XLG material.

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 25%	-	9
25% - 50%	-	11
50% - 75%	-	13
75% - 100%	-	17

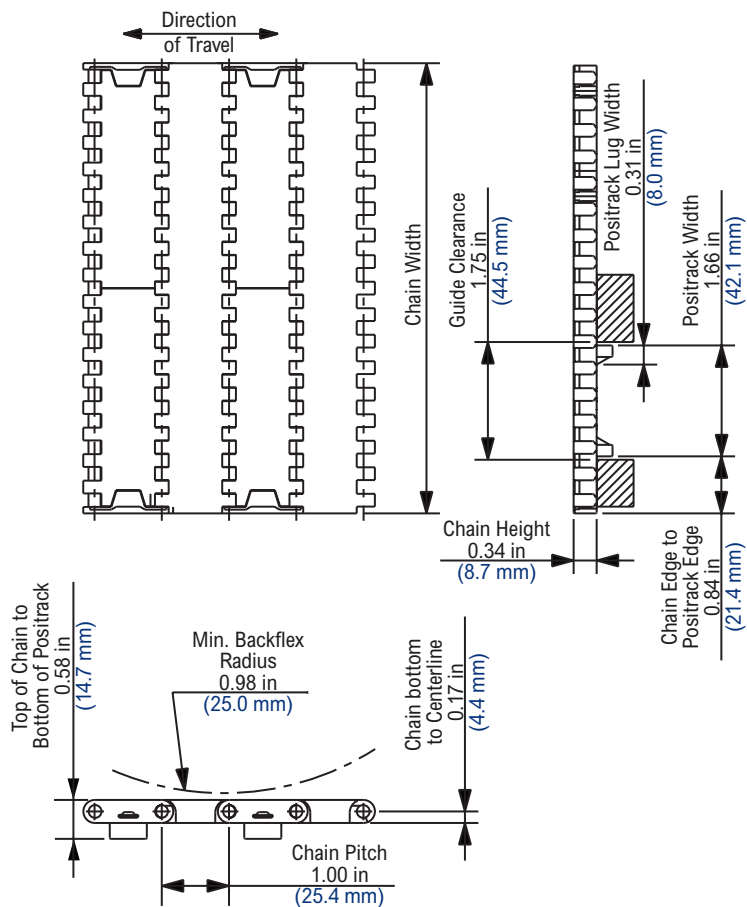

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft	N/m	lbs/ft ²	kg/m ²	
			min	max		min	max						
Standard Materials													
Dry-PT™	Dry PET Low Friction	Polyester	-40	180	150	-40	82	66	1,500	21,885	1.33	6.49	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	1,500	21,885	1.33	6.49	Yes
XLG	Low Friction Green	Polypropylene	-40	180	150	-40	82	66	1,500	21,885	1.33	6.49	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

For chain width information see Rexnord Chain Width Table on page 300.

Open area = 0.0%.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

1000FT Freeflow


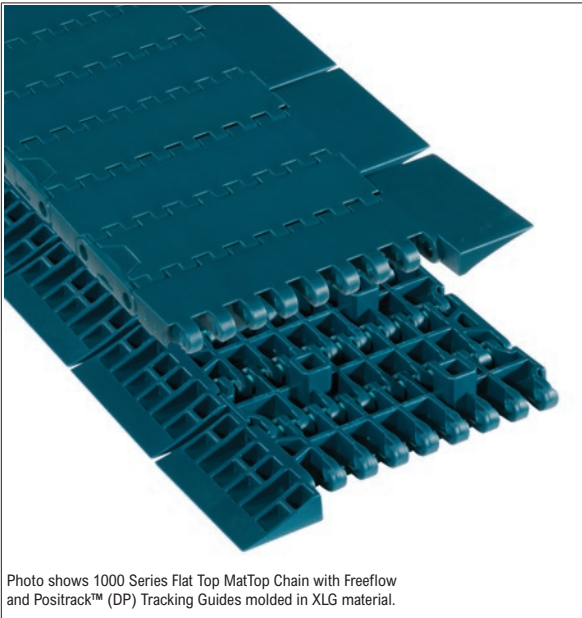


Photo shows 1000 Series Flat Top MatTop Chain with Freeflow and Positrack™ (DP) Tracking Guides molded in XLG material.

Chain Information

Freeflow can be integrated into any width chain divisible by 85MM

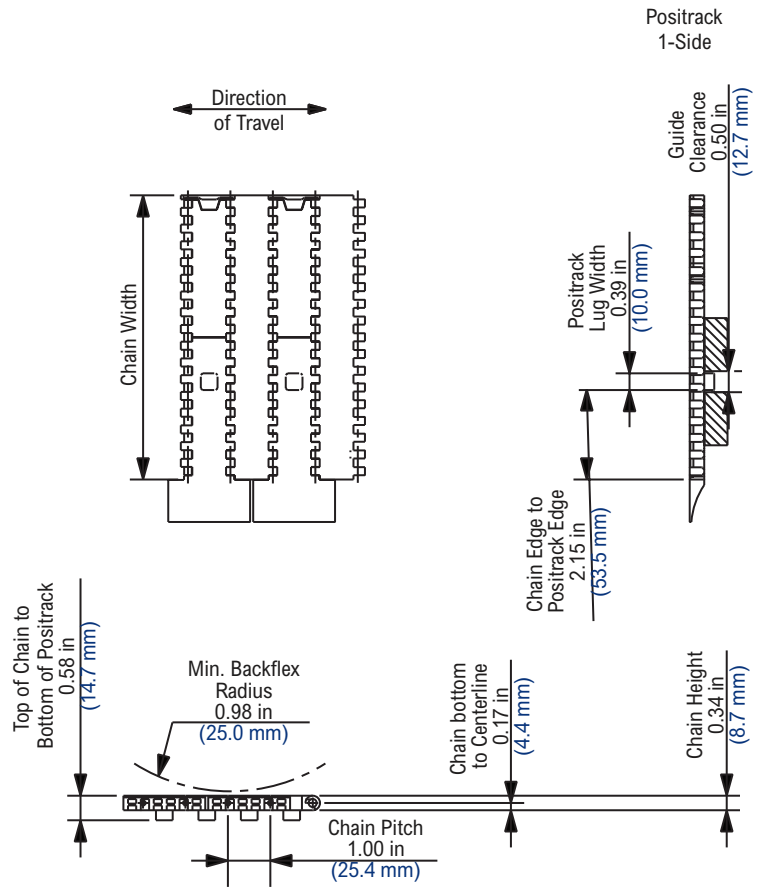

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Standard Materials											
Dry-PT™	Dry PET Low Friction	Polyester	-40	180	150	-40	82	66	1.33	6.49	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	1.33	6.49	Yes
XLG	Low Friction Green	Polypropylene	-40	180	150	-40	82	66	1.33	6.49	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Stocked in 120 pitch, 10 ft (3.048 m) length strands. Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

1000FG


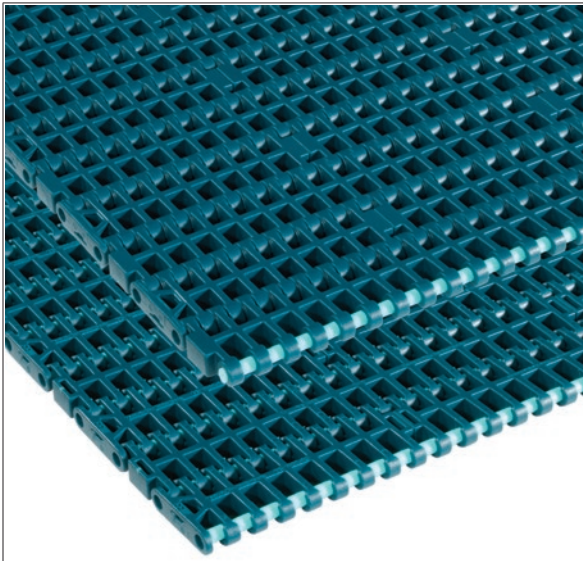


Photo shows 1000 Series Flush Grid MatTop Chain molded in XLG material.

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 25%	-	9
25% - 50%	-	11
50% - 75%	-	13
75% - 100%	-	17

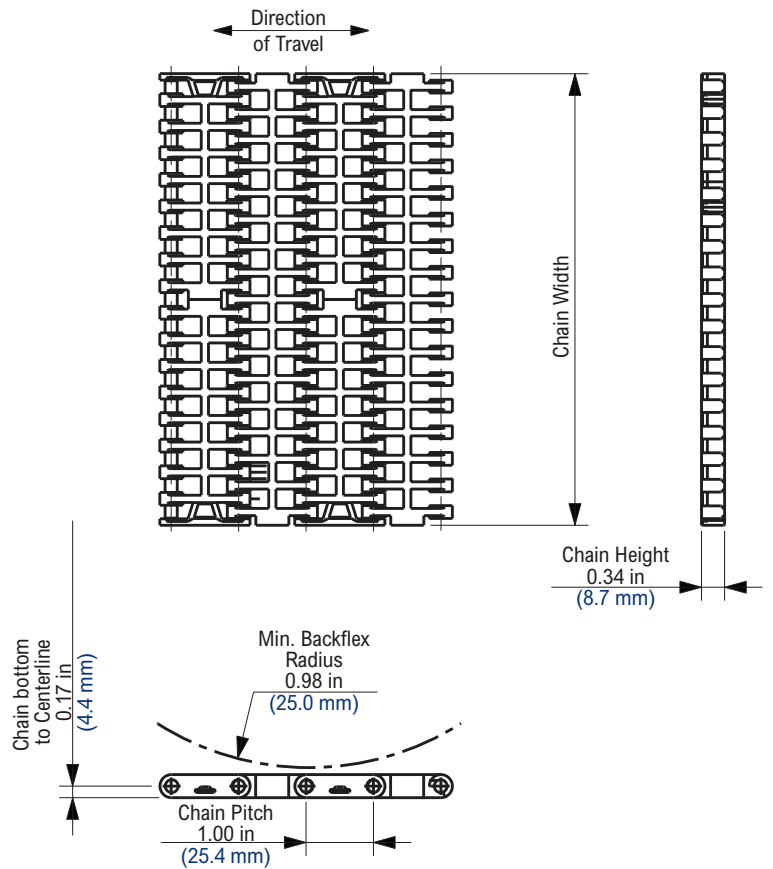

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft	N/m	lbs/ft ²	kg/m ²	
			min	max		min	max						
Standard Materials													
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	1,500	21,885	1.11	5.42	Yes
XLG	Low Friction Green	Polypropylene	-40	180	150	-40	82	66	1,500	21,885	1.11	5.42	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

For chain width information see Rexnord Chain Width Table on page 300. Open area = 40.0%.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

1000FG DP


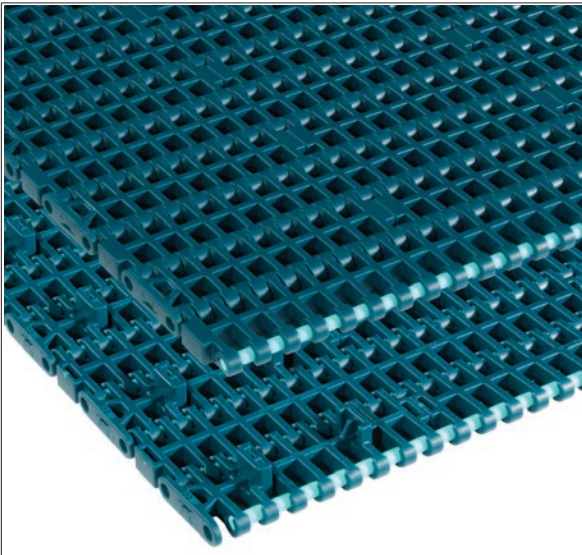


Photo shows 1000 Series Flush Grid MatTop Chain with Positrack™ (DP) Tracking Guides molded in XLG material.

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 25%	-	9
25% - 50%	-	11
50% - 75%	-	13
75% - 100%	-	17

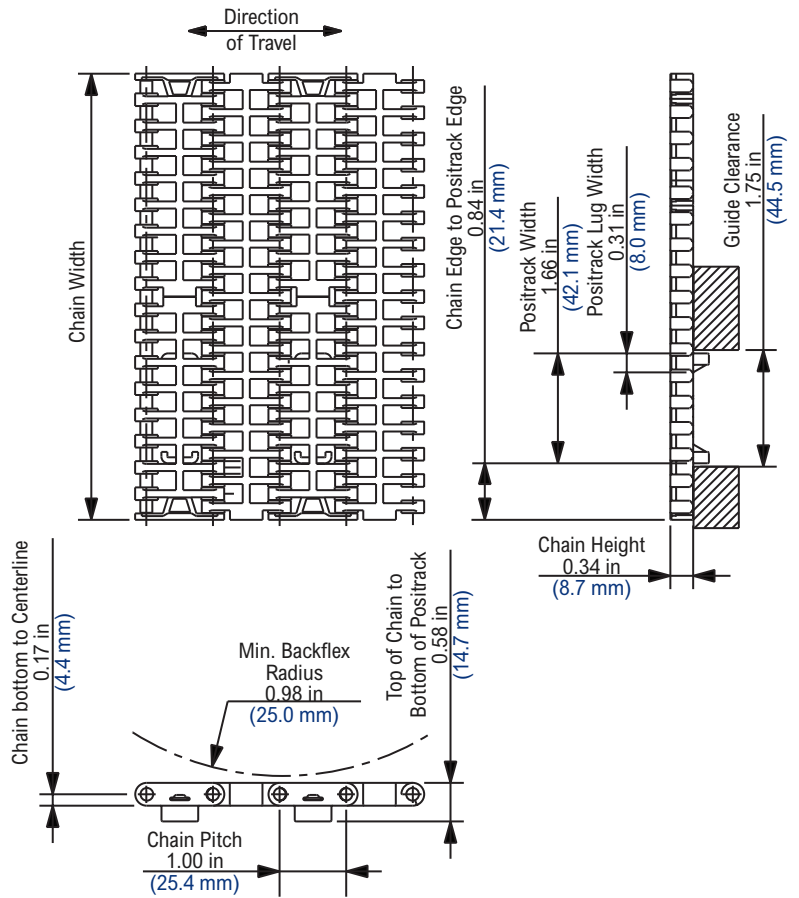

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	1,500	21,885	1.11	5.42	Yes
XLG	Low Friction Green	Polypropylene	-40	180	150	-40	82	66	1,500	21,885	1.11	5.42	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and MatTop are trademarks of Regal Rexnord™ Corporation.

All rights reserved.

Additional Notes

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

For chain width information see Rexnord Chain Width Table on page 300.

Open area = 40.0%.

1000FG Freeflow


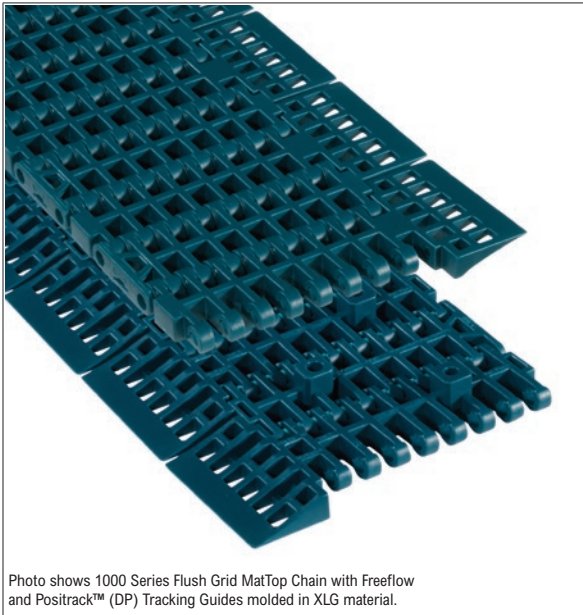


Photo shows 1000 Series Flush Grid MatTop Chain with Freeflow and Positrack™ (DP) Tracking Guides molded in XLG material.

Chain Information

Freeflow can be integrated into any width chain divisible by 85MM

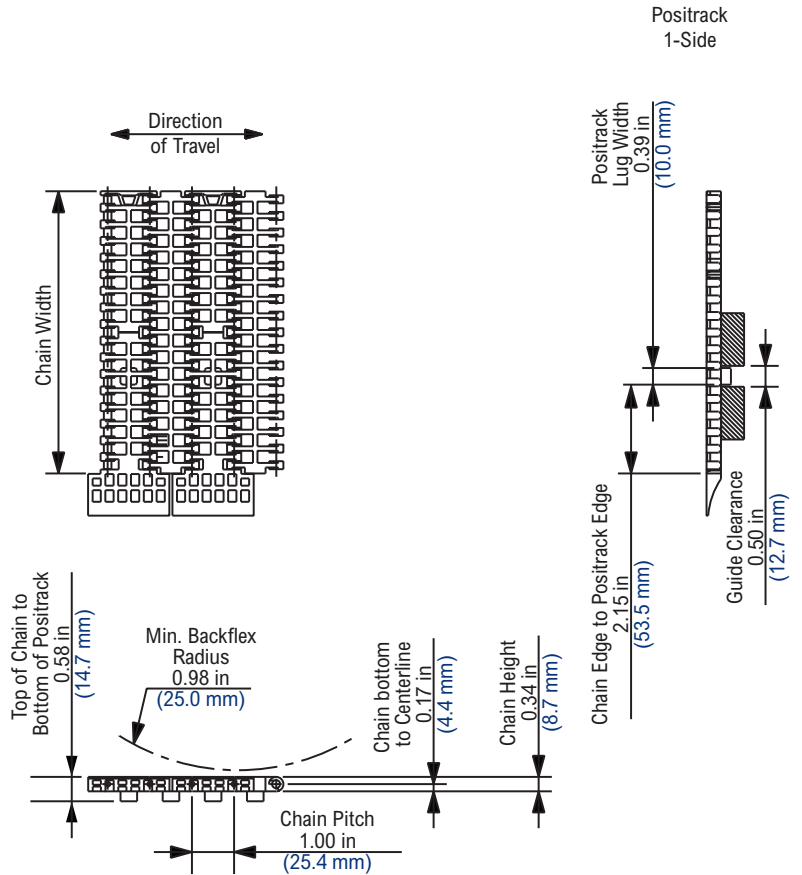

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Standard Materials											
XLG	Low Friction Green	Polypropylene	-40	180	150	-40	82	66	1.11	5.42	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Stocked in 120 pitch, 10 ft (3.048 m) length strands. Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

1000RRR



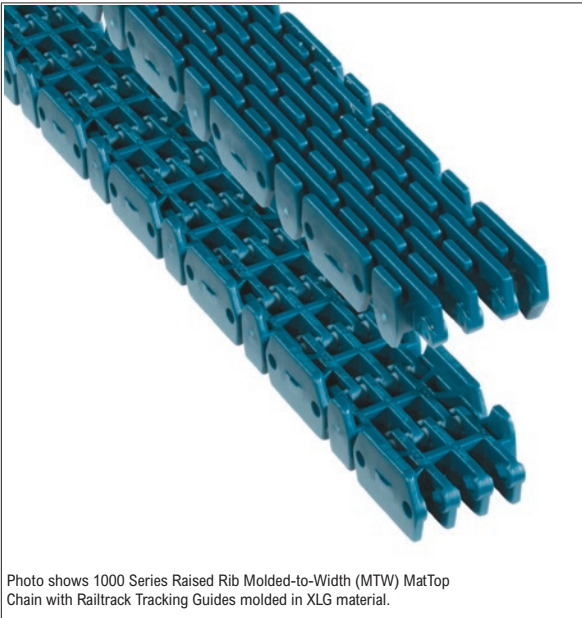


Photo shows 1000 Series Raised Rib Molded-to-Width (MTW) MatTop Chain with Railtrack Tracking Guides molded in XLG material.

Chain Information

desc	Chain Width		Number of Sprockets	Chain Strength	
	in	mm		lbs	N
38MM	1.50	38.0	1	90	400

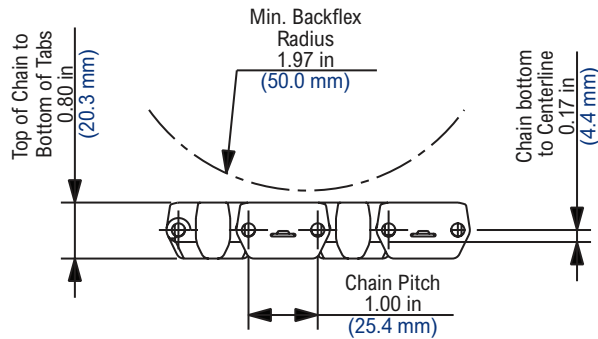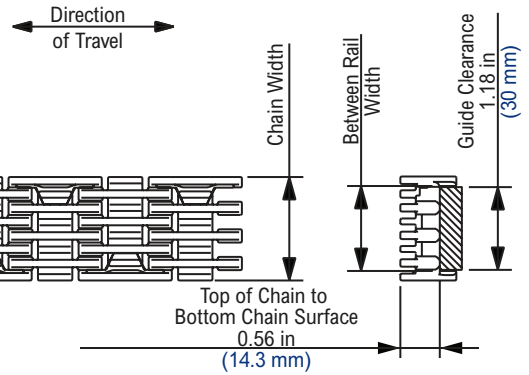

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
			dry	wet		dry	wet				
Standard Materials											
XLG	Low Friction Green	Polyester	-40	180	150	-40	82	66	1.63	7.96	Yes


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Stocked in 120 pitch, 10 ft (3.048 m) length strands. Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended. RRR1000-38XLG is Part No. 10147968. For additional material information, see material portfolio.

NS1000 Thermoplastic Split Sprocket

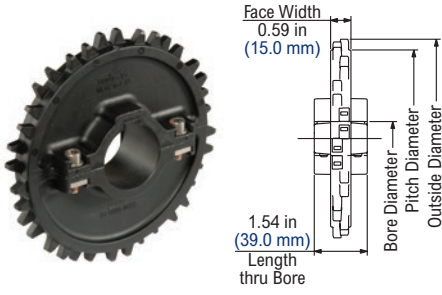

NS1000 Thermoplastic Split Sprocket Imperial Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter			Approximate Weight		
						Round		Square			
actual	effect	in	mm	in	mm	in			lbs	kg	
16	16	5.126	130.20	5.14	130.6	-	1 1/2		1 1/2	0.51	0.23
18	18	5.760	146.30	5.78	146.8	1 1/4	1 1/2		1 1/2	0.60	0.27
20	20	6.394	162.41	6.42	163.1	1 1/4	1 1/2		1 1/2	0.70	0.32


NS1000 sprockets require shaft collars to locate center sprockets.

NS1000 Thermoplastic Split Sprocket Metric Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter					Approximate Weight		
						Round			Square				
actual	effect	in	mm	in	mm	mm					lbs	kg	
16	16	5.126	130.20	5.14	130.6	30	35	40	-	-	40	0.51	0.23
18	18	5.760	146.30	5.78	146.8	30	35	40	-	60	40	0.60	0.27
20	20	6.394	162.41	6.42	163.1	30	35	40	50	-	40	0.70	0.32


Shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

Accessories

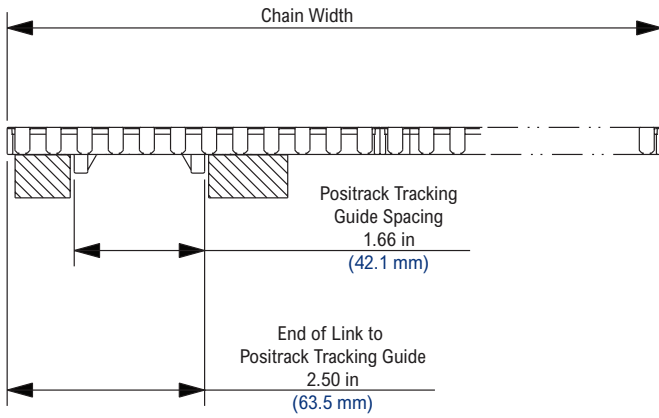

End Module with Positrack™ Tracking Guides

For FGDP and FTDP assembled-to-width chain only.
 End modules may be positioned either on the left-hand or right-hand side of the chain.
 End modules will be spaced every other pitch.

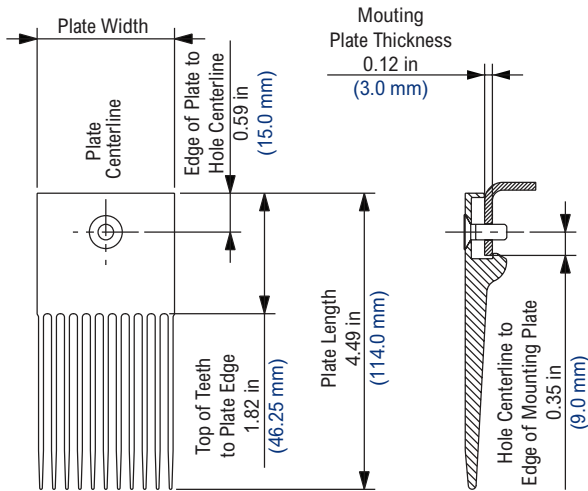

1000 Series Transfer Comb

Part Number	Plate Length		Plate Width		Approximate Weight	
	in	mm	in	mm	lbs	kg
10146448	4.49	114.0	1.69	43.0	0.04	0.02
10146449	4.49	114.0	2.09	53.0	0.31	0.14

For raised rib 1000 Series chains only.
 Transfer combs are molded of XLG material.

1001 FT (MTW) DP


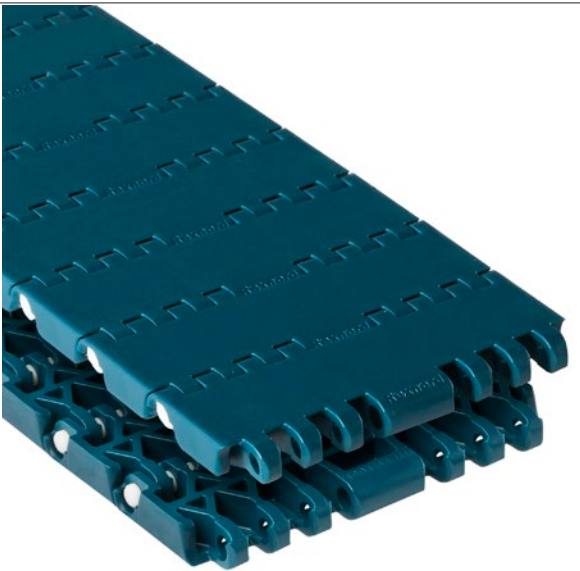


Photo shows 1001 Series Flat Top MatTop Chain with Positrack™ (DP) Tracking Guides molded in XLG material.

Chain Information

Chain Width			Number of Sprockets	Chain Strength	
desc	in	mm		lbs	N
84MM	3.31	84.0	1	337	1,500

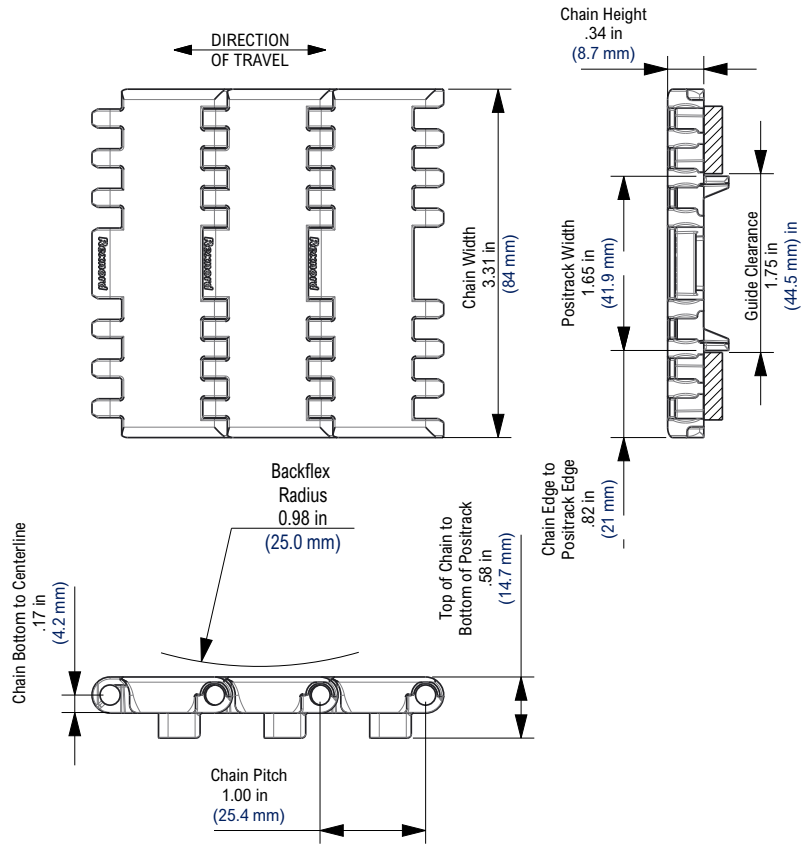

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Standard Materials											
Dry-PT™	Dry PET Low Friction	Polyester	-40	+180	+150	-40	+82	+66	1.33	6.50	Yes
PSX™	Platinum Series X™	Polyester	-40	+180	+150	-40	+82	+66	1.33	6.50	Yes
XLG	Low Friction Green	Polyester	-40	+180	+150	-40	+82	+66	1.33	6.50	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved. Patent Pending

Additional Notes

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

1001 FG (MTW) DP


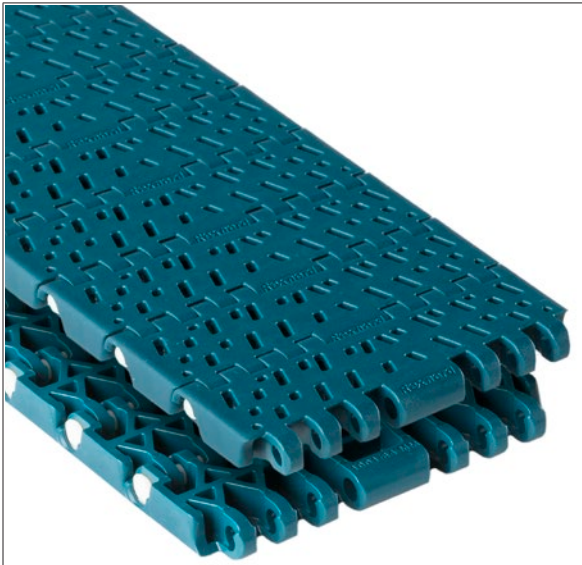


Photo shows 1001 Series Flush Grid MatTop Chain with Positrack™ (DP) Tracking Guides molded in XLG material.

Chain Information

desc	Chain Width		Number of Sprockets	Chain Strength	
	in	mm		lbs	N
84MM	3.31	84.0	1	337	1,500

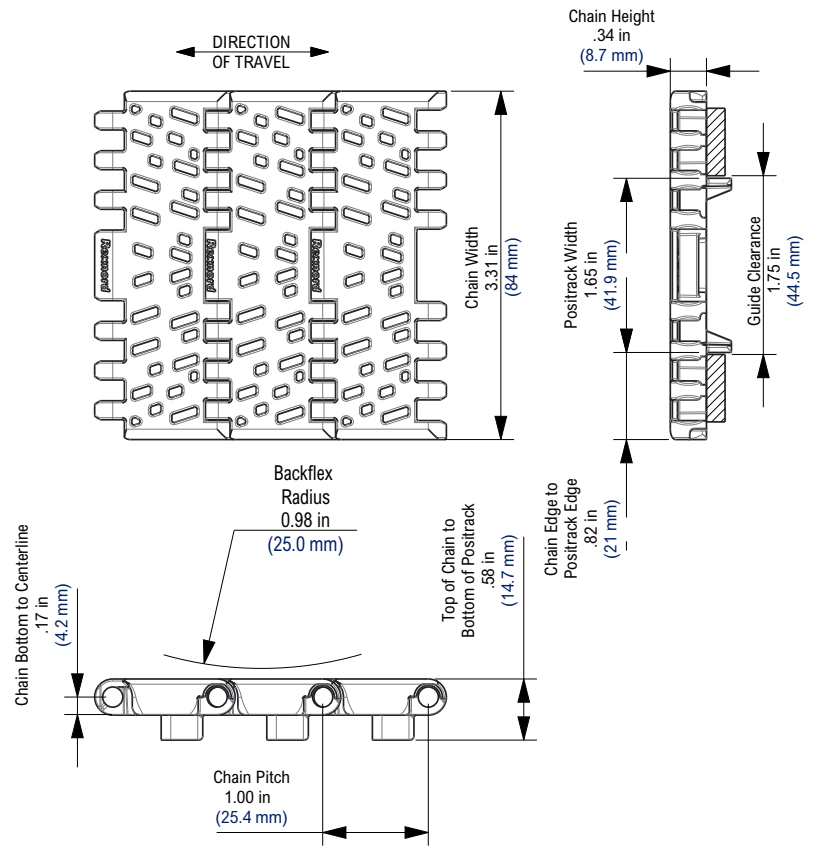

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Standard Materials											
Dry-PT™	Dry PET Low Friction	Polyester	-40	+180	+150	-40	+82	+66	1.29	6.28	Yes
PSX™	Platinum Series X™	Polyester	-40	+180	+150	-40	+82	+66	1.29	6.28	Yes
XLG	Low Friction Green	Polyester	-40	+180	+150	-40	+82	+66	1.29	6.28	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Regal and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved. Patent Pending

Additional Notes

Open area = 25%

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

1255


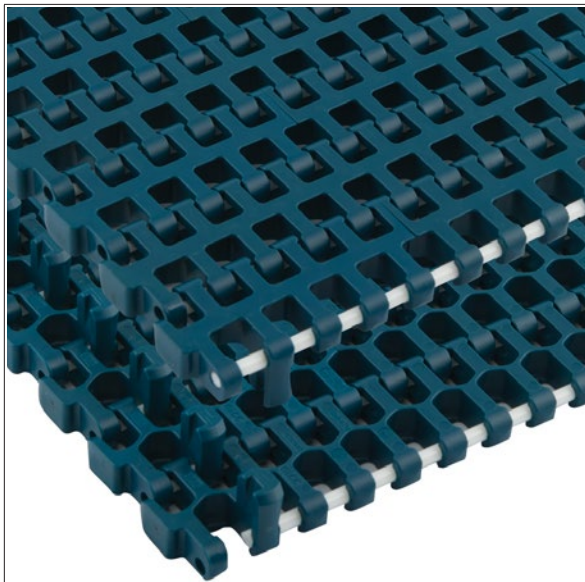


Photo shows 1255 MatTop Chain molded in XLG material.

Chain Information

Chain Width		Drive Sprockets	Idler Sprockets
in	mm		
6.69	170	3	2
10.04	255	5	3
13.39	340	6	4
16.73	425	7	5
20.08	510	8	6
23.43	595	9	7
26.77	680	10	8

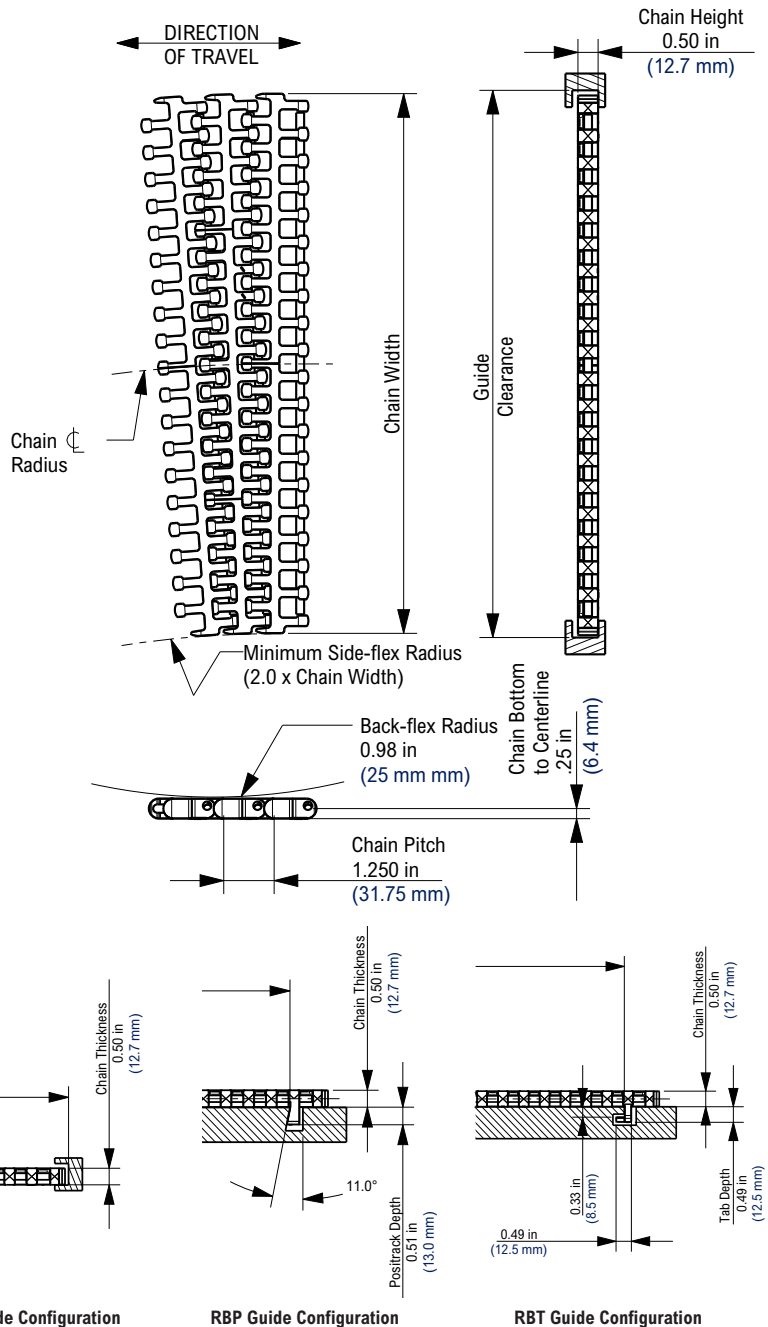

RB Guide Configuration

RBP Guide Configuration

RBT Guide Configuration

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength				Approximate Weight	FDA Approval	
			Fahrenheit			Celsius			Straight		Curve				
			min	max		min	max		lbs/ft	N/m	lbs	N	lbs/ft ²	kg/m ²	
				dry	wet		dry	wet							
Standard Materials															
XLG	Low Friction Green	Polyester	-40	180	150	-40	82	66	1,508	22,000	450	2,000	1.64	8.00	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved Patent Pending.

Additional Notes

Open area = 39.0%
Chain strength is listed at room temperature. NR = Not Recommended.
"S-turn" capable MatTop Chain

1255 SuperGrip™


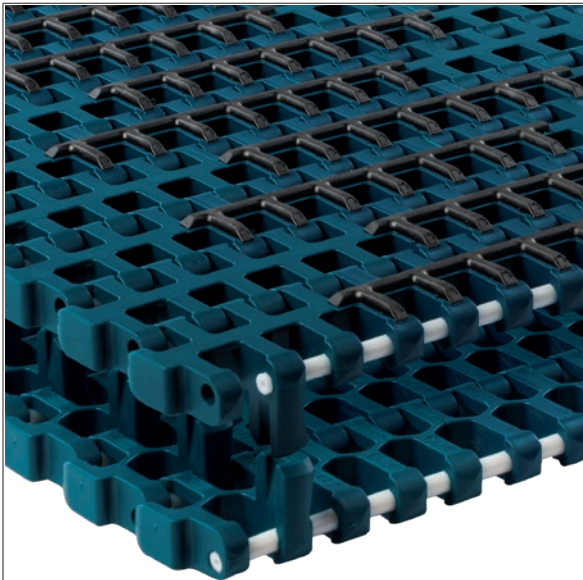


Photo shows 1255 SuperGrip MatTop Chain molded in XLG material.

Chain Information

Chain Width		Drive Sprockets	Idler Sprockets
in	mm		
6.69	170	3	2
10.04	255	5	3
13.39	340	6	4
16.73	425	7	5
20.08	510	8	6
23.43	595	9	7
26.77	680	10	8

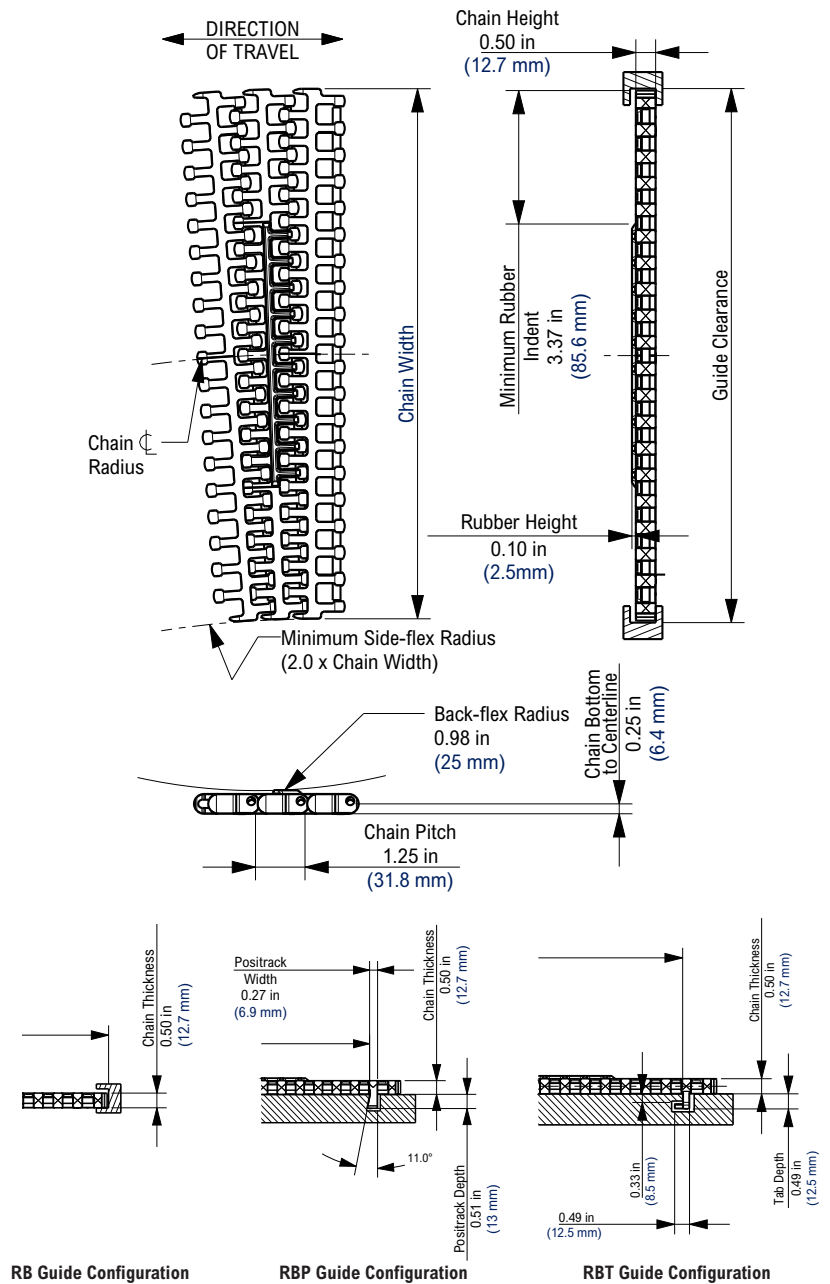

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength				Approximate Weight		FDA Approval	
			Fahrenheit			Celsius			Straight		Curve		lbs/ft ²	kg/m ²		
			min	max dry	max wet	min	max dry	max wet	lbs/ft	N/m	lbs	N				
Standard Materials																
XLG	Low Friction Green	Polyester	-40	180	150	-40	82	66	1,508	22,000	450	2,000	1.64	8.00	Yes	
Non-Standard Materials																
SMB	Blue Cut Resistant	Polyester	-40	180	150	-40	82	66	1,508	22,000	450	2,000	1.64	8.00	Yes	
WSM	White Cut Resistant	Polyester	-40	180	150	-40	82	66	1,508	22,000	450	2,000	1.64	8.00	Yes	

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved Patent Pending.

Additional Notes

Open area = 39.0%

Chain strength is listed at room temperature. NR = Not Recommended.

“S-turn” capable MatTop Chain

1265


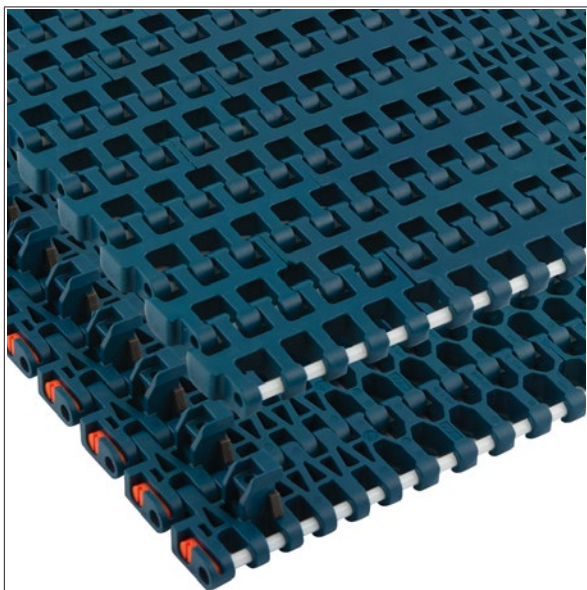


Photo shows 1265 MatTop Chain molded in XLG material.

Chain Information

Chain Width		Drive Sprockets	Idler Sprockets
in	mm		
10.04	255	4	3
13.39	340	5	4
16.73	425	6	5
20.08	510	7	6
23.43	595	8	7
26.77	680	9	8
30.12	765	10	9
33.46	850	11	10
36.81	935	12	11
40.16	1020	13	12
43.50	1105	14	13
46.85	1190	15	14
50.20	1275	16	15
53.54	1360	17	16
56.89	1445	18	17
60.24	1530	19	18

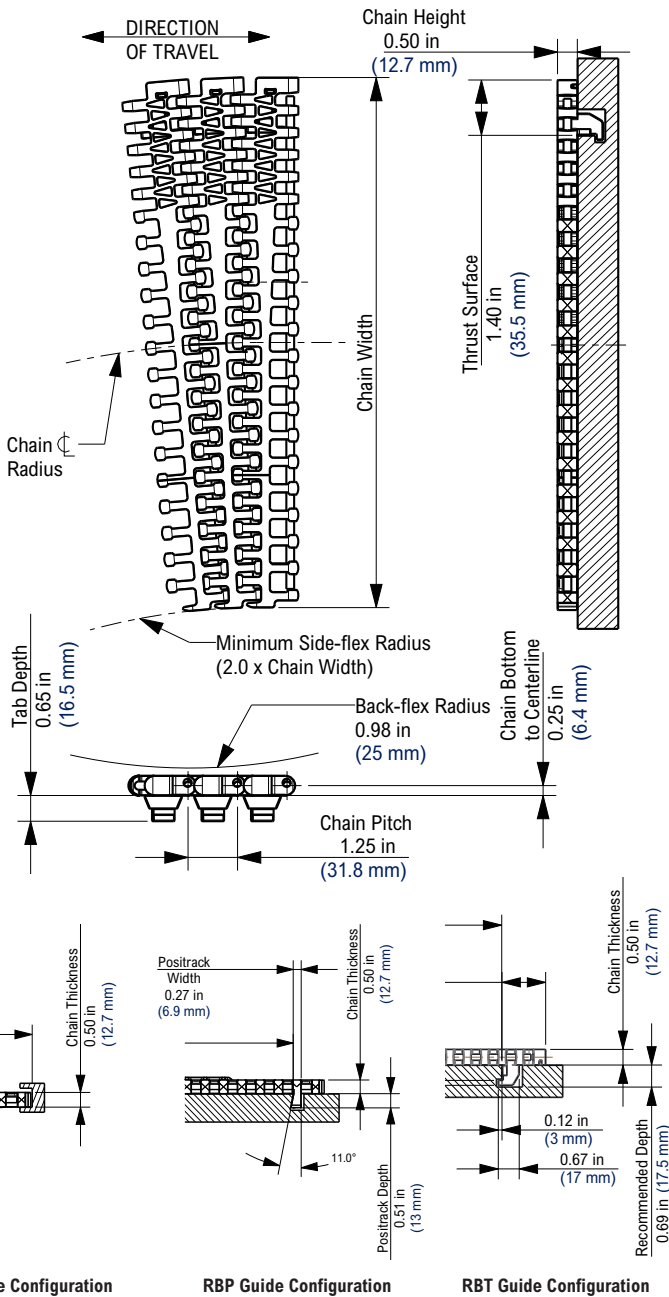

RB Guide Configuration RBP Guide Configuration RBT Guide Configuration

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength				Approximate Weight		FDA Approval	
			Fahrenheit			Celsius			Straight		Curve		lbs/ft ²	kg/m ²		
			min	max		min	max		lbs/ft	N/m	lbs	N				
Standard Materials																
XLG	Low Friction Green	Polyester	-40	180	150	-40	82	66	1,508	22,000	674	3,000	1.64	8.00	Yes	

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved Patent Pending.

Additional Notes

Open area = 39.0%
 Chain strength is listed at room temperature. NR = Not Recommended.
 1265 combines 1255 inner & center modules with high strength 1265 outer modules.
 CW or CCW turn capable


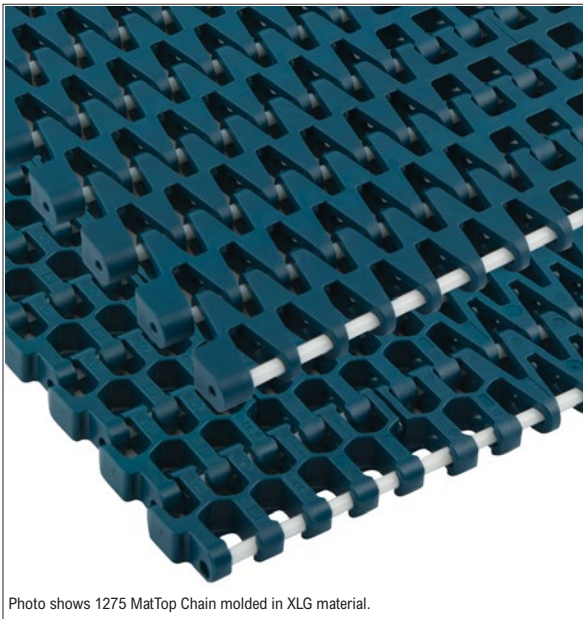


Photo shows 1275 MatTop Chain molded in XLG material.

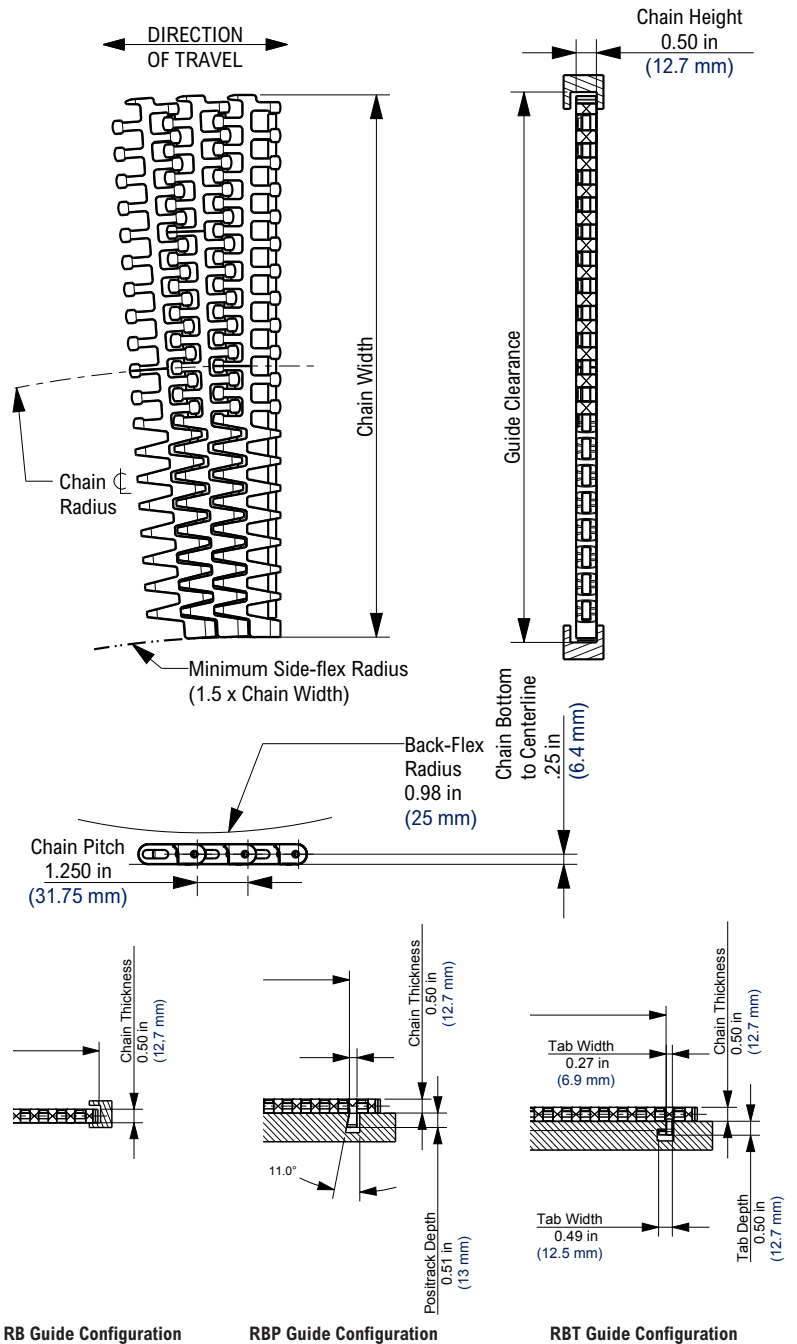

Chain Information

Chain Width		Drive Sprockets	Idler Sprockets
in	mm		
10.04	255	5	3
13.39	340	6	4
16.73	425	7	5
20.08	510	8	6
23.43	595	9	7
26.77	380	10	8
30.12	765	11	9

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength				Approximate Weight		FDA Approval
			Fahrenheit			Celsius			Straight		Curve		lbs/ft ²	kg/m ²	
			min	max		min	max		lbs/ft	N/m	lbs	N			
Standard Materials															
XLG	Low Friction Green	Polyester	-40	180	150	-40	82	66	1,508	22,000	450	2,000	1.64	8.00	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved Patent Pending.

Additional Notes

Open area = 39.0%
 Chain strength is listed at room temperature. NR = Not Recommended.
 1275 combines 1255 outer & center modules with tight side-flexing 1275 inner modules.
 CW or CCW turn capable

1285


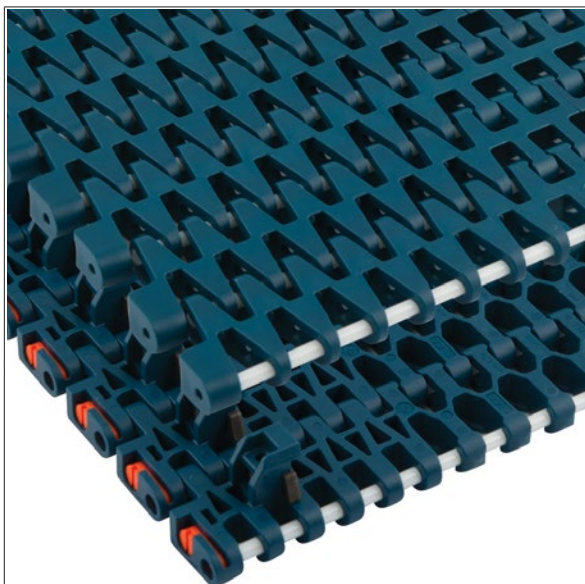


Photo shows 1285 MatTop Chain molded in XLG material.

Chain Information

Chain Width		Drive Sprockets	Idler Sprockets
in	mm		
13.39	340	5	4
16.73	425	6	5
20.08	510	7	6
23.43	595	8	7
26.77	680	9	8
30.12	765	10	9
33.46	850	11	10
36.81	935	12	11
40.16	1020	13	12
43.50	1105	14	13
46.85	1190	15	14
50.20	1275	16	15
53.54	1360	17	16
56.89	1445	18	17
60.24	1530	19	18

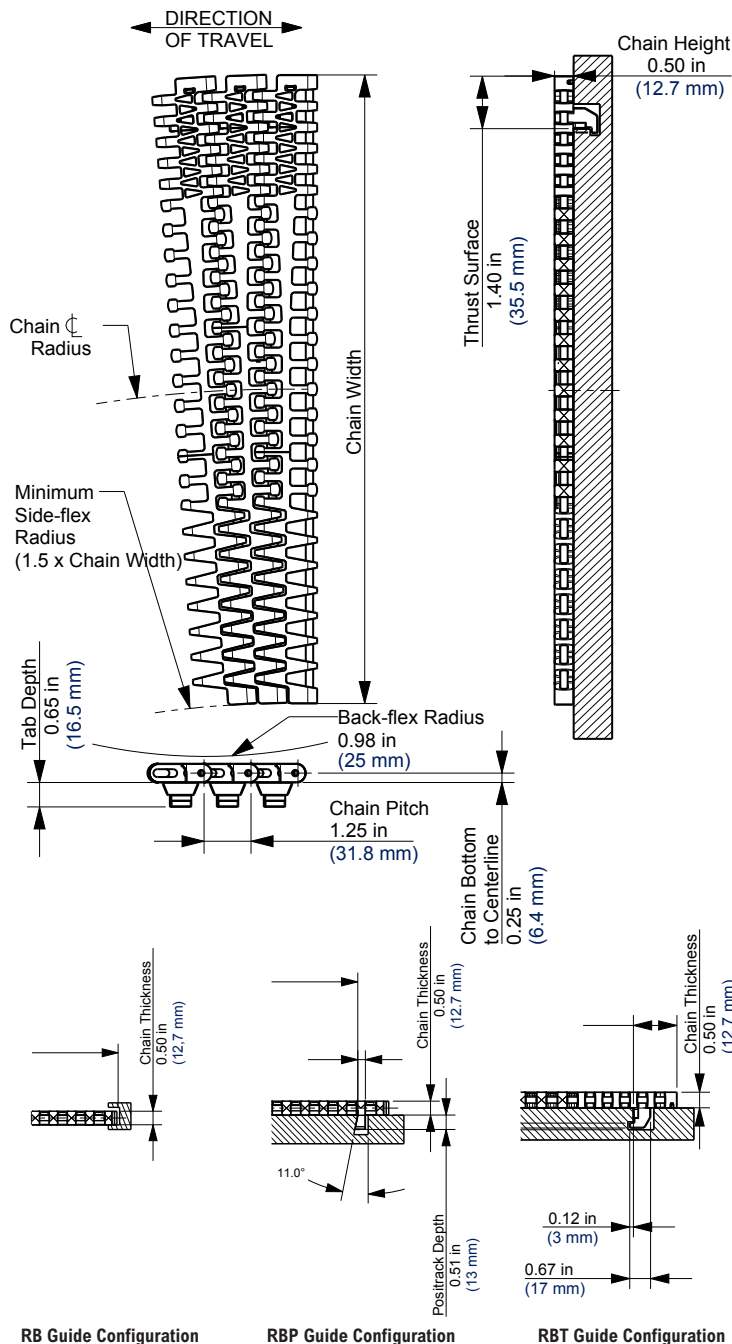

RB Guide Configuration RBP Guide Configuration RBT Guide Configuration

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength				Approximate Weight		FDA Approval	
			Fahrenheit			Celsius			Straight		Curve		lbs/ft ²	kg/m ²		
			min	max		min	max		lbs/ft	N/m	lbs	N				
Standard Materials																
XLG	Low Friction Green	Polyester	-40	180	150	-40	82	66	1,508	22,000	674	3,000	1.64	8.00	Yes	


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved Patent Pending.


Additional Notes

Open area = 39.0%
 Chain strength is listed at room temperature. NR = Not Recommended.
 1285 combines 1265 high strength outer modules, 1285 center modules and tight side-flexing 1275 inner modules.
 CW or CCW turn capable

KU1200 Thermoplastic Sprocket

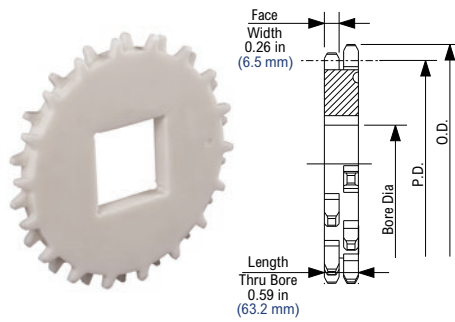

KUS1200 Thermoplastic Sprocket

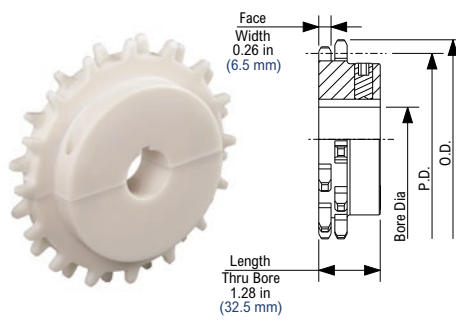

KU1200 Thermoplastic Sprocket Information



Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
10T	10T	4.047	102.80	4.197	106.60	1	2	25	55	1.0	1 1/2	25	40	1	2	20	55	0.19	0.09
13T	13T	5.224	132.70	5.413	137.50	1	3	25	75	1.0	2 1/2	25	60	1	3	20	75	0.38	0.20
15T	15T	6.012	152.70	6.224	158.10	1 3/16	3 1/2	30	105	1.0	3	25	70	1	3 1/2	20	105	0.53	0.24
16T	16T	6.409	162.80	6.626	168.30	1 3/16	3 1/2	30	115	1.0	3	25	80	1	3 1/2	20	115	0.60	0.27

KUS1200 Thermoplastic Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
10T	10T	4.047	102.80	4.197	106.60	1	1 1/2	20	40	1.0	1 3/8	25	35	1	1 5/8	25	40	0.39	0.2
13T	13T	5.224	132.70	5.413	137.50	1	1 7/8	25	45	1.0	1 1/2	25	40	1	1 7/8	25	50	0.63	0.3
15T	15T	6.012	152.70	6.224	158.10	1 1/8	2 3/4	25	70	1.0	2 1/4	25	60	1	2 3/4	25	70	0.86	0.4
16T	16T	6.409	162.80	6.626	168.30	1 1/4	3	30	70	1.0	2 1/2	25	65	1	3	25	75	1.03	0.5

Accessories

Extruded Curve Profile

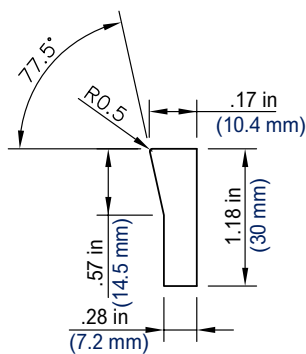

RBP Guiding Profile 1255 and 1275

Part # 10383610

To guide belt through the curve.

Material is ULF

Available in 9.84 ft (3 meter) length strips

RBT Guiding Profile for 1265 and 1285

Part # 10383623

To guide belt through the curve.

Material is ULF

Available in 5.91 ft (1.8 meter) length strips

1503


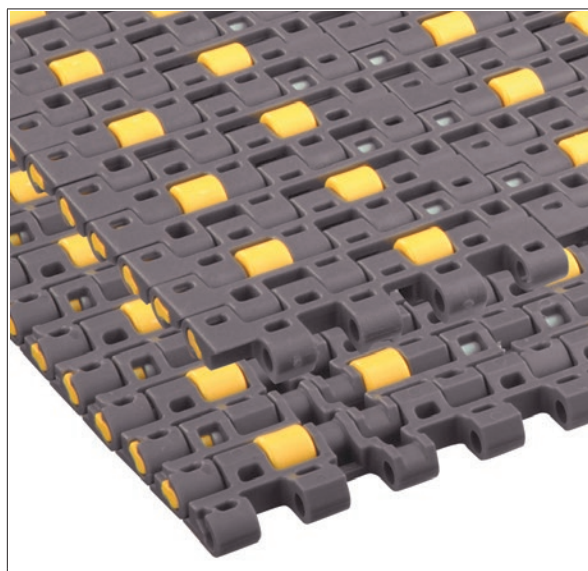


Photo shows 1503 MatTop Chain molded in High Performance (HP) material and yellow acetal rollers.

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 100%	4	13

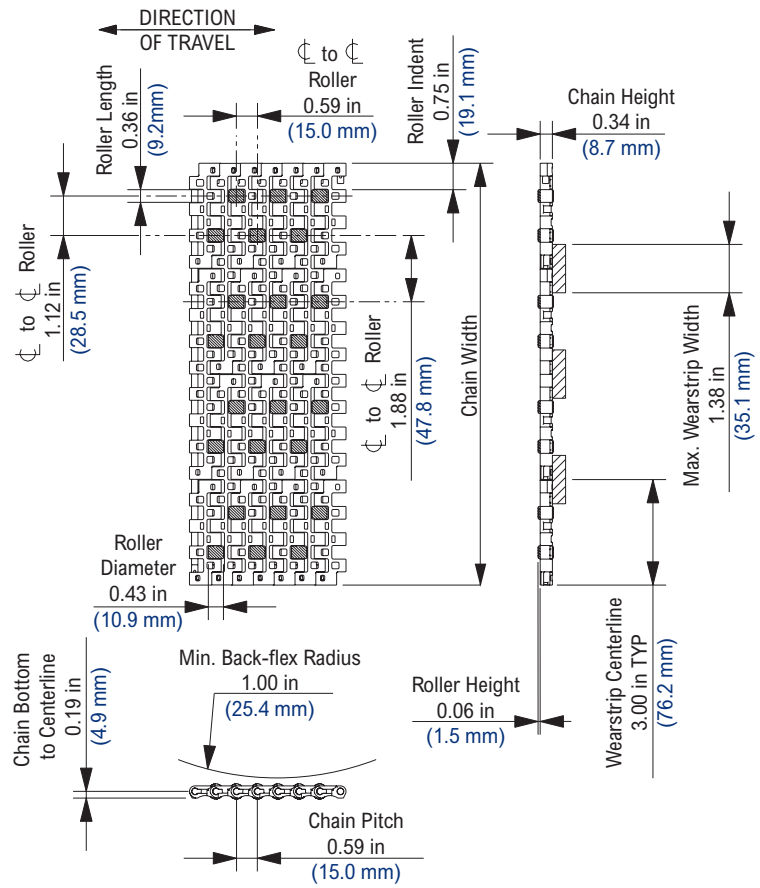

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft	N/m	lbs/ft ²	kg/m ²	
			min	max		min	max						
				dry	wet		dry	wet					
Standard Materials													
HP™	High Performance	Polyester	-40	180	150	-40	82	66	325	4,742	1.30	6.35	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, MatTop, Platinum Series, HP, and PS are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patent: 5960937

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For chain width information see Rexnord Chain Width Table on page 300. Acetal rollers. Open area = 26.0%. Stainless steel pins are available on a made-to-order basis. Typical coefficient of friction between chain and product = 0.11. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.


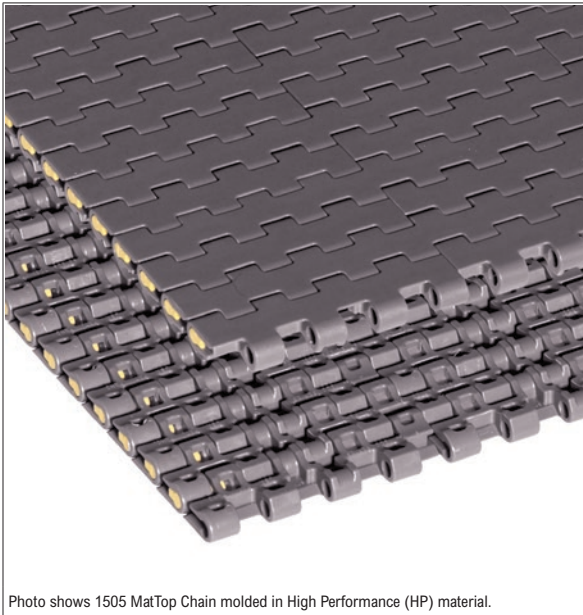


Photo shows 1505 MatTop Chain molded in High Performance (HP) material.

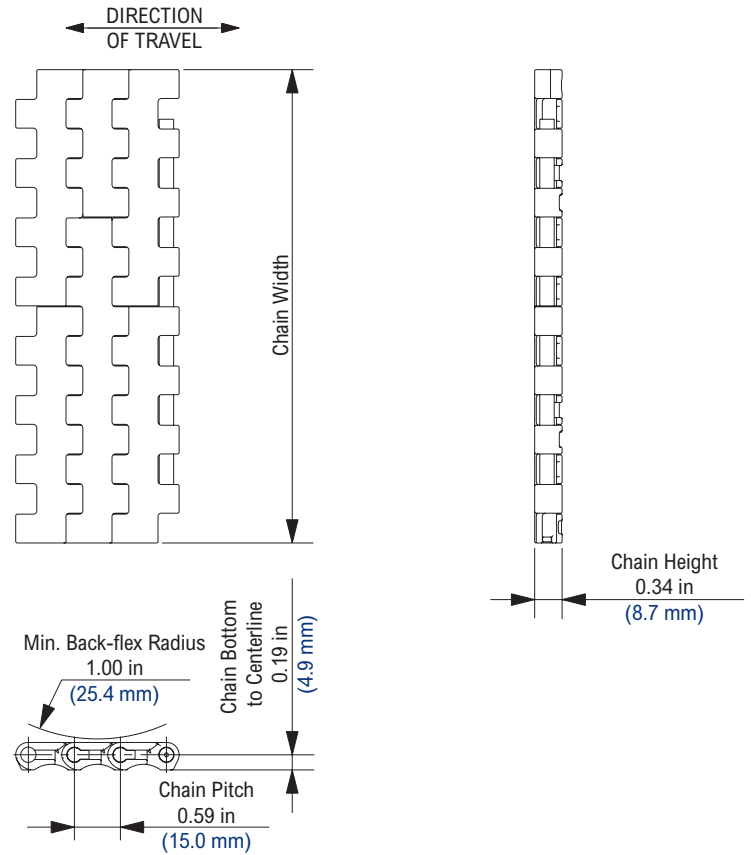

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 100%	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	450	6,566	1.43	6.99	No
HP™	High Performance	Polyester	-40	180	150	-40	82	66	900	13,131	1.63	7.95	Yes
WHT	White High Temperature	Polyester	40	220	212	4	104	100	500	7,295	1.13	5.52	Yes
Non-Standard Materials													
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	540	7,879	1.63	7.95	No
BLT	Blue Low Temperature	Polyethylene	-100	80	80	-73	27	27	250	3,648	1.13	5.52	Yes
Dry-PT™	Dry PET Low Friction	Polyester	-40	180	150	-40	82	66	900	13,131	1.63	7.95	Yes
ESD	Electrostatic Dissipative	Polyester	0	180	180	-18	82	82	500	7,295	1.13	5.52	No
HT	High Temperature	Polyester	40	220	212	4	104	100	500	7,295	1.13	5.52	Yes
LF	Low Friction	Polyester	-40	180	150	-40	82	66	900	13,131	1.63	7.95	Yes
MR	Melt Resistant	Polyester	-80	220	NR	-62	104	NR	900	13,131	1.63	7.95	No
P	Chemical Resistant	Polyester	0	180	140	-18	82	60	720	10,505	1.63	7.95	Yes
PS	Platinum Series	Polyester	-40	180	150	-40	82	66	900	13,131	1.63	7.95	Yes
PSX™	Platinum Series X	Polyester	-40	180	150	-40	82	66	900	13,131	1.63	7.95	Yes
SMB	Blue Cut Resistant	Polyester	-40	180	150	-40	82	66	900	13,131	1.63	7.95	Yes
WHP	White High Performance	Polyester	-40	180	150	-40	82	66	900	13,131	1.63	7.95	Yes
WLT	White Low Temperature	Polyethylene	-100	80	80	-73	27	27	250	3,648	1.13	5.52	Yes
WSM	White Cut Resistant	Polyester	-40	180	150	-40	82	66	900	13,131	1.63	7.95	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, Dry-PT, FRPLUS, Platinum Series, Platinum Series X, HP, PS and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patent: 5960937

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300. Open area = 2.0%.

Stainless steel pins are available on a made-to-order basis.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

1505 RubberTop™


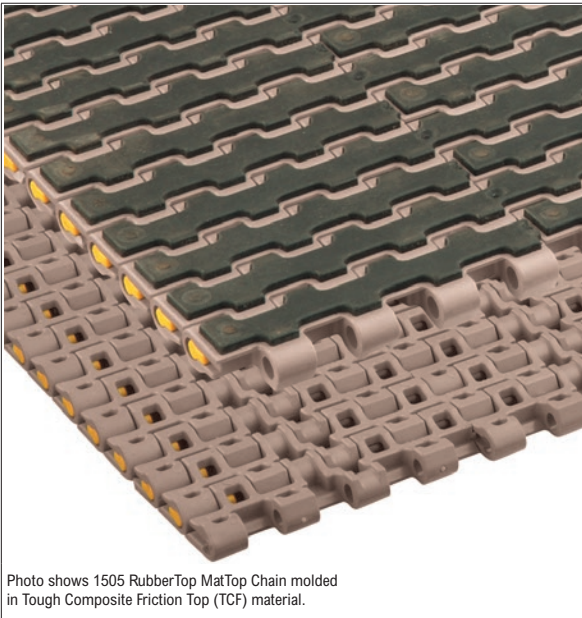


Photo shows 1505 RubberTop MatTop Chain molded in Tough Composite Friction Top (TCF) material.

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 100%	4	13

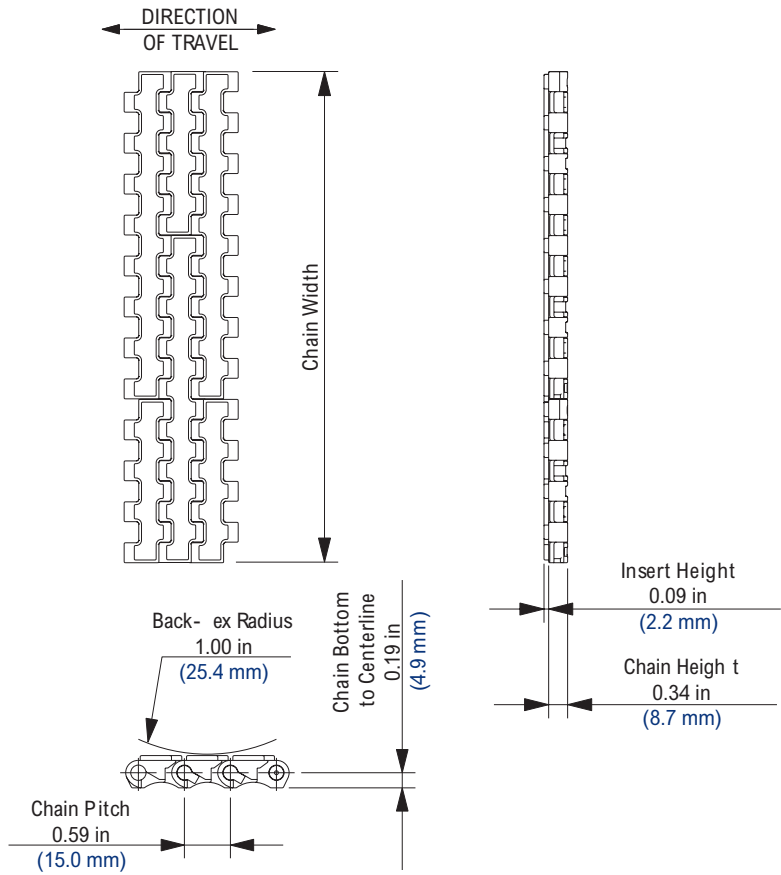

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HT	High Temperature	Polyester	40	180	140	4	82	60	500	7,295	1.35	6.59	Yes
GTC	Gray Tough Composite	Acetal	0	180	140	-18	82	60	675	9,848	1.63	7.96	No



Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, MatTop and RubberTop are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patent: 5960937

Additional Notes

For chain width information see Rexnord Chain Width Table on page 300. Open area = 2.0%. TC links are molded with 50 Shore A urethane friction pads. HT links are molded with 50 Shore A TPE friction pads. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

1505 (MTW)

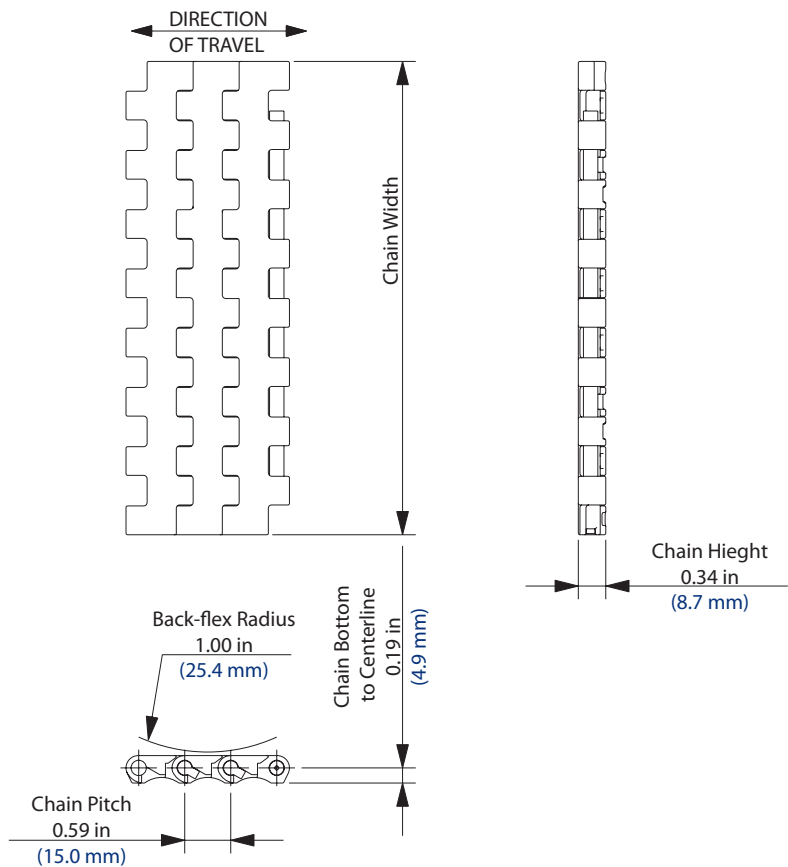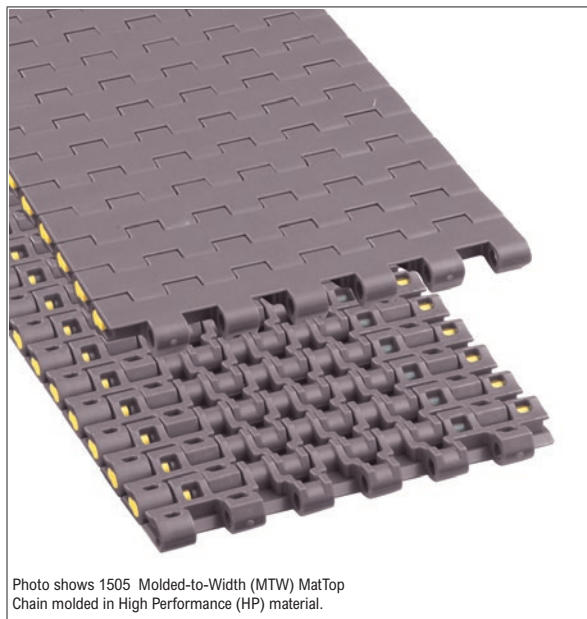

Chain Information

desc	Chain Width		Number of Sprockets	Chain Strength	
	in	mm		lbs	N
38MM	1.50	38.0	1	100	445
46MM	1.81	46.0	1	100	445
3	3.00	76.2	1	150	667
4 1/2	4.50	114.3	1	225	1,001
6	6.00	152.4	2	240	1,068

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
			dry	wet		dry	wet				
Standard Materials											
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	1.43	6.99	No
HP™	High Performance	Polyester	-40	180	150	-40	82	66	1.30	6.35	Yes
WHT	White High Temperature	Polyester	40	220	212	4	104	100	0.92	4.49	Yes
Non-Standard Materials											
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	1.30	6.35	No
BLT	Blue Low Temperature	Polyethylene	-100	80	80	-73	27	27	0.92	4.49	Yes
Dry-PT™	Dry PET Low Friction	Polyester	-40	180	150	-40	82	66	1.30	6.35	Yes
ESD	Electrostatic Dissipative	Polyester	0	180	180	-18	82	82	0.92	4.49	No
HT	High Temperature	Polyester	40	220	212	4	104	100	0.92	4.49	Yes
LF	Low Friction	Polyester	-40	180	150	-40	82	66	1.30	6.35	Yes
MR	Melt Resistant	Polyester	-80	220	NR	-62	104	NR	1.30	6.35	No
P	Chemical Resistant	Polyester	0	180	140	-18	82	60	1.30	6.35	Yes
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	1.30	6.35	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	1.30	6.35	Yes
SMB	Blue Cut Resistant	Polyester	-40	180	150	-40	82	66	1.30	6.35	Yes
WHP	White High Performance	Polyester	-40	180	150	-40	82	66	1.30	6.35	Yes
WLT	White Low Temperature	Polyethylene	-100	80	80	-73	27	27	0.92	4.49	Yes
WSM	White Cut Resistant	Polyester	-40	180	150	-40	82	66	1.30	6.35	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, Dry-PT, FRPLUS, Platinum Series, Platinum Series X, PS and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patent: 5960937

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 204 pitch, 10 ft (3.048 m) length strands.

Open area = 2.0%.

Stainless steel pins are available on a made-to-order basis.

Chain strength is based on acetal-based materials and is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

1505 DTS™ PT


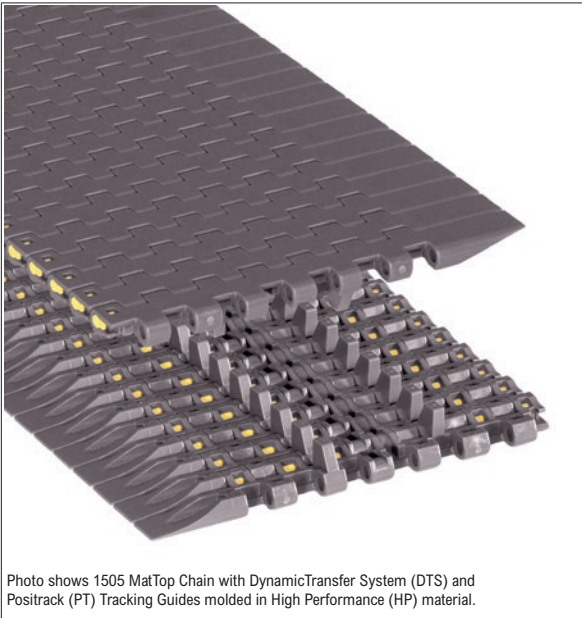


Photo shows 1505 MatTop Chain with DynamicTransfer System (DTS) and Positrack (PT) Tracking Guides molded in High Performance (HP) material.

Chain Information

Chain Width		Chain Edge to Tracking Guide Edge		Number of Sprockets	Chain Strength		
desc	in	mm	in		mm	lbs	N
4 1/2	6.30	160.0	1.62	41.1	1	225	1,001

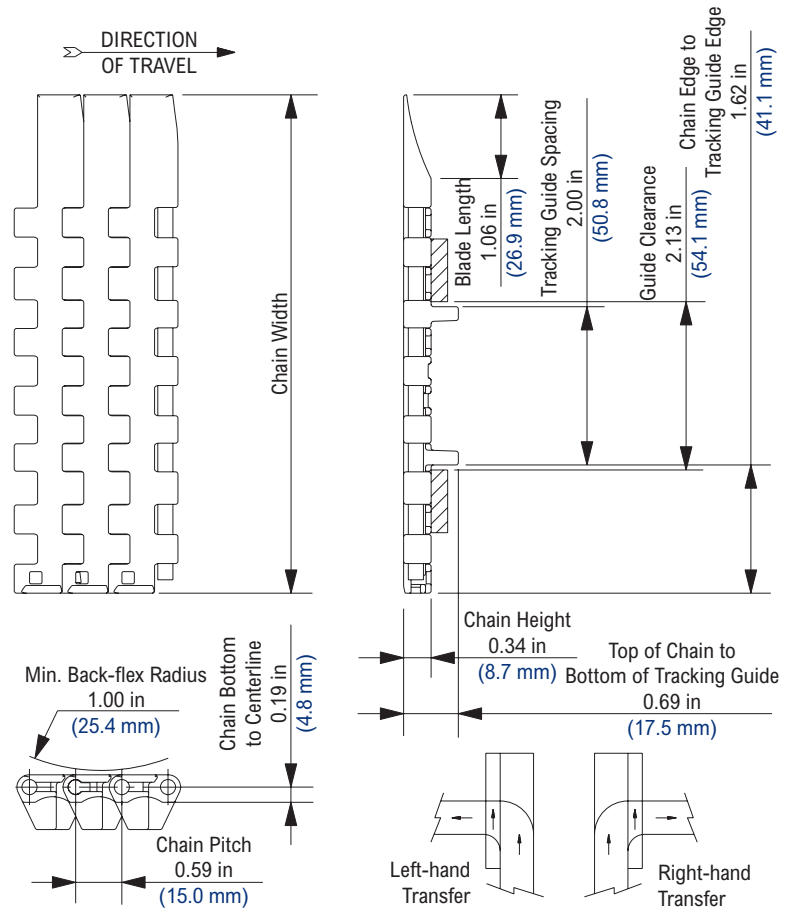

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	1.30	6	Yes
Non-Standard Materials											
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	1.30	6	No
Dry-PT™	Dry PET Low Friction	Polyester	-40	180	150	-40	82	66	1.30	6.35	Yes
FR	Flame Retardant	Polyester	0	180	140	-18	82	60	1.30	6	No
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	1.43	6.99	No
LF	Low Friction	Polyester	-40	180	150	-40	82	66	1.30	6	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, Dry-PT, DTS, DynamicTransfer System and FRPLUS are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patent: 5634550, 5960937

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 204 pitch, 10 ft (3.048 m) length strands.

Available in both left-hand and right-hand modules.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

Not to be used with 7 tooth sprocket.


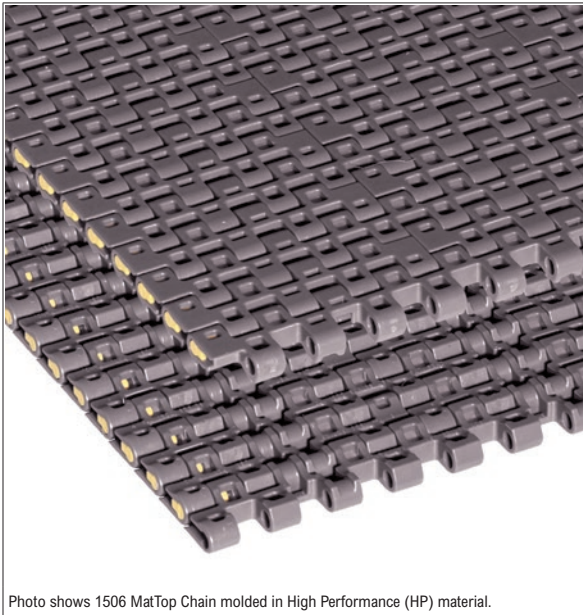


Photo shows 1506 MatTop Chain molded in High Performance (HP) material.

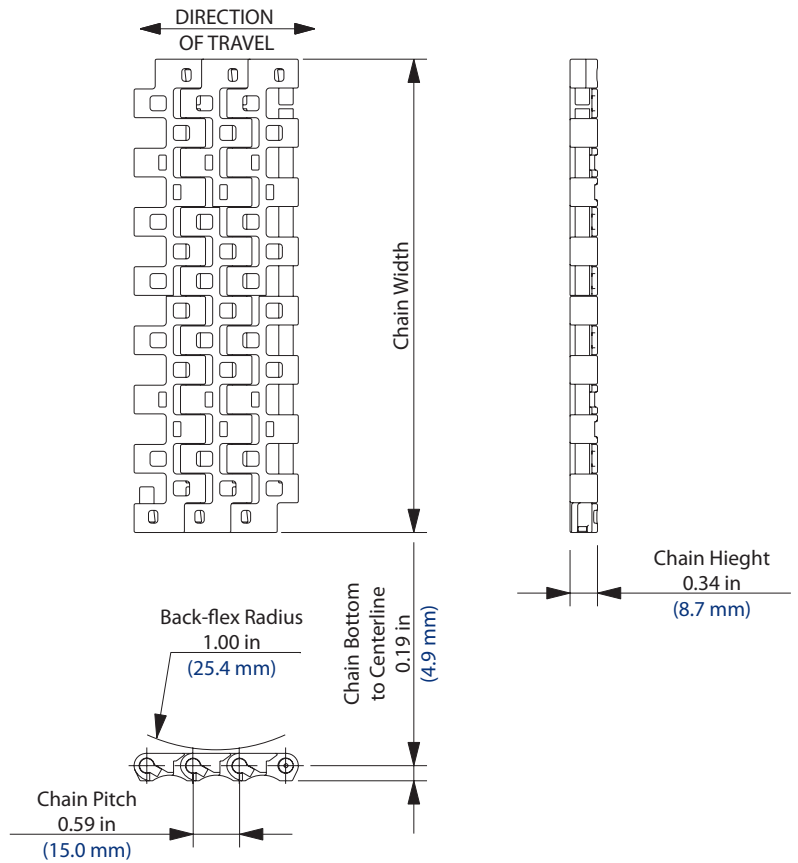

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 100%	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft	N/m	lbs/ft ²	kg/m ²	
			min	max		min	max						
Standard Materials													
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	450	6,566	1.42	6.93	No
HP™	High Performance	Polyester	-40	180	150	-40	82	66	900	13,131	1.30	6.35	Yes
WHT	White High Temperature	Polyester	40	220	212	4	104	100	500	7,295	0.92	4.49	Yes
Non-Standard Materials													
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	540	7,879	1.30	6.35	No
BLT	Blue Low Temperature	Polyethylene	-100	80	80	-73	27	27	250	3,648	0.92	4.49	Yes
DUV	Plain Acetal Ultraviolet Resistant	Polyester	0	180	150	-18	82	66	900	13,131	1.30	6.35	No
ESD	Electrostatic Dissipative	Polyester	0	180	180	-18	82	82	540	7,879	0.92	4.49	No
LF	Low Friction	Polyester	-40	180	150	-40	82	66	900	13,131	1.30	6.35	Yes
WHP	White High Performance	Polyester	-40	180	150	-40	82	66	900	13,131	1.30	6.35	Yes
WLT	White Low Temperature	Polyethylene	-100	80	80	-73	27	27	250	3,648	0.92	4.49	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, MatTop and FRPLUS are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patent: 5960937

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For chain width information see Rexnord Chain Width Table on page 300. Open area = 21.0%. Stainless steel pins are available on a made-to-order basis. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

1506 (MTW)


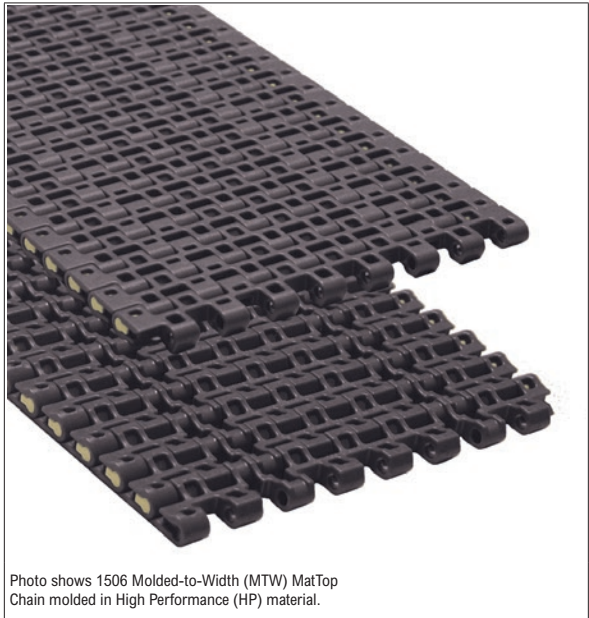


Photo shows 1506 Molded-to-Width (MTW) MatTop Chain molded in High Performance (HP) material.

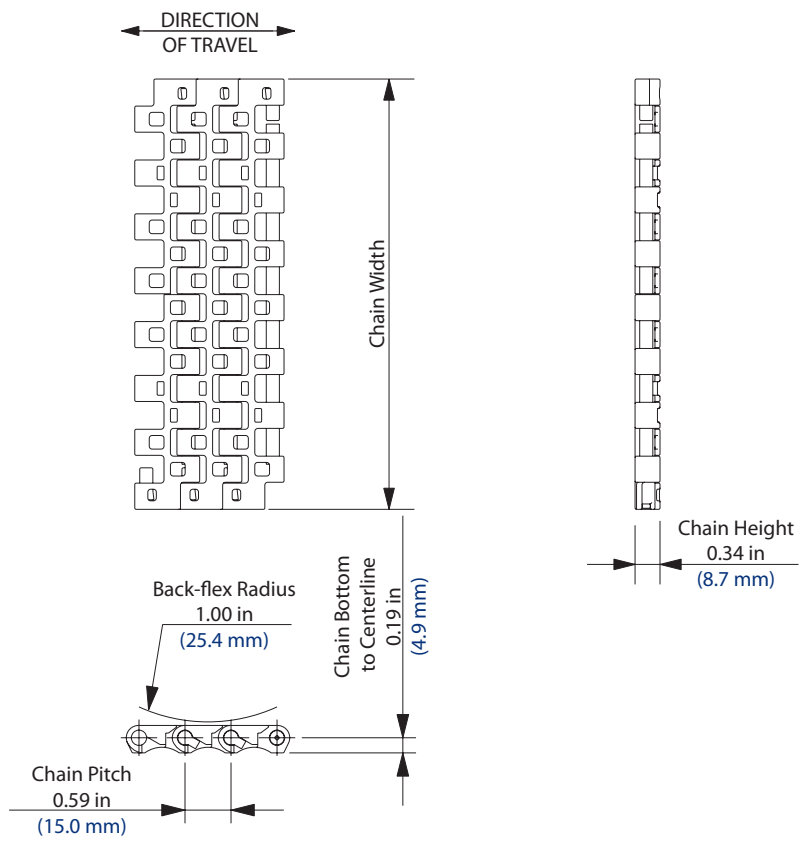

Chain Information

desc	Chain Width		Number of Sprockets	Chain Strength	
	in	mm		lbs	N
38MM	1.50	38.0	1	100	445
46MM	1.81	46.0	1	100	445
3	3.00	76.2	1	150	667
4 1/2	4.50	114.3	1	225	1,001
6	6.00	152.4	2	300	1,334

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
			dry	wet		dry	wet				
Standard Materials											
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	1.42	6.93	No
HP™	High Performance	Polyester	-40	180	150	-40	82	66	1.30	6.35	Yes
WHT	White High Temperature	Polyester	40	220	212	4	104	100	0.92	4.49	Yes
Non-Standard Materials											
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	1.30	6.35	No
BLT	Blue Low Temperature	Polyethylene	-100	80	80	-73	27	27	0.92	4.49	Yes
DUV	Plain Acetal Ultraviolet Resistant	Polyester	0	180	150	-18	82	66	1.30	6.35	No
ESD	Electrostatic Dissipative	Polyester	0	180	180	-18	82	82	0.92	4.49	No
LF	Low Friction	Polyester	-40	180	150	-40	82	66	1.30	6.35	Yes
WHP	White High Performance	Polyester	-40	180	150	-40	82	66	1.30	6.35	Yes
WLT	White Low Temperature	Polyethylene	-100	80	80	-73	27	27	0.92	4.49	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, MatTop and FRPLUS are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patent: 5960937

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For chain width information see Rexnord Chain Width Table on page 300. Open area = 21.0%. Stainless steel pins are available on a made-to-order basis. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.


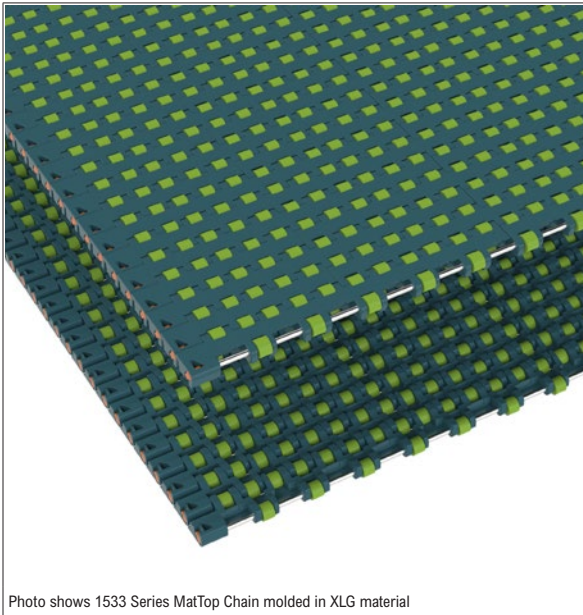


Photo shows 1533 Series MatTop Chain molded in XLG material

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 100%	3.6	11,8

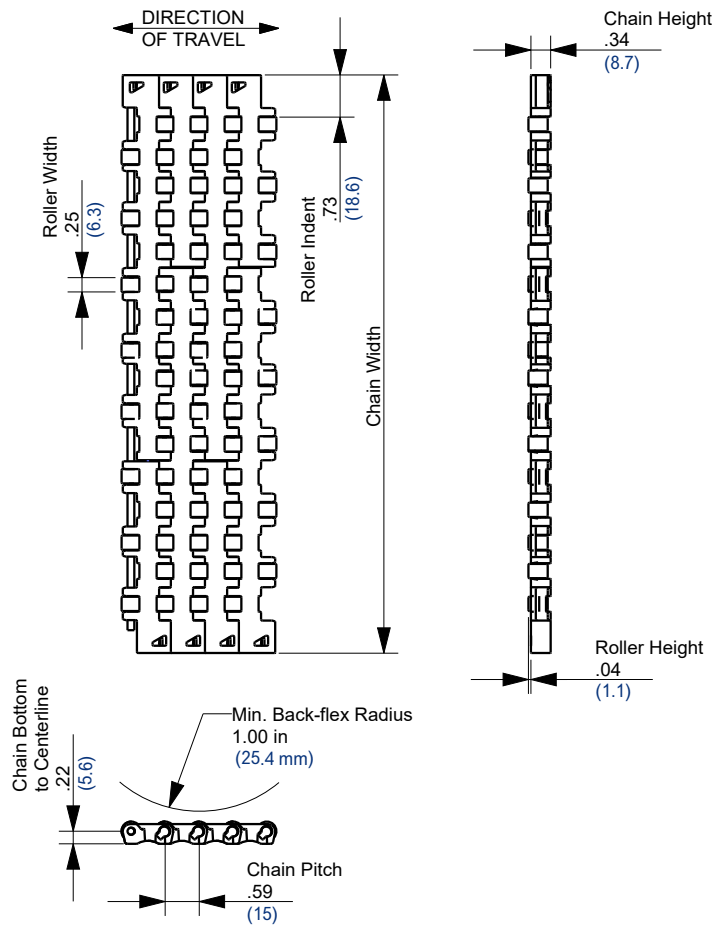

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval	
			Fahrenheit			Celsius			lbs/ft	N/m	lbs/ft ²	kg/m ²		
			min	max		min	max							
				dry	wet		dry	wet						
Standard Materials														
HP	High Performance	Stainless Steel	-40	+180	+150	-40	+82	+66	1096	16000	2.8	13.5	Yes	
XLG	Low Friction Green	Stainless Steel	-40	+180	+150	-40	+82	+66	1096	16000	2.8	13.5	Yes	

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Pending

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300.

Open area = 3.3%.

Typical coefficient of friction between chain and product = 0.06 - 0.08

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

1553


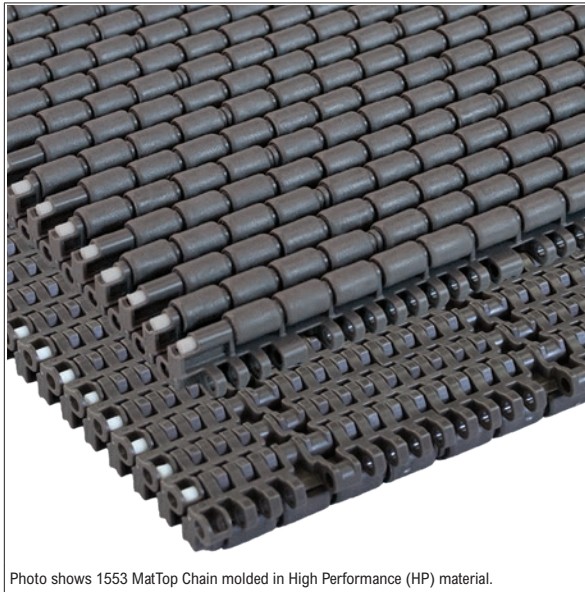


Photo shows 1553 MatTop Chain molded in High Performance (HP) material.

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 100%	3.6	11.8

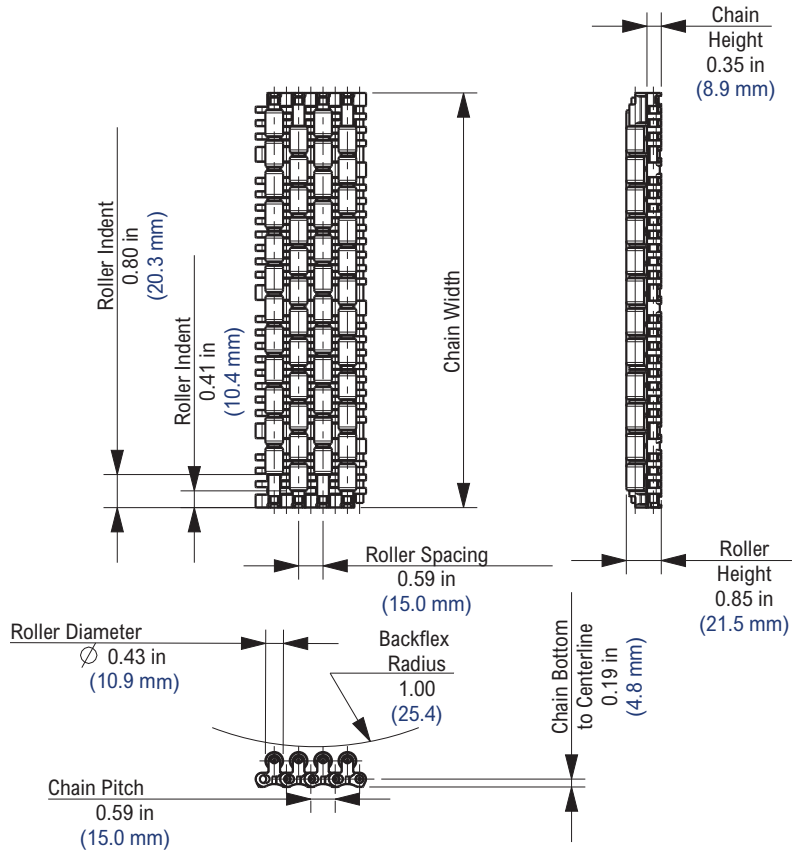

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HP™	High Performance	Polyester	-40	180	150	-40	82	66	900	13,131	3.04	14.84	Yes
Non-Standard Materials													
LF	Low Friction	Polyester	-40	180	150	-40	82	66	900	13,131	3.04	14.84	Yes

Regulatory Information


The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patent: 8151978B2

Additional Notes

Non-standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For chain width information see Rexnord Chain Width Table on page 300. Acetal rollers. Open area = 2.0%. Typical coefficient of friction between chain and product = 0.09. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

N1500 Thermoplastic Sprocket

NS1500 Thermoplastic Split Sprocket

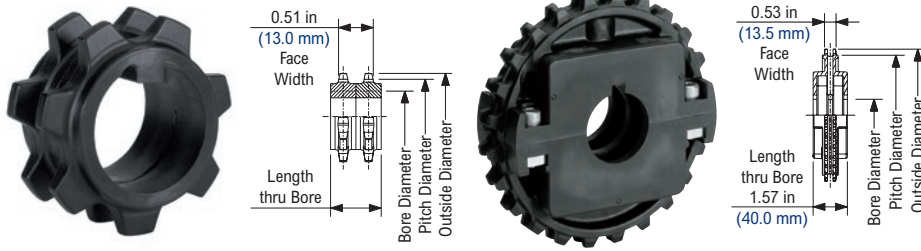

N1500 Thermoplastic Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)				Bore Diameter (Idler)		Length Thru Bore		Approximate Weight	
actual	effect	in	mm	in	mm	Round		Square		in	mm	in	mm	lbs	kg
7	7	1.364	34.65	1.31	33.3	3/4	20	-	-	3/4	20	0.73	18.5	0.02	0.01
12	12	2.287	58.09	2.28	57.9	-	-	1	25	-	-	0.95	24.1	0.08	0.04

7 Tooth Shaft-ready round bore sprocket shipped with integral key without setscrew. 2 sprocket pieces and 2 retaining rings are supplied per part. Idler bores are designed to spin freely on the shaft.

NS1500 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
actual	effect	in	mm	in	mm	Round				Square				in		mm		lbs	kg
						min	max	min	max	min	max	min	max	min	max	min	max		
24	24	4.524	114.91	4.55	115.6	1	2	25	50	1	2	25	60	1	2	25	60	0.53	0.24
32	32	6.040	153.42	6.10	154.9	1	2 1/2	25	75	1	3 1/2	25	90	1	3	25	90	0.71	0.32

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.


Pusher Attachment (F-Style)

All pusher attachments are molded 6 in (152.4 mm) wide and can be cut down to a minimum height of 1/4 in (6.35 mm).

The F2 designation represents an F-style pusher attachment at a height of 2 in (50.8 mm).


Please indicate if pusher attachments are required every pitch, every second pitch, etc. when ordering. Also, indicate if indents are required in the center, on one or both sides of the chain.


For example, "I would like F2 pusher attachments every 8th pitch indented 3/4 in on both sides of the chain."

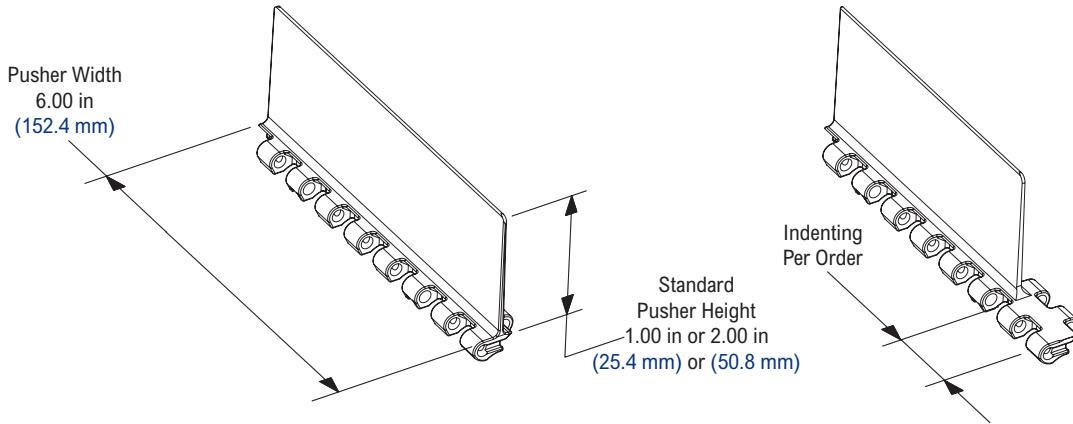

Sideguard Attachment

Please indicate if sideguard attachments are required down one or both sides of the chain when ordering. Sideguard attachments can be cut down to a minimum height of 1 in (25.4 mm). If the chain is ordered with both sideguard and pusher attachments, the sideguard attachment will be furnished the same height as the pusher attachment. Please contact Rexnord if any deviations from this standard are required. Patent 6840371.

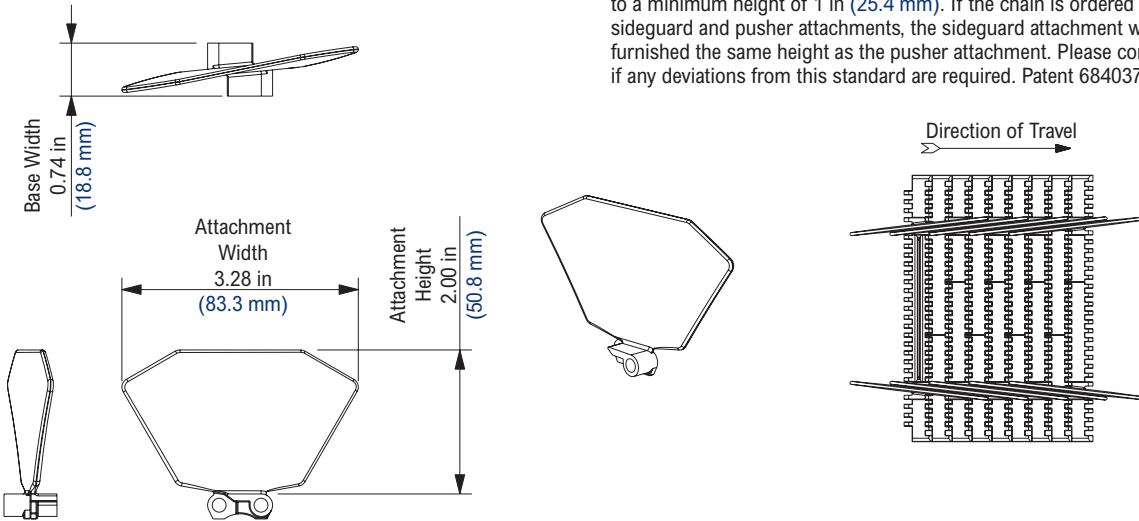

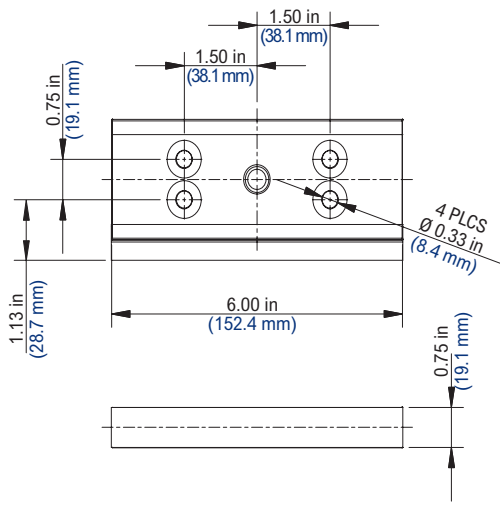


Modular Nose-Over Bar (Standard Profile)

Base in reinforced nylon (PA)
 Nosebar in moly filled nylon
 Uses standard 5/16 in (M8) flat head screws (not included)
 Marbett is a registered trademark of Regal Rexnord Corporation.
 All Rights Reserved.
 US Patent 6367619



Standard Profile

Part Number	Hardware
10148210	No

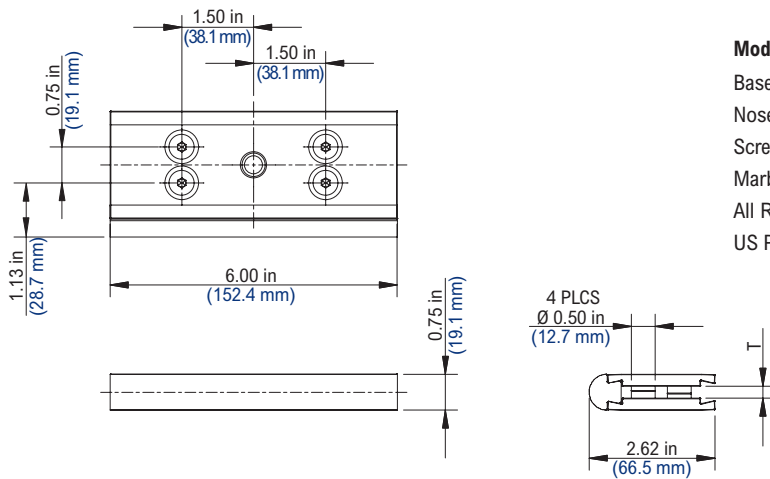


Modular Nose-Over Bar (Low Profile)

Base in reinforced nylon (PA)
 Nosebar in moly filled nylon
 Screws in stainless steel; Threaded insert in brass
 Marbett is a registered trademark of Regal Rexnord Corporation.
 All Rights Reserved.
 US Patent 6367619



Low Profile

Part Number	T Dimension	Hardware
10148211	8.00 mm	M6
10148212	0.25 in	1/4-20

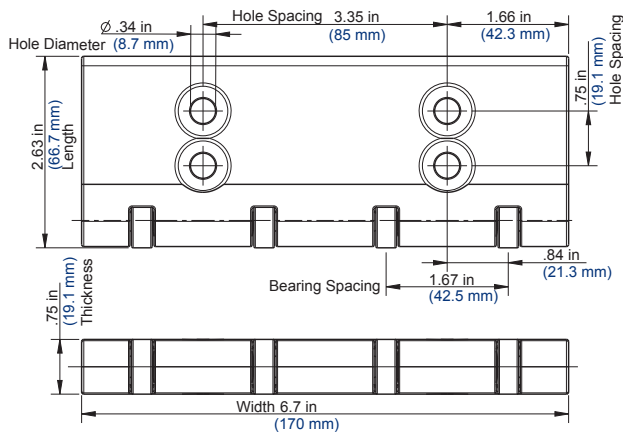

Molded Dynamic Nose-Over Bar

Base is molded BWR material
 Zinc plated bearings are standard
 Uses standard 5/16 in (M8) flat head screws (not included)



Dynamic Nose-Over Bar

Part Number	Overall Length	Hole Spacing	Hole Spacing (Length)
10478852	6.00 in	3.00 in (76.2 mm)	0.75 in (19.1 mm)
10478945	3.00 in	—	0.75 in (19.1 mm)
10478853	170 mm	3.35 in (85 mm)	0.75 in (19.1 mm)
10478976	85 mm	—	0.75 in (19.1 mm)


1625B-TAB



Photo shows 1625B-TAB MatTop Chain molded in High Performance (HP) material.

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 100%	4	13

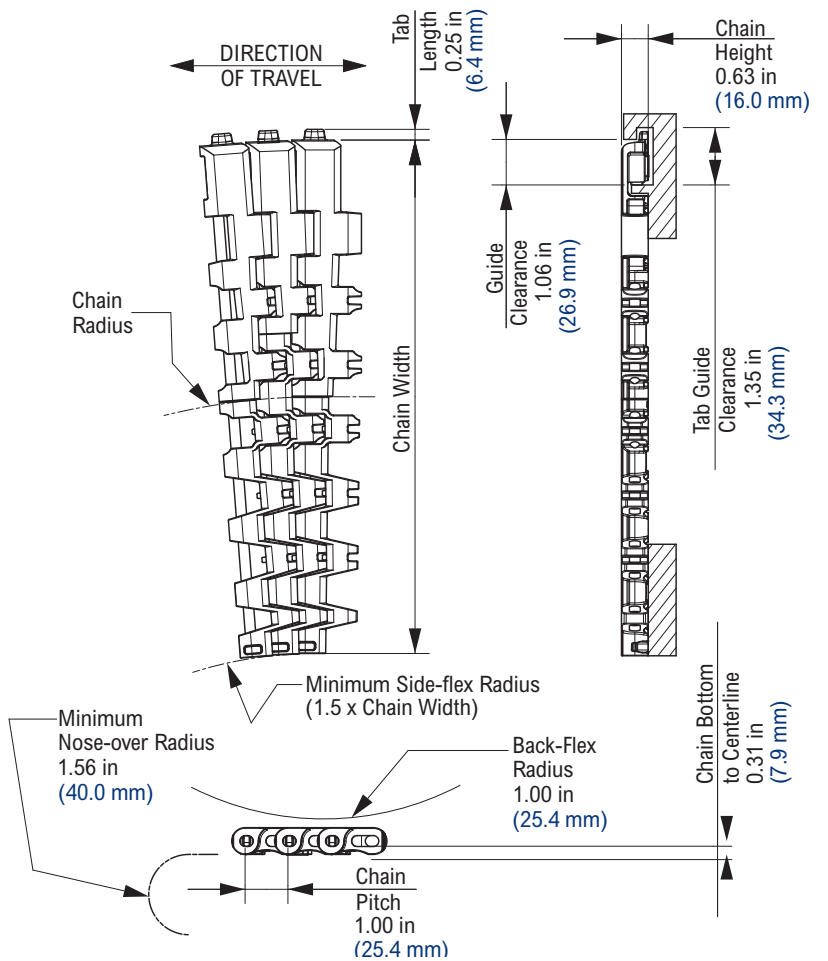

Available Materials




Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
				dry	wet		dry	wet					
Standard Materials													
HP™	High Performance	Polyester	-40	180	150	-40	82	66	200	2,918	2.47	12.06	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved. Patent Pending.

Additional Notes

For chain width information see Rexnord Chain Width Table on page 300. Open area = 3.0%. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

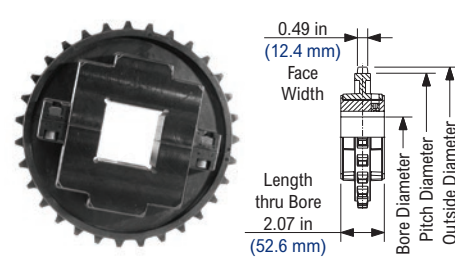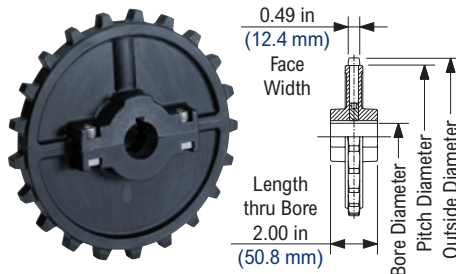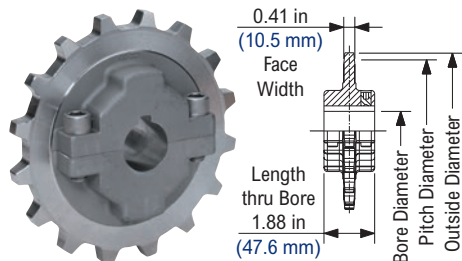

SSS7700 Stainless Steel Split Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)												Bore Diameter (Round)				Approximate Weight	
			Round				Square				in		mm							
			in	mm	in	mm	in	mm	in	mm	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg	
16	16	5.126	130.20	5.14	130.6	1	2	25	50	1	1	25	25	1	2	25	50	3.50	1.59	
18	18	5.759	146.28	5.78	146.8	1	2	25	50	1	1	25	25	1	2	25	50	5.00	2.27	
21	21	6.710	170.43	6.72	170.7	1	2 1/2	25	60	1	3 1/2*	25	90*	1	3 1/2	25	60	6.00	2.72	

Shaft-ready round bore sprockets are shipped with keyway and no setscrew.

* The 3-1/2 in and 90 mm bores for the 21 tooth square bore sprocket and all round bore sprockets above 1-1/2 in (40 mm) are supplied as machined bores. All other bores are supplied with split bore adapters.

NS7700 Thermoplastic Split Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)												Bore Diameter (Idler)				Approximate Weight	
			Round				Square				in		mm							
			in	mm	in	mm	in	mm	in	mm	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg	
16	16	5.126	130.20	5.14	130.6	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	0.73	0.33	
18	18	5.759	146.28	5.78	146.8	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	0.84	0.38	
21	21	6.710	170.43	6.72	170.7	1	1 5/8	25	40	3 1/2	3 1/2	90	90	1	1 5/8	25	40	0.97	0.44	
31	31	9.885	251.08	9.93	252.2	2	4 1/2	50	120	2	4 1/2	50	120	2	4 1/2	50	120	3.72	1.69	

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

* The 3-1/2 in and 90 mm square bore are supplied with bore adapters. 1-1/2 in and 40 mm round bore are supplied with bore adapters.

NS7700 Thermoplastic Split Sprocket with Adapter Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)												Bore Diameter (Idler)				Approximate Weight	
			Round				Square				in		mm							
			in	mm	in	mm	in	mm	in	mm	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg	
21	21	6.710	170.43	6.72	170.7	1 11/16	2 1/2	25	65	1	3	25	75	1 11/16	3	25	75	0.97	0.44	
31	31	9.885	251.08	9.93	252.2	1	1 15/16	25	45	1	1 1/2	25	40	1	1 15/16	25	40	3.72	1.69	


Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

* The 3-1/2 in and 90 mm square bore are supplied with bore adapters. 1-1/2 in and 40 mm round bore are supplied with bore adapters.

3125




Photo shows 3125 MatTop Chain molded in Black Cut Resistant (BSM) material.

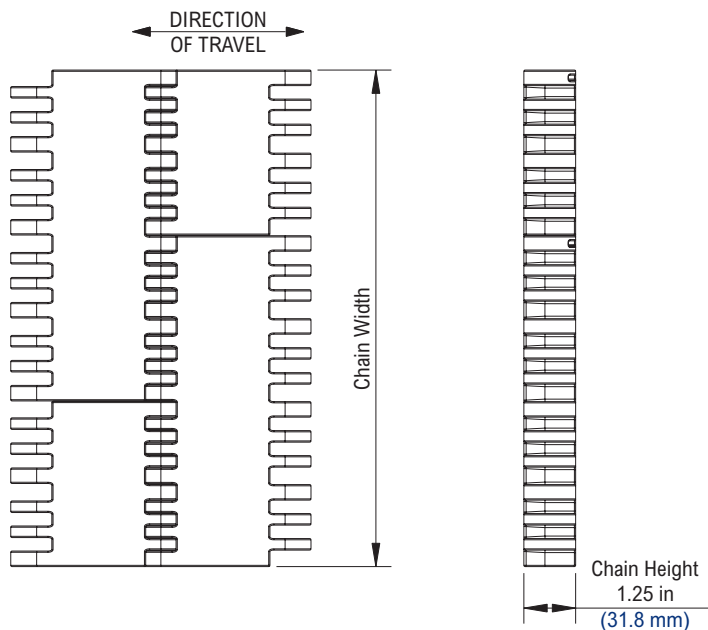

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 100%	6	20

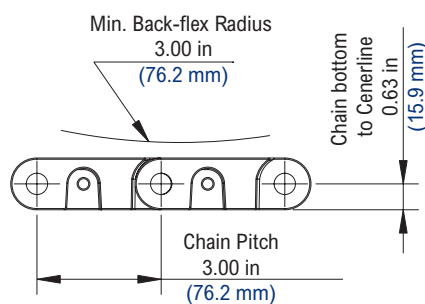

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
BSM	Black Cut Resistant	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.26	30.56	No
BYSM	Black Cut Resistant with Yellow End Links	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.26	30.56	No
Non-Standard Materials													
BRSM	Black Cut Resistant with Red End Links	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.26	30.56	No
BUV	Blue Ultraviolet Resistant	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.26	30.56	No
DUV	Black Ultraviolet Resistant	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.26	30.56	No
RSM	Red Cut Resistant	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.26	30.56	Yes
RUV	Red Ultraviolet Resistant	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.26	30.56	No
SMB	Blue Cut Resistant	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.26	30.56	Yes
YSM	Yellow Cut Resistant	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.26	30.56	Yes
YUV	Yellow Ultraviolet Resistant	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.26	30.56	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300.

Open area = 2.3%.

Stainless steel pins are available on a made-to-order basis.

3125 (MTW)


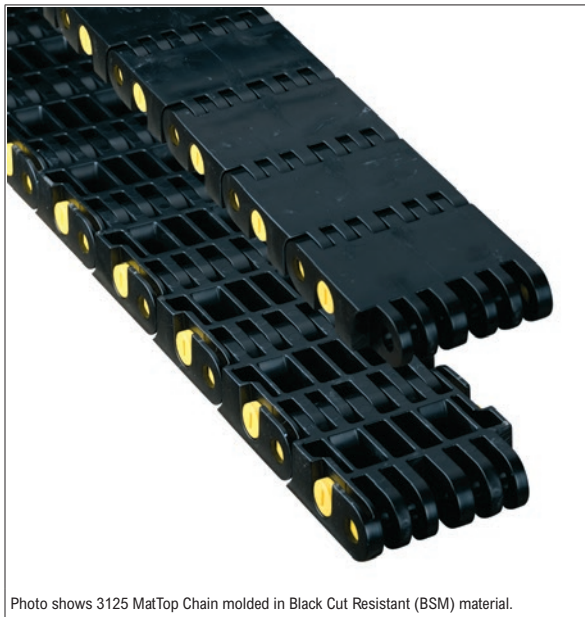


Photo shows 3125 MatTop Chain molded in Black Cut Resistant (BSM) material.

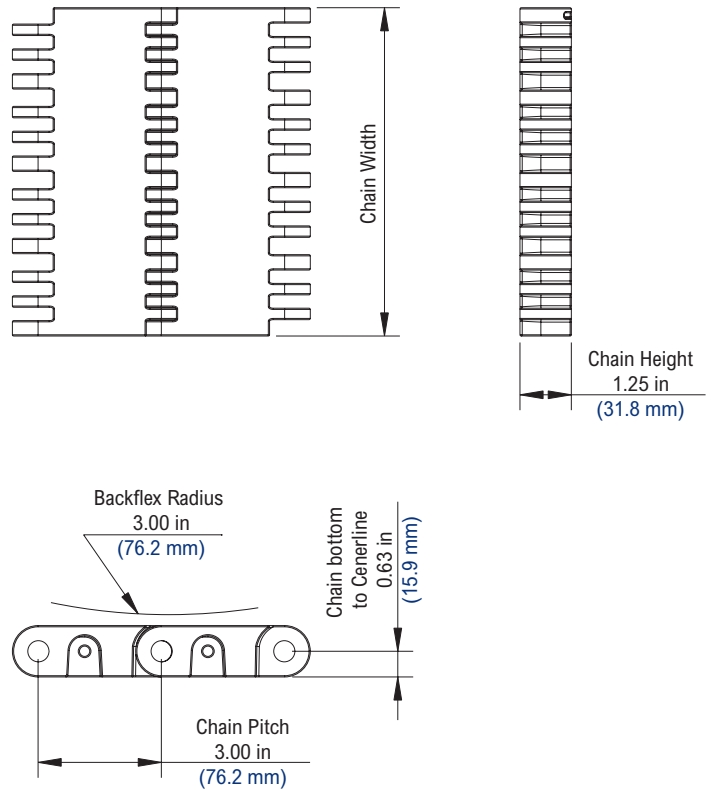

Chain Information

desc	Chain Width		Number of Sprockets	Chain Strength	
	in	mm		lbs	N
4	4.00	101.6	2	2,650	11,788
8	8.00	203.2	4	5,300	23,576

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
			dry	wet		dry	wet				
Standard Materials											
BSM	Black Cut Resistant	Polyester	-40	180	150	-40	82	66	6.26	30.56	No
Non-Standard Materials											
BUV	Blue Ultraviolet Resistant	Polyester	-40	180	150	-40	82	66	6.26	30.56	No
DUV	Black Ultraviolet Resistant	Polyester	-40	180	150	-40	82	66	6.26	30.56	No
RSM	Red Cut Resistant	Polyester	-40	180	150	-40	82	66	6.26	30.56	Yes
RUV	Red Ultraviolet Resistant	Polyester	-40	180	150	-40	82	66	6.26	30.56	No
SMB	Blue Cut Resistant	Polyester	-40	180	150	-40	82	66	6.26	30.56	Yes
YSM	Yellow Cut Resistant	Polyester	-40	180	150	-40	82	66	6.26	30.56	Yes
YUV	Yellow Ultraviolet Resistant	Polyester	-40	180	150	-40	82	66	6.26	30.56	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Regal and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 20 pitch, 5 ft (1.524 m) length strands.

For chain width information see Rexnord Chain Width Table on page 300.

Open area = 2.3%.

Stainless steel pins are available on a made-to-order basis.

3129


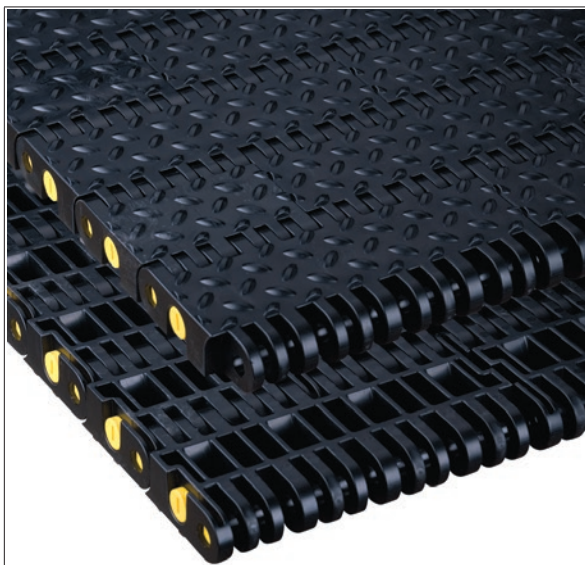


Photo shows 3129 MatTop Chain molded in Black Cut Resistant (BSM) material.

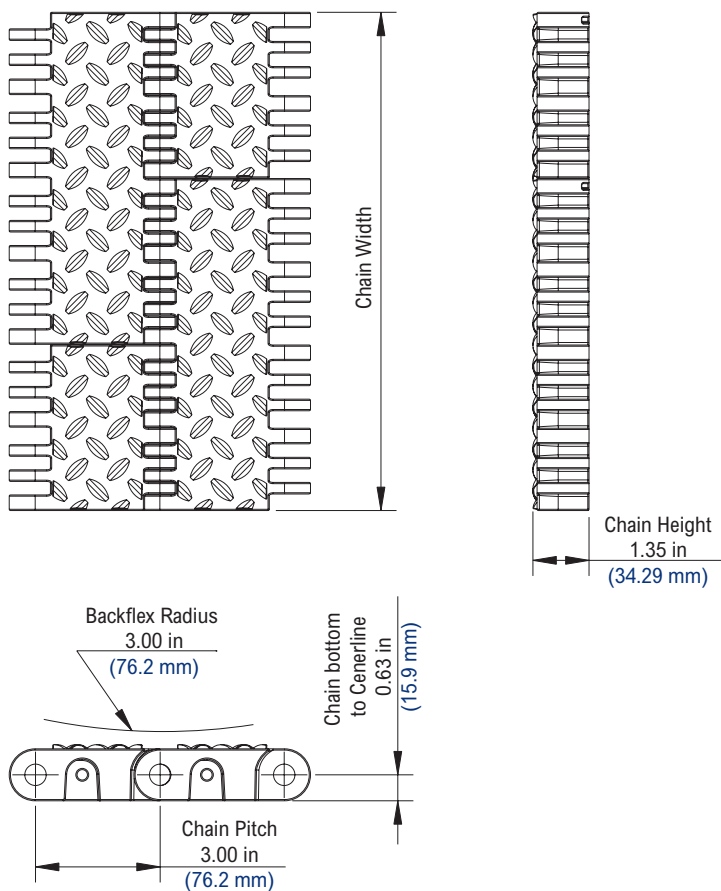

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 100%	6	20

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
BSM	Black Cut Resistant	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.35	31.00	No
BYSM	Black Cut Resistant with Yellow End Links	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.35	31.00	No
Non-Standard Materials													
BRSM	Black Cut Resistant with Red End Links	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.35	31.00	No
BUV	Blue Ultraviolet Resistant	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.35	31.00	No
DUV	Black Ultraviolet Resistant	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.35	31.00	No
RSM	Red Cut Resistant	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.35	31.00	Yes
RUV	Red Ultraviolet Resistant	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.35	31.00	No
SMB	Blue Cut Resistant	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.35	31.00	Yes
YSM	Yellow Cut Resistant	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.35	31.00	Yes
YUV	Yellow Ultraviolet Resistant	Polyester	-40	180	150	-40	82	66	8,000	116,720	6.35	31.00	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300.


Open area = 2.3%.

Stainless steel pins are available on a made-to-order basis.

3129 (MTW)




Photo shows 3129 MatTop Chain molded in Black Cut Resistant (BSM) material.

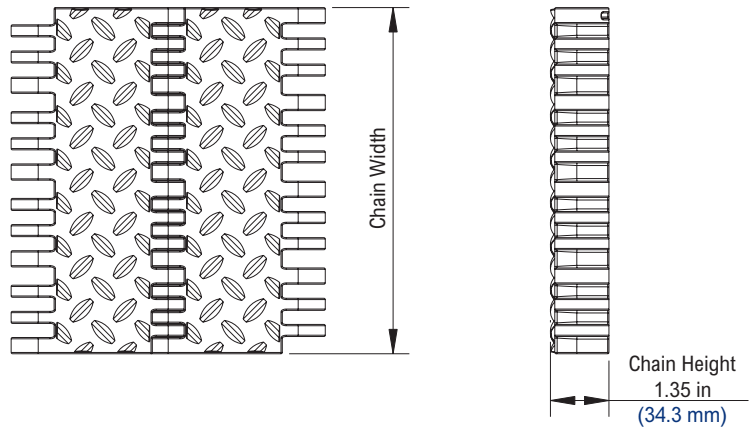

Chain Information

desc	Chain Width		Number of Sprockets	Chain Strength	
	in	mm		lbs	N
4	4.00	101.6	2	2,650	11,788
8	8.00	203.2	4	5,300	23,576

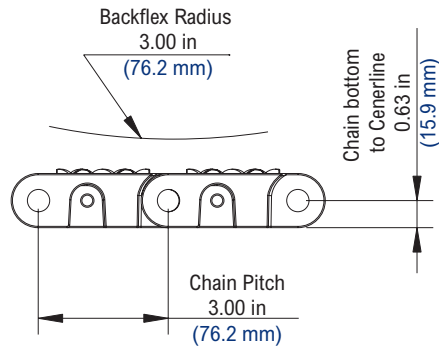

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft ²	kg/m ²	
			min	max		min	max				
	dry	wet	min	dry	wet	dry	wet				
Standard Materials											
BSM	Black Cut Resistant	Polyester	-40	180	150	-40	82	66	6.35	31.00	No
Non-Standard Materials											
BUV	Blue Ultraviolet Resistant	Polyester	-40	180	150	-40	82	66	6.35	31.00	No
DUV	Black Ultraviolet Resistant	Polyester	-40	180	150	-40	82	66	6.35	31.00	No
RSM	Red Cut Resistant	Polyester	-40	180	150	-40	82	66	6.35	31.00	Yes
RUV	Red Ultraviolet Resistant	Polyester	-40	180	150	-40	82	66	6.35	31.00	No
SMB	Blue Cut Resistant	Polyester	-40	180	150	-40	82	66	6.35	31.00	Yes
YSM	Yellow Cut Resistant	Polyester	-40	180	150	-40	82	66	6.35	31.00	Yes
YUV	Yellow Ultraviolet Resistant	Polyester	-40	180	150	-40	82	66	6.35	31.00	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Regal and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 20 pitch, 5 ft (1.524 m) length strands.

For chain width information see Rexnord Chain Width Table on page 300.

Open area = 2.3%.

Stainless steel pins are available on a made-to-order basis.


3185 (MTW)



Photo shows 3185 MatTop Chain molded in Black Cut Resistant (BSM) material.

Chain Information

Chain Width			Number of Sprockets	Chain Strength	
desc	in	mm		lbs	N
3.2	3.18	81	1	2,100	9,341

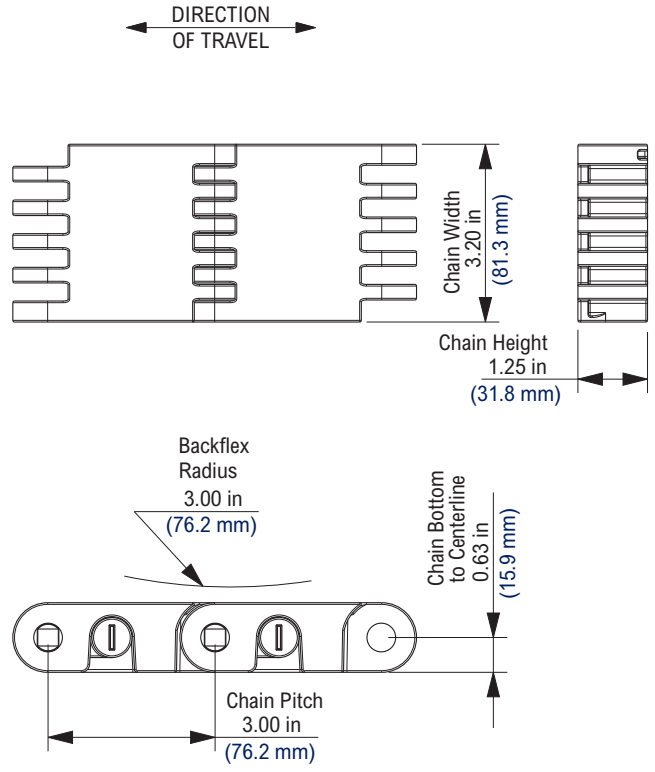

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
			dry	wet		dry	wet				
Standard Materials											
BSM	Black Cut Resistant	Polyester	-40	180	150	-40	82	66	5.67	27.66	No
Non-Standard Materials											
HCAS	High Capacity Anti-Static	Polyester	0	180	NR	-18	82	NR	5.67	27.66	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.


Additional Notes

For chain width information see Rexnord Chain Width Table on page 300. Open area = 2.3%. Stainless steel pins are available on a made-to-order basis.

3185 RubberTop™ (MTW)



Photo shows 3185 (RubberTop) MatTop Chain molded in Black Cut Resistant (BSM) material.

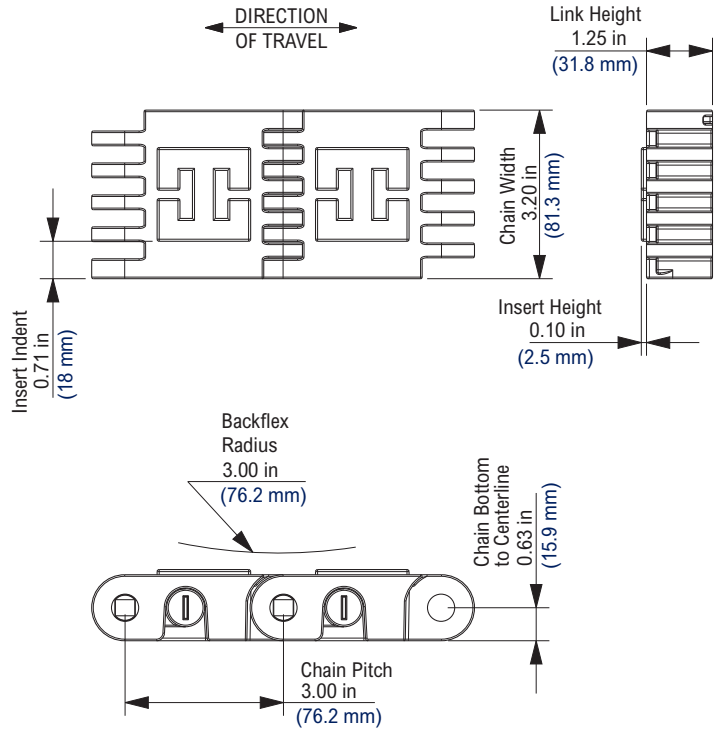

Chain Information

Chain Width			Number of Sprockets	Chain Strength	
desc	in	mm		lbs	N
3.2	3.18	81	1	2,100	9,341

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
			dry	wet		dry	wet				
Standard Materials											
BSM	Black Cut Resistant	Polyester	-40	180	150	-40	82	66	6.26	30.56	No


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, MatTop and RubberTop are trademarks of Regal Rexnord Corporation. All rights reserved.


Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 20 pitch, 5 ft (1.524 m) length strands. For chain width information see Rexnord Chain Width Table on page 300. Open area = 2.3%. Stainless steel pins are available on a made-to-order basis.


KU3120 Nylon Sprocket



KUS3120 Nylon Split Sprocket



SSS3120 Stainless Steel Sprocket



KU3120 Nylon Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight		FDA Approval
						Round				Square				in		mm				
						actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	
9	9	8.77	228.8	8.62	218.9	1 15/16	4	50	100	2	4	50	100	-	-	-	-	2.45	1.11	Yes
10	10	9.71	246.6	9.61	244.1	2 3/16	4	55	100	2	4	55	100	-	-	-	-	3.27	1.48	Yes
11	11	10.65	270.5	10.59	269.0	2 5/16	4 1/2	60	120	2	4	60	120	-	-	-	-	3.92	1.78	Yes


KUS3120 Nylon Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight		FDA Approval
						Round				Square				in		mm				
						actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	
9	9	8.77	228.8	8.62	218.9	1 15/16	4	50	90	1 1/2	2 1/2	40	90	-	-	-	-	2.80	1.27	Yes
10	10	9.71	246.6	9.61	244.1	2 3/16	4	55	100	1 1/2	3	40	100	-	-	-	-	3.50	1.59	Yes
11	11	10.65	270.5	10.59	269.0	2 5/16	4 1/2	60	120	1 1/2	3 1/2	40	120	-	-	-	-	4.47	2.03	Yes


SSS3120 Stainless Steel Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max
10	10	9.71	246.6	9.61	244.1	-	-	-	-	2 1/2	2 1/2	60	60	-	-	-	-	13.08	5.93

KU3180 Nylon Sprocket

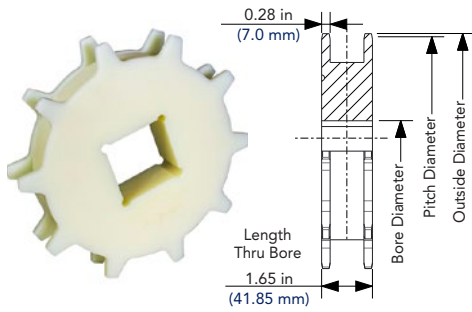

KUS3180 Nylon Split Sprocket

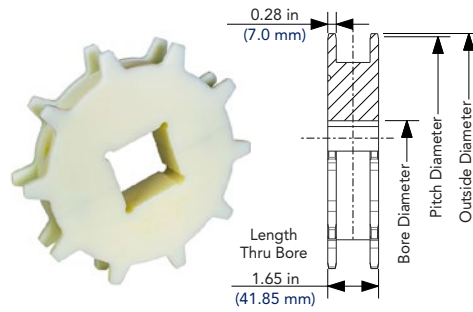

KU3180 H-Style Nylon Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight		FDA Approval		
						Round				Square				in		mm						
						in	mm	min	max	min	max	min	max	min	max	min	max				min	max
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg	
8	8	7.84	199.12	7.62	193.50	1 13/16	3 1/2	45	90	1 1/2	3 1/2	40	90	-	-	-	-	1.63	0.74			Yes
9	9	8.77	222.79	8.62	218.95	1 15/16	4	50	100	1 1/2	4	40	100	-	-	-	-	1.97	0.89			Yes
10	10	9.71	246.59	9.61	244.12	1 15/16	4	55	100	1 1/2	4	40	100	-	-	-	-	2.75	1.25			Yes
11	11	10.65	270.47	10.59	269.06	1 15/16	4 1/2	60	120	1 1/2	4 1/2	40	120	-	-	-	-	3.66	1.66			Yes
12	12	11.59	294.41	11.54	293.98	1 15/16	4 1/2	60	120	1 1/2	4 1/2	40	120	-	-	-	-	4.15	1.88			Yes

KUS3180 H-Style Nylon Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight		FDA Approval		
						Round				Square				in		mm						
						in	mm	min	max	min	max	min	max	min	max	min	max				min	max
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg	
8	8	7.84	199.12	7.62	193.50	1 13/16	3	45	90	1 1/2	3 1/2	40	90	-	-	-	-	1.63	0.74			Yes
9	9	8.77	222.79	8.62	218.95	1 15/16	4	50	100	1 1/2	4	40	100	-	-	-	-	1.97	0.89			Yes
10	10	9.71	246.59	9.61	244.12	1 15/16	4	55	100	1 1/2	4	40	100	-	-	-	-	2.75	1.25			Yes
11	11	10.65	270.47	10.59	269.06	1 15/16	4 1/2	60	120	1 1/2	4 1/2	40	120	-	-	-	-	3.66	1.66			Yes
12	12	11.59	294.41	11.54	293.98	1 15/16	4 1/2	60	120	1 1/2	4 1/2	40	120	-	-	-	-	4.15	1.88			Yes

3120 T1 Pushers (T-Style)


All T1 pusher attachments are molded-to-width and 4 in (101.6 mm) wide.

The T1 designation represents a T-style pusher attachment at a height of 1 in (25.4 mm).

Please indicate if the pusher attachments are required every second pitch, fifth pitch, tenth pitch, etc. when ordering.

T1 Pushers are available in BSM (Black) and YSM (Yellow) materials.

The pusher attachment cannot be modified.

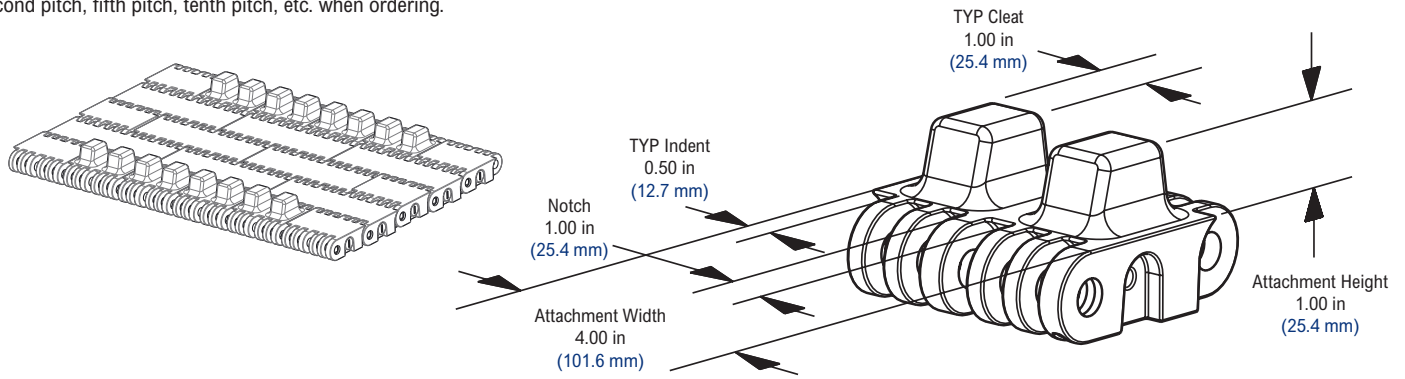

3120 T2 Pushers (T-Style)


All T2 pusher attachments are molded-to-width and 4 in (101.6 mm) wide.

The T2 designation represents a T-style pusher attachment at a height of 2 in (50.8 mm).

Please indicate if the pusher attachments are required every second pitch, fifth pitch, tenth pitch, etc. when ordering.

T2 Pushers are available in BSM (Black) and YSM (Yellow) materials.

The pusher attachment cannot be modified.

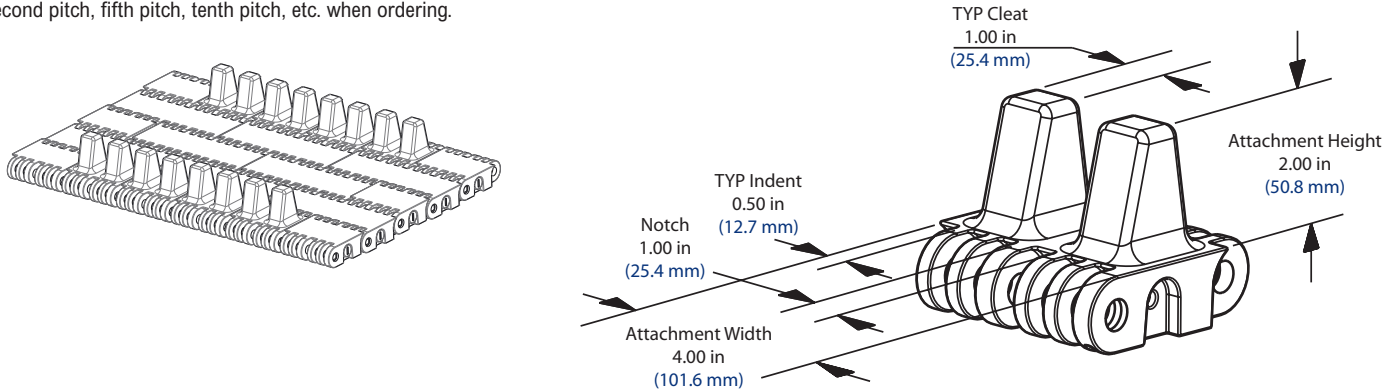

3120 Sideguard Attachment

All sideguard attachments are end links molded to 2 in (50.8 mm) or 4 in (101.6 mm) wide.


SG40 designation represents a robust sideguard at a height of 1.57 in (40 mm).

Please indicate if the pusher attachments are required every pitch, second pitch, fifth pitch, tenth pitch, etc. when ordering.

Sideguards can be assembled in the same row as T pushers.

SG40 Sideguards are available in BSM (Black) and YSM (Yellow) materials.

The sideguard attachment cannot be modified.

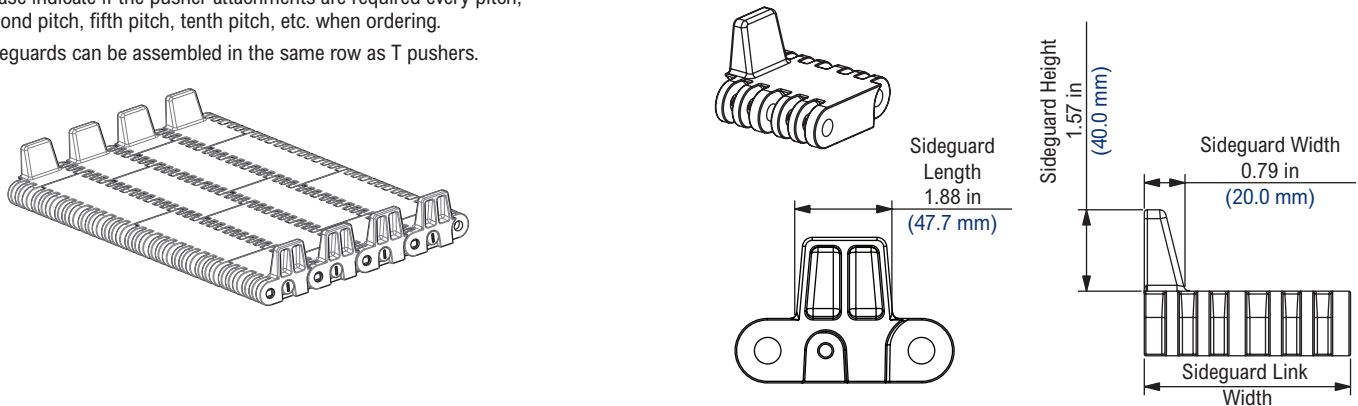


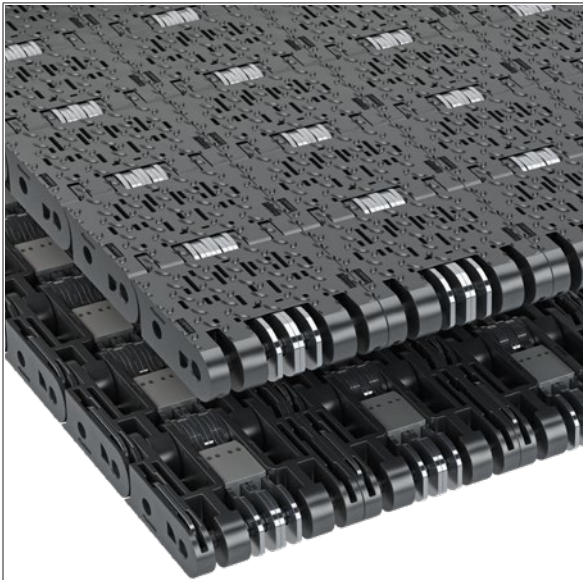


Photo shows 3122HYB MatTop Chain molded in Black (BM) material.

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	3	10
50% - 100%	3	10

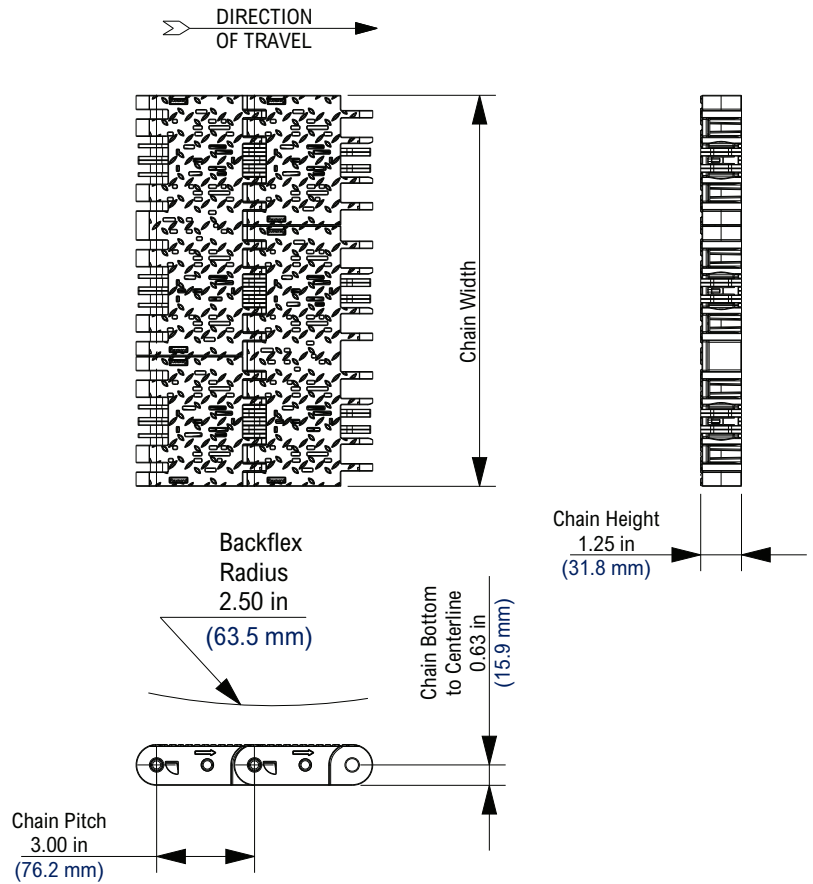

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Non-Standard Materials													
BM	Black Material	Stainless Steel	-40	+180	+150	-40	+82	+66	18,000	262,690	11.61	56.67	Yes
BYM	Black Material with Yellow Ends	Stainless Steel	-40	+180	+150	-40	+82	+66	18,000	262,690	11.61	56.67	Yes
BRM	Black Material with Red Ends	Stainless Steel	-40	+180	+150	-40	+82	+66	18,000	262,690	11.61	56.67	Yes
BDBM	Black Material with Blue Ends	Stainless Steel	-40	+180	+150	-40	+82	+66	18,000	262,690	11.61	56.67	Yes
FR-PA	Flame retardant Nylon (Black)	Stainless Steel	-40	220	NR	-40	104	NR	18,000	262,690	11.33	55.32	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, HYB and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved. Patent Pending


Additional Notes

Open area = 6.70%
Chain strength is listed at room temperature. NR = Not Recommended. Based on H-style Sprocket.

3122HYB™ (MTW)



Photo shows 3122HYB (MTW) MatTop Chain molded in Black (BM) material.

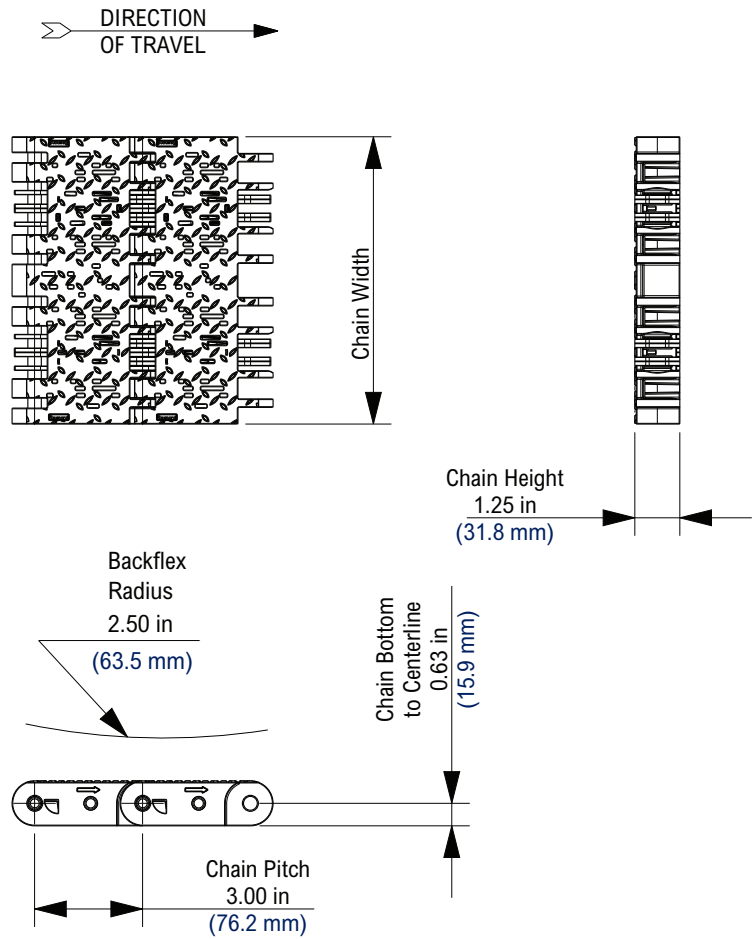

Chain Information

Chain Width desc	Chain Width		Number of Sprockets	Chain Strength	
	in	mm		lbs	N
4	4.0	101.6	1	6,000	26689

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
			dry	wet		dry	wet				
Non-Standard Materials											
BM	Black Material	Stainless Steel	-40	+180	+150	-40	+82	+66	11.61	56.67	Yes
FR-PA	Flame retardant Nylon (Black)	Stainless Steel	-40	+220	NR	-40	+104	NR	11.33	55.32	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, HYB and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved. Patent Pending


Additional Notes

Open area = 6.70%
Chain strength is listed at room temperature. NR = Not Recommended.
Based on H-style Sprocket.

3125HYB™ (MTW)



Photo shows 3125HYB (MTW) MatTop Chain molded in Black (BM) material.

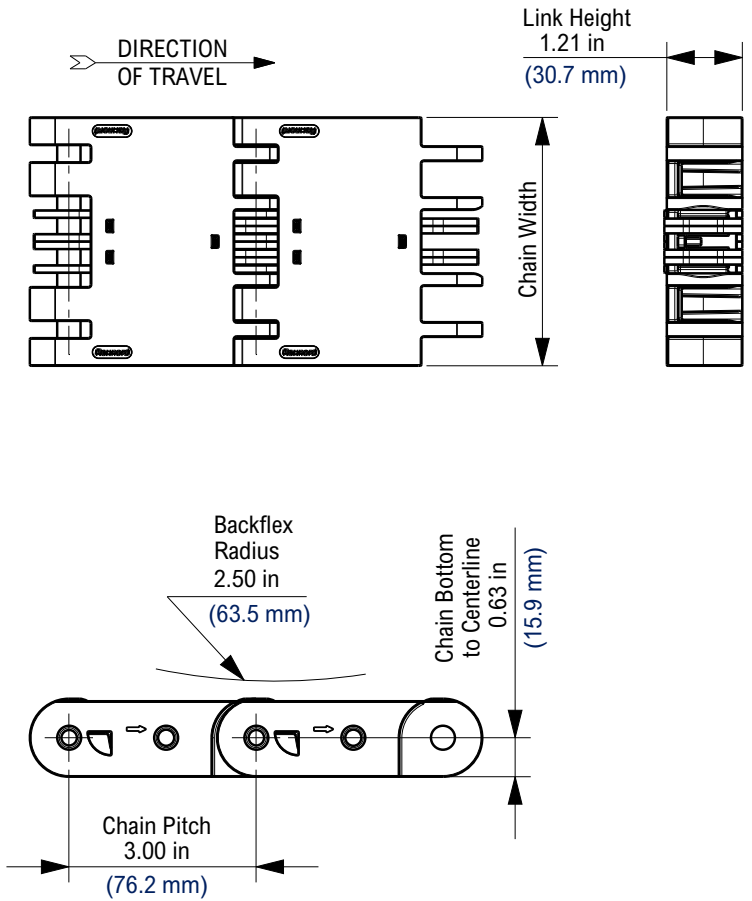

Chain Information

desc	Chain Width		Number of Sprockets	Chain Strength	
	in	mm		lbs	N
4	4.0	101.6	1	6,000	26689

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Non-Standard Materials											
BM	Black Material	Stainless Steel	-40	+180	+150	-40	+82	+66	11.61	56.67	Yes
BYM	Yellow Material	Stainless Steel	-40	+180	+150	-40	+82	+66	11.61	56.67	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, HYB and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.


Additional Notes

Open area = 6.70%
Chain strength is listed at room temperature. NR = Not Recommended.
Based on H-style Sprocket.

3125HYB RubberTop™ (MTW)



Photo shows 3125HYB RubberTop (MTW) MatTop Chain molded in Black (BM) material.

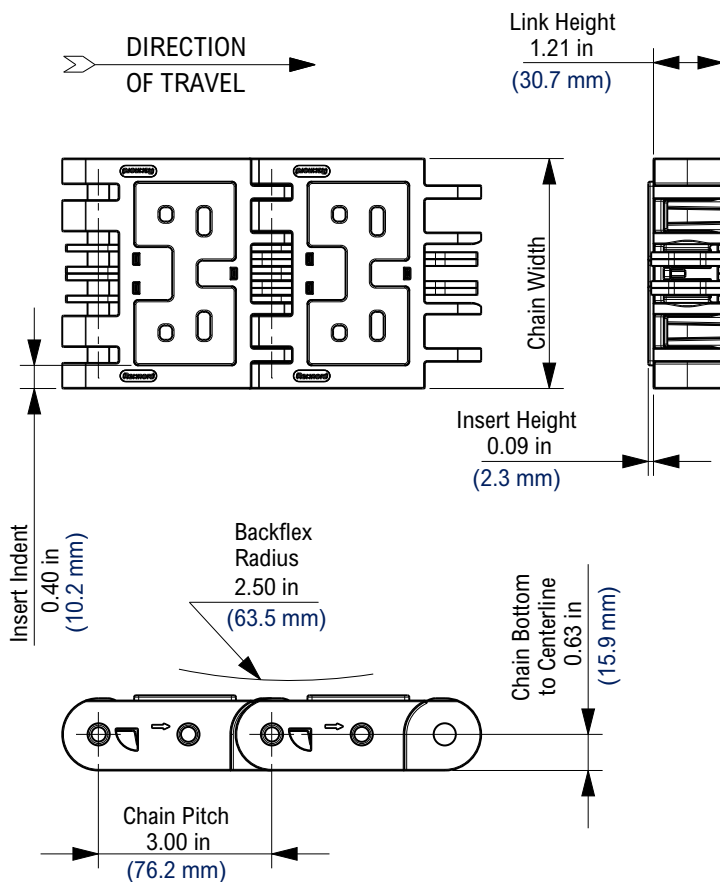

Chain Information

Chain Width desc	Chain Width		Number of Sprockets	Chain Strength	
	in	mm		lbs	N
4	4.0	101.6	1	6,000	26689

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
			dry	wet		dry	wet				
Non-Standard Materials											
BM	Black Material	Stainless Steel	-40	+180	+150	-40	+82	+66	11.61	56.67	Yes


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, HYB and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Open area = 6.70%
 Chain strength is listed at room temperature. NR = Not Recommended.
 Based on H-style Sprocket.

KU3120HYB Thermoplastic Sprocket

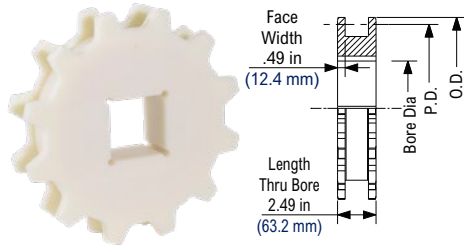

KU3120HYB Thermoplastic Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						min	max	min	max	min	max	min	max	min	max	min	max		
12	N/A	11.591	294.41	11.768	298.91	4	6 1/2	100	165	2 1/2	4 1/2	60	12	-	-	-	-	6.50	2.95
18	N/A	17.276	438.81	17.589	446.76	NR	NR	NR	NR	3	9	75	225	-	-	-	-	16.90	7.67
24	N/A	22.984	583.79	23.359	593.32	NR	NR	NR	NR	3 1/2	10	85	240	-	-	-	-	34.00	15.42

4705


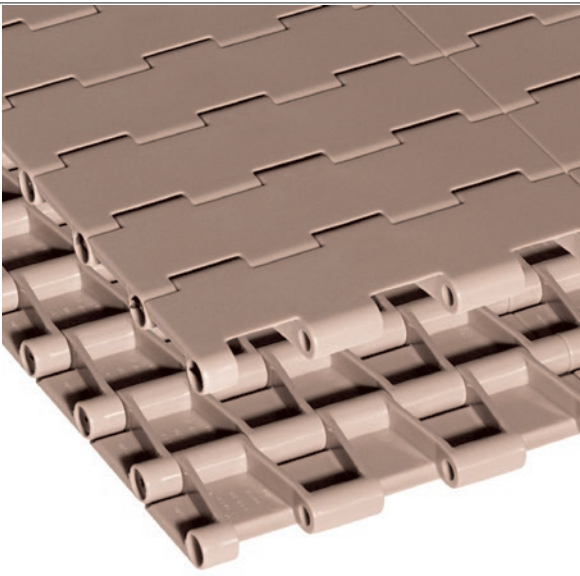


Photo shows 4705 MatTop Chain molded in Low Friction (LF) material.

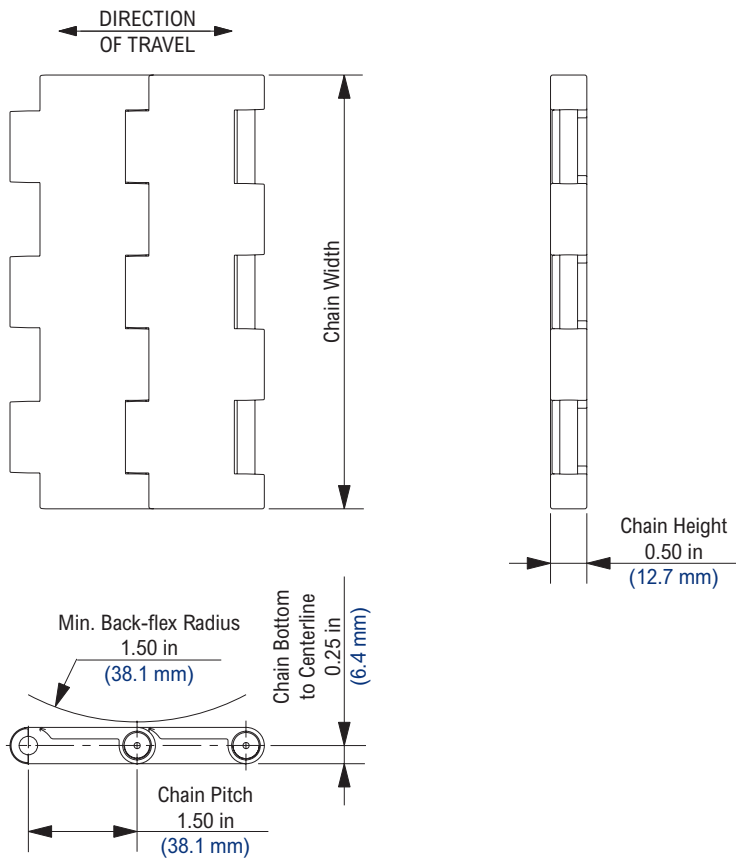

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 80%	2	7
80% - 100%	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
BLT	Blue Low Temperature	Polyethylene	-100	80	80	-73	27	27	400	5,836	1.38	6.74	Yes
HT	High Temperature	Acetal	40	220	212	4	104	100	600	8,754	1.26	6.15	Yes
LF	Low Friction	Acetal	-40	180	150	-40	82	66	1,200	17,508	1.86	9.08	Yes
WHT	White High Temperature	Acetal	40	220	212	4	104	100	600	8,754	1.26	6.15	Yes
Non-Standard Materials													
AS	Anti-Static	Acetal	0	180	NR	-18	82	NR	720	10,505	1.86	9.08	No
BSM	Black Cut Resistant	Acetal	-40	180	150	-40	82	66	1,200	17,508	1.86	9.08	No
BWR	Black Wear Resistant	Acetal	-40	180	NR	-40	82	NR	1,200	17,508	1.86	9.08	No
GTC	Gray Tough Composite	Acetal	0	180	140	-18	82	60	900	13,131	1.52	7.42	No
HUV	High Temp. Ultraviolet Resistant	Acetal	40	220	180	4	104	82	600	8,754	1.26	6.15	No
MR	Melt Resistant	Acetal	-80	220	NR	-62	104	NR	1,200	17,508	1.86	9.08	No
WLT	White Low Temperature	Polyethylene	-100	80	80	-73	27	27	400	5,836	1.38	6.74	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For chain width information see Rexnord Chain Width Table on page 300. Open area = 2.1%. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

4705 TAB


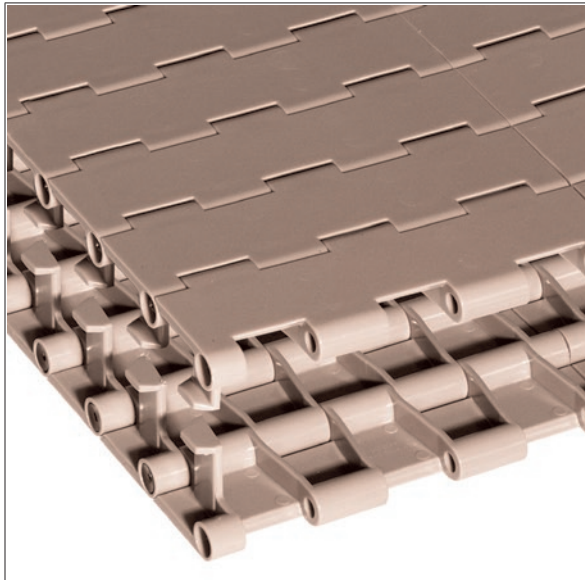


Photo shows 4705 TAB MatTop Chain molded in Low Friction (LF) material.

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 80%	2	7
80% - 100%	4	13

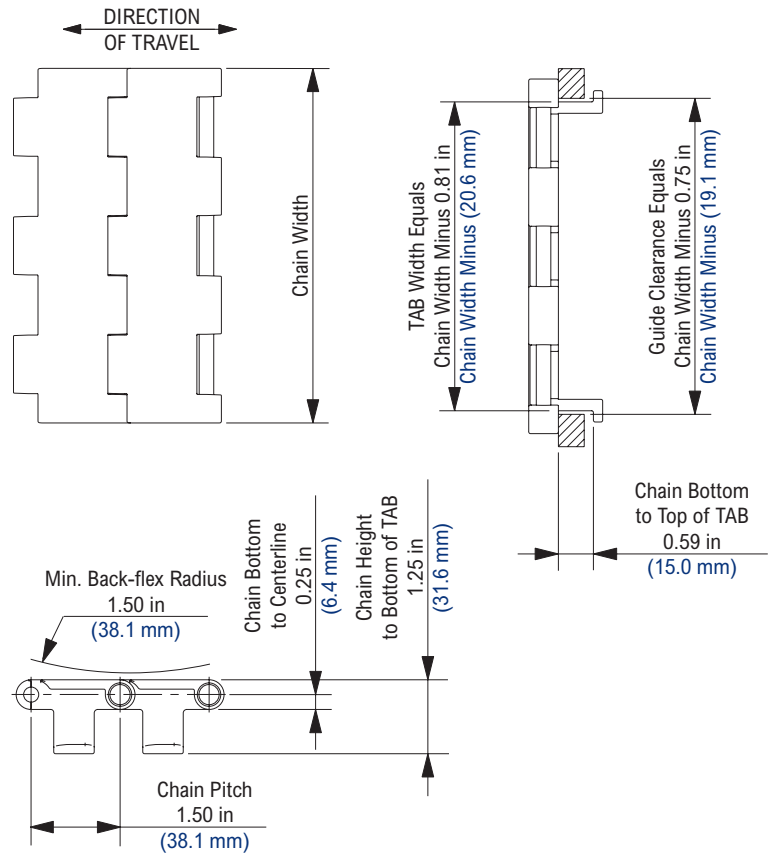

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
LF	Low Friction	Acetal	-40	180	150	-40	82	66	1,200	17,508	1.86	9.08	Yes
Non-Standard Materials													
HT	High Temperature	Acetal	40	220	212	4	104	100	600	8,754	1.26	6.15	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300.

Open area = 2.1%.

Please indicate the desired location of TABs.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

4705V E7



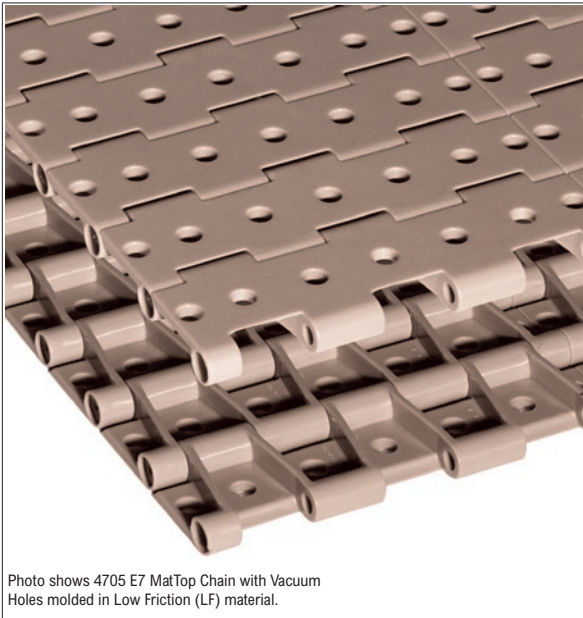


Photo shows 4705 E7 MatTop Chain with Vacuum Holes molded in Low Friction (LF) material.

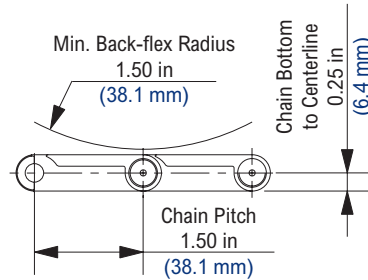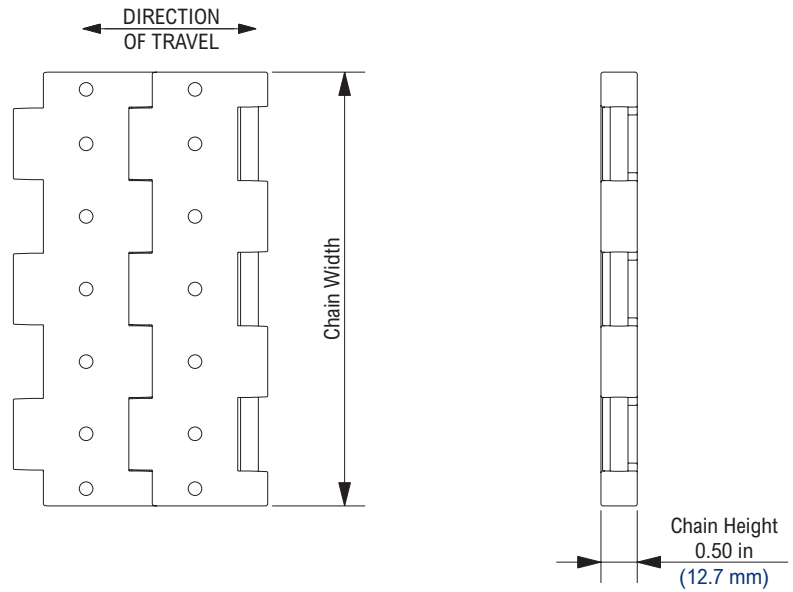

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 80%	2	7
80% - 100%	4	13

Edge Hole Diameter			Center Hole Diameter			Open Area
in	mm	number	in	mm	number	
3/16	4.76	2	9/32	7.14	5	0.1 %
5/16	7.94	2	5/16	7.94	5	8.1 %
7/32	5.56	2	7/32	5.56	5	5.0 %

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
				dry	wet		dry	wet					
Non-Standard Materials													
FR	Flame Retardant	Acetal	0	180	140	-18	82	60	1,020	14,882	1.86	9.08	No
HS	Heat Stabilized	Acetal	-40	220	212	-40	104	100	1,200	17,508	1.86	9.08	No
HT	High Temperature	Acetal	40	220	212	4	104	100	600	8,754	1.26	6.15	Yes
LF	Low Friction	Acetal	-40	180	150	-40	82	66	1,200	17,508	1.86	9.08	Yes
MR	Melt Resistant	Acetal	-80	220	NR	-62	104	NR	1,200	17,508	1.86	9.08	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300.

Open area is dependent on the number of holes and hole diameters.

Number of holes and their location may vary; hole diameters range from 1/16 in (1.6 mm) up to 1/4 in (6.4 mm) diameter in 1/32 in (0.8 mm) increments.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

4705V E14


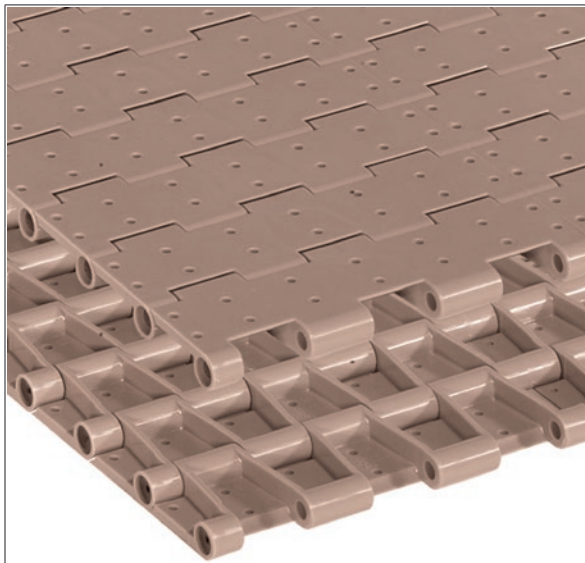


Photo shows 4705 E14 MatTop Chain with Vacuum Holes molded in Low Friction (LF) material.

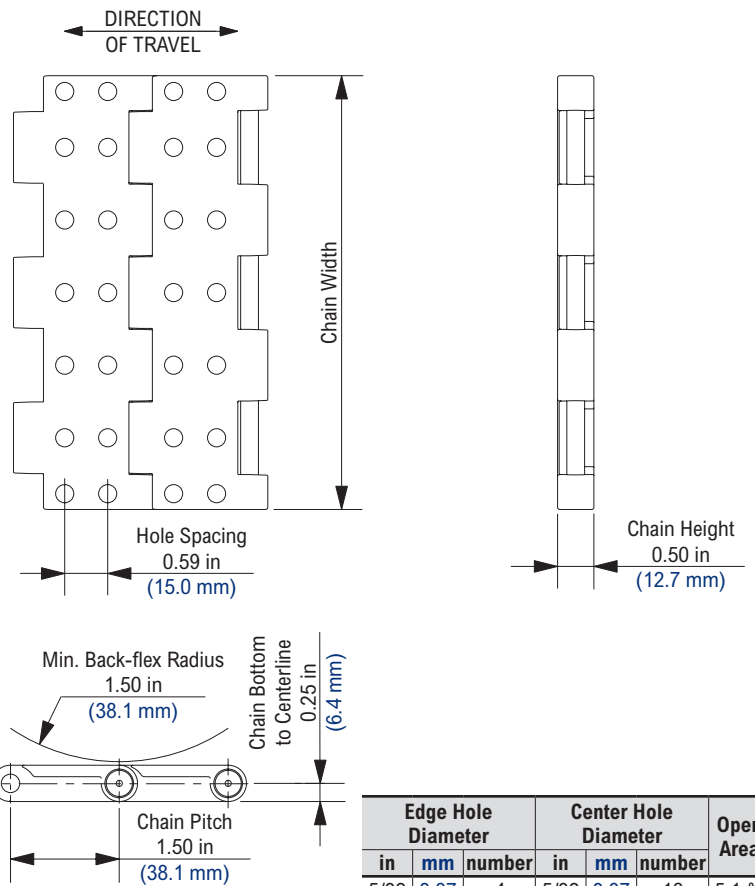

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 80%	2	7
80% - 100%	4	13

Edge Hole Diameter			Center Hole Diameter			Open Area
in	mm	number	in	mm	number	
5/32	3.97	4	5/32	3.97	10	5.1 %
5/32	3.97	4	1/4	6.35	10	8.4 %
1/8	3.18	4	1/8	3.18	10	4.0 %

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Non-Standard Materials													
FR	Flame Retardant	Acetal	0	180	140	-18	82	60	1,020	14,882	1.86	9.08	No
HS	Heat Stabilized	Acetal	-40	220	212	-40	104	100	1,200	17,508	1.86	9.08	No
HT	High Temperature	Acetal	40	220	212	4	104	100	600	8,754	1.26	6.15	Yes
LF	Low Friction	Acetal	-40	180	150	-40	82	66	1,200	17,508	1.86	9.08	Yes
MR	Melt Resistant	Acetal	-80	220	NR	-62	104	NR	1,200	17,508	1.86	9.08	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Regal and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300.

Open area is dependent on the number of holes and hole diameters.

Number of holes and their location may vary; hole diameters range from 1/16 in (1.6 mm) up to 1/4 in (6.4 mm) diameter in 1/32 in (0.8 mm) increments.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

4706


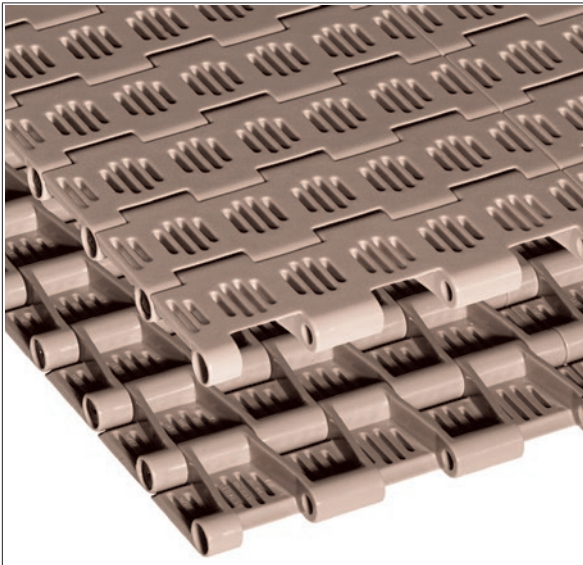


Photo shows 4706 MatTop Chain molded in Low Friction (LF) material.

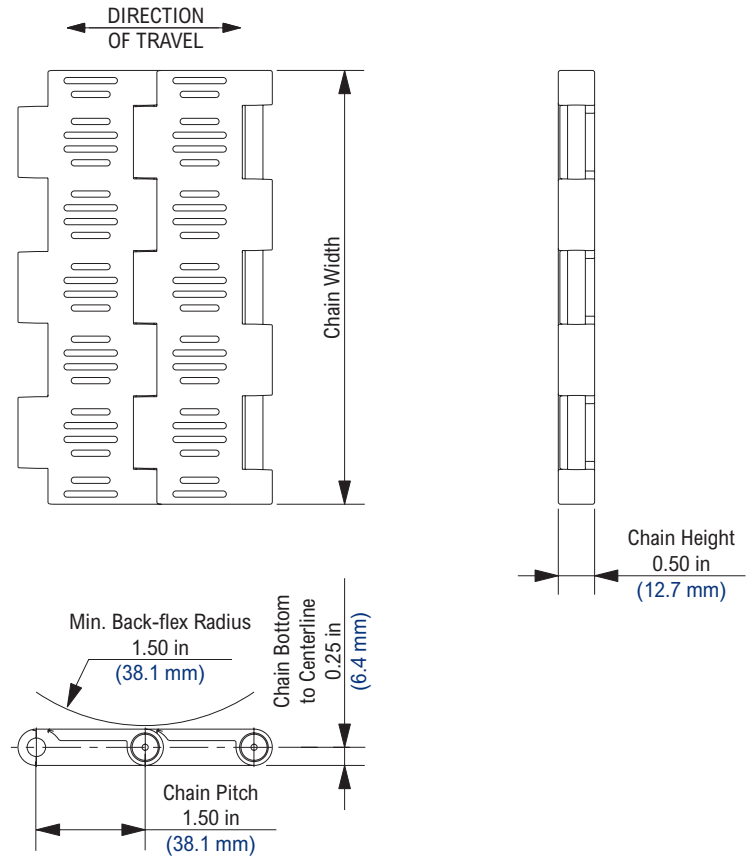

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 80%	2	7
80% - 100%	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HT	High Temperature	Acetal	40	220	212	4	104	100	600	8,754	1.12	5.47	Yes
LF	Low Friction	Acetal	-40	180	150	-40	82	66	1,200	17,508	1.62	7.91	Yes
Non-Standard Materials													
BWR	Black Wear Resistant	Acetal	-40	180	NR	-40	82	NR	1,200	17,508	1.62	7.91	No
FR	Flame Retardant	Acetal	0	180	140	-18	82	60	1,020	14,882	1.62	7.91	No
WHT	White High Temperature	Acetal	40	220	212	4	104	100	600	8,754	1.12	5.47	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For chain width information see Rexnord Chain Width Table on page 300. Open area = 22.1%. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.


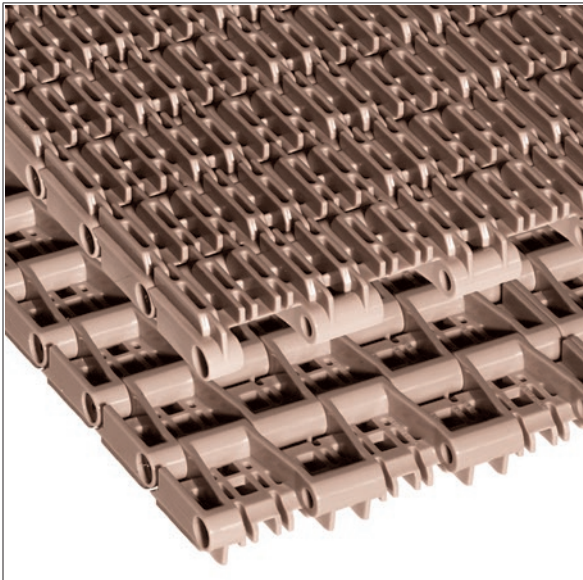


Photo shows 4707 MatTop Chain molded in Low Friction (LF) material.

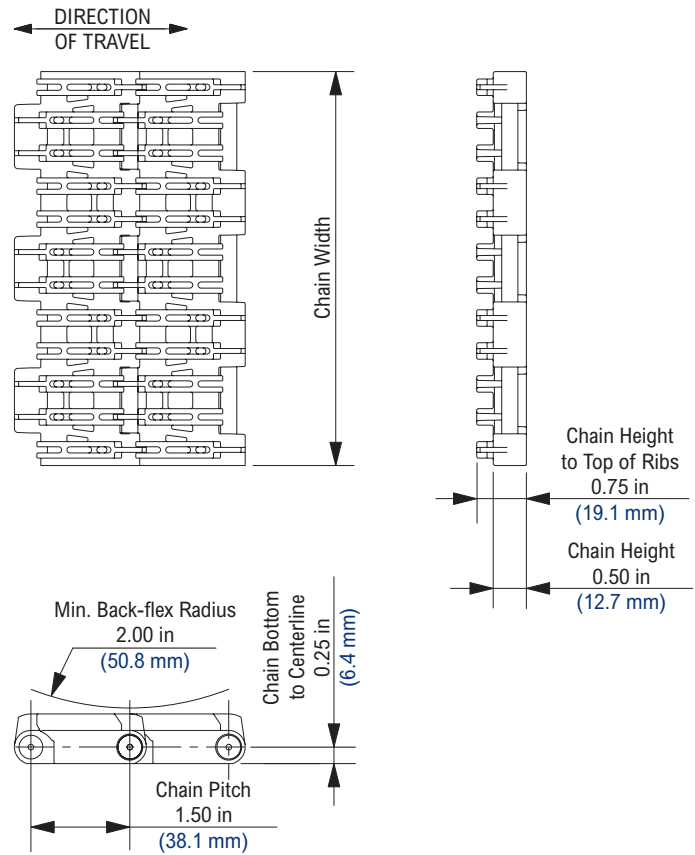

Chain Information

Chain Capacity	Number of Sprockets			
	with Transfer Comb		without Transfer Comb	
	per ft	per m	per ft	per m
0% - 80%	4	13	2	7
80% - 100%	4	13	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HT	High Temperature	Acetal	40	220	212	4	104	100	600	8,754	1.42	6.93	Yes
LF	Low Friction	Acetal	-40	180	150	-40	82	66	1,200	17,508	2.14	10.45	Yes


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patent: 4438838


Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For chain width information see Rexnord Chain Width Table on page 300. Open area = 23.1%. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.


820 Cast Iron Arm Body Sprocket

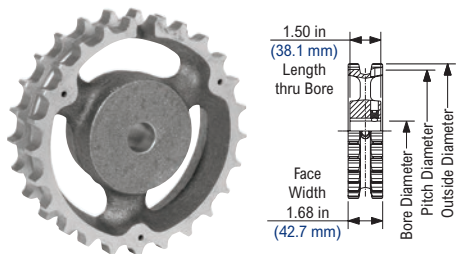

820 Cast Iron Block Body Sprocket

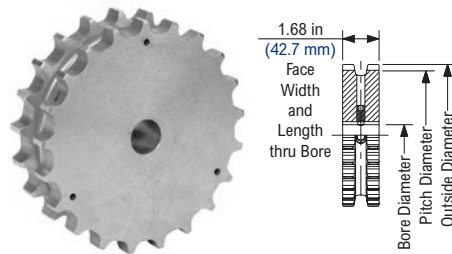

NS820 Thermoplastic Split Sprocket

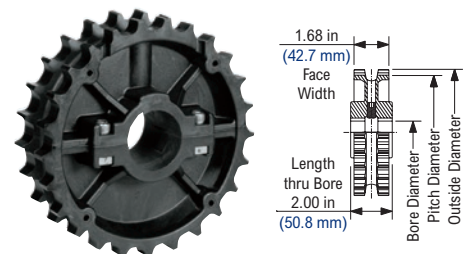

820 Cast Iron Arm Body Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)										Bore Diameter (Round)				Approximate Weight		
			Round				Square						in		mm				
			in		mm		in		mm		in		mm						
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
19	9 1/2	4.622	117.40	4.61	117.1	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.28	1.49
20	10	4.854	123.29	4.86	123.4	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.81	1.73
21	10 1/2	5.089	129.26	5.12	130.0	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	4.63	2.10
22	11	5.324	135.23	5.35	135.9	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.12	2.32
23	11 1/2	5.560	141.22	5.59	142.0	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.31	2.41
24	12	5.796	147.22	5.83	148.1	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.41	2.45
25	12 1/2	6.032	153.21	6.07	154.2	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.57	2.53
27	13 1/2	6.504	165.20	6.56	166.6	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.50	2.95
29	14 1/2	6.978	177.24	7.05	179.1	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.72	3.05
31	15 1/2	7.452	189.28	7.53	191.3	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.86	3.11
41	20 1/2	9.826	249.58	9.93	252.2	1	2 1/2	20	65	-	-	-	-	1	2 1/2	20	65	16.23	7.36

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

820 Cast Iron Block Body Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)										Bore Diameter (Round)				Approximate Weight		
			Round				Square						in		mm				
			in		mm		in		mm		in		mm						
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
13	6 1/2	3.228	81.99	3.11	79.0	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	2.45	1.11
15	7 1/2	3.688	93.68	3.63	92.2	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.57	1.62
17	8 1/2	4.152	105.46	4.12	104.6	1	1 11/16	20	40	-	-	-	-	1	1 11/16	20	40	4.83	2.19
21	10 1/2	5.089	129.26	5.12	130.0	1	2 11/16	20	70	-	-	-	-	1	2 11/16	20	70	4.63	2.10
25	12 1/2	6.032	153.21	6.07	154.2	1	3 7/16	20	90	-	-	-	-	1	3 7/16	20	90	5.57	2.53


Shaft-ready round bore sprockets are shipped with keyway and setscrew.

NS820 Thermoplastic Split Sprocket Information


Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)										Bore Diameter (Idler)				Approximate Weight		
			Round				Square						in		mm				
			in		mm		in		mm		in		mm						
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
21	10 1/2	5.089	129.26	5.12	130.0	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.01	0.46
23	11 1/2	5.560	141.22	5.59	142.0	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.19	0.54
25	12 1/2	6.032	153.21	6.07	154.2	1	2	25	50	-	-	-	-	1	2	25	50	1.39	0.63
27	13 1/2	6.504	165.20	6.56	166.6	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.76	0.80

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.


N4700 Thermoplastic Sprocket

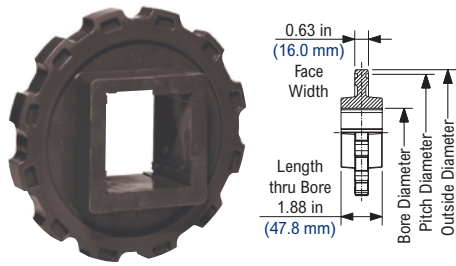

N5700 Thermoplastic Sprocket

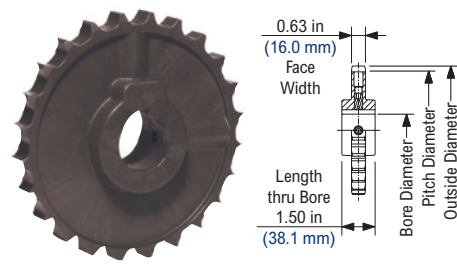

NS5700 Thermoplastic Split Sprocket

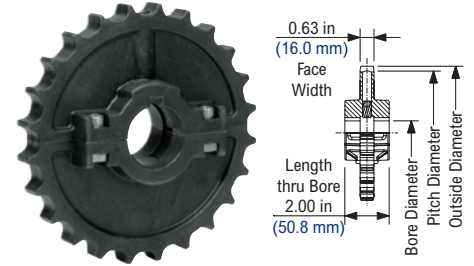

N4700 Thermoplastic Sprocket Imperial Information

Number of Teeth		Pitch Diameter		Outside Diameter		Imperial Square Bore Diameter				Approximate Weight	
actual	effect	in	mm	in	mm	in				lbs	kg
12	12	5.796	147.22	5.75	146.1	1 1/2				0.49	0.22
21	21	10.064	255.63	10.08	256.0	-				0.77	0.35

N4700 Thermoplastic Sprocket Metric Information

Number of Teeth		Pitch Diameter		Outside Diameter		Metric Square Bore Diameter				Approximate Weight	
actual	effect	in	mm	in	mm	mm				lbs	kg
12	12	5.796	147.22	5.75	146.1	65				0.49	0.22
21	21	10.064	255.63	10.08	256.0	65				0.77	0.35

N5700 Thermoplastic Sprocket Imperial Information

Number of Teeth		Pitch Diameter		Outside Diameter		Imperial Round Bore Diameter					Approximate Weight	
actual	effect	in	mm	in	mm	in					lbs	kg
24	12	5.796	147.22	5.80	147.3	1	1 3/16	1 1/4	1 7/16	1 1/2	1.01	0.46

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

N5700 Thermoplastic Sprocket Metric Information

Number of Teeth		Pitch Diameter		Outside Diameter		Metric Round Bore Diameter				Approximate Weight	
actual	effect	in	mm	in	mm	mm				lbs	kg
24	12	5.796	147.22	5.80	147.3	25	30	35	35	1.01	0.46

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

NS5700 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight					
						Round				Square				in						mm			
						in		mm		in		mm		min		max				min		max	
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg				
21	10 1/2	5.089	129.26	5.12	130.0	1	1 1/2	25	35	-	-	-	-	1	1 1/2	25	35	0.80	0.36				
23	11 1/2	5.560	141.22	5.59	142.0	1	1 1/2	25	35	-	-	-	-	1	1 1/2	25	35	0.91	0.41				
24	12	5.796	147.22	5.81	147.6	1	1 1/2	25	35	-	-	-	-	1	1 1/2	25	35	1.01	0.46				
25	12 1/2	6.032	153.21	6.07	154.2	1	1 15/16	25	50	-	-	-	-	1	1 15/16	25	50	1.04	0.47				
27	13 1/2	6.504	165.20	6.57	166.9	1	1 1/2	25	35	-	-	-	-	1	1 1/2	25	35	1.04	0.47				

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft. 24 tooth sprocket has a Length thru Bore of 1.62 in (41.1 mm).

Pusher Attachment (F-Style)


All pusher attachments are molded 6 in (152.4 mm) wide and can be cut down to a minimum height of 1/4 in (6.35 mm).

The F2 designation represents an F-style pusher attachment at a height of 2 in (50.8 mm).

Please indicate if pusher attachments are required every pitch, every second pitch, etc. when ordering. Also, indicate if indents are required in the center, on one or both sides of the chain.

For example, "I would like F2 pusher attachments every 8th pitch indented 3/4 in on both sides of the chain."

For 4705 and 4706 chains only.

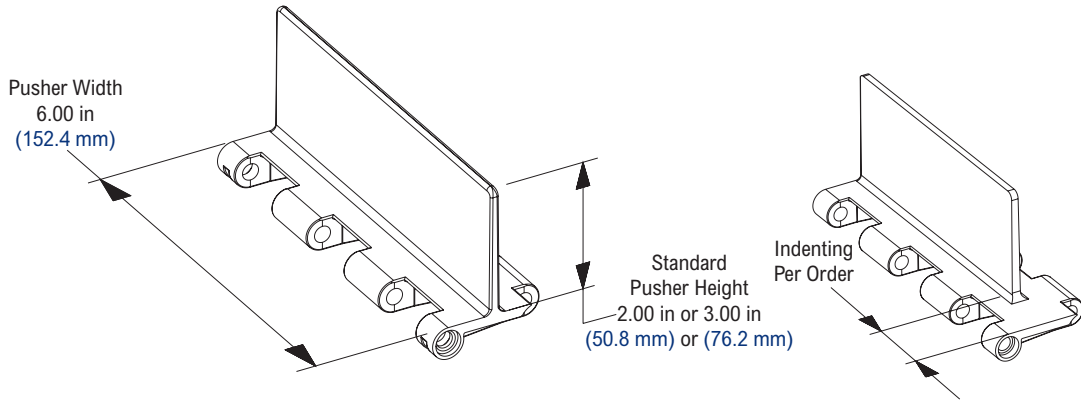


Sideguard Attachment


Please indicate if sideguard attachments are required down one or both sides of the chain when ordering.

Sideguard attachments can be cut down to a minimum height of 1 in (25.4 mm).

If the chain is ordered with both sideguard and pusher attachments, the sideguard attachment will be furnished the same height as the pusher attachment.

Please contact Regal Rexnord if any deviations from this standard are required.

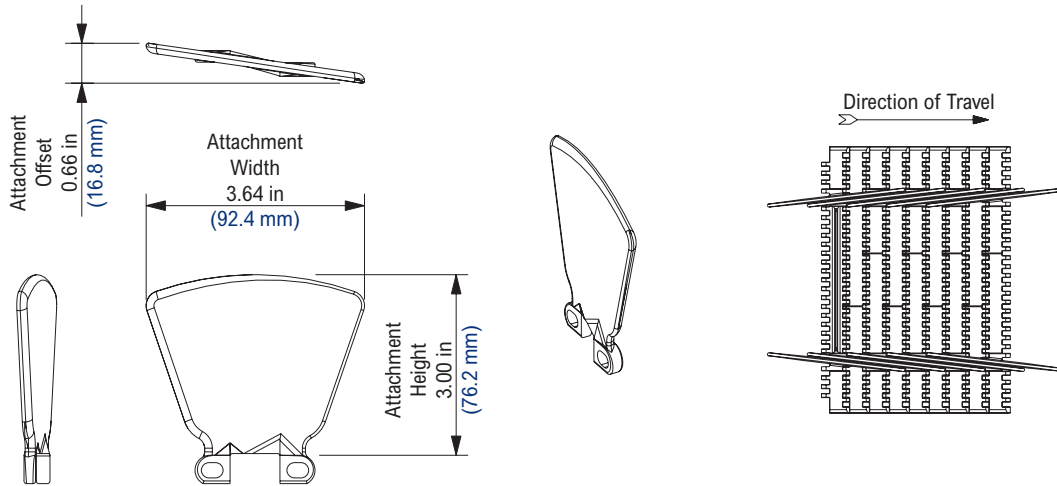

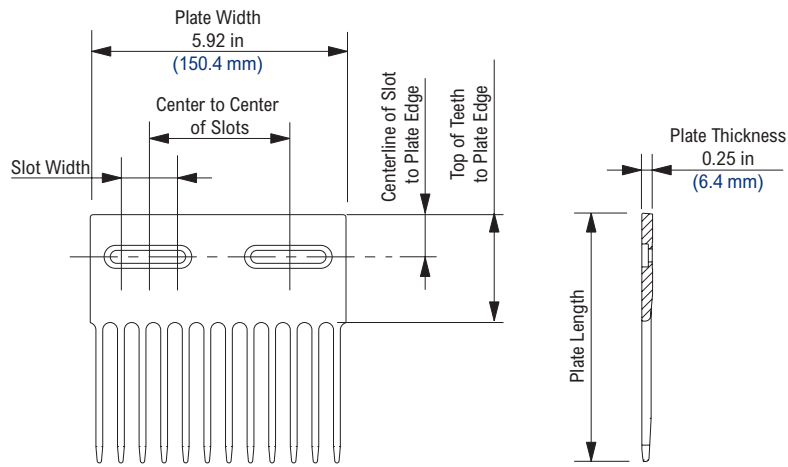


4707/5997/6997 Transfer Comb Kit

Transfer Comb Kit Number	Transfer Plate Part Number	Screw Part Number	Slot Caps Part Number	Plate Length		Slot Width		Centerline of Slot to Plate Edge		Top of Teeth to Plate Edge		Center to Center of Slots		Approximate Weight	
				in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
10131495	10074648	10075965	10069160	6.18	157.0	1.50	38.1	1.00	25.4	4.40	111.8	3.25	82.6	0.48	0.22
10131813	10070598	10075965	10075964	5.75	146.1	0.75	19.1	1.00	25.4	2.24	56.9	4.00	101.6	0.24	0.11
10131834	10075632	10075965	10069160	8.50	215.9	1.50	38.1	2.00	50.8	3.50	88.9	3.25	82.6	0.28	0.13
10131838	10069161	10075965	10069160	7.50	190.5	1.50	38.1	1.00	25.4	2.50	63.5	3.25	82.6	0.30	0.14

The 10070598 transfer comb is molded in white acetal. The 10075632 and 10069161 transfer combs are molded in a proprietary black internally lubricated high temperature material.

Transfer comb kits are supplied with 1/4 x 20 screws and slot caps.

For 4707 and 5997 chains only.

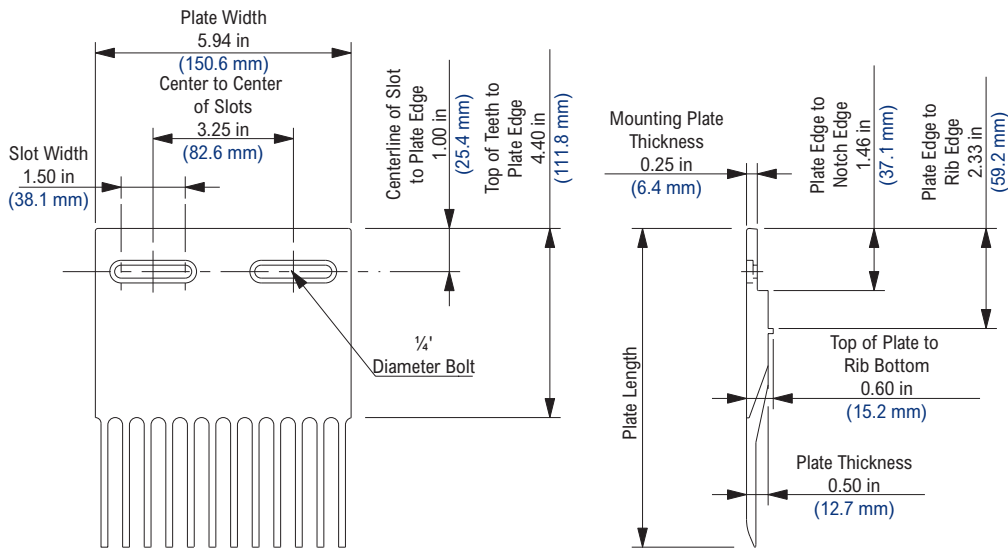

4707/5997/6997 Heavy Duty Transfer Comb Kit


Transfer Comb Kit Number	Transfer Plate Part Number	Screw Part Number	Slot Caps Part Number	Plate Length		Slot Width		Centerline of Slot to Plate Edge		Top of Teeth to Plate Edge		Center to Center of Slots		Approximate Weight	
				in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
10131497	10074649	10075965	10069160	7.95	201.9	1.50	38.1	1.00	25.4	4.40	111.8	3.25	82.6	0.53	0.24
10131499	10071978	10075965	10069160	7.95	201.9	1.50	38.1	1.00	25.4	4.40	111.8	3.25	82.6	0.53	0.24

Transfer combs are molded in a proprietary black internally lubricated high temperature material.

Transfer comb kits are supplied with 1/4 x 20 screws and slot caps.

For 5997, 4707 and 9200 chains only.

The 10071978 transfer comb has the bottom rib removed.

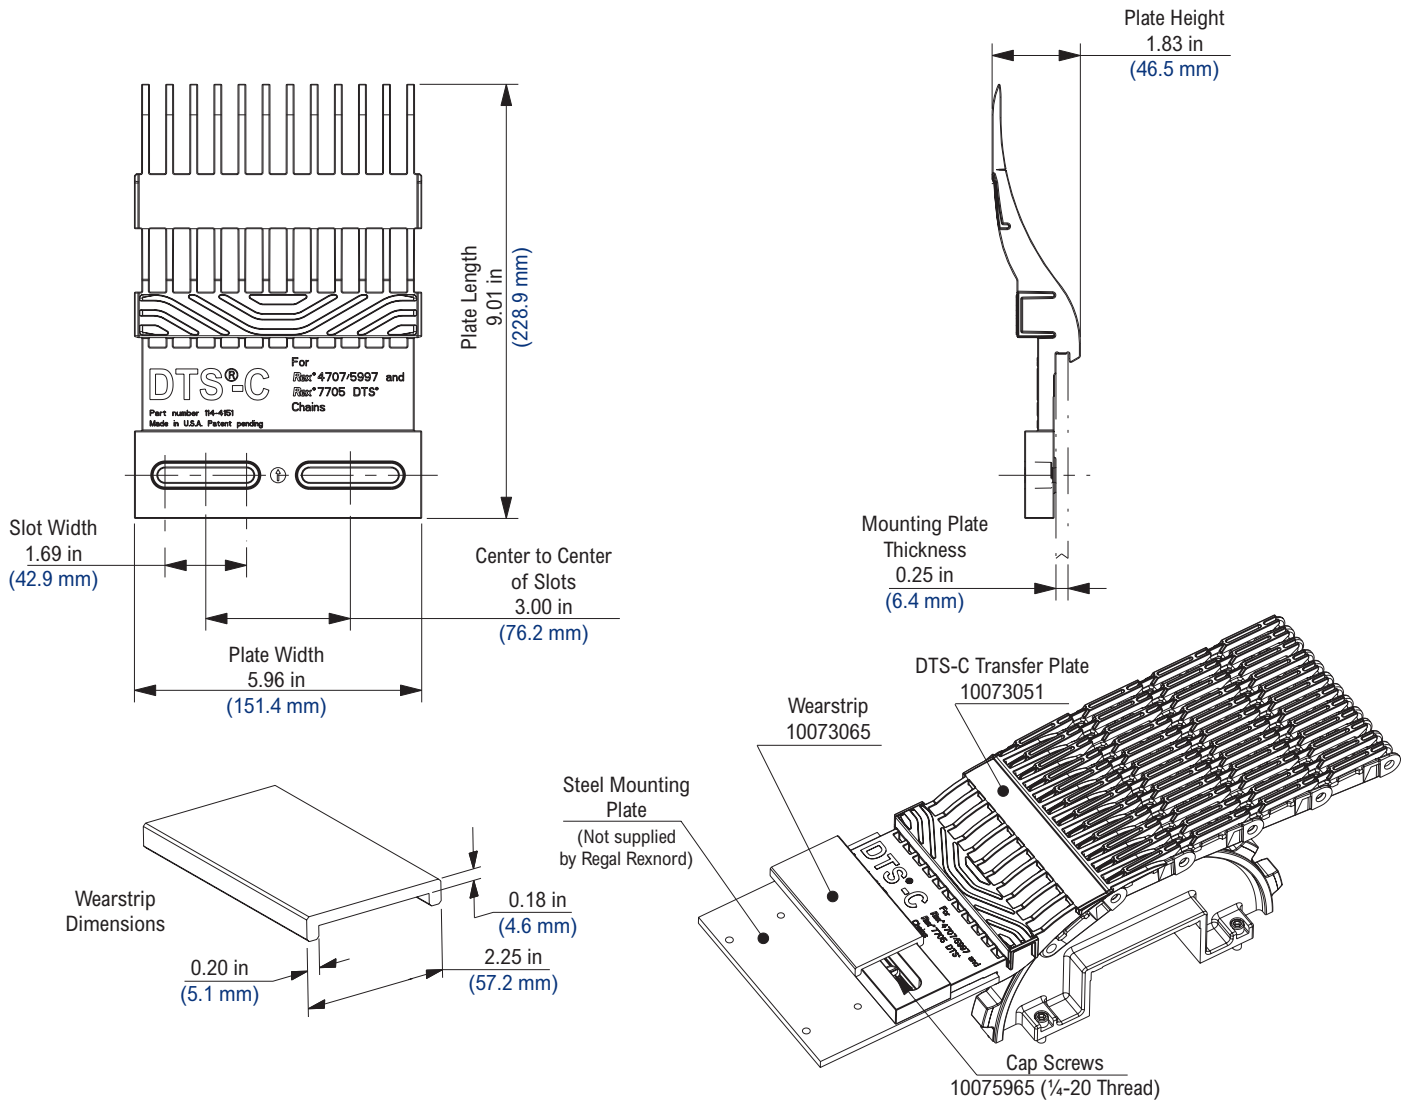

DTS-C Component Part Numbers


Component Description	Kit Part Number	Comb Part Number	Screw Part Number	Wearstrip Part Number (10 ft length)	For Use With		
					Raised Rib Chain	DTS Chain	Takeway Chain
DTS-C Comb Kit	10131580	10073051	10075965	NA	4707, 5997 or 6997	7705DTS-450	7705, 7706 or 1055
Wearstrip	NA			10073065			

Each kit includes one comb and two mounting screws.

Wearstrip is sold in 10 ft (3.048 m) lengths and is sold separately.



Photo shows 5705 MatTop Chain molded in High Performance (HP) material.

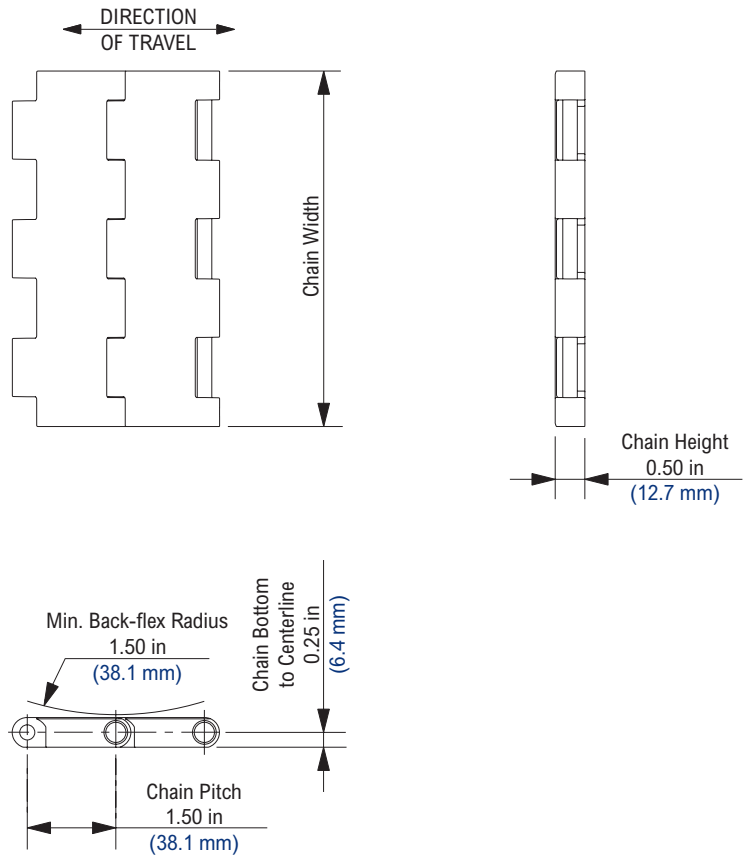

Chain Information

Chain Capacity	Number of Sprockets			
	820 Series		4700/5700 Series	
	per ft	per m	per ft	per m
0% - 50%	2	7	2	7
50% - 100%	4	13	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HP™	High Performance	Polyester	-40	180	150	-40	82	66	1,200	17,508	1.86	9.08	Yes
LF	Low Friction	Polyester	-40	180	150	-40	82	66	1,200	17,508	1.86	9.08	Yes
Non-Standard Materials													
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	720	10,505	1.86	9.08	No
BLT	Blue Low Temperature	Polyethylene	-100	80	80	-73	27	27	400	5,836	1.38	6.74	Yes
MR	Melt Resistant	Polyester	-80	220	NR	-62	104	NR	1,200	17,508	1.86	9.08	No
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	1,200	17,508	1.86	9.08	Yes
WHT	White High Temperature	Polyester	40	220	212	4	104	100	600	8,754	1.26	6.15	Yes
WLT	White Low Temperature	Polyethylene	-100	80	80	-73	27	27	400	5,836	1.38	6.74	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, MatTop, Platinum Series X and PSX are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For chain width information see Rexnord Chain Width Table on page 300. Open area = 2.1%. Stainless steel pins are available on a made-to-order basis. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

5705 SuperGrip


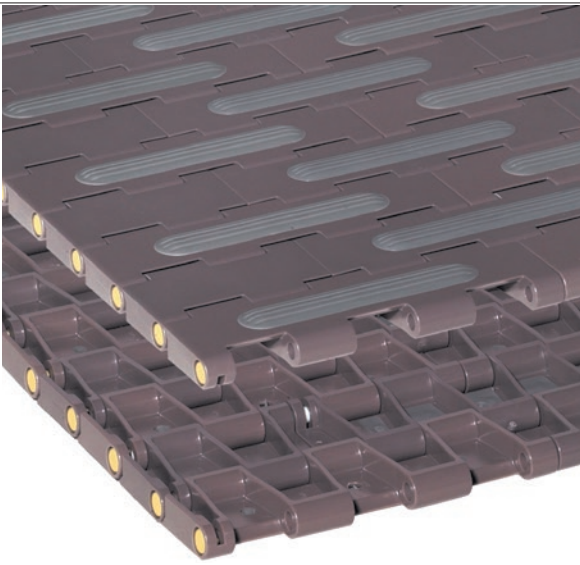


Photo shows 5705 SuperGrip MatTop Chain with High Friction Inserts molded in High Performance (HP) material.

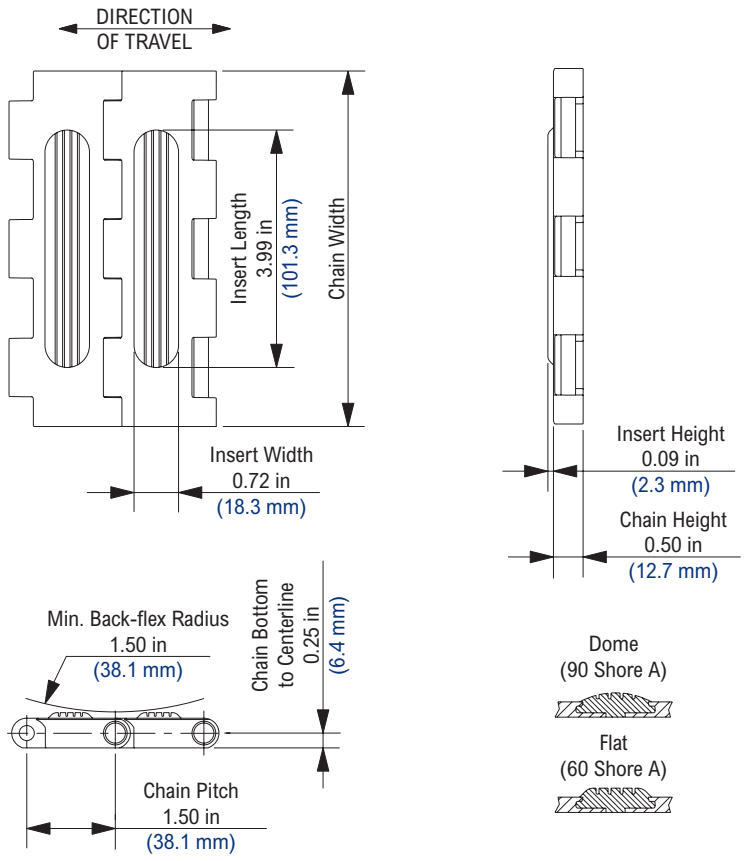

Chain Information

Chain Capacity	Number of Sprockets			
	820 Series		4700/5700 Series	
	per ft	per m	per ft	per m
0% - 50%	2	7	2	7
50% - 100%	4	13	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
				dry	wet		dry	wet					
Standard Materials													
HP™	High Performance	Polyester	-40	180	150	-40	82	66	1,200	17,508	1.86	9.08	No
Non-Standard Materials													
HT	High Temperature	Polyester	40	220	212	4	104	100	600	8,754	1.26	6.15	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For chain width information see Rexnord Chain Width Table on page 300. Open area = 2.1%. Stainless steel pins are available on a made-to-order basis. Inserts may be spaced every pitch, every second pitch, etc. FDA approval only applies to 60 Shore A inserts. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

5705 (MTW)


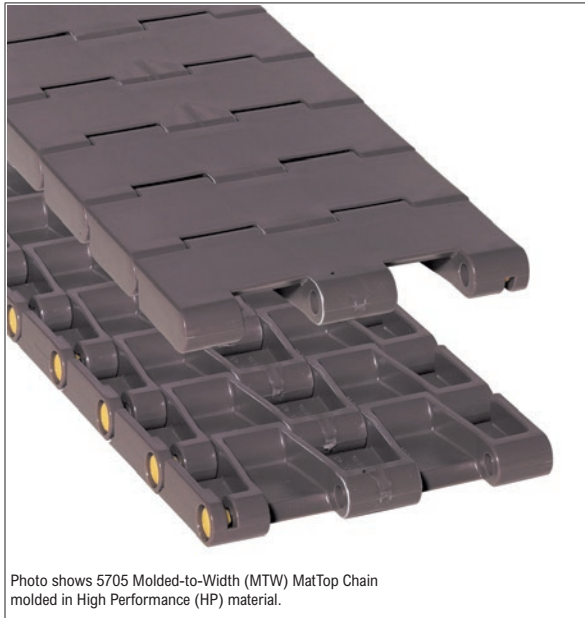


Photo shows 5705 Molded-to-Width (MTW) MatTop Chain molded in High Performance (HP) material.

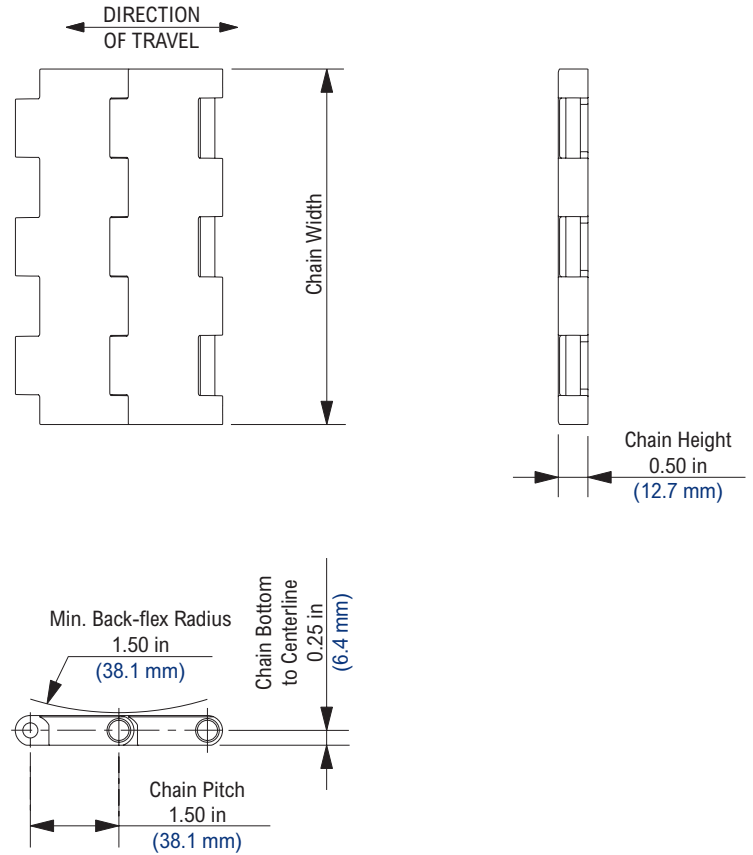

Chain Information

desc	Chain Width		Number of Sprockets		Chain Strength	
	in	mm	820	4700/5700	lbs	N
3 1/4	3.25	82.6	NR	1	420	1,868
4 1/2	4.50	114.3	NR	1	420	1,868
6	6.00	152.4	2	2	600	2,669
7 1/2	7.50	190.5	NR	2	800	3,560
15	15.00	381.0	3	3	1,600	7,100

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft ²	kg/m ²	
			min	max		min	max				
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	1.86	9.08	Yes
Non-Standard Materials											
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	1.86	9.08	No
BWR	Black Wear Resistant	Polyester	-40	180	NR	-40	82	NR	1.86	9.08	No
Dry-PT™	Dry PET Low Friction	Polyester	-40	180	150	-40	82	66	1.86	9.08	Yes
HT	High Temperature	Polyester	40	220	212	4	104	100	1.26	6.15	Yes
LF	Low Friction	Polyester	40	180	150	4	82	66	1.86	9.08	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	1.86	9.08	Yes
WX	Green Abrasion Resistant Polyamide	Acetal	-40	220	NR	-40	104	NR	1.86	9.08	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, Dry-PT, Platinum Series X and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 80 pitch, 10 ft (3.048 m) length strands.

Open area = 2.1%.

Stainless steel pins are available on a made-to-order basis.


Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

5705 (MTW) PT



Photo shows 5705 Molded-to-Width (MTW) MatTop Chain with Positrack (PT) Tracking Guides molded in High Performance (HP) material.

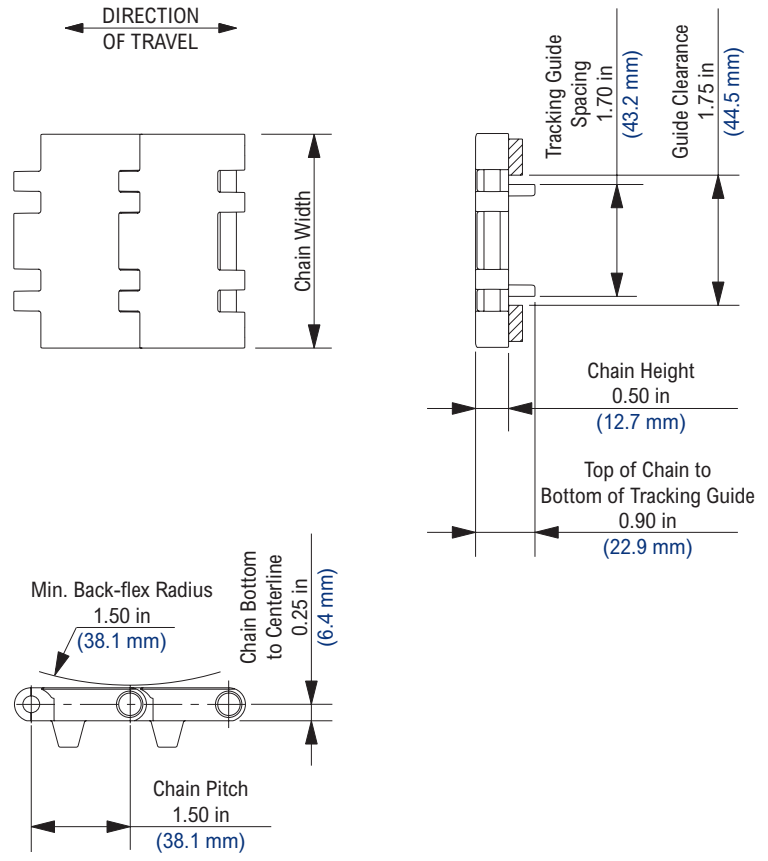

Chain Information

desc	Chain Width		Number of Sprockets		Chain Strength	
	in	mm	820	4700/5700	lbs	N
3 1/4	3.25	82.6	NR	1	420	1,868
4 1/2	4.50	114.3	NR	1	420	1,868

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	1.86	9.08	Yes
Non-Standard Materials											
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	1.86	9.08	No
Dry-PT™	Dry PET Low Friction	Polyester	-40	180	150	-40	82	66	1.86	9.08	Yes
LF	Low Friction	Polyester	-40	180	150	-40	82	66	1.86	9.08	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	1.86	9.08	Yes
WX	Green Abrasion Resistant Polyamide	Acetal	-40	220	NR	-40	104	NR	1.86	9.08	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, MatTop, Dry-PT, Platinum Series X and PSX are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 80 pitch, 10 ft (3.048 m) length strands. Open area = 2.1%. Stainless steel pins are available on a made-to-order basis. Same guide clearance as Rexnord 815, 820 and 831 TableTop Chain. Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.


5705 DTS™ PT



Photo shows 5705 MatTop Chain with Dynamic Transfer System (DTS) with Positrack™ (PT) Tracking Guides molded in High Performance (HP) material.

Chain Information

Chain Width			Number of Sprockets		Chain Strength	
desc	in	mm	820	4700/5700	lbs	N
4 1/2	6.80	172.7	NR	1	420	1,868

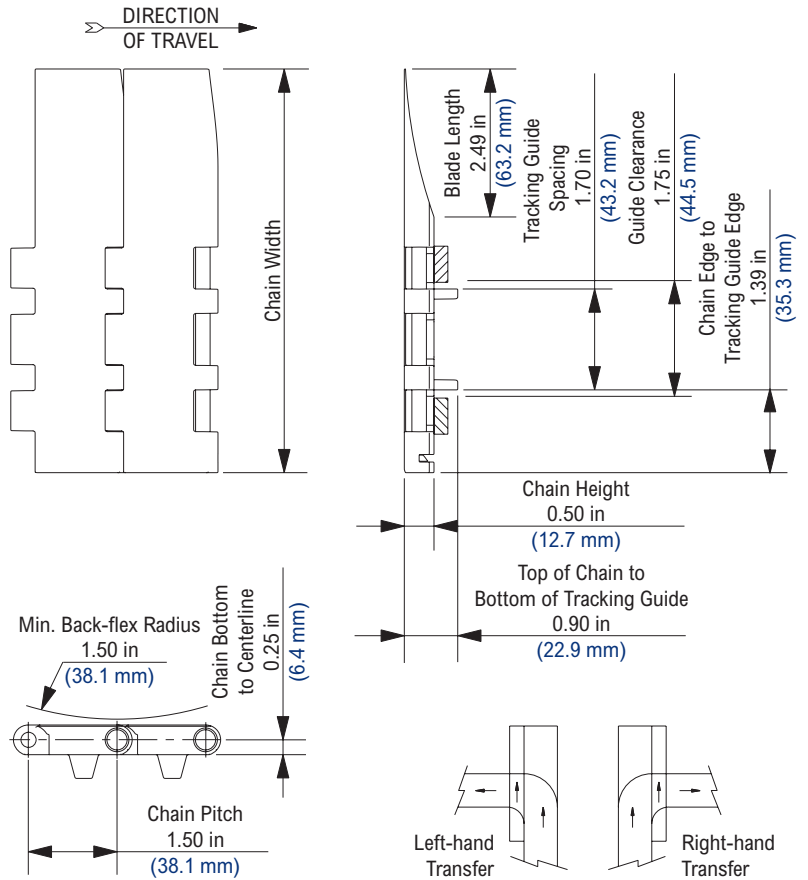

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	1.86	9.08	Yes
Non-Standard Materials											
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	1.86	9.08	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, MatTop, TableTop, DynamicTransfer System, DTS, Platinum Series X and PSX are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patent: 5634550


Additional Notes

Stocked in 80 pitch, 10 ft (3.048 m) length strands. Available in both left-hand and right-hand modules. Same guide clearance as Rexnord 815, 820 and 831 TableTop™ Chain. Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

5706



Photo shows 5706 MatTop Chain molded in High Performance (HP) material.

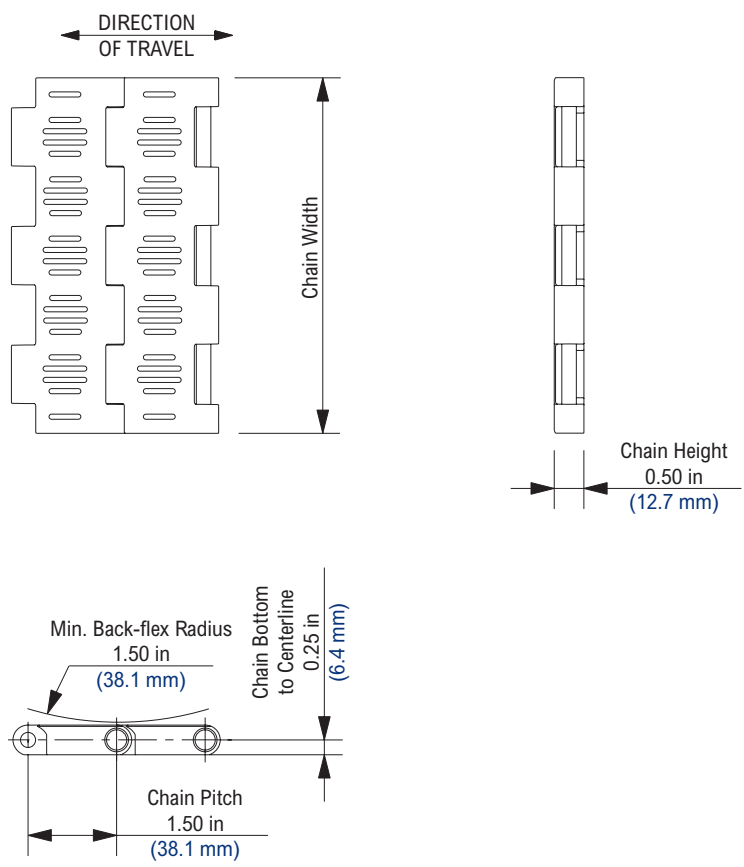

Chain Information

Chain Capacity	Number of Sprockets			
	820 Series		4700/5700 Series	
	per ft	per m	per ft	per m
0% - 50%	2	7	2	7
50% - 100%	4	13	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HP™	High Performance	Polyester	-40	180	150	-40	82	66	1,200	17,508	1.86	9.08	Yes
Non-Standard Materials													
HS	Heat Stabilized	Polyester	-40	220	212	-40	104	100	1,200	17,508	1.62	7.91	No
LF	Low Friction	Polyester	-40	180	150	-40	82	66	1,200	17,508	1.62	7.91	Yes
WX	Green Abrasion Resistant Polyamide	Acetal	-40	220	NR	-40	104	NR	1,200	17,508	1.86	9.08	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.


Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 80 pitch, 10 ft (3.048 m) length strands. Open area = 22.1%. Stainless steel pins are available on a made-to-order basis. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

5706 (MTW)



Photo shows 5706 Molded-to-Width (MTW) MatTop Chain molded in High Performance (HP) material.

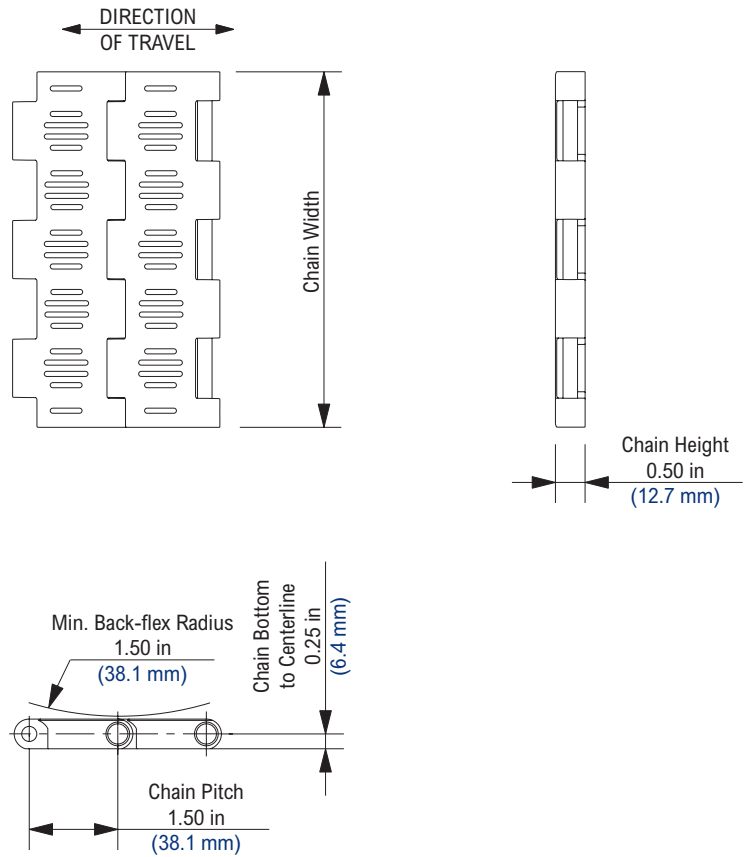

Chain Information

desc	Chain Width		Number of Sprockets		Chain Strength	
	in	mm	820	4700/5700	lbs	N
3 1/4	3.25	82.6	NR	1	420	1,868
4 1/2	4.50	114.3	NR	1	420	1,868
6	6.00	152.4	2	2	600	2,670
7 1/2	7.50	190.5	NR	2	800	3,560
15	15.00	381.0	3	3	1,600	7,117

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	1.62	7.91	Yes
Non-Standard Materials											
LF	Low Friction	Polyester	-40	180	150	-40	82	66	1.62	7.91	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	1.62	7.91	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Regal, MatTop, Platinum Series X and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 80 pitch, 10 ft (3.048 m) length strands.

Open area = 22.1%.

Stainless steel pins are available on a made-to-order basis.

Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

5706 (MTW) PT


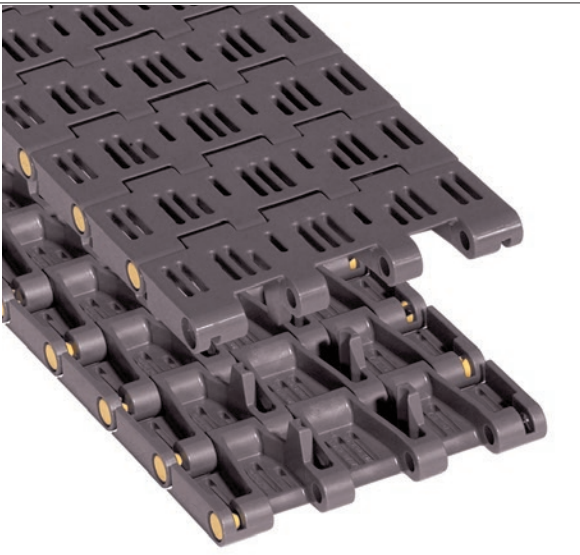


Photo shows 5706 Molded-to-Width (MTW) MatTop Chain with Positrack (PT) Tracking Guides molded in High Performance (HP) material.

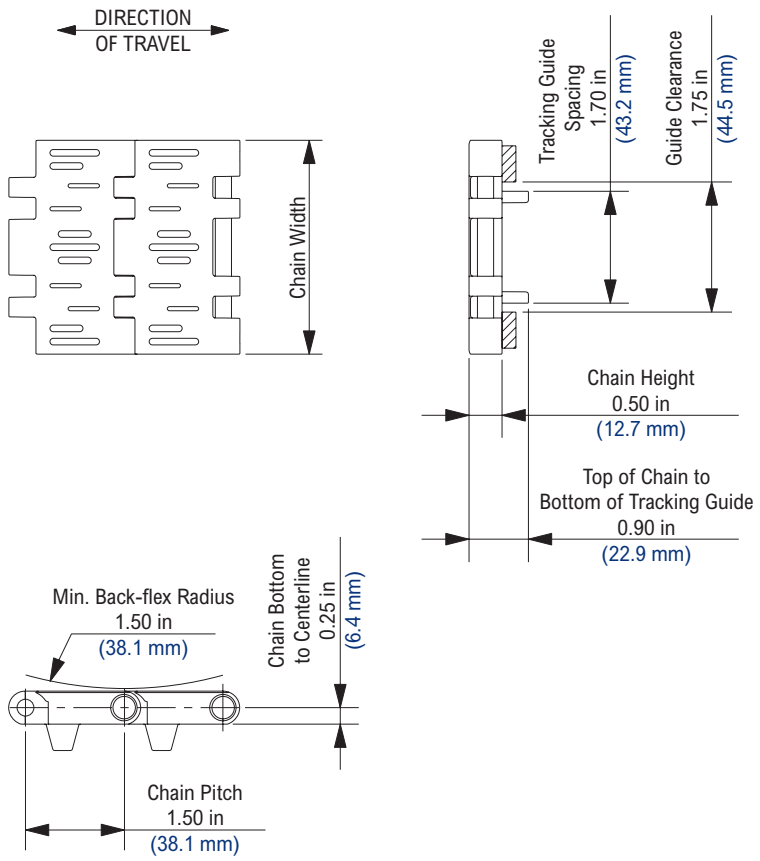

Chain Information

Chain Width desc	Chain Width		Number of Sprockets		Chain Strength	
	in	mm	820	4700/5700	lbs	N
3 1/4	3.25	82.6	NR	1	420	1,868
4 1/2	4.50	114.3	NR	1	420	1,868

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	1.62	7.91	Yes
Non-Standard Materials											
LF	Low Friction	Polyester	-40	180	150	-40	82	66	1.62	7.91	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	1.62	7.91	Yes


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, MatTop, TableTop, Platinum Series X and PSX are trademarks of Regal Rexnord Corporation. All rights reserved.


Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 80 pitch, 10 ft (3.048 m) length strands. Open area = 22.1%. Stainless steel pins are available on a made-to-order basis. Same guide clearance as Rexnord 815, 820 and 831 TableTop™ Chain. Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.


820 Cast Iron Arm Body Sprocket

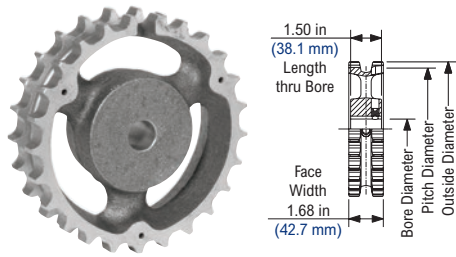

820 Cast Iron Block Body Sprocket

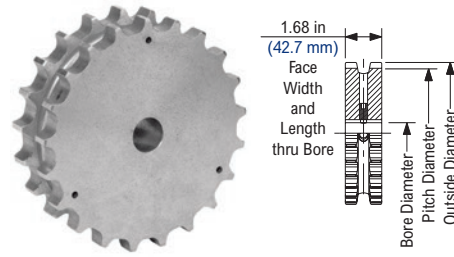

NS820 Thermoplastic Split Sprocket

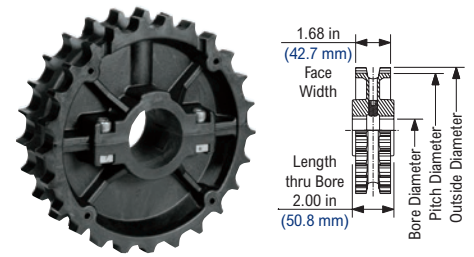

820 Cast Iron Arm Body Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in		mm		in		mm		in		mm			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
19	9 1/2	4.622	117.40	4.61	117.1	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.28	1.49
20	10	4.854	123.29	4.86	123.4	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.81	1.73
21	10 1/2	5.089	129.26	5.12	130.0	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	4.63	2.10
22	11	5.324	135.23	5.35	135.9	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.12	2.32
23	11 1/2	5.560	141.22	5.59	142.0	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.31	2.41
24	12	5.796	147.22	5.83	148.1	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.41	2.45
25	12 1/2	6.032	153.21	6.07	154.2	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	5.57	2.53
27	13 1/2	6.504	165.20	6.56	166.6	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.50	2.95
29	14 1/2	6.978	177.24	7.05	179.1	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.72	3.05
31	15 1/2	7.452	189.28	7.53	191.3	1	1 3/4	20	45	-	-	-	-	1	1 3/4	20	45	6.86	3.11
41	20 1/2	9.826	249.58	9.93	252.2	1	2 1/2	20	65	-	-	-	-	1	2 1/2	20	65	16.23	7.36

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

820 Cast Iron Block Body Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in		mm		in		mm		in		mm			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
13	6 1/2	3.228	81.99	3.11	79.0	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	2.45	1.11
15	7 1/2	3.688	93.68	3.63	92.2	1	1 1/4	20	30	-	-	-	-	1	1 1/4	20	30	3.57	1.62
17	8 1/2	4.152	105.46	4.12	104.6	1	1 11/16	20	40	-	-	-	-	1	1 11/16	20	40	4.83	2.19
21	10 1/2	5.089	129.26	5.12	130.0	1	2 11/16	20	70	-	-	-	-	1	2 11/16	20	70	4.63	2.10
25	12 1/2	6.032	153.21	6.07	154.2	1	3 7/16	20	90	-	-	-	-	1	3 7/16	20	90	5.57	2.53


Shaft-ready round bore sprockets are shipped with keyway and setscrew.

NS820 Thermoplastic Split Sprocket Information


Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in		mm		in		mm		in		mm			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
21	10 1/2	5.089	129.26	5.12	130.0	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.01	0.46
23	11 1/2	5.560	141.22	5.59	142.0	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.19	0.54
25	12 1/2	6.032	153.21	6.07	154.2	1	2	25	50	-	-	-	-	1	2	25	50	1.39	0.63
27	13 1/2	6.504	165.20	6.56	166.6	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	1.76	0.80

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.


N4700 Thermoplastic Sprocket

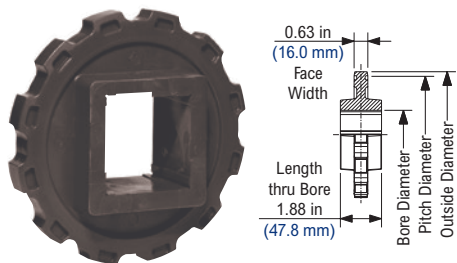

N5700 Thermoplastic Sprocket

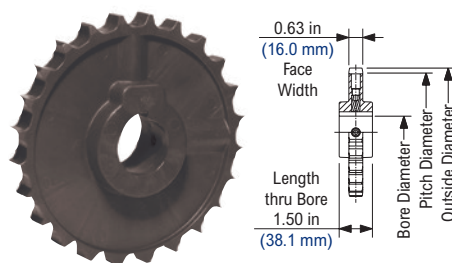

NS5700 Thermoplastic Split Sprocket

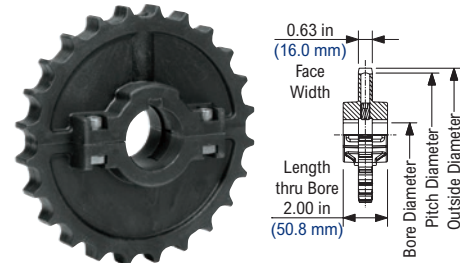

N4700 Thermoplastic Sprocket Imperial Information

Number of Teeth		Pitch Diameter		Outside Diameter		Imperial Square Bore Diameter				Approximate Weight	
actual	effect	in	mm	in	mm	in				lbs	kg
12	12	5.796	147.22	5.75	146.1	1 1/2				0.49	0.22
21	21	10.064	255.63	10.08	256.0	-				0.77	0.35

N4700 Thermoplastic Sprocket Metric Information

Number of Teeth		Pitch Diameter		Outside Diameter		Metric Square Bore Diameter				Approximate Weight	
actual	effect	in	mm	in	mm	mm				lbs	kg
12	12	5.796	147.22	5.75	146.1	65				0.49	0.22
21	21	10.064	255.63	10.08	256.0	65				0.77	0.35

N5700 Thermoplastic Sprocket Imperial Information

Number of Teeth		Pitch Diameter		Outside Diameter		Imperial Round Bore Diameter					Approximate Weight	
actual	effect	in	mm	in	mm	in					lbs	kg
24	12	5.796	147.22	5.80	147.3	1	1 3/16	1 1/4	1 7/16	1 1/2	1.01	0.46

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

N5700 Thermoplastic Sprocket Metric Information

Number of Teeth		Pitch Diameter		Outside Diameter		Metric Round Bore Diameter				Approximate Weight	
actual	effect	in	mm	in	mm	mm				lbs	kg
24	12	5.796	147.22	5.80	147.3	25	30	35		1.01	0.46

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

NS5700 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in		mm		in		mm		in		mm			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
21	10 1/2	5.089	129.26	5.12	130.0	1	1 1/2	25	35	-	-	-	-	1	1 1/2	25	35	0.80	0.36
23	11 1/2	5.560	141.22	5.59	142.0	1	1 1/2	25	35	-	-	-	-	1	1 1/2	25	35	0.91	0.41
24	12	5.796	147.22	5.81	147.6	1	1 1/2	25	35	-	-	-	-	1	1 1/2	25	35	1.01	0.46
25	12 1/2	6.032	153.21	6.07	154.2	1	1 15/16	25	50	-	-	-	-	1	1 15/16	25	50	1.04	0.47
27	13 1/2	6.504	165.20	6.57	166.9	1	1 1/2	25	35	-	-	-	-	1	1 1/2	25	35	1.04	0.47

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft. 24 tooth sprocket has a Length thru Bore of 1.62 in (41.1 mm).


Pusher Attachment (F-Style)

All pusher attachments are molded 6 in (152.4 mm) wide and can be cut down to a minimum height of 1/4 in (6.35 mm).

The F2 designation represents an F-style pusher attachment at a height of 2 in (50.8 mm).

Please indicate if pusher attachments are required every pitch, every second pitch, etc. when ordering. Also, indicate if indents are required in the center, on one or both sides of the chain.

For example, "I would like F2 pusher attachments every 8th pitch indented 3/4 in on both sides of the chain."

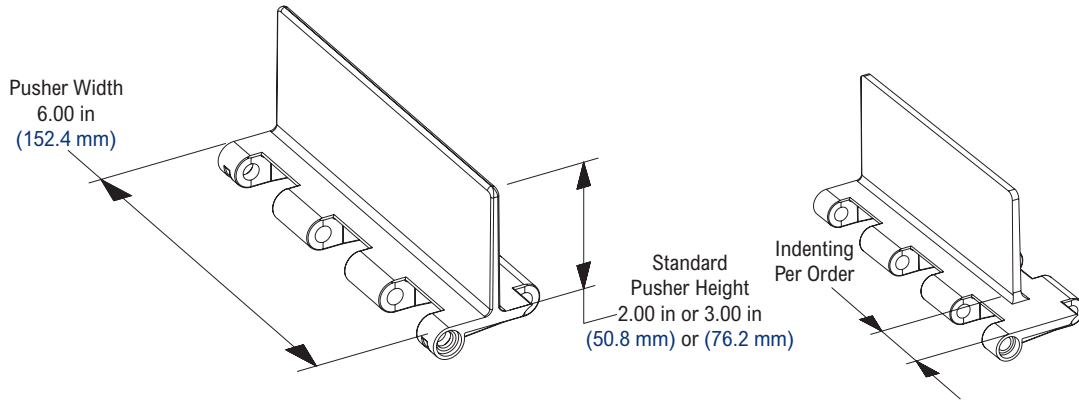

5935



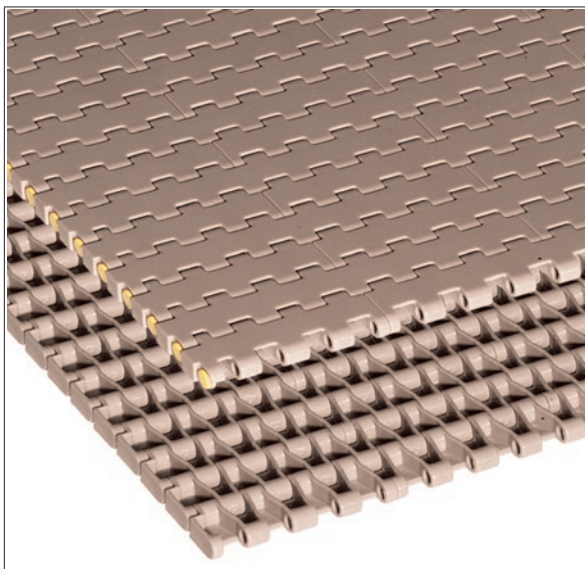


Photo shows 5935 MatTop Chain molded in Low Friction (LF) material.

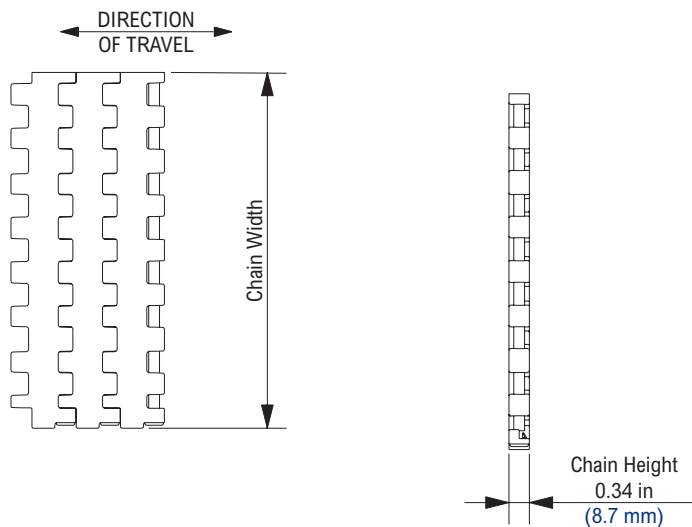

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	4	13
50% - 75%	6	20
75% - 100%	8	26

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
BHT	Blue High Temperature	Polypropylene	40	220	212	4	104	100	500	7,295	0.92	4.49	Yes
HP™	High Performance	Polypropylene	-40	180	150	-40	82	66	900	13,131	1.30	6.35	Yes
HT	High Temperature	Polypropylene	40	220	212	4	104	100	500	7,295	0.92	4.49	Yes
LF	Low Friction	Polypropylene	-40	180	150	-40	82	66	900	13,131	1.30	6.35	Yes
Non-Standard Materials													
AS	Anti-Static	Polypropylene	0	180	NR	-18	82	NR	540	7,879	1.30	6.35	No
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	450	6,566	1.43	6.99	No
HUV	High Temp. Ultraviolet Resistant	Polypropylene	40	220	180	4	104	82	500	7,295	0.92	4.49	No
MR	Melt Resistant	Polypropylene	-80	220	NR	-62	104	NR	900	13,131	1.30	6.35	No
WHT	White High Temperature	Polypropylene	40	220	212	4	104	100	500	7,295	0.92	4.49	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop and FRPLUS are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 4858753, 5096053, 5020659, 4436200

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300. Open area = 1.8%.


Stainless steel pins are available on a made-to-order basis.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.




Photo shows 5935 V MatTop Chain with Vacuum Holes molded in Melt Resistant (MR) material.

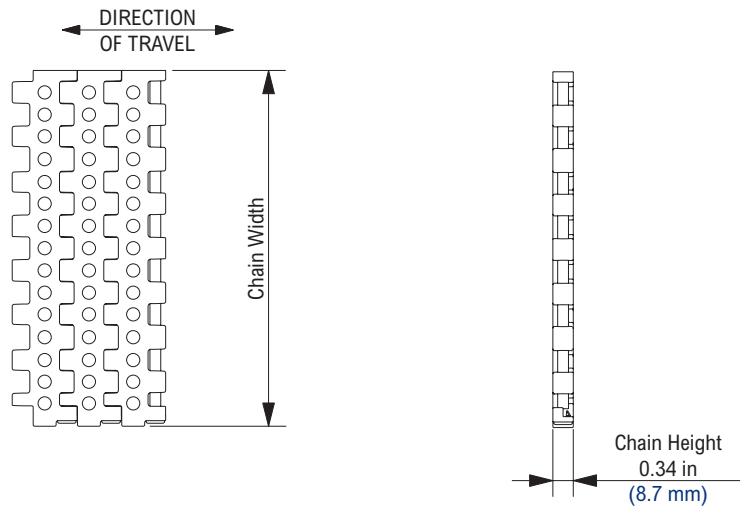

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	4	13
50% - 75%	6	20
75% - 100%	8	26



Hole Diameter		Hole Spacing		Holes per Module	Open Area
in	mm	in	mm		
1/8	3.18	3/8	9.53	15	6.2%
1/8	3.18	3/4	19.05	8	4.3%
9/64	3.57	3/4	19.05	8	4.9%
9/64	3.57	3/8	9.53	15	7.3%
5/32	3.97	3/4	19.05	8	5.5%
3/16	4.76	3/4	19.05	8	7.0%
7/32	5.56	3/4	19.05	8	8.8%
1/4	6.35	3/4	19.05	8	10.8%

Standard hole sizes listed per 6 in (152.4 mm) module. All vacuum holes are centered on the chain.

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Non-Standard Materials													
FR	Flame Retardant	Polypropylene	0	180	140	-18	82	60	765	11,161	1.30	6.35	No
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	450	6,566	1.42	6.93	No
HP™	High Performance	Polypropylene	-40	180	150	-40	82	66	900	13,131	1.30	6.35	Yes
HT	High Temperature	Polypropylene	40	220	212	4	104	100	500	7,295	0.92	4.49	Yes
LF	Low Friction	Polypropylene	-40	180	150	-40	82	66	900	13,131	1.30	6.35	Yes
MR	Melt Resistant	Polypropylene	-80	220	NR	-62	104	NR	900	13,131	1.30	6.35	No
PS™	Platinum Series™	Polypropylene	-40	180	150	-40	82	66	900	13,131	1.30	6.35	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Regal, MatTop, FRPLUS, Platinum Series and PS are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 4858753, 5096053, 5020659, 4436200

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300.

Open area is dependent on the number of holes and hole diameters.

Number of holes and their location may vary; hole diameters range from 1/16 in (1.6 mm) up to 1/4 in (6.4 mm) diameter in 1/32 in (0.8 mm) increments.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

5935 (MTW)



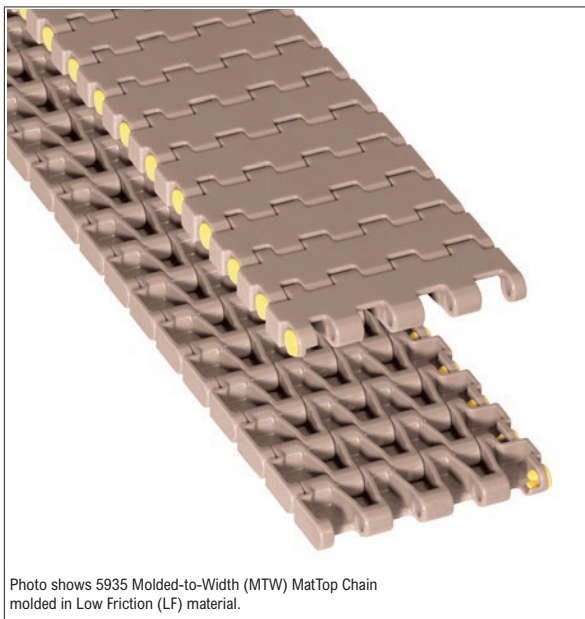


Photo shows 5935 Molded-to-Width (MTW) MatTop Chain molded in Low Friction (LF) material.


DIRECTION OF TRAVEL

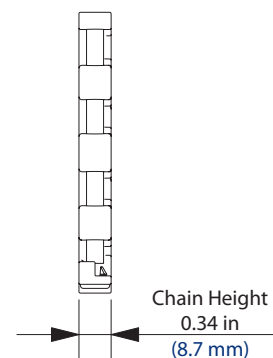

Chain Height
0.34 in
(8.7 mm)

Chain Information

Chain Width			Number of Sprockets	Chain Strength	
desc	in	mm		lbs	N
3	3.00	76.2	1	225	1,001

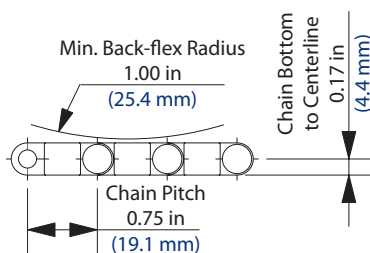

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft ²	kg/m ²	
			min	max		min	max				
	dry	wet		dry	wet		dry	wet			
Standard Materials											
BHT	Blue High Temperature	Polypropylene	40	220	212	4	104	100	0.92	4.49	Yes
HP™	High Performance	Polypropylene	-40	180	150	-40	82	66	1.30	6.35	Yes
LF	Low Friction	Polypropylene	-40	180	150	-40	82	66	1.30	6.35	Yes
Non-Standard Materials											
FRPLUS™	Flame Retardant Low Friction	Acetal	0	+180	+140	-18	+82	+60	1.43	6.99	No
MR	Melt Resistant	Polypropylene	-80	220	NR	-62	104	NR	1.30	6.35	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop and FRPLUS are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 4858753, 5096053, 5020659, 4436200

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Open area = 1.8%.

Stainless steel pins are available on a made-to-order basis.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.


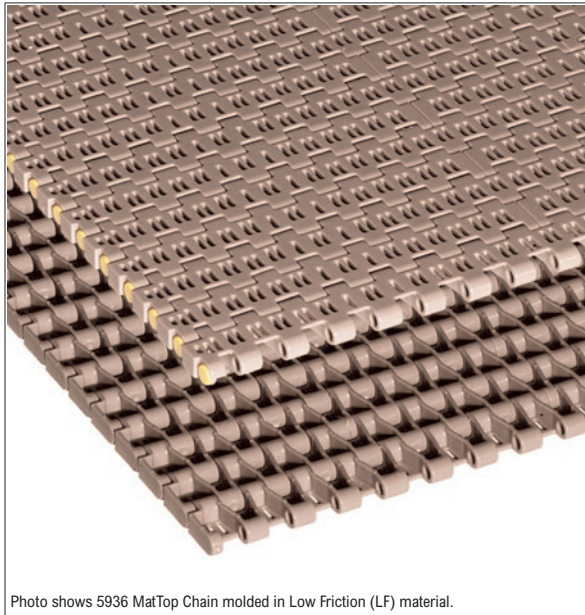


Photo shows 5936 MatTop Chain molded in Low Friction (LF) material.

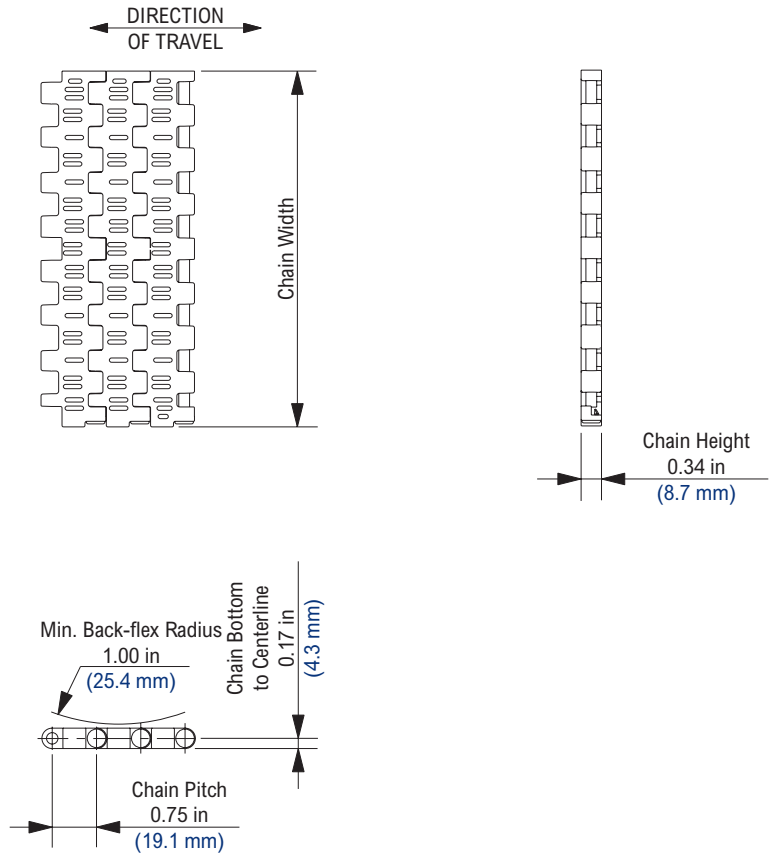

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	4	13
50% - 75%	6	20
75% - 100%	8	26

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HP™	High Performance	Polypropylene	-40	180	150	-40	82	66	900	13,131	1.30	6.35	Yes
HT	High Temperature	Polypropylene	40	220	212	4	104	100	500	7,295	0.92	4.49	Yes
LF	Low Friction	Polypropylene	-40	180	150	-40	82	66	900	13,131	1.30	6.35	Yes
Non-Standard Materials													
AS	Anti-Static	Polypropylene	0	180	NR	-18	82	NR	540	7,879	1.30	6.35	No
BLT	Blue Low Temperature	Polyethylene	-100	80	80	-73	27	27	250	3,648	1.12	5.47	Yes
FR	Flame Retardant	Polypropylene	0	180	140	-18	82	60	765	11,161	1.30	6.35	No
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	450	6,566	1.43	6.99	No
MR	Melt Resistant	Polypropylene	-80	220	NR	-62	104	NR	900	13,131	1.30	6.35	No
PSX™	Platinum Series X™	Polypropylene	-40	180	150	-40	82	66	900	13,131	1.30	6.35	Yes
WHT	White High Temperature	Polypropylene	40	220	212	4	104	100	500	7,295	0.92	4.49	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, FRPLUS, Platinum Series X and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 4858753, 5096053, 5020659, 4436200

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300.


Open area = 17.2%.

Stainless steel pins are available on a made-to-order basis.


Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

N5936 Thermoplastic Sprocket



NS5936 Thermoplastic Split Sprocket



N5936 Thermoplastic Sprocket Imperial Information

Number of Teeth		Pitch Diameter		Outside Diameter		Hex	Round								Square		Approximate Weight						
actual	effect	in	mm	in	mm		in																lbs
10	10	2.450	62.23	2.50	63.5	1 1/2	1	-	-	-	-	-	-	-	-	-	-	-	0.09	0.04			
24	24	5.801	147.35	5.88	149.4	-	1	1 3/16	1 1/4	1 7/16	1 1/2	1 15/16	1 1/2	2	2 1/2			0.44	0.20				
25	25	6.040	153.42	6.15	156.2	-	-	-	-	-	-	-	-	1 1/2	2	2 1/2			0.48	0.21			

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

N5936 Thermoplastic Sprocket Metric Information

Number of Teeth		Pitch Diameter		Outside Diameter		Hex	Round											Square			Approximate Weight		
actual	effect	in	mm	in	mm		mm																lbs
10	10	2.450	62.23	2.50	63.5	-	25	-	-	-	-	-	-	-	-	-	-	-	0.09	0.04			
24	24	5.801	147.35	5.88	149.4	-	25	30	35	40	45	50	40	50	-	65			0.44	0.20			
25	25	6.040	153.42	6.15	156.2	-	-	-	-	-	-	-	40	50	60	65			0.46	0.21			

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

NS5936 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in		mm		in		mm		in		mm			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
24	24	5.800	147.32	5.88	149.4	1	2	25	50	1	2 1/2*	25	65*	1	1 15/16	25	50	0.57	0.26

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

* The 2-1/2 in and 65 mm bores for the 24 tooth square bore sprocket and all round bore sprockets above 1-15/16 in are supplied as molded bores. All other bores are supplied with split bore adapters.

Rexnord™ 5930 Series MatTop™ Chain Compatible Sprockets


Pusher Attachment (F-Style)

All pusher attachments are molded 6 in (152.4 mm) wide and can be cut down to a minimum height of 1/4 in (6.35 mm).

The F2 designation represents an F-style pusher attachment at a height of 2 in (50.8 mm).

Please indicate if pusher attachments are required every pitch, every second pitch, etc. when ordering. Also, indicate if indents are required in the center, on one or both sides of the chain.

For example, "I would like F2 pusher attachments every 8th pitch indented 3/4 in on both sides of the chain."

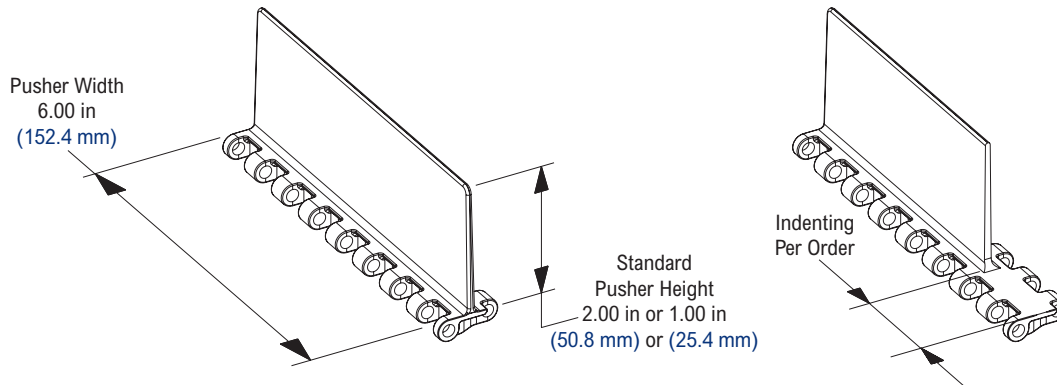





Sideguard Attachment

Please indicate if sideguard attachments are required down one or both sides of the chain when ordering.

Sideguard attachments can be cut down to a minimum height of 1 in (25.4 mm).

If the chain is ordered with both sideguard and pusher attachments, the sideguard attachment will be furnished the same height as the pusher attachment.

Please contact Regal Rexnord if any deviations from this standard are required.

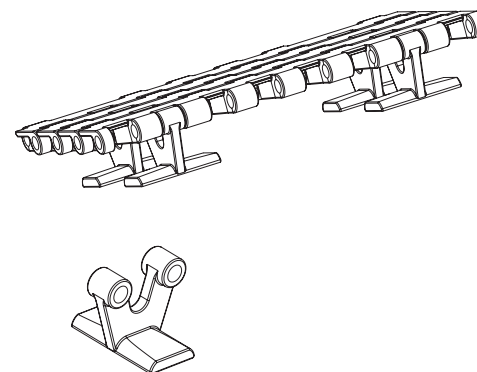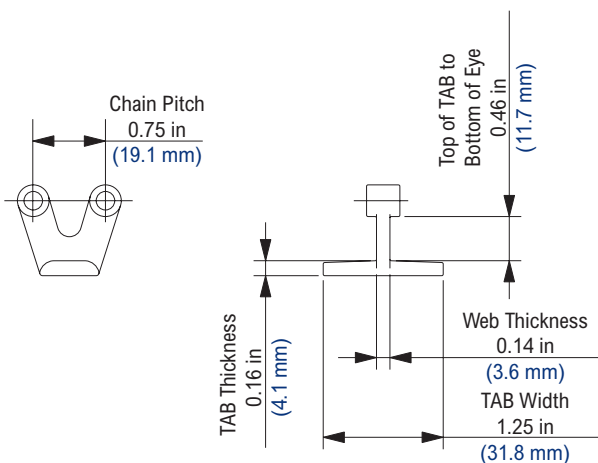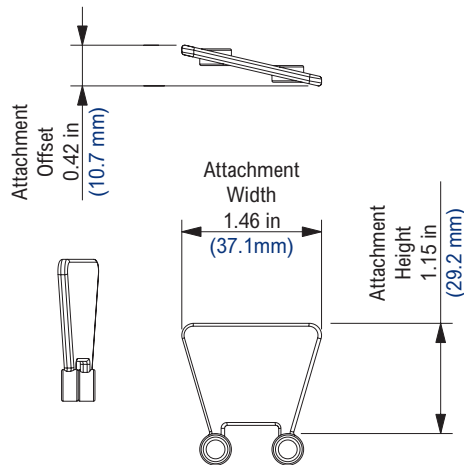

TAB Attachment

Please indicate if hold down TAB attachments are required every second pitch, etc., when ordering.

Please contact Regal Rexnord for specific applications.

5995


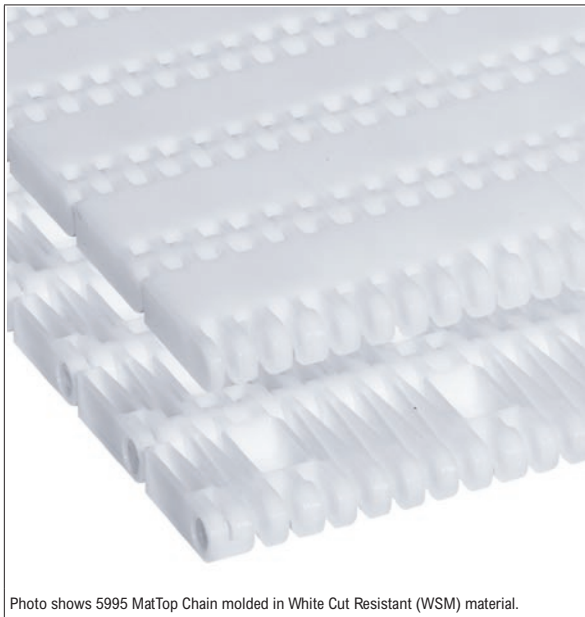


Photo shows 5995 MatTop Chain molded in White Cut Resistant (WSM) material.

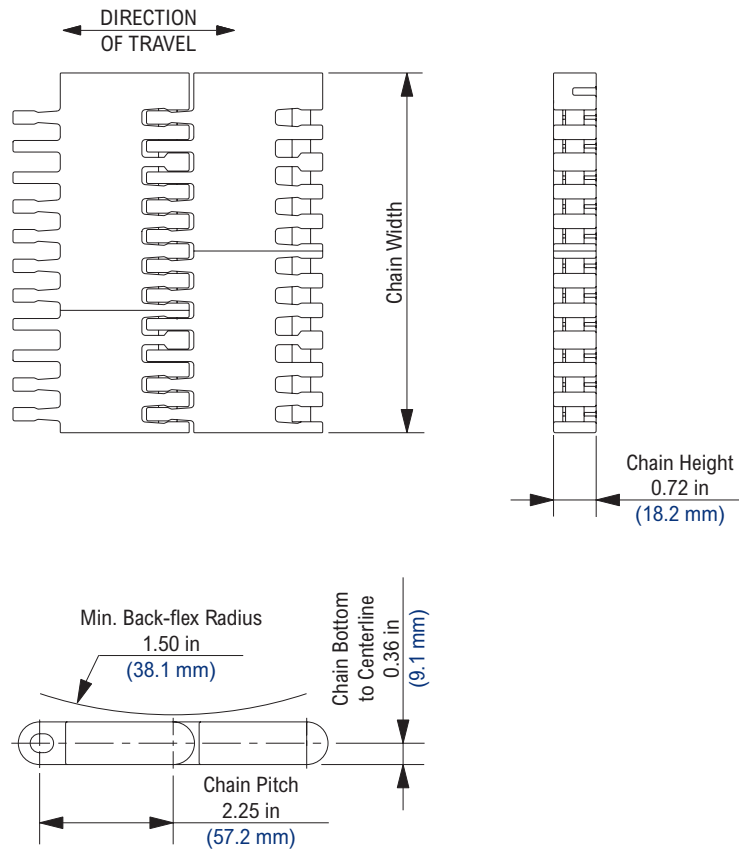

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Non-Standard Materials													
DUV	Plain Acetal Ultraviolet Resistant	Polypropylene	0	180	150	-18	82	66	3,500	51,065	3.00	14.65	No
WHT	White High Temperature	Polypropylene	40	220	212	4	104	100	2,400	35,016	2.20	10.74	Yes
WLT	White Low Temperature	Polyethylene	-100	80	80	-73	27	27	1,600	23,344	2.30	11.23	Yes
WSM	White Cut Resistant	Polypropylene	-40	180	150	-40	82	66	3,500	51,065	3.00	14.65	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 4858753, 5096053, 5020659

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300.

Open area = 12.0%.

Stainless steel pins are available on a made-to-order basis.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.


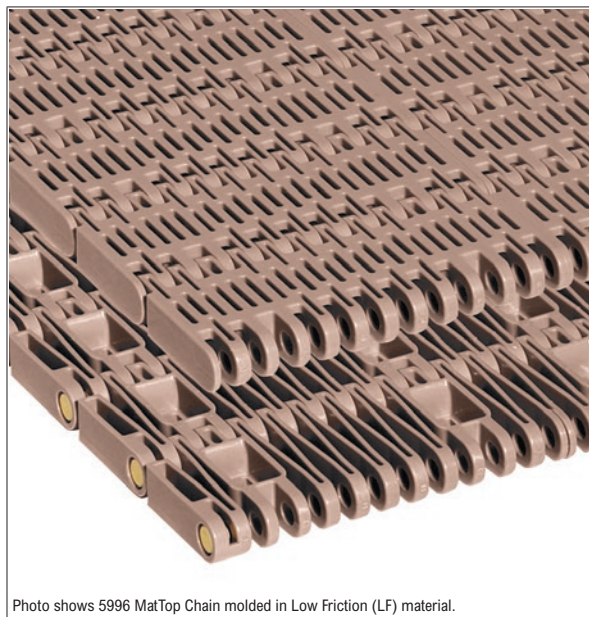


Photo shows 5996 MatTop Chain molded in Low Friction (LF) material.

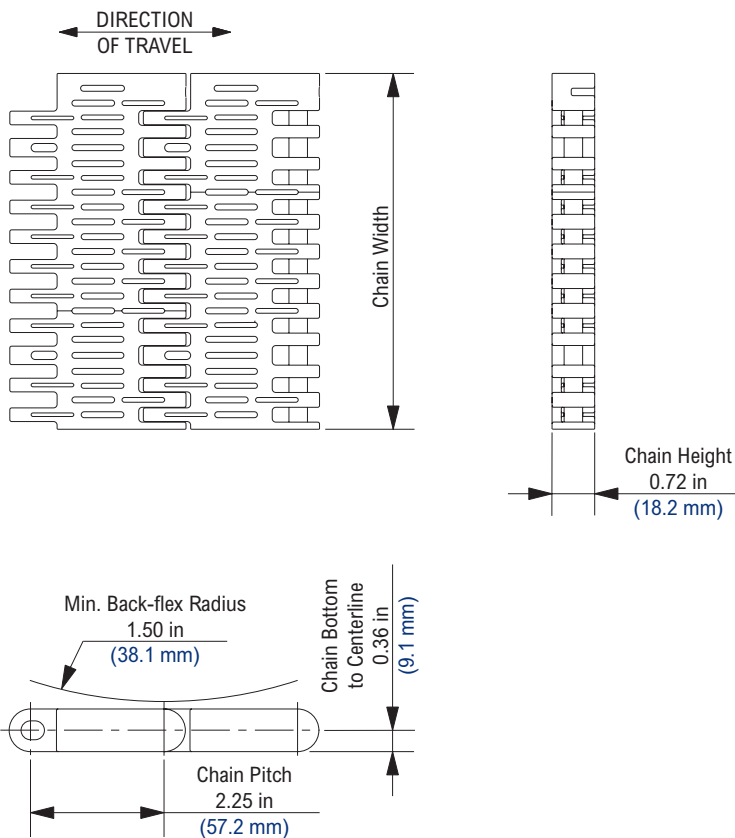

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HUV	High Temp. Ultraviolet Resistant	Polypropylene	40	220	180	4	104	82	2,400	35,016	1.70	8.30	No
LF	Low Friction	Polypropylene	-40	180	150	-40	82	66	3,500	51,065	1.60	7.81	Yes
WHT	White High Temperature	Polypropylene	40	220	212	4	104	100	2,400	35,016	1.70	8.30	Yes
WLT	White Low Temperature	Polyethylene	-100	80	80	-73	27	27	1,600	23,344	1.10	5.37	Yes
Non-Standard Materials													
DUV	Plain Acetal Ultraviolet Resistant	Polypropylene	0	180	150	-18	82	66	3,500	51,065	2.30	11.23	No
LUV	Low Temp. Ultraviolet Resistant	Polyethylene	-40	80	80	-40	27	27	1,600	23,344	1.80	8.79	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patents: 4858753, 5096053, 5020659

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For chain width information see Rexnord Chain Width Table on page 300. Open area = 22.1%. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

5997


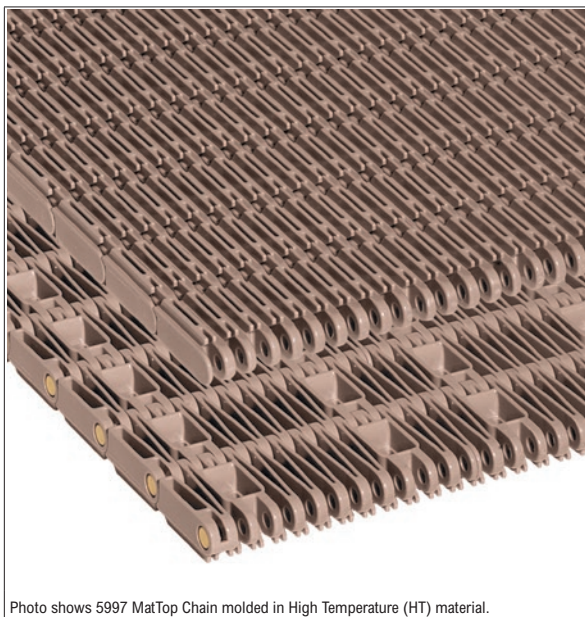


Photo shows 5997 MatTop Chain molded in High Temperature (HT) material.

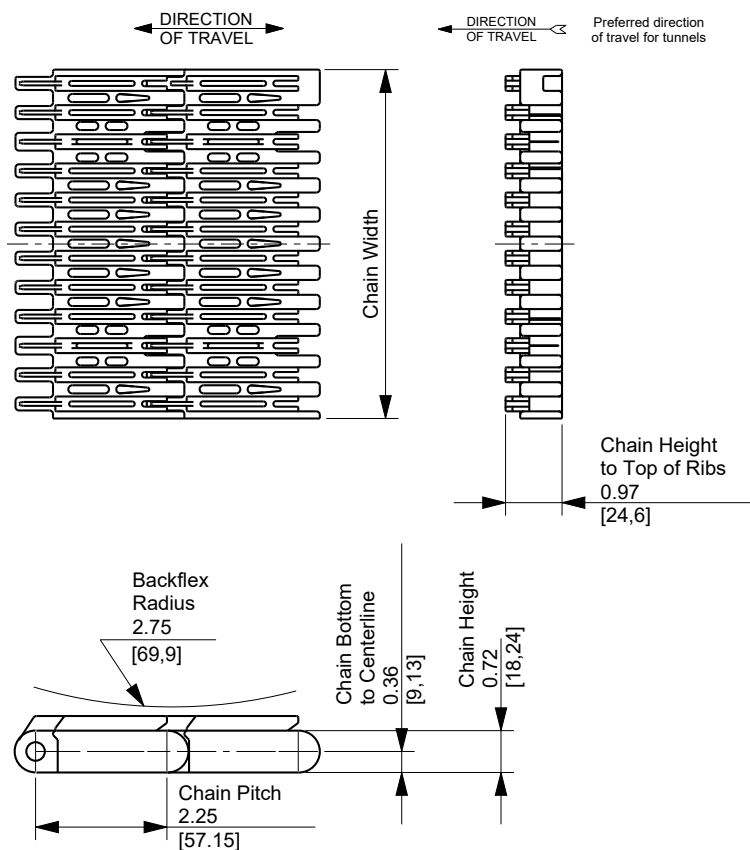

Chain Information

Chain Capacity	Number of Sprockets			
	with Transfer Comb		without Transfer Comb	
	per ft	per m	per ft	per m
0% - 50%	4	13	2	7
50% - 100%	4	13	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HT	High Temperature	Polypropylene	40	220	212	4	104	100	2,400	35,016	2.20	10.74	Yes
USP	Ultra Stabilized Polypropylene	Polypropylene	40	220	212	4	104	100	2,400	35,016	2.20	10.74	Yes
Non-Standard Materials													
WHT	White High Temperature	Polypropylene	40	220	212	4	104	100	2,400	35,016	2.20	10.74	Yes

**5997 has been upgraded to 6997.
See page 237 for 6997 information.**

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patents: 4858753, 5096053, 5020659

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For chain width information see Rexnord Chain Width Table on page 300. Open area = 22.3%. Stainless steel pins are available on a made-to-order basis. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.


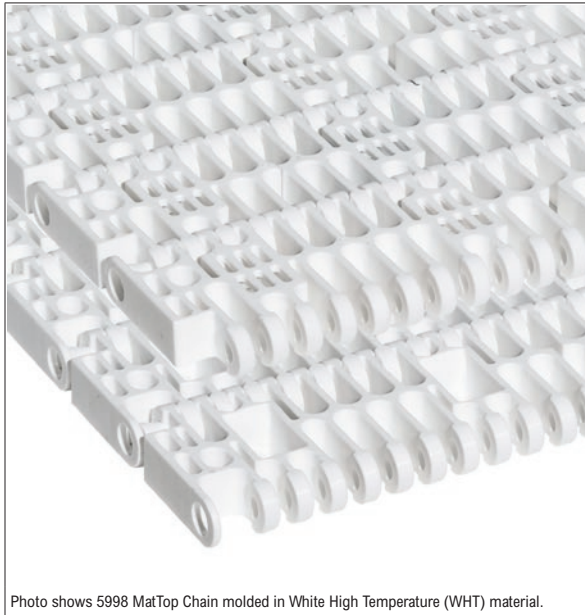


Photo shows 5998 MatTop Chain molded in White High Temperature (WHT) material.

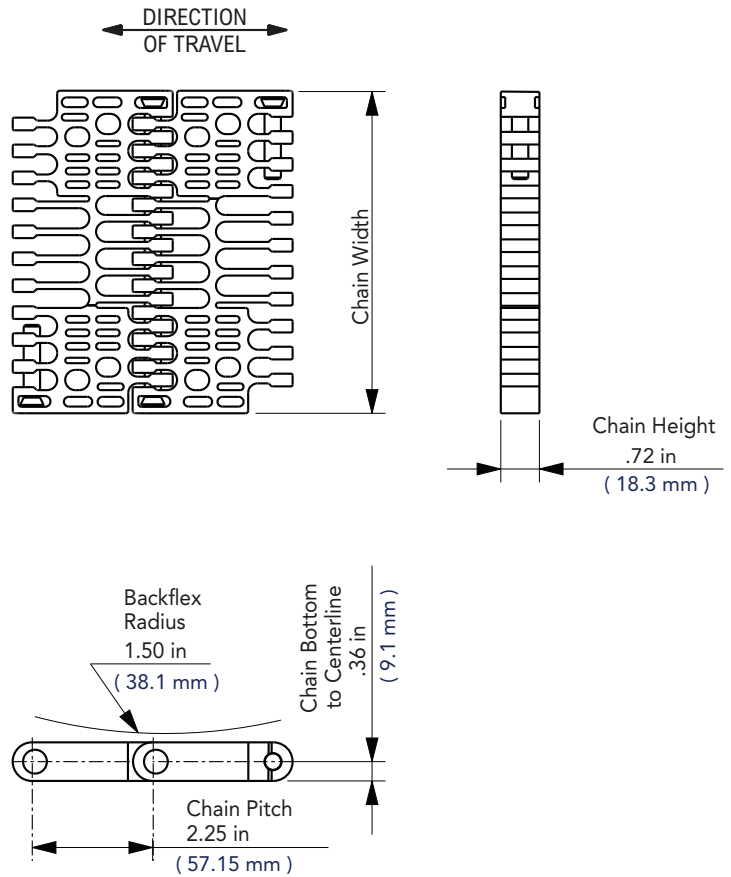

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

Available Materials




Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HUV	High Temp. Ultraviolet Resistance	Polypropylene	40	220	180	4	104	82	2,400	35,016	1.70	8.30	No
WHT	White High Temperature	Polypropylene	40	220	212	4	104	100	2,400	35,016	1.70	8.30	Yes
WLT	White Low Temperature	Polyethylene	-100	80	80	-73	27	27	1,600	23,344	1.80	8.79	Yes
Non-Standard Materials													
DUV	Plain Acetal Ultraviolet Resistant	Polypropylene	0	180	150	-18	82	66	3,500	51,065	2.30	11.23	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patents: 5816390, 5573106

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For chain width information see Rexnord Chain Width Table on page 300. Open area = 42.1%. Stainless steel pins are available on a made-to-order basis. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.



NS5996 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	in	mm	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
9	9	6.579	167.11	6.46	164.1	1	2 5/8	25	70	1	3 1/2*	25	90*	1	2 3/4	25	70	1.68	0.76
12	12	8.693	220.80	8.70	221.0	1	2 3/4	25	70	1	3 1/2*	25	90*	1	2 3/4	25	70	1.98	0.90
14	14	10.111	256.82	10.03	254.8	1	4 1/2	25	120	1	4 1/2**	25	120**	1	3 1/2	25	90	2.12	0.96

* The 3-1/2 in and 90 mm bores for the 9 and 12 tooth square bore sprockets are supplied as molded bores. All other bores are supplied with split bore adapters. 85 mm not possible.

** The 3-1/2 in, 4-1/2 in, 90 mm and 120 mm bores for the 14 tooth square bore sprockets are supplied as molded bores. All other bores are supplied with split bore adapters. 115mm not possible.

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft. Similar bore sizes are available with the use of split plastic adapters.

N5996 Thermoplastic Sprocket Molded in HS (Heat Stabilized) — Imperial Information

Number of Teeth		Pitch Diameter		Outside Diameter		Imperial Bore Diameter						Approximate Weight	
						Square							
						in							
actual	effect	in	mm	in	mm							lbs	kg
9	9	6.579	167.11	6.46	164.1	1 1/2 in						0.88	0.40

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

N5996 Thermoplastic Sprocket Molded in HS (Heat Stabilized) — Metric Information

Number of Teeth		Pitch Diameter		Outside Diameter		Metric Bore Diameter						Approximate Weight	
						Square							
						mm							
actual	effect	in	mm	in	mm							lbs	kg
9	9	6.579	167.11	6.46	164.1	40						0.88	0.40
14	14	10.111	256.82	10.10	256.5	-						1.60	0.73

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

N5996 Thermoplastic Sprocket Molded in PE (Polyethylene) — Imperial Information

Number of Teeth		Pitch Diameter		Outside Diameter		Imperial Bore Diameter						Approximate Weight		
						Round			Square					
						in			in					
actual	effect	in	mm	in	mm							lbs	kg	
7	7	5.186	131.72	4.94	125.5	-	-	-	1 1/2	-	-	-	0.38	0.17
9	9	6.579	167.11	6.46	164.1	-	-	-	1 1/2	2	2 1/2	-	0.69	0.31

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

5996 Pusher Attachment (F-Style)


All pusher attachments are molded 6 in (152.4 mm) wide and can be cut down to a minimum height of 1/4 in (6.35 mm).

The F4 designation represents an F-style pusher attachment at a height of 4 in (101.6 mm).

Please indicate if pusher attachments are required every pitch, every second pitch, etc. when ordering. Also, indicate if indents are required in the center, on one or both sides of the chain.

For example, "I would like F4 pusher attachments every 8th pitch indented 3/4 in on both sides of the chain."

For 5996 chain only.

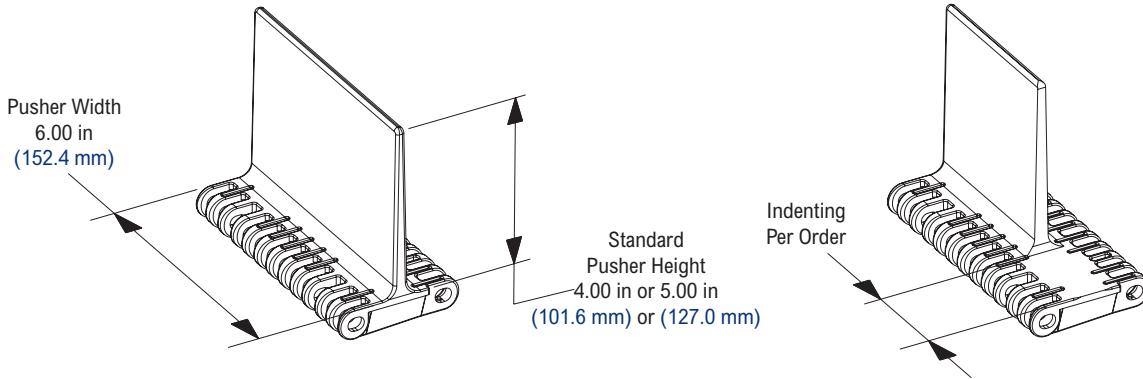

5998 Pusher Attachment (F-Style)


All pusher attachments are molded 6 in (152.4 mm) wide and can be cut down to a minimum height of 1/4 in (6.35 mm).

The F4 designation represents an F-style pusher attachment at a height of 4 in (101.6 mm).

Please indicate if pusher attachments are required every pitch, every second pitch, etc. when ordering. Also, indicate if indents are required in the center, on one or both sides of the chain.

For example, "I would like F4 pusher attachments every 8th pitch indented 3/4 in on both sides of the chain."

For 5998 chain only.

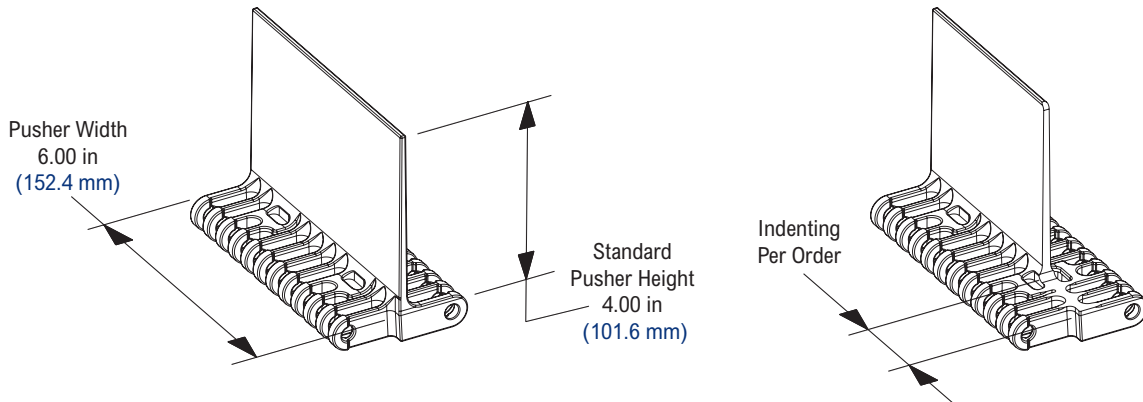


Sideguard Attachment


Please indicate if sideguard attachments are required down one or both sides of the chain when ordering.

Sideguard attachments can be cut down to a minimum height of 1 in (25.4 mm).

If the chain is ordered with both sideguard and pusher attachments, the sideguard attachment will be furnished the same height as the pusher attachment.

Please contact Regal Rexnord if any deviations from this standard are required.

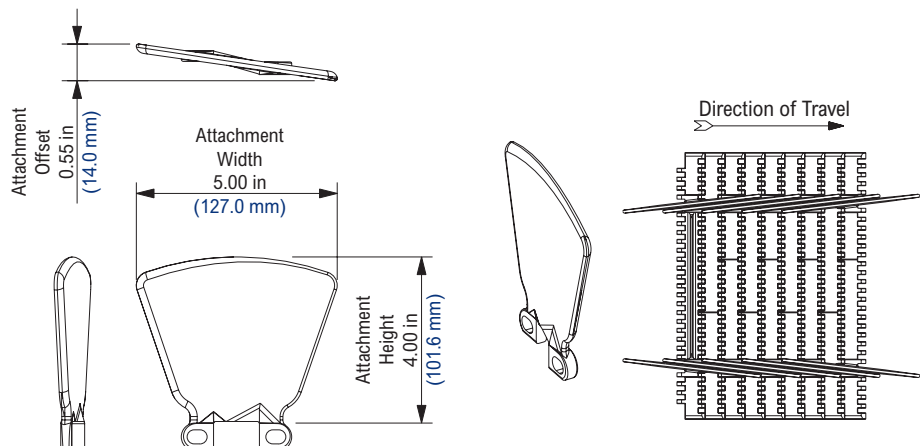


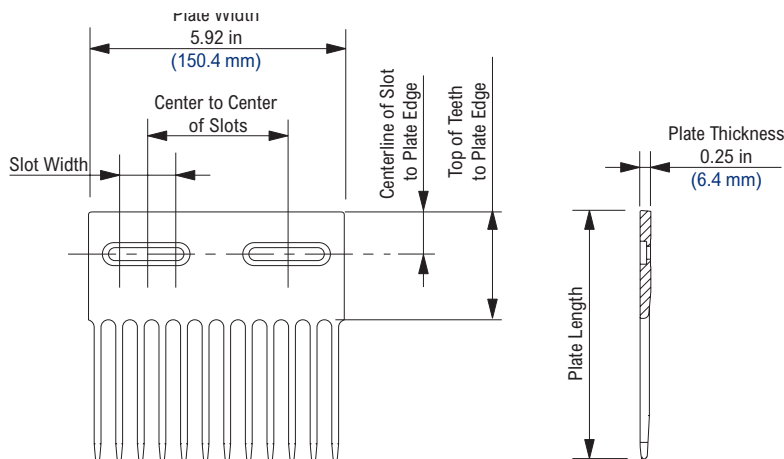

4707/5997/6997 Transfer Comb Kit

Transfer Comb Kit Number	Transfer Plate Part Number	Screw Part Number	Slot Caps Part Number	Plate Length		Slot Width		Centerline of Slot to Plate Edge		Top of Teeth to Plate Edge		Center to Center of Slots		Approximate Weight	
				in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
10131495	10074648	10075965	10069160	6.18	157.0	1.50	38.1	1.00	25.4	4.40	111.8	3.25	82.6	0.48	0.22
10131813	10070598	10075965	10075964	5.75	146.1	0.75	19.1	1.00	25.4	2.24	56.9	4.00	101.6	0.24	0.11
10131834	10075632	10075965	10069160	8.50	215.9	1.50	38.1	2.00	50.8	3.50	88.9	3.25	82.6	0.28	0.13
10131838	10069161	10075965	10069160	7.50	190.5	1.50	38.1	1.00	25.4	2.50	63.5	3.25	82.6	0.30	0.14


The 10070598 transfer comb is molded in white acetal. The 10075632 and 10069161 transfer combs are molded in a proprietary black internally lubricated high temperature material. Transfer comb kits are supplied with 1/4-20 screws and slot caps. For 4707, 5997 and 6997 chains only.

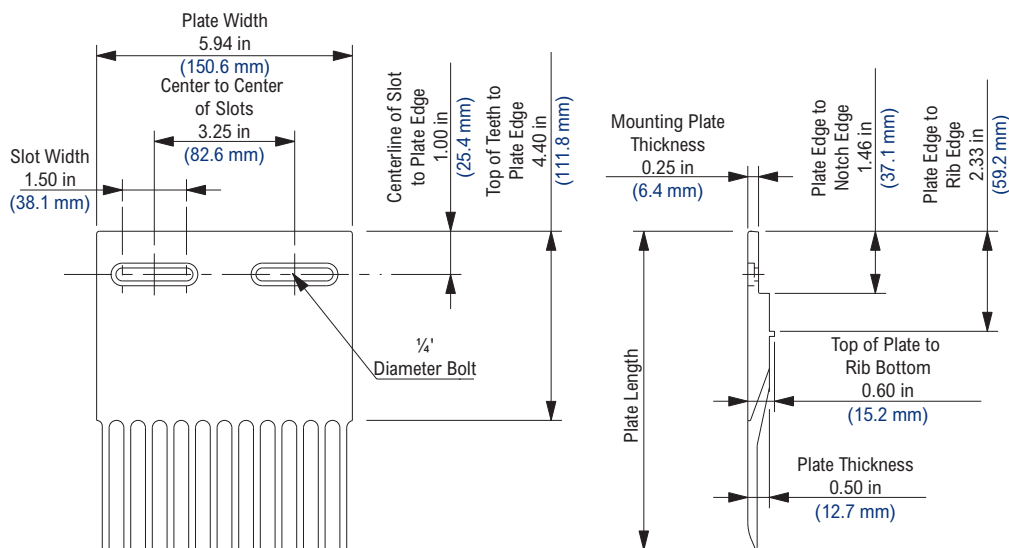

4707/5997/6997 Heavy Duty Transfer Comb Kit

Transfer Comb Kit Number	Transfer Plate Part Number	Screw Part Number	Slot Caps Part Number	Plate Length		Slot Width		Centerline of Slot to Plate Edge		Top of Teeth to Plate Edge		Center to Center of Slots		Approximate Weight	
				in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
10131497	10074649	10075965	10069160	7.95	201.9	1.50	38.1	1.00	25.4	4.40	111.8	3.25	82.6	0.53	0.24
10131499	10071978	10075965	10069160	7.95	201.9	1.50	38.1	1.00	25.4	4.40	111.8	3.25	82.6	0.53	0.24


Transfer combs are molded in a proprietary black internally lubricated high temperature material. Transfer comb kits are supplied with 1/4-20 screws and slot caps. For 4707, 5997 and 6997 chains only. The 10071978 transfer comb has the bottom rib removed.

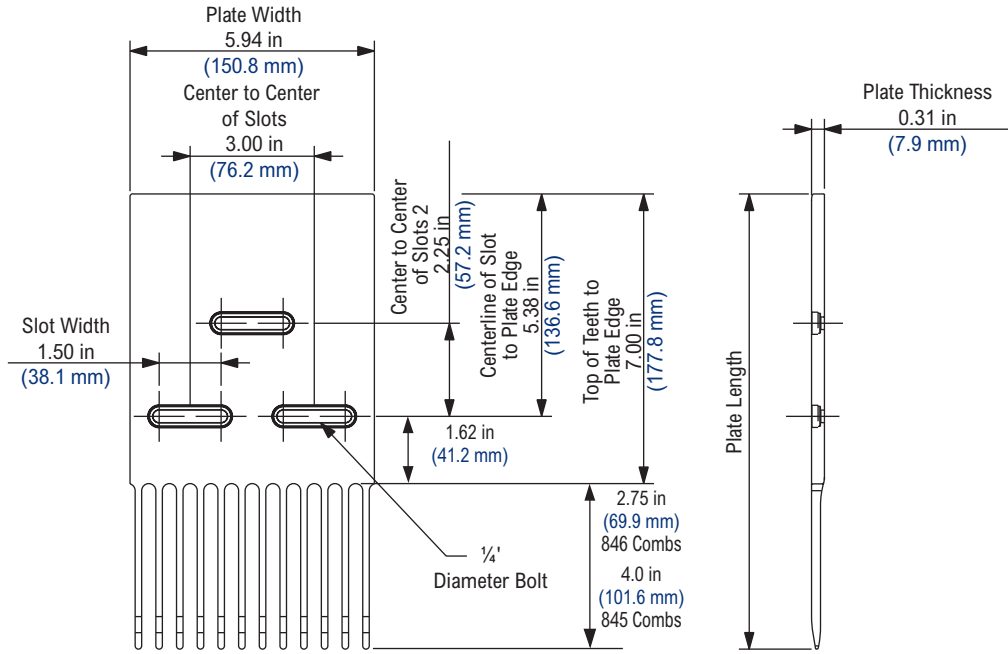

4707/5997/6997 Retrofit Transfer Comb Kit

Transfer Comb Kit Number	Transfer Plate Part Number	Screw Part Number	Slot Caps Part Number	Plate Length		Slot Width		Distance From Centerline of Slot to Plate Edge		Distance From Top of Teeth to Plate Edge		Distance Between Center to Center of Slots		Approximate Weight	
				in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
10131941	10074860	10075965	10069160	11.00	279.4	1.50	38.1	5.38	136.7	7.00	177.8	3.00	76.2	0.31	0.14
10323925	10074860	10177423	10069160	11.00	279.4	1.50	38.1	5.38	136.7	7.00	177.8	3.00	76.2	0.31	0.14
10131942	10074861	10075965	10069160	9.75	247.7	1.50	38.1	5.38	136.7	7.00	177.8	3.00	76.2	0.28	0.13
10131943	10074861	10177423	10069160	9.75	247.7	1.50	38.1	5.38	136.7	7.00	177.8	3.00	76.2	0.28	0.13

Transfer combs are molded in a proprietary black internally lubricated high temperature material. The 10131941 and 10131942 transfer comb kits are supplied with 1/4-20 screws and slot caps. The 10323925 and 10131943 transfer comb kits are supplied with M6x1 screws and slot caps. For 5997 and 6997 chains only.

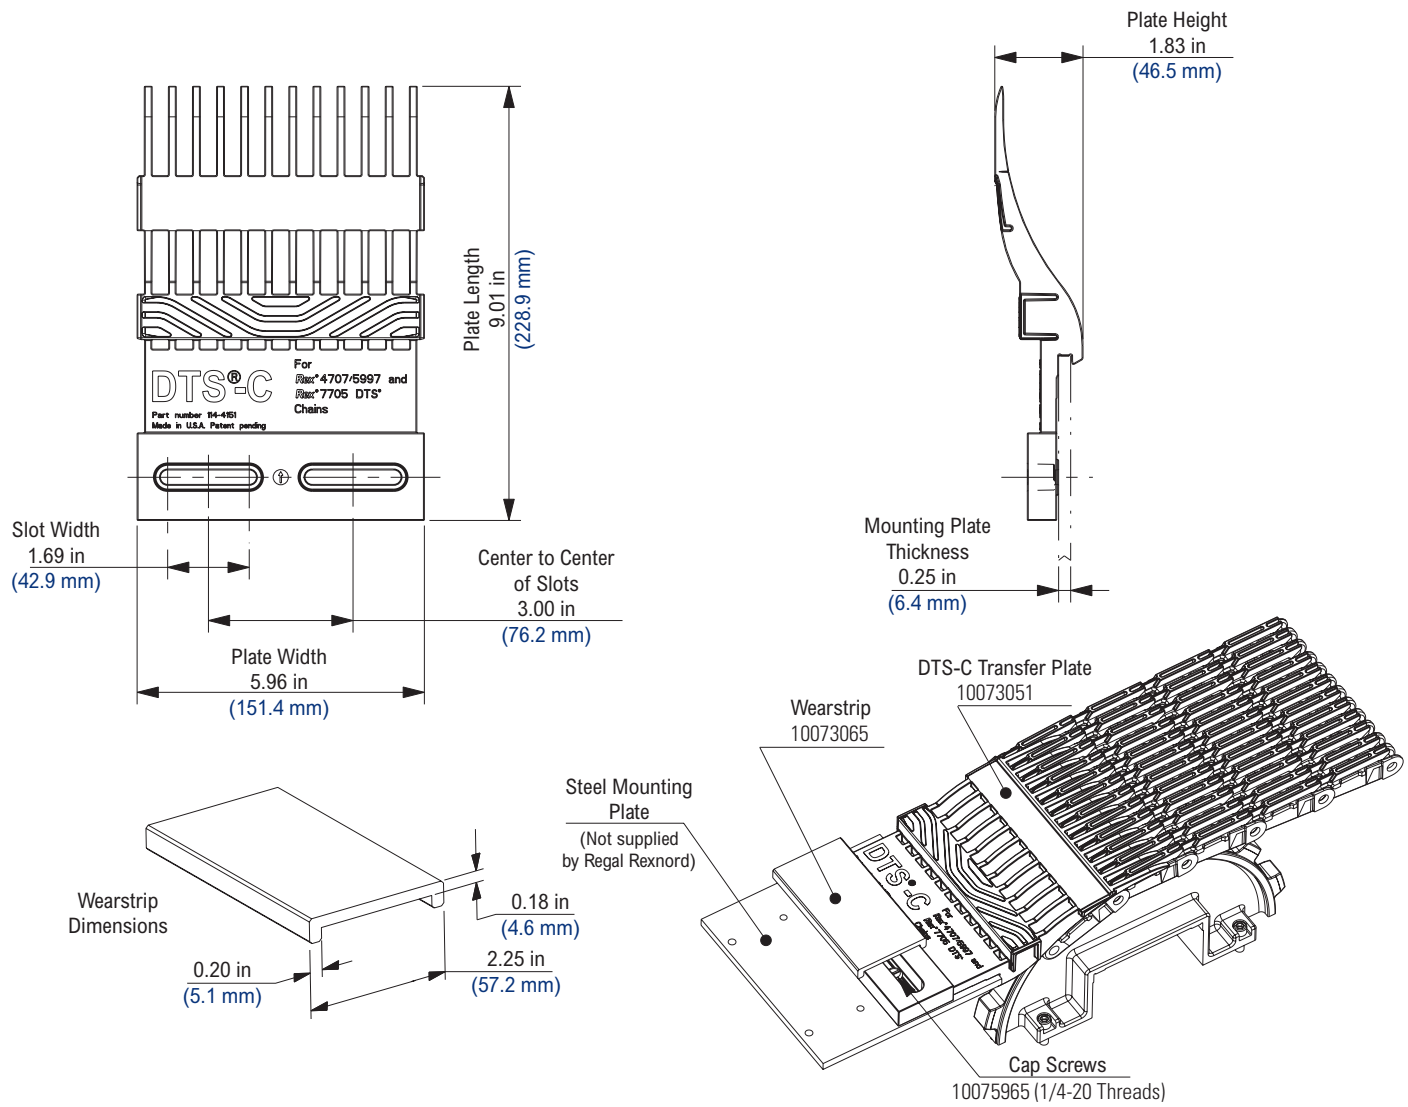

DTS-C Component Part Numbers

Component Description	Kit Part Number	Comb Part Number	Screw Part Number	Wearstrip Part Number (10 ft length)	For Use With		
					Raised Rib Chain	DTS Chain	Takeway Chain
DTS-C Comb Kit	10131580	10073051	10075965	NA	4707, 5997 or 6997	7705DTS-4.5	7705, 7706 or 1055
Wearstrip	NA			10073065			

Each kit includes one comb and two mounting screws.

Wearstrip is sold in 10 ft (3.048 m) lengths and is sold separately.

6938


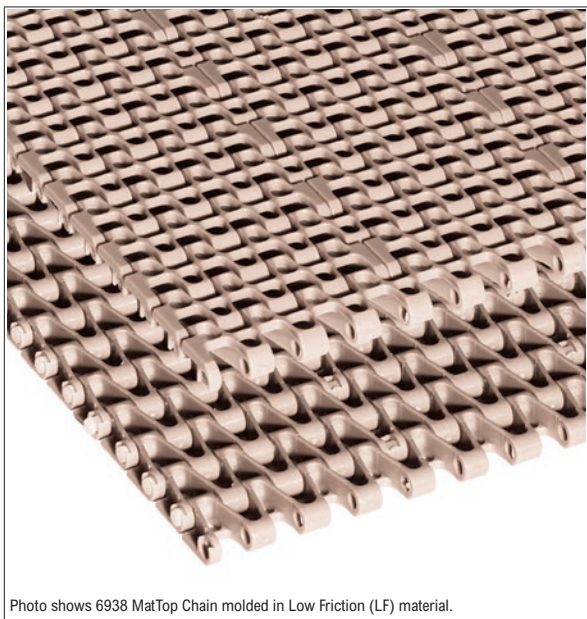


Photo shows 6938 MatTop Chain molded in Low Friction (LF) material.

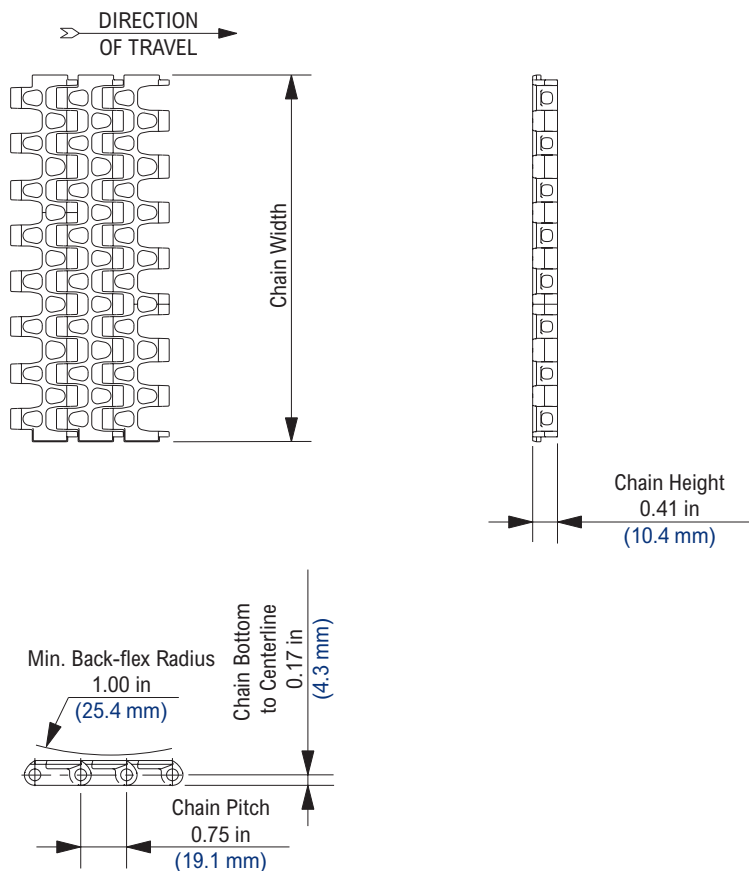

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	4	13
50% - 75%	6	20
75% - 100%	8	26

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
LF	Low Friction	Polypropylene	-40	180	150	-40	82	66	800	11,672	1.06	5.18	Yes
WHT	White High Temperature	Polypropylene	40	220	212	4	104	100	500	7,295	0.75	3.66	Yes
Non-Standard Materials													
AS	Anti-Static	Polypropylene	0	180	NR	-18	82	NR	480	7,003	1.06	5.18	No
FTR	Fryer Temperature Resistant	Polypropylene	-80	220	NR	-62	104	NR	800	11,672	1.06	5.18	Yes
HP™	High Performance	Polypropylene	-40	180	150	-40	82	66	800	11,672	1.06	5.18	Yes
WLT	White Low Temperature	Polyethylene	-100	80	80	-73	27	27	400	5,836	0.82	4.00	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 5253749, 4436200

Additional Notes



Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300.

Open area = 60.0%.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.



N5936 Thermoplastic Sprocket Imperial Information

Number of Teeth		Pitch Diameter		Outside Diameter		Hex	Round							Square		Approximate Weight					
actual	effect	in	mm	in	mm		in														lbs
10	10	2.50	63.5	2.450	62.23	1 1/2	1	-	-	-	-	-	-	-	-	-	-	0.09	0.04		
24	24	5.88	149.4	5.801	147.35	-	1	1 3/16	1 1/4	1 7/16	1 1/2	1 15/16	1 1/2	2 in	2 1/2	-	-	0.44	0.20		
25	25	6.15	156.2	6.040	153.42	-	-	-	-	-	-	-	-	1 1/2	2 in	2 1/2	-	-	0.46	0.21	

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

N5936 Thermoplastic Sprocket Metric Information

Number of Teeth		Pitch Diameter		Outside Diameter		Hex	Round							Square		Approximate Weight					
actual	effect	in	mm	in	mm		mm														lbs
10	10	2.450	62.23	2.50	63.5	35	25	-	-	-	-	-	-	-	-	-	-	0.09	0.04		
24	24	5.801	147.35	5.88	149.4	-	25	30	35	40	45	50	40	50	-	65	-	0.44	0.20		
25	25	6.040	153.42	6.15	156.2	-	-	-	-	-	-	-	-	40	50	60	65	0.46	0.21		

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

NS5936 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	in	mm	in	mm	in	mm	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
24	24	5.800	147.32	5.88	149.4	1	2	25	50	1	2 1/2*	25	65*	1	1 15/16	25	50	0.57	0.26

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

* The 2-1/2 in and 65 mm bores for the 24 tooth square bore sprocket and all round bore sprockets above 1-15/16 in are supplied as molded bores. All other bores are supplied with split bore adapters.


Pusher Attachment (F-Style)

All pusher attachments are molded 6 in (152.4 mm) wide and can be cut down to a minimum height of 1/4 in (6.35 mm).

The F4 designation represents an F-style pusher attachment at a height of 4 in (101.6 mm).

Please indicate if pusher attachments are required every pitch, every second pitch, etc. when ordering. Also, indicate if indents are required in the center, on one or both sides of the chain.

For example, "I would like F4 pusher attachments every 8th pitch indented 3/4 in on both sides of the chain."

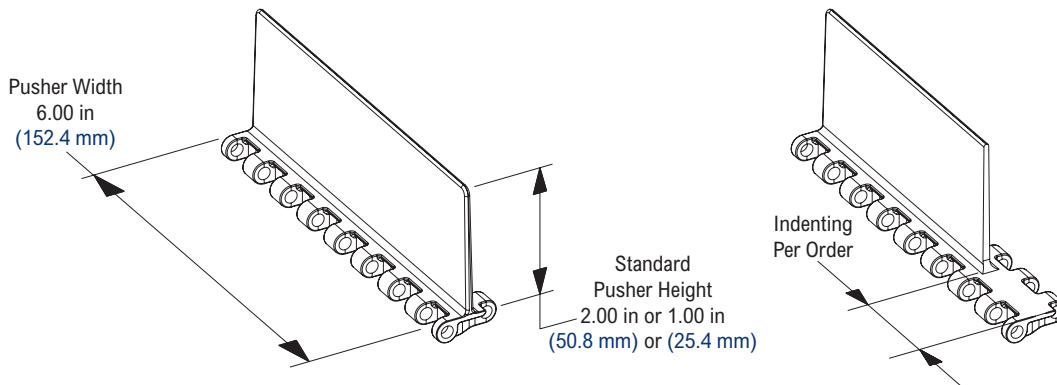

6995


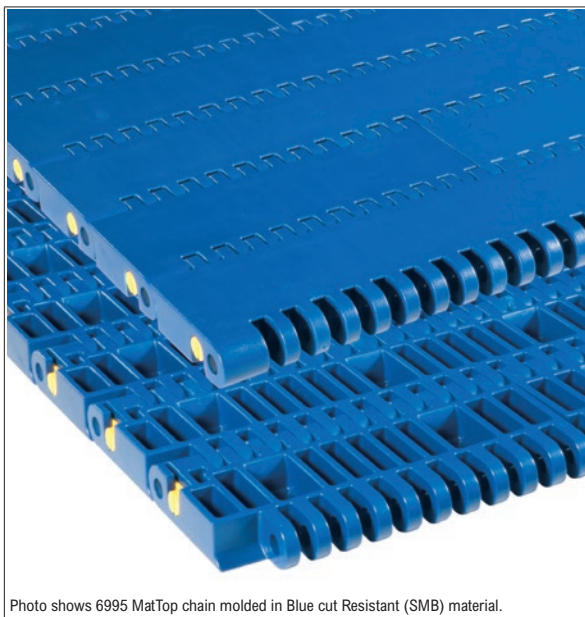


Photo shows 6995 MatTop chain molded in Blue cut Resistant (SMB) material.

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

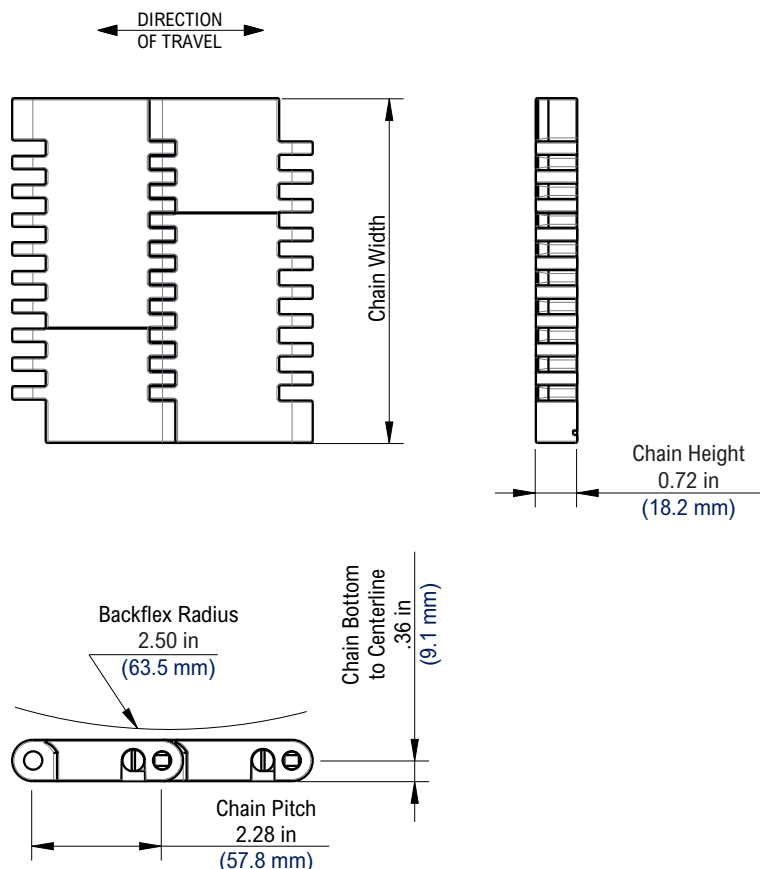

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
BRSM	Black Cut Resistant with Red End Links	Polyester	-40	180	150	-40	82	66	5,000	72,950	3.33	16.26	No
BSM	Black Cut Resistant	Polyester	-40	180	150	-40	82	66	5,000	72,950	3.33	16.26	No
BYSM	Black Cut Resistant with Yellow End Links	Polyester	-40	180	150	-40	82	66	5,000	72,950	3.33	16.26	No
SMB	Blue Cut Resistant	Polyester	-40	180	150	-40	82	66	5,000	72,950	3.33	16.26	Yes
SRMB	Blue Cut Resistant with Red End Links	Polyester	-40	180	150	-40	82	66	5,000	72,950	3.33	16.26	Yes
Non-Standard Materials													
BUV	Blue Ultraviolet Resistant	Polyester	0	180	150	-18	82	66	5,000	72,950	3.33	16.26	No
DUV	Black Ultraviolet Resistant	Polyester	0	180	150	-18	82	66	5,000	72,950	3.33	16.26	No
HUV	High Temperature Ultraviolet Resistant	Polypropylene	40	220	180	4	104	82	2,700	39,393	2.17	10.59	No
LUV	Low Temperature Ultraviolet Resistant	Polyethylene	-40	80	80	-40	27	27	1,800	26,262	2.17	10.59	No
RSM	Red Cut Resistant	Polyester	-40	180	150	-40	82	66	5,000	72,950	3.33	16.26	Yes
RUV	Red Ultraviolet Resistant	Polyester	0	180	150	-18	82	66	5,000	72,950	3.33	16.26	No
SYMB	Blue Cut Resistant with Yellow End Links	Polyester	-40	180	150	-40	82	66	5,000	72,950	3.33	16.26	Yes
WHT	White High Temperature	Polypropylene	40	220	212	4	104	100	2,700	39,393	2.17	10.59	Yes
YSM	Yellow Cut Resistant	Polyester	-40	180	150	-40	82	66	5,000	72,950	3.33	16.26	Yes
WSM	White Cut Resistant	Polyester	-40	180	150	-40	82	66	5,000	72,950	3.33	16.26	Yes
YUV	Yellow Ultraviolet Resistant	Polyester	0	180	150	-18	82	66	5,000	72,950	3.33	16.26	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300.

Open area = 1.8%.

Stainless steel pins are available on a made-to-order basis.

Polypropylene pins are standard for acetal chains over 42 in (1.067 m) wide.


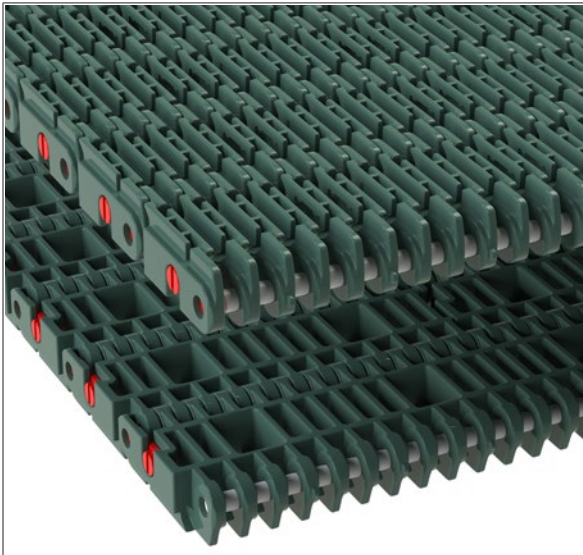


Photo shows 6997 MatTop Chain molded in Ultra Stabilized Polypropylene (USP) material.

Chain Information

Chain Capacity	Number of Sprockets			
	with Transfer Comb		without Transfer Comb	
	per ft	per m	per ft	per m
0% - 50%	4	13	2	7
50% - 100%	4	13	4	13

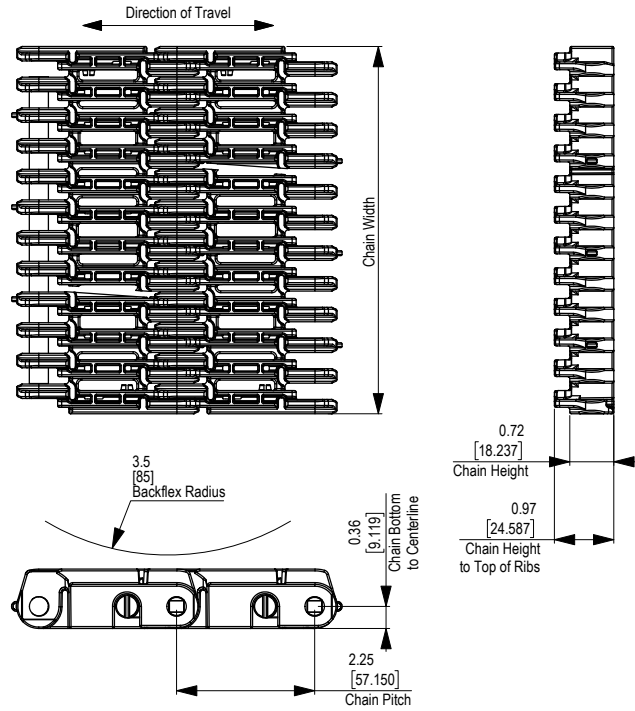

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
				dry	wet		dry	wet					
Standard Materials													
USP	Ultra Stabilized Polypropylene	Polypropylene	40	220	212	4	104	100	2,700	39,393	2.26	11.02	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

For chain width information see Rexnord Chain Width Table on page 300. Open area = 29%. Chain strength is listed at room temperature. For additional material information, see material portfolio.

6999


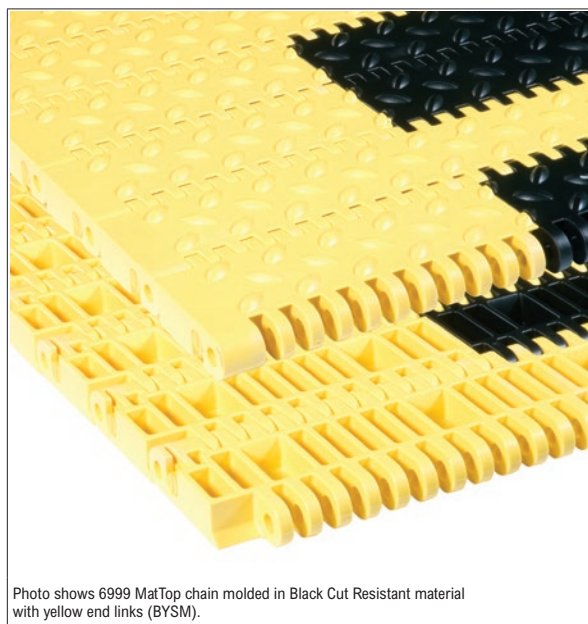


Photo shows 6999 MatTop chain molded in Black Cut Resistant material with yellow end links (BYSM).

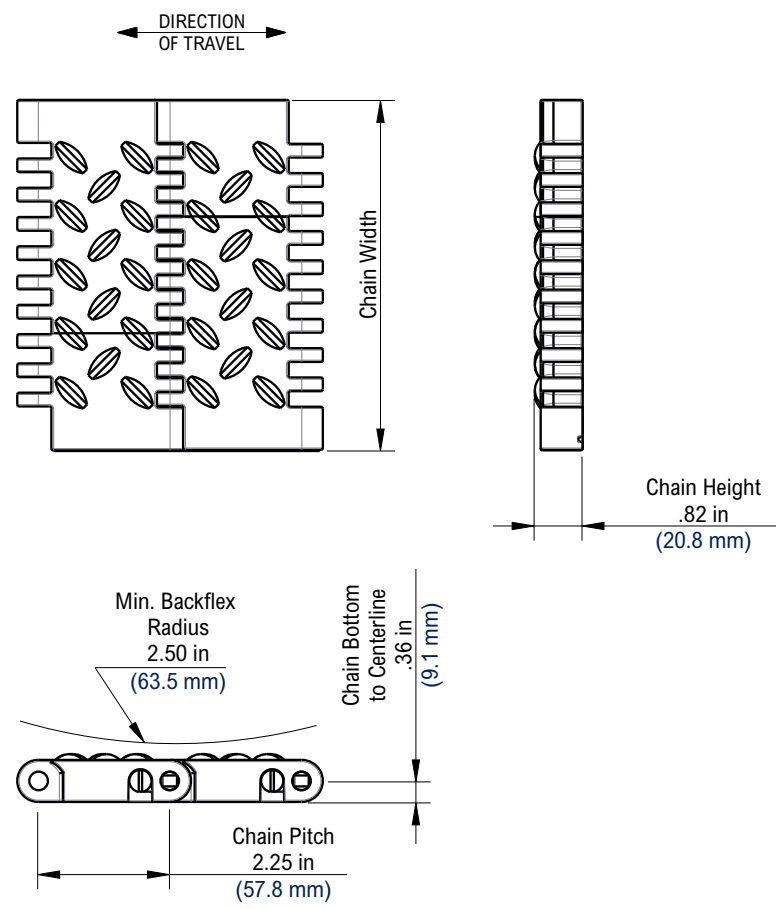

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
BSM	Black Cut Resistant	Polyester	-40	180	150	-40	82	66	5,000	72,950	3.42	16.70	No
BYSM	Black Cut Resistant with Yellow End Links	Polyester	-40	180	150	-40	82	66	5,000	72,950	3.42	16.70	No
Non-Standard Materials													
BRSM	Black Cut Resistant with Red End Links	Polyester	-40	180	150	-40	82	66	5,000	72,950	3.42	16.70	No
BUV	Blue Ultraviolet Resistant	Polyester	0	180	150	-18	82	66	5,000	72,950	3.42	16.70	No
DUV	Black Ultraviolet Resistant	Polyester	0	180	150	-18	82	66	5,000	72,950	3.42	16.70	No
HCAS	High Capacity Anti-Static	Polyester	0	180	150	-18	82	66	4,600	67,114	3.42	16.70	No
HUV	High Temperature Ultraviolet Resistant	Polypropylene	40	220	180	4	104	82	2,700	39,393	2.25	10.99	No
LUV	Low Temperature Ultraviolet Resistant	Polyethylene	-40	80	80	-40	27	27	1,800	26,262	2.25	10.99	No
RSM	Red Cut Resistant	Polyester	-40	180	150	-40	82	66	5,000	72,950	3.42	16.70	Yes
RUV	Red Ultraviolet Resistant	Polyester	0	180	150	-18	82	66	5,000	72,950	3.42	16.70	No
SMB	Blue Cut Resistant	Polyester	-40	180	150	-40	82	66	5,000	72,950	3.42	16.70	Yes
SRMB	Blue Cut Resistant with Red End Links	Polyester	-40	180	150	-40	82	66	5,000	72,950	3.42	16.70	Yes
SYMB	Blue Cut Resistant with Yellow End Links	Polyester	-40	180	150	-40	82	66	5,000	72,950	3.42	16.70	Yes
WLT	White Low Temperature	Polyethylene	-100	80	80	-73	27	27	1,800	26,262	2.17	10.59	Yes
YSM	Yellow Cut Resistant	Polyester	-40	180	150	-40	82	66	5,000	72,950	3.42	16.70	Yes
YUV	Yellow Ultraviolet Resistant	Polyester	0	180	150	-18	82	66	5,000	72,950	3.42	16.70	No


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.


Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For chain width information see Rexnord Chain Width Table on page 300. Open area = 1.8%. Stainless steel pins are available on a made-to-order basis. Polypropylene pins are standard for acetal chains over 42 in (1.067 m) wide.


NS5996 Thermoplastic Split Sprocket



N5996 Thermoplastic Sprocket Molded in HS



N5996 Thermoplastic Sprocket Molded in PE



NS5996 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
9	9	6.579	167.11	6.46	164.1	1	2 5/8	25	70	1	3 1/2*	25	90*	1	2 3/4	25	70	1.68	0.76
12	12	8.693	220.80	8.70	221.0	1	2 3/4	25	70	1	3 1/2*	25	90*	1	2 3/4	25	70	1.98	0.90
14	14	10.111	256.82	10.03	254.8	1	4 1/2	25	120	1	4 1/2**	25	120**	1	3 1/2	25	90	2.12	0.96

* The 3-1/2 in and 90 mm bores for the 9 and 12 tooth square bore sprockets are supplied as molded bores. All other bores are supplied with split bore adapters.

** The 3-1/2 in, 4-1/2 in, 90 mm and 120 mm bores for the 14 tooth square bore sprockets are supplied as molded bores. All other bores are supplied with split bore adapters.

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft. Similar bore sizes are available with the use of split plastic adapters.

N5996 Thermoplastic Sprocket Molded in HS (Heat Stabilized) — Imperial Information

Number of Teeth		Pitch Diameter		Outside Diameter		Imperial Bore Diameter						Approximate Weight			
						Square									
actual	effect	in	mm	in	mm	in						lbs	kg		
9	9	6.579	167.11	6.46	164.1	1 1/2 in			2 in			3 1/2 in		0.88	0.40

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

N5996 Thermoplastic Sprocket Molded in HS (Heat Stabilized) — Metric Information

Number of Teeth		Pitch Diameter		Outside Diameter		Metric Bore Diameter						Approximate Weight	
						Square							
actual	effect	in	mm	in	mm	mm						lbs	kg
9	9	6.579	167.11	6.46	164.1	40			-			0.88	0.40
14	14	10.111	256.82	10.10	256.5	-			90			1.60	0.73


Shaft-ready round bore sprockets are shipped with keyway and setscrew.

N5996 Thermoplastic Sprocket Molded in PE (Polyethylene) — Imperial Information

Number of Teeth		Pitch Diameter		Outside Diameter		Imperial Bore Diameter						Approximate Weight		
						Round			Square					
actual	effect	in	mm	in	mm	in			in			lbs	kg	
7	7	5.186	131.72	4.94	125.5	-	-	-	1 1/2	-	-	-	0.38	0.17
9	9	6.579	167.11	6.46	164.1	1 3/16	1 1/4	2 7/16	1 1/2	2	2 1/2	-	0.69	0.31

Shaft-ready round bore sprockets are shipped with keyway and setscrew.


Rexnord™ 5990 Series MatTop™ Chain Compatible Sprockets

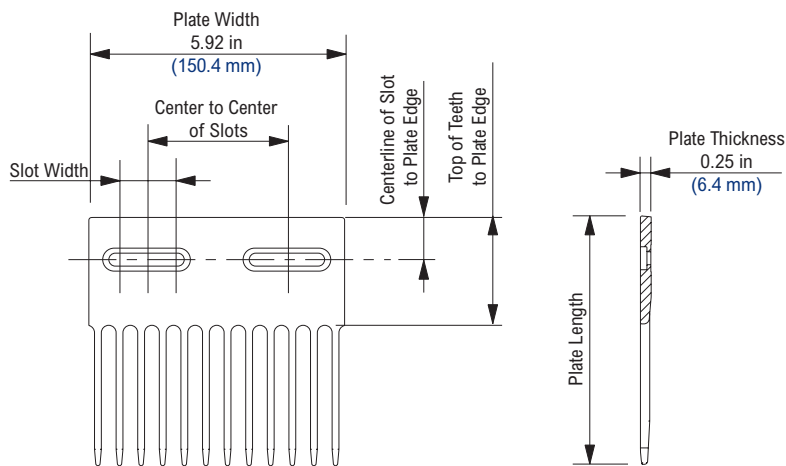

4707/5997/6997 Transfer Comb Kit

Transfer Comb Kit Number	Transfer Plate Part Number	Screw Part Number	Slot Caps Part Number	Plate Length		Slot Width		Centerline of Slot to Plate Edge		Top of Teeth to Plate Edge		Center to Center of Slots		Approximate Weight	
				in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
10131495	10074648	10075965	10069160	6.18	157.0	1.50	38.1	1.00	25.4	4.40	111.8	3.25	82.6	0.48	0.22
10131813	10070598	10075965	10075964	5.75	146.1	0.75	19.1	1.00	25.4	2.24	56.9	4.00	101.6	0.24	0.11
10131834	10075632	10075965	10069160	8.50	215.9	1.50	38.1	2.00	50.8	3.50	88.9	3.25	82.6	0.28	0.13
10131838	10069161	10075965	10069160	7.50	190.5	1.50	38.1	1.00	25.4	2.50	63.5	3.25	82.6	0.30	0.14


The 10070598 transfer comb is molded in white acetal. The 10075632 and 10069161 transfer combs are molded in a proprietary black internally lubricated high temperature material. Transfer comb kits are supplied with 1/4-20 screws and slot caps. For 4707, 5997 and 6997 chains only.

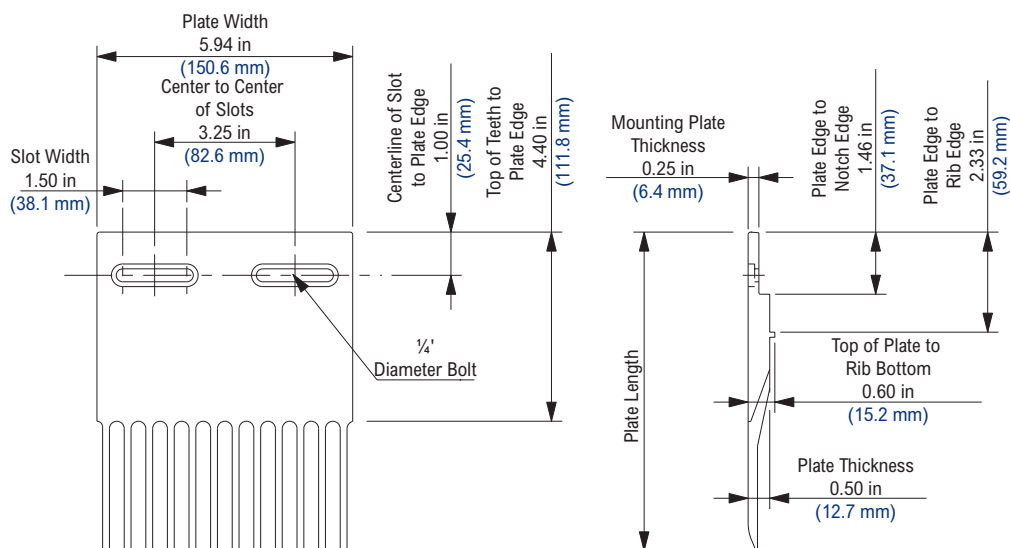

4707/5997/6997 Heavy Duty Transfer Comb Kit

Transfer Comb Kit Number	Transfer Plate Part Number	Screw Part Number	Slot Caps Part Number	Plate Length		Slot Width		Centerline of Slot to Plate Edge		Top of Teeth to Plate Edge		Center to Center of Slots		Approximate Weight	
				in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
10131497	10074649	10075965	10069160	7.95	201.9	1.50	38.1	1.00	25.4	4.40	111.8	3.25	82.6	0.53	0.24
10131499	10071978	10075965	10069160	7.95	201.9	1.50	38.1	1.00	25.4	4.40	111.8	3.25	82.6	0.53	0.24


Transfer combs are molded in a proprietary black internally lubricated high temperature material. Transfer comb kits are supplied with 1/4-20 screws and slot caps. For 4707, 5997 and 6997 chains only. The 10071978 transfer comb has the bottom rib removed.

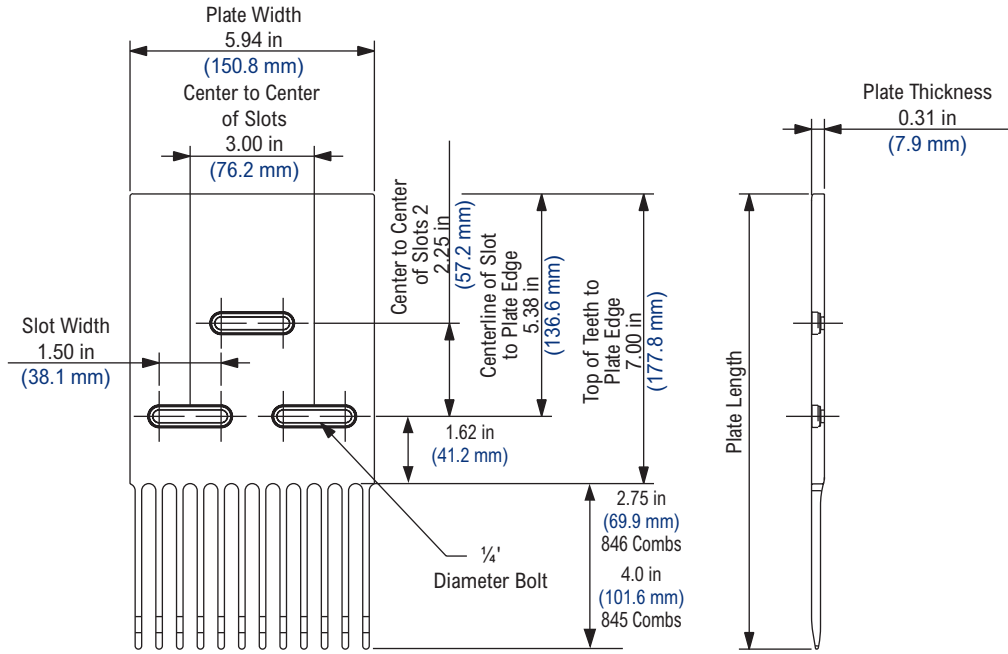

4707/5997/6997 Retrofit Transfer Comb Kit

Transfer Comb Kit Number	Transfer Plate Part Number	Screw Part Number	Slot Caps Part Number	Plate Length		Slot Width		Distance From Centerline of Slot to Plate Edge		Distance From Top of Teeth to Plate Edge		Distance Between Center to Center of Slots		Approximate Weight	
				in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
10131941	10074860	10075965	10069160	11.00	279.4	1.50	38.1	5.38	136.7	7.00	177.8	3.00	76.2	0.31	0.14
10323925	10074860	10177423	10069160	11.00	279.4	1.50	38.1	5.38	136.7	7.00	177.8	3.00	76.2	0.31	0.14
10131942	10074861	10075965	10069160	9.75	247.7	1.50	38.1	5.38	136.7	7.00	177.8	3.00	76.2	0.28	0.13
10131943	10074861	10177423	10069160	9.75	247.7	1.50	38.1	5.38	136.7	7.00	177.8	3.00	76.2	0.28	0.13

Transfer combs are molded in a proprietary black internally lubricated high temperature material. The 10131941 and 10131942 transfer comb kits are supplied with 1/4-20 screws and slot caps. The 10323925 and 10131943 transfer comb kits are supplied with M6x1 screws and slot caps. For 6997 chains only.

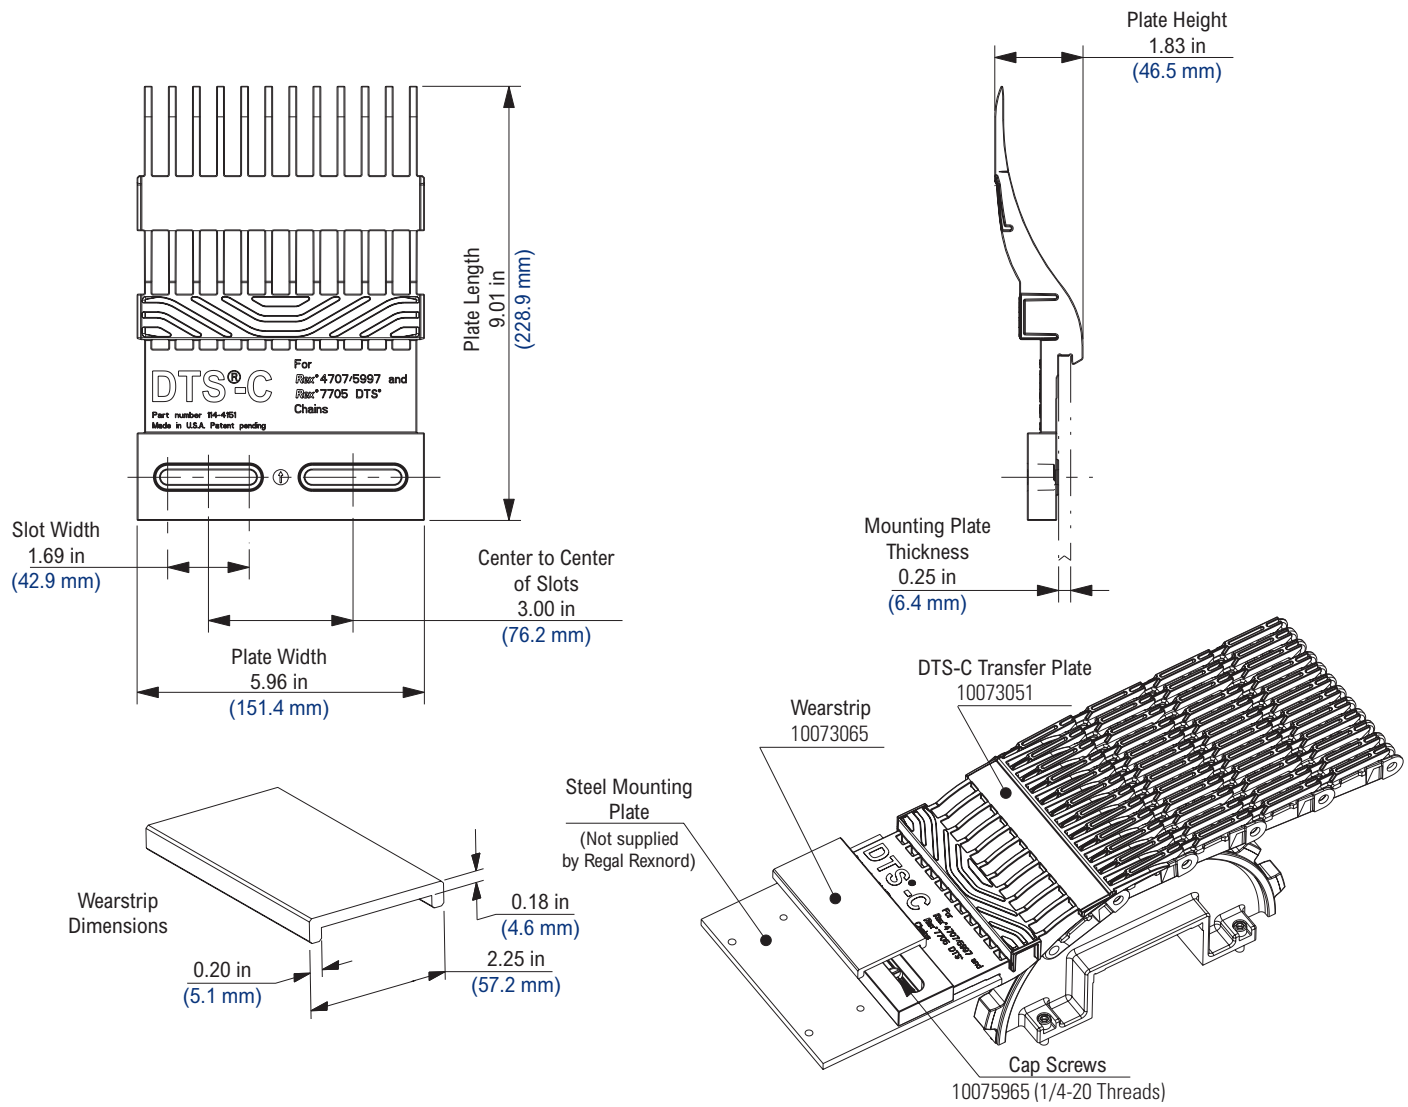

DTS-C Component Part Numbers

Component Description	Kit Part Number	Comb Part Number	Screw Part Number	Wearstrip Part Number (10 ft length)	For Use With		
					Raised Rib Chain	DTS Chain	Takeaway Chain
DTS-C Comb Kit	10131580	10073051	10075965	NA	4707, 5997 or 6997	7705DTS-4.5	7705, 7706 or 1055
Wearstrip	NA			10073065			

Each kit includes one comb and two mounting screws.

Wearstrip is sold in 10 ft (3.048 m) lengths and is sold separately.

Pusher Attachments (T-Style)


All T1 pusher attachments are molded on a 6 in (152.4 mm) wide link with 0.5 in (12.7mm) indents on both sides.

6990 T-Style attachments are available in T1, T1.5 & T2 configurations. The T1 designation represents a T-style pusher attachment with a height of 1 in (25.4 mm).

T-Style pushers are available in any 3 letter material designation. YSM (yellow) is standard.

Please indicate if pusher attachments are required every second pitch, fifth pitch, tenth pitch, etc. when ordering.

Standard indent increment is 3.00 in (76.2 mm) starting at 3.50 in (88.9 mm) placed on required pitch location (i.e. every 2nd, 5th, 10th, etc.). For example, a 30 in (762.0 mm) wide chain with a 6.50 in (165.1 mm) indent on both sides would result in a centered 17.00 in (431.8 mm) T pusher attachment.

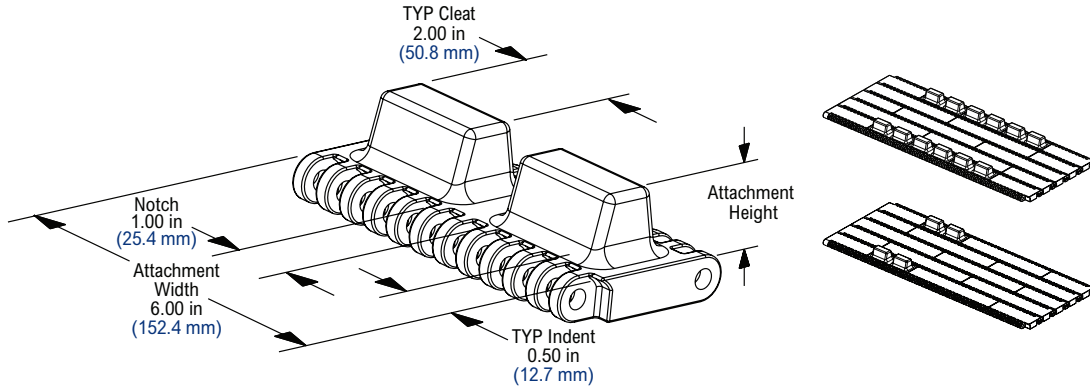


6990 Sideguard Attachment

Sideguard link widths are available in 2 in (50.8 mm) and 3 in (76.2 mm) links to accommodate standard brick patterns.

Sideguard links are end links so no indent is available for the sideguards.

If chain is to have pushers and sideguards, pushers must be placed on even pitch increments.

Please contact Regal Rexnord for specific applications.

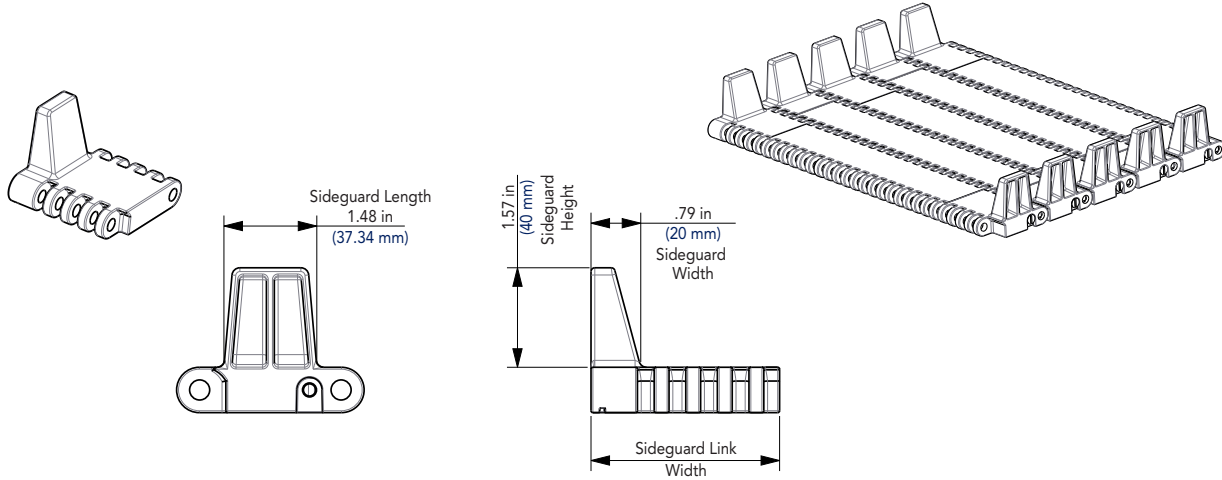


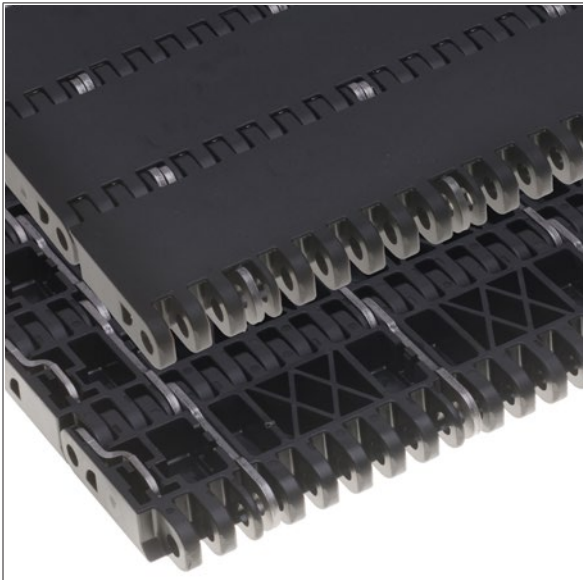


Photo shows 6995H4 MatTop Chain molded in Black Cut Resistant (BSM) material.

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

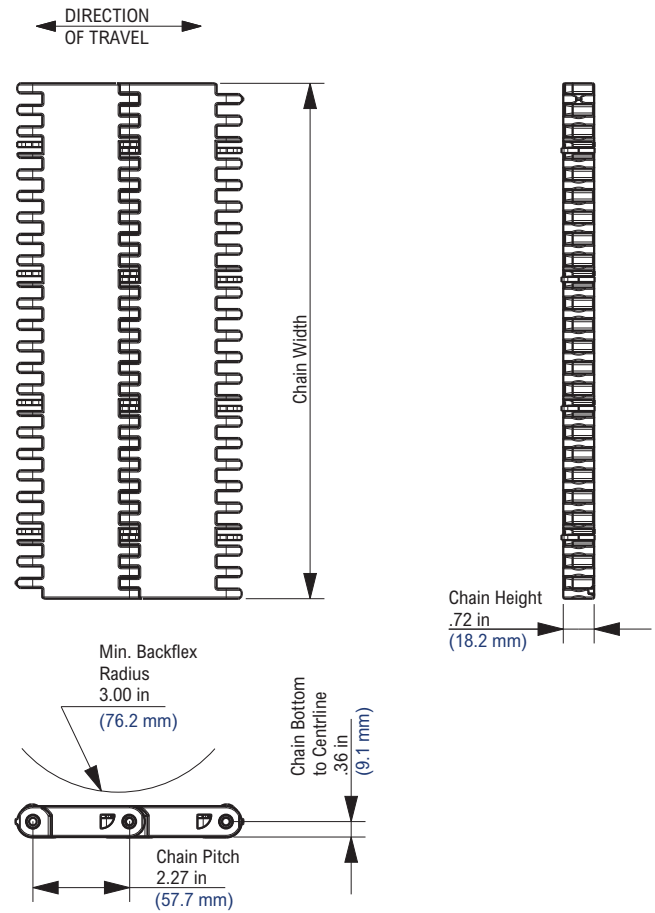

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
				dry	wet		dry	wet					
Non-Standard Materials													
BM	Black Material	Stainless Steel	-40	180	150	-40	82	66	6,850	100,000	5.48	26.8	Yes
BRM	Black Material with Red End Links	Stainless Steel	-40	180	150	-40	82	66	6,850	100,000	5.48	26.8	Yes
BSM	Black Cut Resistant	Stainless Steel	-40	180	150	-40	82	66	6,850	100,000	5.48	26.8	No
BYM	Black Material with Yellow End Links	Stainless Steel	-40	180	150	-40	82	66	6,850	100,000	5.48	26.8	Yes
FR-PA	Black Flame Retardant Nylon	Stainless Steel	-40	180	NA	-40	82	NA	6,850	100,000	4.90	23.9	No
GTC	Grey Tough Composite	Stainless Steel	0	180	140	-18	82	60	6,850	100,000	5.04	24.6	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.


Additional Notes

For chain width information see Rexnord Chain Width Table on page 300. Open area = 1.8%.

6995H8



Photo shows 6995H8 MatTop Chain molded in Black Cut Resistant (BSM) material.

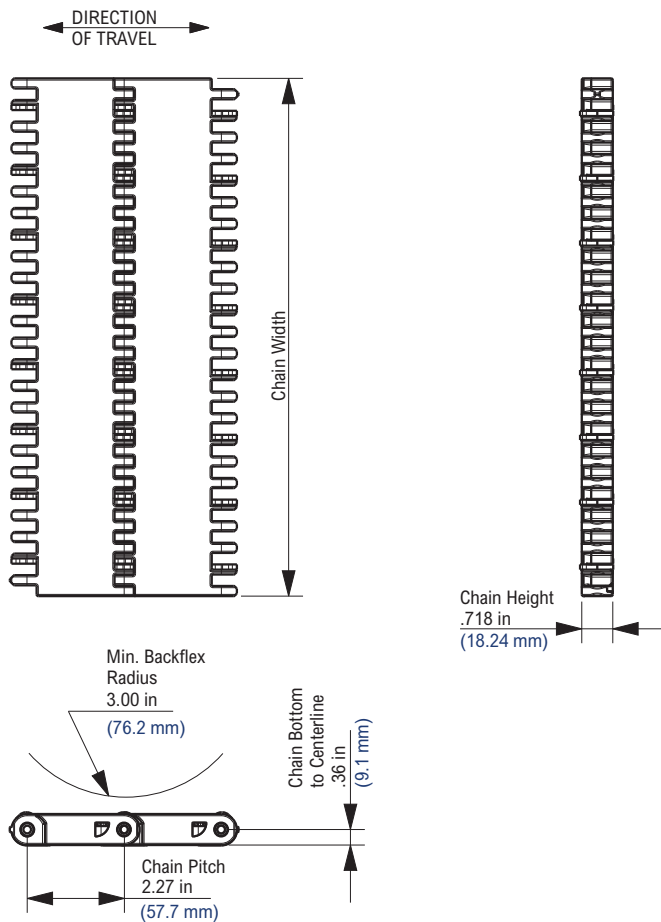

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Non-Standard Materials													
BM	Black Material	Stainless Steel	-40	180	150	-40	82	66	11,645	170,000	6.44	31.4	Yes
BRM	Black Material with Red End Links	Stainless Steel	-40	180	150	-40	82	66	11,645	170,000	6.44	31.4	Yes
BSM	Black Cut Resistant	Stainless Steel	-40	180	150	-40	82	66	11,645	170,000	6.44	31.4	No
BYM	Black Material with Yellow End Links	Stainless Steel	-40	180	150	-40	82	66	11,645	170,000	6.44	31.4	Yes
FR-PA	Black Flame Retardant Nylon	Stainless Steel	-40	180	NA	-40	82	NA	11,645	170,000	5.88	28.7	No
GTC	Grey Tough Composite	Stainless Steel	0	180	140	-18	82	60	11,645	170,000	6.01	29.4	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

For chain width information see Rexnord Chain Width Table on page 300. Open area = 1.8%.


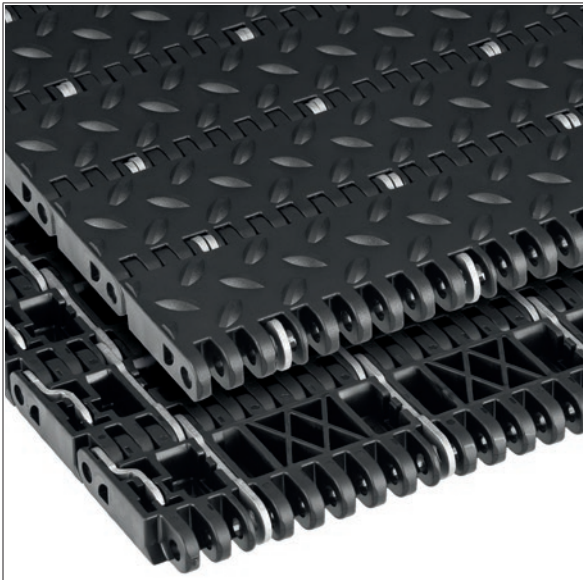


Photo shows 6999H4 MatTop Chain molded in Black Cut Resistant (BSM) material.

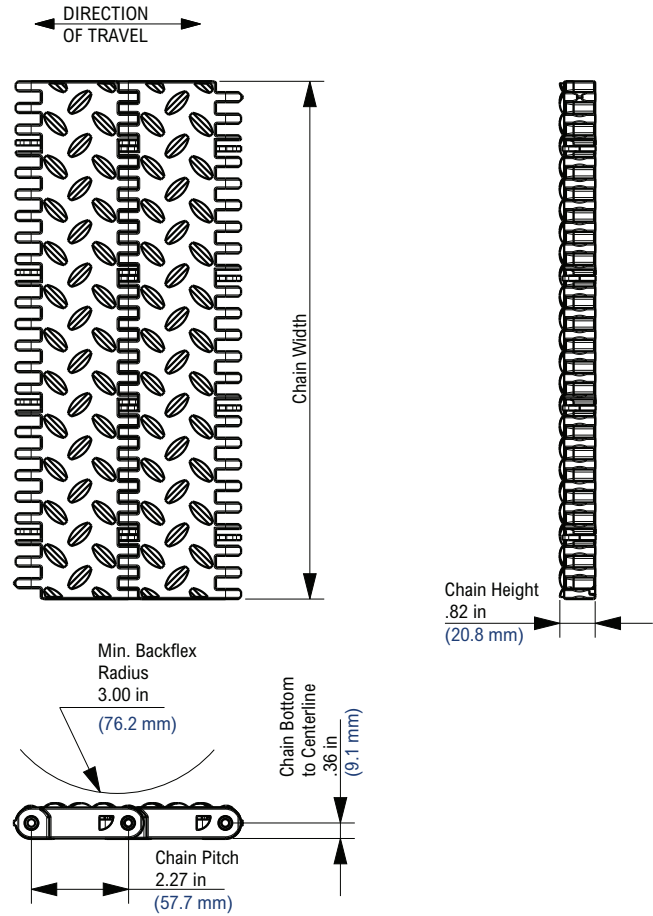

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft	N/m	lbs/ft ²	kg/m ²	
			min	max		min	max						
Non-Standard Materials													
BM	Black Material	Stainless Steel	-40	180	150	-40	82	66	6,850	100,000	5.58	27.3	Yes
BRM	Black Material with Red End Links	Stainless Steel	-40	180	150	-40	82	66	6,850	100,000	5.58	27.3	Yes
BSM	Black Cut Resistant	Stainless Steel	-40	180	150	-40	82	66	6,850	100,000	5.58	27.3	No
BYM	Black Material with Yellow End Links	Stainless Steel	-40	180	150	-40	82	66	6,850	100,000	5.58	27.3	Yes
FR-PA	Black Flame Retardant Nylon	Stainless Steel	-40	180	NA	-40	82	NA	6,850	100,000	4.99	24.4	No
GTC	Grey Tough Composite	Stainless Steel	0	180	140	-18	82	60	6,850	100,000	5.21	25.4	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.


Additional Notes

For chain width information see Rexnord Chain Width Table on page 300. Open area = 1.8%.

6999H8



Photo shows 6999H8 MatTop Chain molded in Black Cut Resistant (BSM) material.

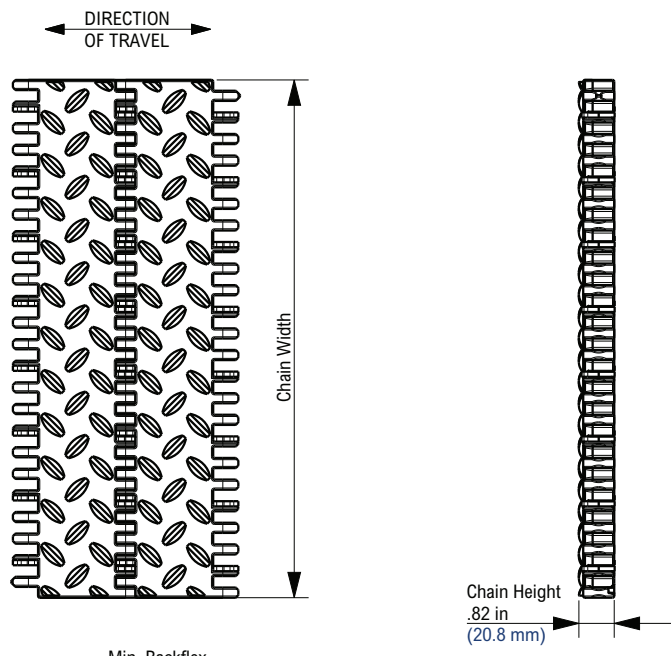

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Non-Standard Materials													
BM	Black Material	Stainless Steel	-40	180	150	-40	82	66	11,645	170,000	6.64	32.4	Yes
BRM	Black Material with Red End Links	Stainless Steel	-40	180	150	-40	82	66	11,645	170,000	6.64	32.4	Yes
BSM	Black Cut Resistant	Stainless Steel	-40	180	150	-40	82	66	11,645	170,000	6.64	32.4	No
BYM	Black Material with Yellow End Links	Stainless Steel	-40	180	150	-40	82	66	11,645	170,000	6.64	32.4	Yes
FR-PA	Black Flame Retardant Nylon	Stainless Steel	-40	180	NA	-40	82	NA	11,645	170,000	6.19	30.2	No
GTC	Grey Tough Composite	Stainless Steel	0	180	140	-18	82	60	11,645	170,000	6.05	29.5	No

Regulatory Information



The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

For chain width information see Rexnord Chain Width Table on page 300. Open area = 1.8%.

KU6990HYB Thermoplastic “B-Style” Sprocket


KU6990HYB Thermoplastic “H-Style” Sprocket

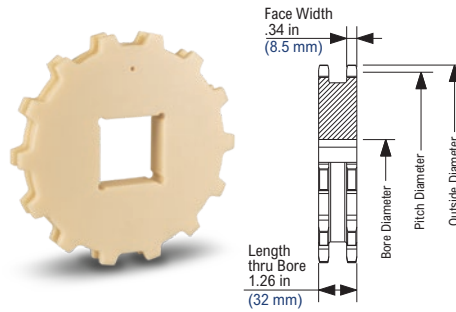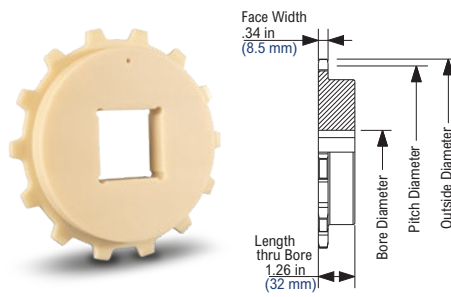

KU6990HYB Thermoplastic “B-Style” and “H-Style” Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Approximate Weight	
						Round				Square					
						in		mm		in		mm			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	lbs	kg
9T	9T	6.712	170.49	6.683	169.75	2-15/16	3-1/2	75	95	1.5	3	35	75	1.84	0.83
10T	10T	7.429	188.69	7.441	189.00	2-15/16	3-7/8	80	95	1.5	3	35	85	2.28	1.03
11T	11T	8.148	206.97	8.194	208.13	2-3/8	4-1/2	80	125	1.5	4	35	100	2.76	1.25
12T	12T	8.870	225.29	8.944	227.18	2-5/8	5-1/4	85	145	1.5	4.5	35	115	3.29	1.49
13T	13T	9.593	243.65	9.69	246.13	2-13/16	5-3/4	90	165	1.5	5	35	130	3.86	1.75
14T	14T	10.317	262.04	10.434	265.02	2-13/16	6-1/2	100	180	2	5.5	50	140	4.47	2.03
15T	15T	11.042	280.46	11.176	283.87	2-13/16	7	100	200	2	6	50	150	5.13	2.33
16T	16T	11.767	298.89	11.917	302.69	2-7/8	7-1/2	100	215	2	6.5	50	160	5.84	2.65
17T	17T	12.494	317.33	12.657	321.49	3-1/16	8	100	230	2.5	7	60	180	6.58	2.99
18T	18T	13.220	335.79	13.395	340.23	3-5/16	9	100	250	2.5	7.5	60	190	7.37	3.35
19T	19T	13.947	354.26	14.133	358.98	3-5/16	9	100	260	2.5	8	60	210	8.21	3.73
20T	20T	14.675	372.75	14.87	377.70	3-5/16	9	115	280	2.5	8.5	60	220	9.09	4.13
21T	21T	15.403	391.24	15.607	396.42	3-5/16	11	115	290	2.5	9	60	230	10.01	4.55
22T	22T	16.131	409.73	16.313	414.35	3-3/8	11	115	310	2.5	9.5	60	240	10.94	4.97
23T	23T	16.859	428.22	17.048	433.02	3-3/8	12	125	310	3	10	75	260	11.94	5.43
24T	24T	17.588	446.74	17.783	451.69	3-3/4	12	130	310	3	10.5	75	270	13.00	5.91
25T	25T	18.317	465.25	18.518	470.36	3-7/8	12	135	310	3	11	75	280	14.09	6.41
26T	26T	19.045	483.74	19.253	489.03	3-7/8	12	135	310	3	11.5	75	300	15.23	6.92
27T	27T	19.774	502.26	19.987	507.67	3-7/8	12	135	310	4.5	12	110	310	16.42	7.46
28T	28T	20.504	520.80	20.721	526.31	3-7/8	12	135	310	4.5	12	110	310	17.65	8.02
29T	29T	21.233	539.32	21.454	544.93	3-7/8	12	140	310	4.5	12	110	310	18.92	8.60
30T	30T	21.962	557.83	22.188	563.58	4-1/8	12	145	310	4.5	12	110	310	20.23	9.20

KUS6990HYB Thermoplastic "B-Style" Split Sprocket KUS6990HYB Thermoplastic "H-Style" Split Sprocket

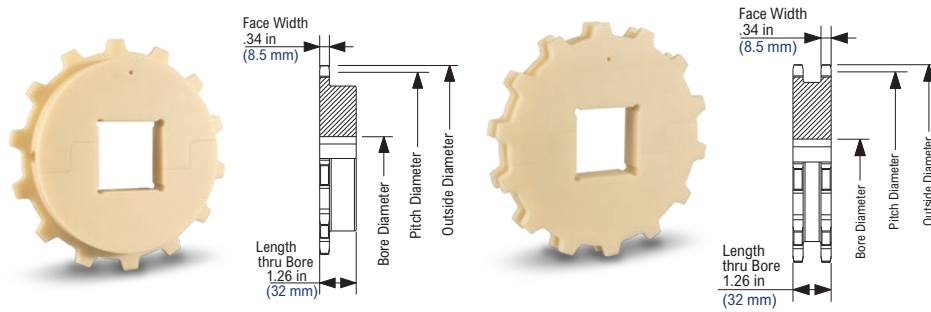


KUS6990HYB Thermoplastic "B-Style" and "H-Style" Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Approximate Weight	
						Round				Square					
						in		mm		in		mm			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	lbs	kg
9T	9T	6.712	170.49	6.683	169.75	-	-	-	-	1.5	2	35	50	1.84	0.83
10T	10T	7.429	188.69	7.441	189.00	-	-	-	-	1.5	2.5	35	65	2.28	1.03
11T	11T	8.148	206.97	8.194	208.13	2-3/8	3	75	75	1.5	3	35	75	2.76	1.25
12T	12T	8.870	225.29	8.944	227.18	2-5/8	4	85	100	1.5	4	35	100	3.29	1.49
13T	13T	9.593	243.65	9.69	246.13	2-13/16	4.5	90	115	1.5	4.5	35	115	3.86	1.75
14T	14T	10.317	262.04	10.434	265.02	2-13/16	5	100	125	2	5	50	125	4.47	2.03
15T	15T	11.042	280.46	11.176	283.87	2-13/16	6	100	150	2	6	50	150	5.13	2.33
16T	16T	11.767	298.89	11.917	302.69	2-7/8	6.5	100	160	2	6.5	50	160	5.84	2.65
17T	17T	12.494	317.33	12.657	321.49	3-1/16	7	100	180	2.5	7	60	180	6.58	2.99
18T	18T	13.220	335.79	13.395	340.23	3-5/16	7.5	100	190	2.5	7.5	60	190	7.37	3.35
19T	19T	13.947	354.26	14.133	358.98	3-5/16	8	100	210	2.5	8	60	210	8.21	3.73
20T	20T	14.675	372.75	14.87	377.70	3-5/16	8.5	115	220	2.5	8.5	60	220	9.09	4.13
21T	21T	15.403	391.24	15.607	396.42	3-5/16	9	115	230	2.5	9	60	230	10.01	4.55
22T	22T	16.131	409.73	16.313	414.35	3-3/8	9.5	115	240	2.5	9.5	60	240	10.94	4.97
23T	23T	16.859	428.22	17.048	433.02	3-3/8	10	125	260	3	10	75	260	11.94	5.43
24T	24T	17.588	446.74	17.783	451.69	3-3/4	10.5	130	270	3	10.5	75	270	13.00	5.91
25T	25T	18.317	465.25	18.518	470.36	3-7/8	11	135	280	3	11	75	280	14.09	6.41
26T	26T	19.045	483.74	19.253	489.03	3-7/8	11.5	135	300	3	11.5	75	300	15.23	6.92
27T	27T	19.774	502.26	19.987	507.67	3-7/8	12	135	310	4.5	12	110	310	16.42	7.46
28T	28T	20.504	520.80	20.721	526.31	3-7/8	12	135	310	4.5	12	110	310	17.65	8.02
29T	29T	21.233	539.32	21.454	544.93	3-7/8	12	140	310	4.5	12	110	310	18.92	8.60
30T	30T	21.962	557.83	22.188	563.58	4-1/8	12	145	310	4.5	12	110	310	20.23	9.20


Rexnord™ 6990HYB™ Series MatTop™ Chain Compatible Sprockets

6990HYB Pusher Attachment

All pusher attachments are molded 6 in (152.4 mm) wide with a 1.5 in (38.1 mm) pusher height and 0.5 in (12.7 mm) side indent.

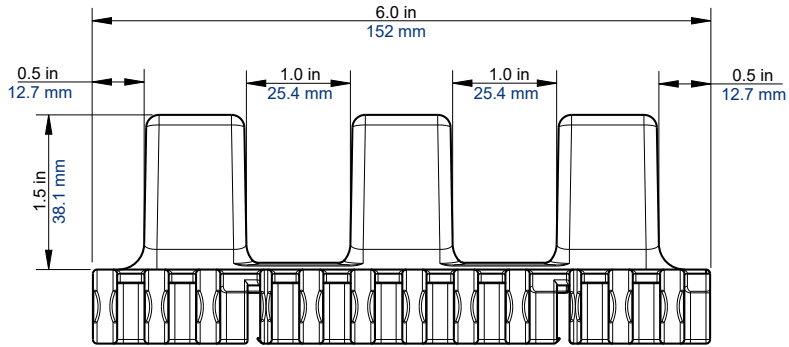

POM (YSM) H4 Hybrid Pusher

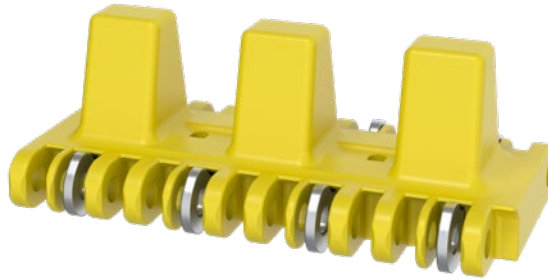

POM (YSM) H8 Hybrid Pusher

7703


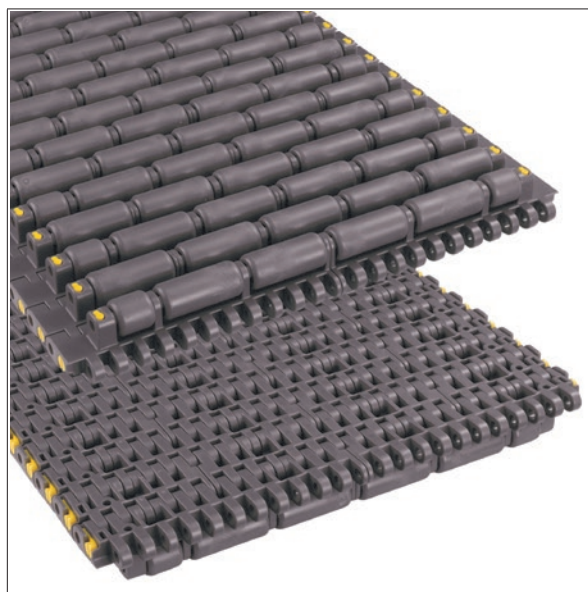


Photo shows 7703 MatTop Chain molded in High Performance (HP) material.

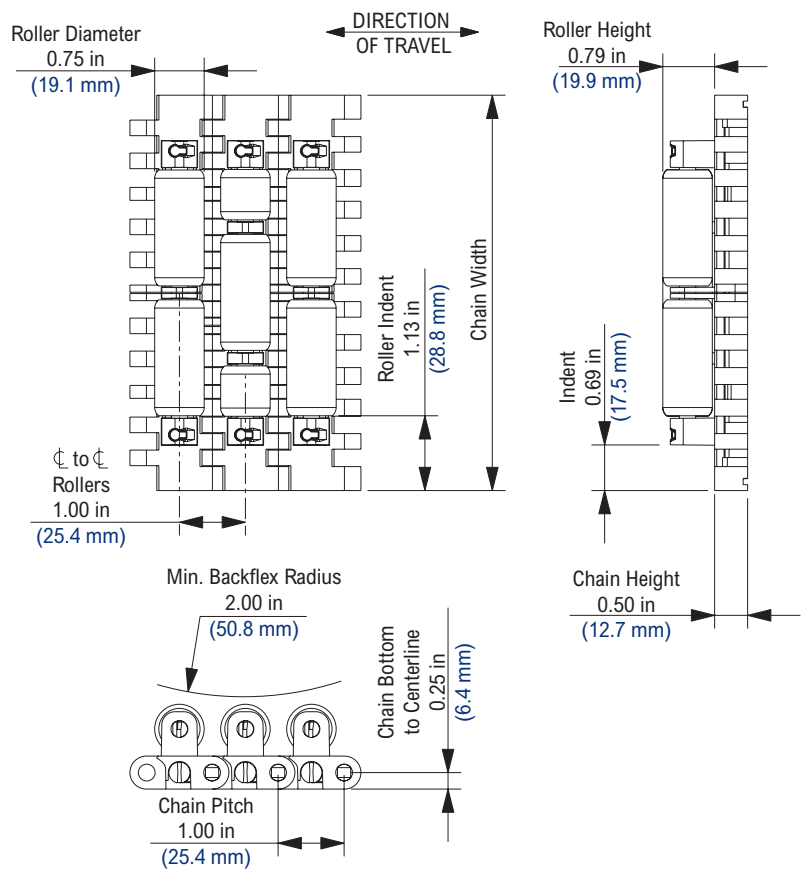

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2,950	43,041	5.10	24.90	Yes
Non-Standard Materials													
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	2,950	43,041	5.10	24.90	Yes
WX	Green Abrasion Resistant Polyamide	Acetal	-40	220	NR	-40	104	NR	2,950	43,041	5.10	24.90	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, MatTop, Platinum Series and PS are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For chain width information see Rexnord Chain Width Table on page 300. Open area = 3.0%. WX chain is assembled with HP rollers. Typical coefficient of friction between chain and product = 0.09. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.


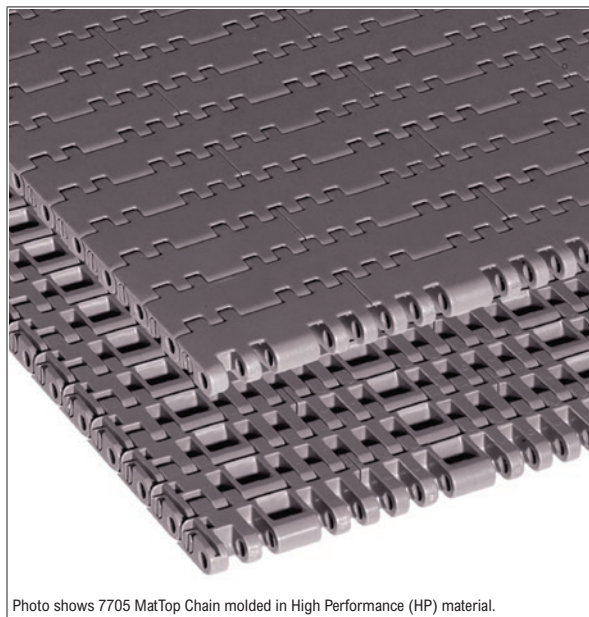


Photo shows 7705 MatTop Chain molded in High Performance (HP) material.

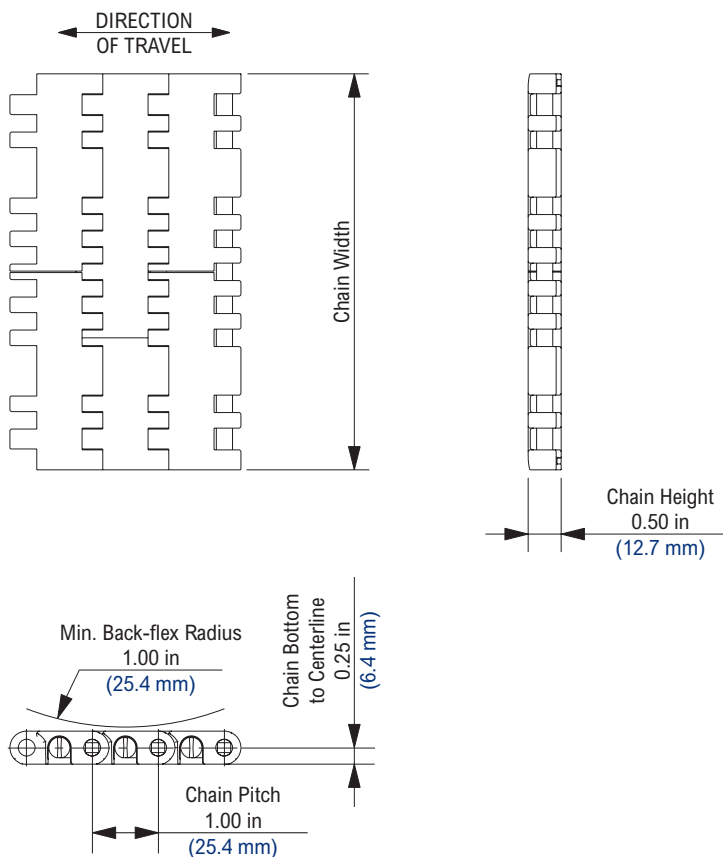

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max dry wet		min	max dry wet		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2,950	43,041	2.76	13.48	Yes
HT	High Temperature	Polypropylene	40	220	212	4	104	100	1,800	26,262	1.85	9.03	Yes
Non-Standard Materials													
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	1,770	25,824	2.76	13.48	No
Dry-PT™	Dry PET Low Friction	Polyester	-40	180	150	-40	82	66	2,950	43,041	2.76	13.48	Yes
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	1,475	21,521	3.04	14.85	No
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	2,950	43,041	2.76	13.48	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	2,950	43,041	2.76	13.48	Yes
WX	Green Abrasion Resistant Polyamide	Acetal	-40	220	NR	-40	104	NR	2,950	43,041	2.76	13.48	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, MatTop, Dry-PT, FRPLUS, Platinum Series, Platinum Series X, PS and PSX are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For chain width information see Rexnord Chain Width Table on page 300. Open area = 3.0%. Stainless steel pins are available on a made-to-order basis. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

7705 (Metric)


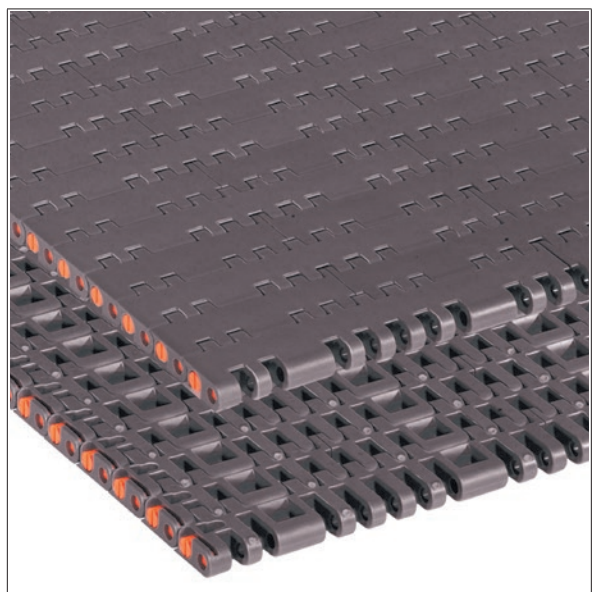


Photo shows Metric 7705 MatTop Chain molded in High Performance (HP) material.

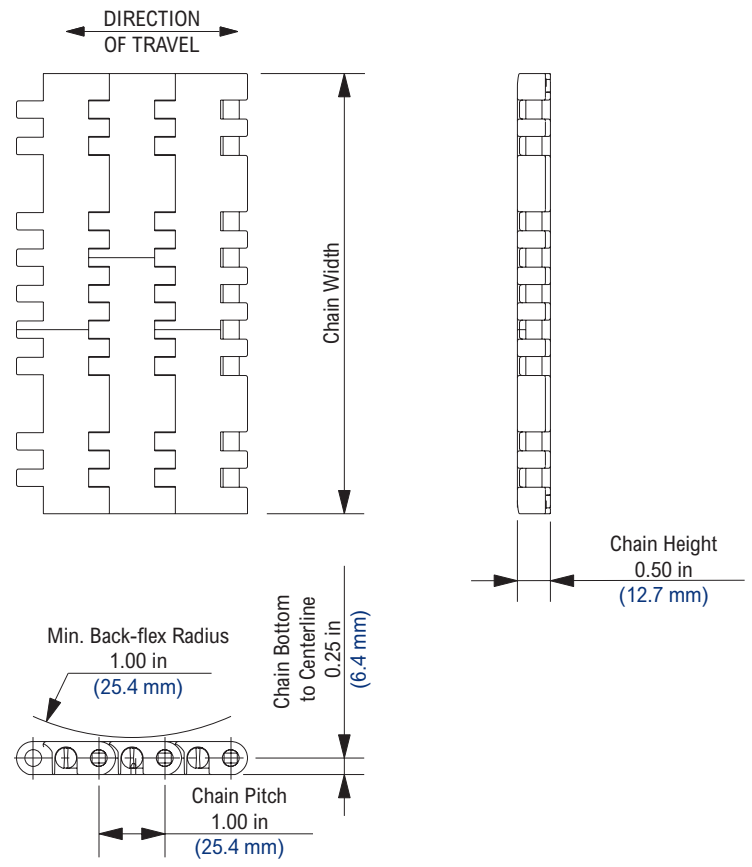

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2,950	43,041	2.76	13.48	Yes
Non-Standard Materials													
Dry-PT™	Dry PET Low Friction	Polyester	-40	180	150	-40	82	66	2,950	43,041	2.76	13.48	Yes
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	2,950	43,041	2.76	13.48	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	2,950	43,041	2.76	13.48	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, Dry-PT, Platinum Series, Platinum Series X, PS and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patent: 5335768

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300.

Open area = 3.0%.

Stainless steel pins are available on a made-to-order basis.

Metric modules, designated by orange plugs, will not couple with English modules.

Also available with PosiTrack Tracking Guides; please see accessories for more information.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

7705 (MTW)


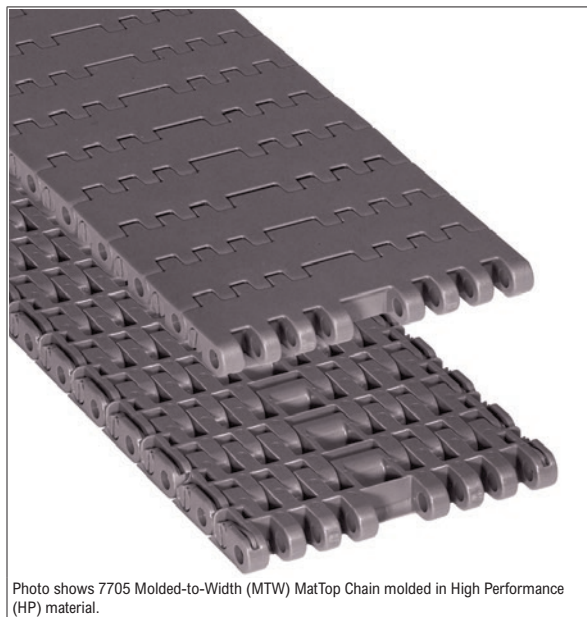


Photo shows 7705 Molded-to-Width (MTW) MatTop Chain molded in High Performance (HP) material.

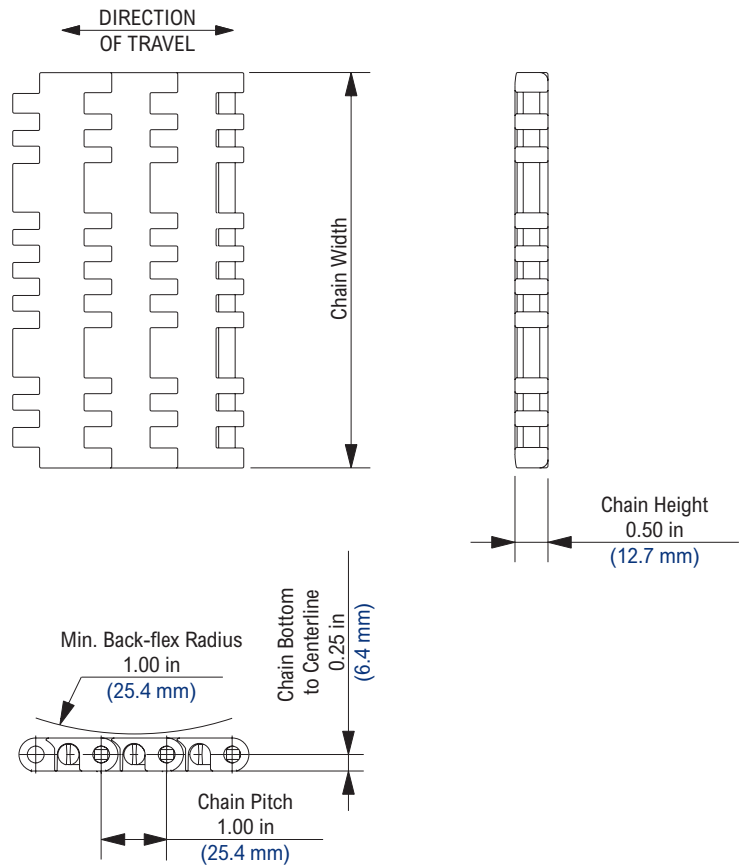

Chain Information

Chain Width			Number of Sprockets	Chain Strength	
desc	in	mm		lbs	N
3 1/4	3.25	82.6	1	685	3,047
4 1/2	4.50	114.3	1	1,025	4,559
6	6.00	152.4	2	1,475	6,561
7 1/2	7.50	190.5	2	1,750	7,784
15	15.00	381.0	3	3,400	15,124

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft ²	kg/m ²	
			min	max		min	max				
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2.76	13.48	Yes
HT	High Temperature	Polypropylene	40	220	212	4	104	100	1.85	9.03	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	2.76	13.48	Yes
Non-Standard Materials											
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	2.76	13.48	No
BSM	Black Cut Resistant	Polyester	-40	180	150	-40	82	66	2.76	13.48	No
Dry-PT™	Dry PET Low Friction	Polyester	-40	180	150	-40	82	66	2.76	13.48	Yes
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	3.04	14.85	No
P	Chemical Resistant	Polyester	0	180	140	-18	82	60	2.76	13.48	Yes
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	2.76	13.48	Yes
WHP	White High Performance	Polyester	-40	180	150	-40	82	66	2.76	13.48	Yes
WX	Green Abrasion Resistant Polyamide	Acetal	-40	220	NR	-40	104	NR	2.70	13.18	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, Dry-PT, FRPLUS, Platinum Series, Platinum Series X, PS and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patent: 5335768

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 120 pitch, 10 ft (3.048 m) length strands.

Open area = 3.0%.

Stainless steel pins are available on a made-to-order basis.

WX7705-15 is supplied as bricked assembly.


Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

7705 (MTW) PT



Photo shows 7705 Molded-to-Width (MTW) MatTop Chain with Positrack™ (PT) Tracking Guides molded in High Performance (HP) material.

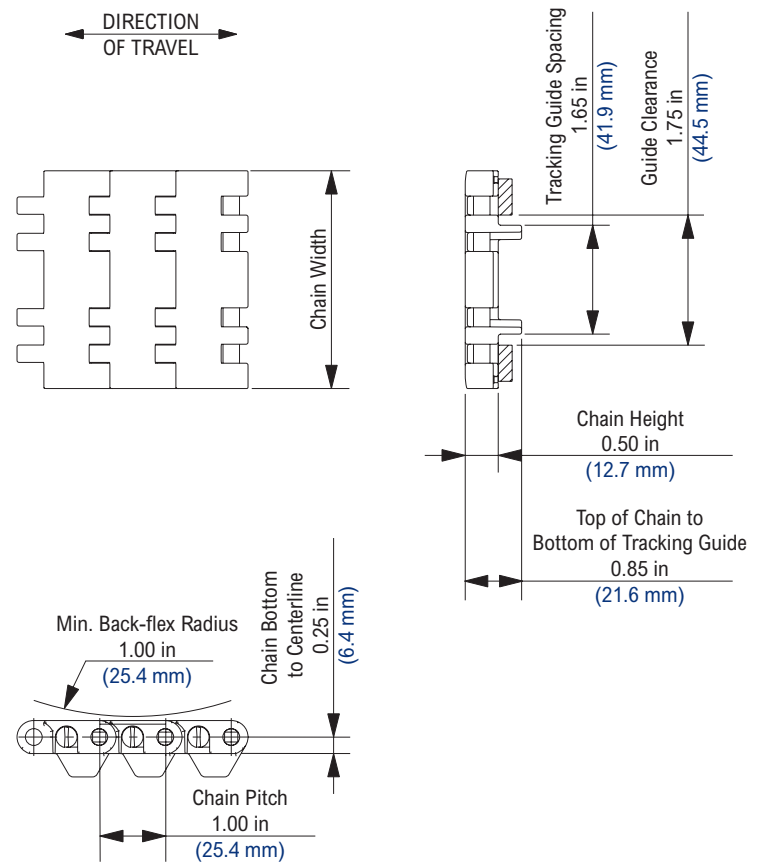

Chain Information

desc	Chain Width		Number of Sprockets	Chain Strength	
	in	mm		lbs	N
3 1/4	3.25	82.6	1	685	3,047
4 1/2	4.50	114.3	1	1,025	4,559
7 1/2	7.50	190.5	2	1,750	7,784

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
			dry	wet		dry	wet				
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2.76	13.48	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	2.76	13.48	Yes
Non-Standard Materials											
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	2.76	13.48	No
BSM	Black Cut Resistant	Polyester	-40	180	150	-40	82	66	2.76	13.48	No
Dry-PT™	Dry PET Low Friction	Polyester	-40	180	150	-40	82	66	2.76	13.48	Yes
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	3.04	14.85	No
HT	High Temperature	Polypropylene	40	220	212	4	104	100	1.85	9.03	Yes
P	Chemical Resistant	Polyester	0	180	140	-18	82	60	2.76	13.48	Yes
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	2.76	13.48	Yes
WHP	White High Performance	Polyester	-40	180	150	-40	82	66	2.76	13.48	Yes
WX	Green Abrasion Resistant Polyamide	Acetal	-40	220	NR	-40	104	NR	2.70	13.18	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, Dry-PT, FRPLUS, Platinum Series, Platinum Series X, PS and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patent: 5335768

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 120 pitch, 10 ft (3.048 m) length strands.

Open area = 3.0%.

Stainless steel pins are available on a made-to-order basis.

NS7700-21T and NS7700-31T sprockets may not be compatible with 7705/6 MTW PT due to bore adapters that can interfere with the chains' positrack.

Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

7705 (MTW) PT (Metric)


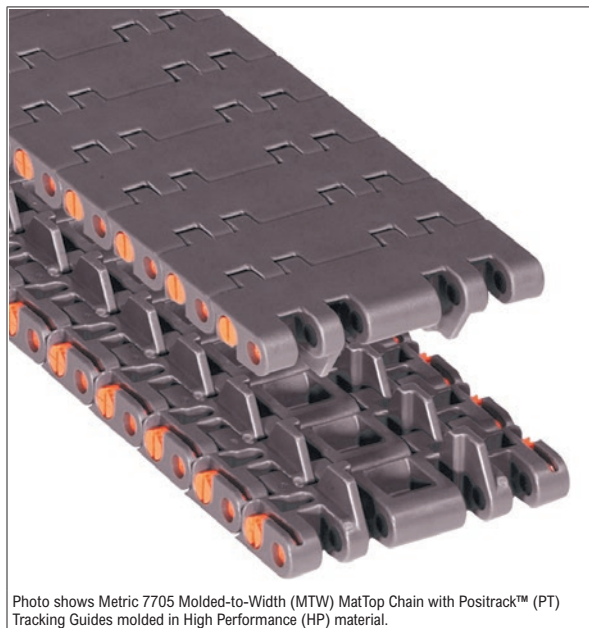


Photo shows Metric 7705 Molded-to-Width (MTW) MatTop Chain with Positrac™ (PT) Tracking Guides molded in High Performance (HP) material.

Chain Information

Chain Width			Number of Sprockets	Chain Strength	
desc	in	mm		lbs	N
84 MM	3.31	84.0	1	685	3,047

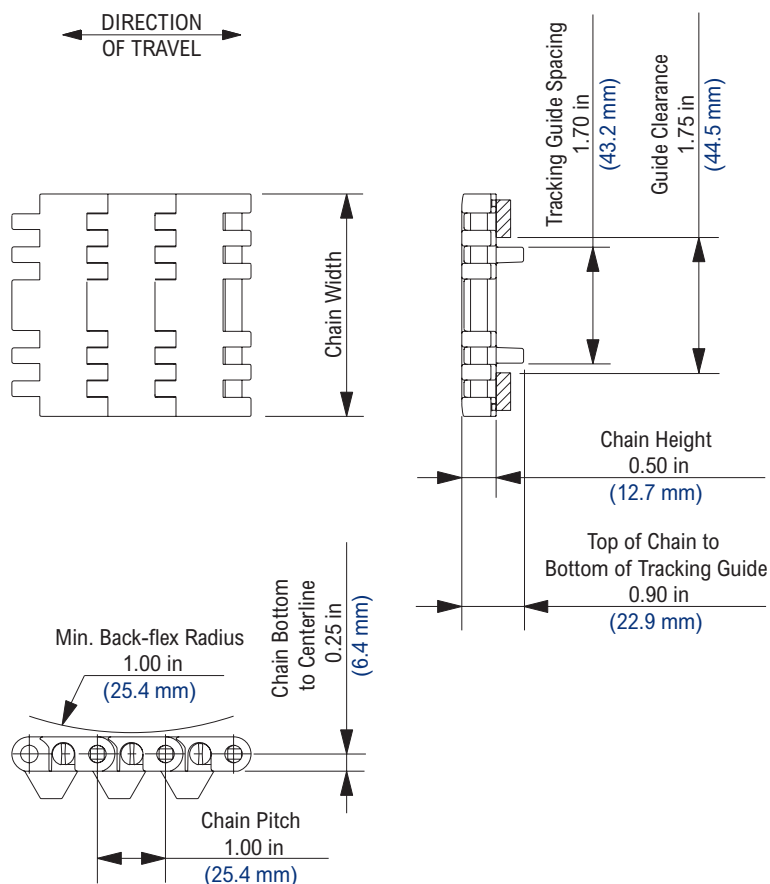

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft ²	kg/m ²	
			min	max		min	max				
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2.76	13.48	Yes
Non-Standard Materials											
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	2.76	13.48	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	2.76	13.48	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, Platinum Series, Platinum Series X, PS and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patent: 5335768

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 120 pitch, 10 ft (3.048 m) length strands.

Open area = 3.0%.

Stainless steel pins are available on a made-to-order basis.

Metric modules designated by orange plugs.

NS7700-21T and NS7700-31T sprockets may not be compatible with 7705 MTW PT due to bore adapters that can interfere with the chains' positrac.

Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

7705 RubberTop™


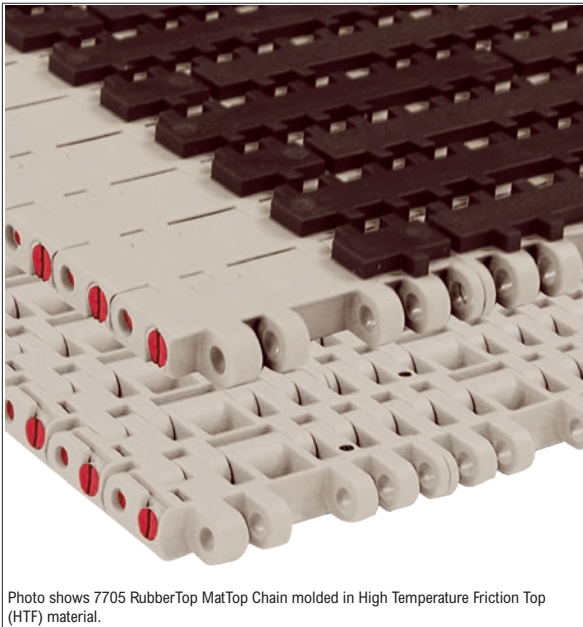


Photo shows 7705 RubberTop MatTop Chain molded in High Temperature Friction Top (HTF) material.

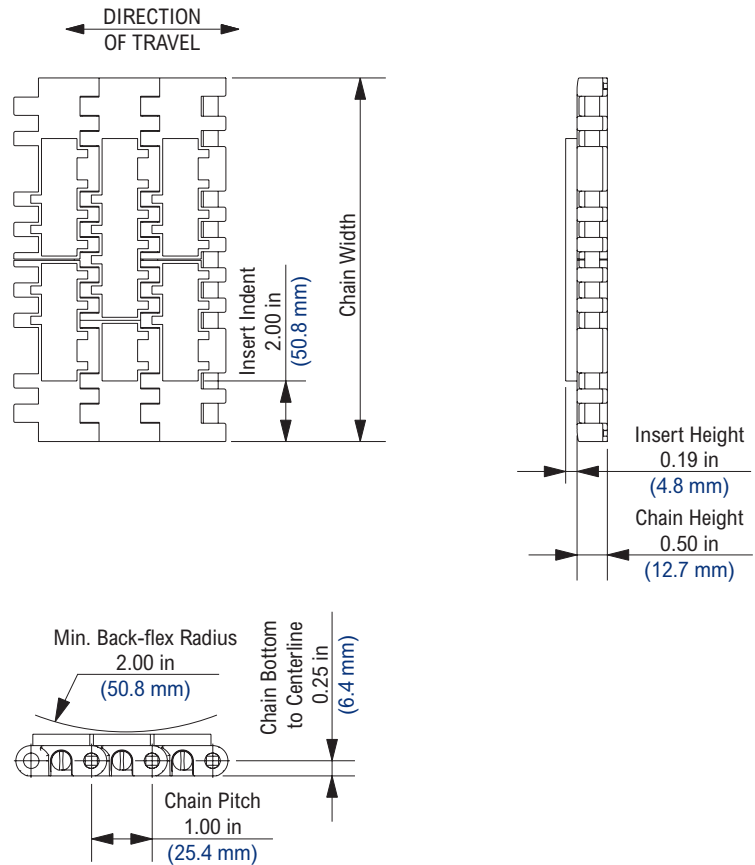

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HT	High Temperature	Polypropylene	40	180	140	4	104	100	1,800	26,262	2.17	10.59	Yes
GTC	Gray Tough Composite	Acetal	0	180	140	-18	82	60	2,200	32,098	2.63	12.84	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, MatTop and RubberTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

For chain width information see Rexnord Chain Width Table on page 300. Open area = 3.0%. TC links are molded with 50 Shore A urethane friction pads. HT links are molded with 50 Shore A TPE friction pads. TCFmodules are designated by black plugs. Stainless steel pins are available on a made-to-order basis. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

7705 SuperGrip™ (MTW)


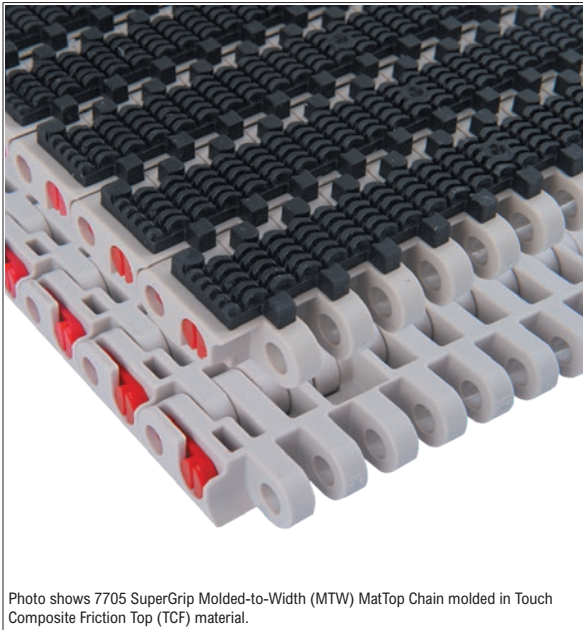


Photo shows 7705 SuperGrip Molded-to-Width (MTW) MatTop Chain molded in Touch Composite Friction Top (TCF) material.

Chain Information

desc	Chain Width		Number of Sprockets	Chain Strength	
	in	mm		lbs	N
4	4.00	101.6	1	700	3,144
6	6.00	152.4	2	1,100	4,893

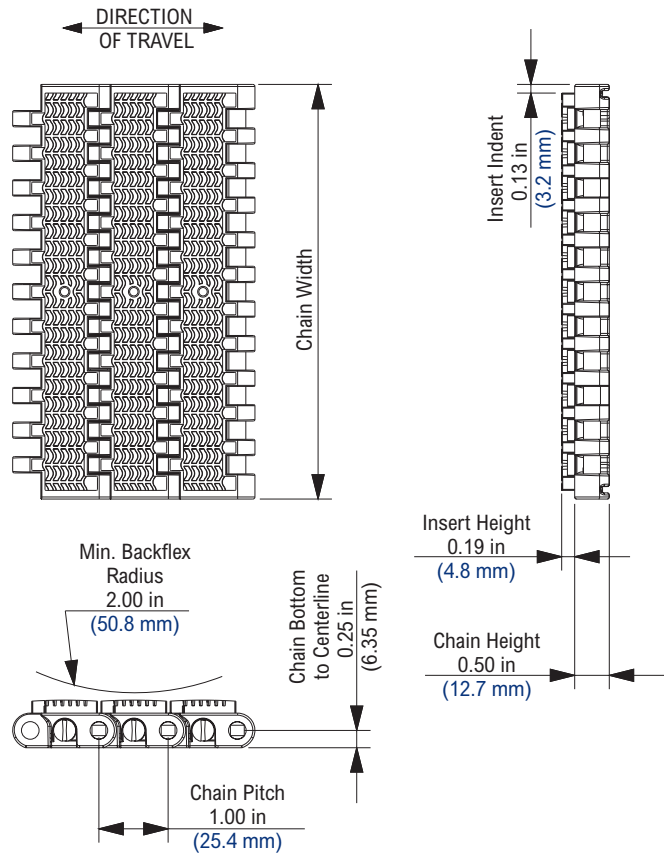

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Standard Materials											
HT	High Temperature	Polypropylene	40	180	140	4	104	100	2.17	10.59	Yes
Non-Standard Materials											
GTC	Gray Tough Composite	Acetal	0	180	140	-18	82	60	2.63	12.84	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patent: 5335768

Additional Notes

For chain width information see Rexnord Chain Width Table on page 300. Open area = 3.0%. GTC links are molded with 50 Shore A urethane friction pads. HT links are molded with 50 Shore A TPE friction pads. GTC modules are designated by black plugs. Stainless steel pins are available on a made-to-order basis. Chain strength is based on Tough Composite material at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

7705 SuperGrip™


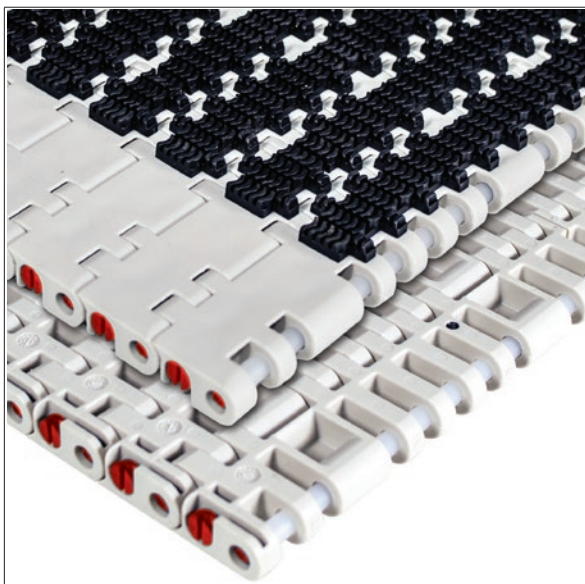


Photo shows 7705SG Assembled-to-Width (ATW) MatTop Chain molded in High Temperature Friction Top (HTF) material.

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

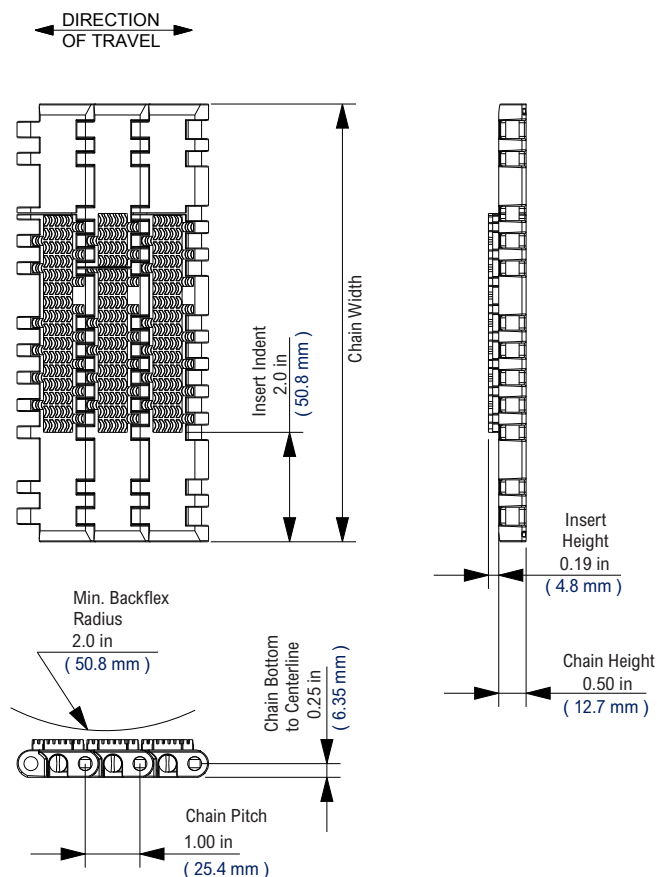

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
GTC	Gray Tough Composite	Acetal	0	180	140	-18	82	60	2,200	32,098	2.63	12.84	No
Non-Standard Materials													
HT	High Temperature	Polypropylene	40	180	140	4	104	100	1,800	26,262	2.17	10.59	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

For chain width information see Rexnord Chain Width Table on page 300.

Open area = 3.0%.

TCF links are molded with 50 Shore A urethane friction pads.

HTF links are molded with 50 Shore A TPE friction pads.

TCF modules are designated by black plugs.

Stainless steel pins are available on a made-to-order basis.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

7705 DTS™ PT


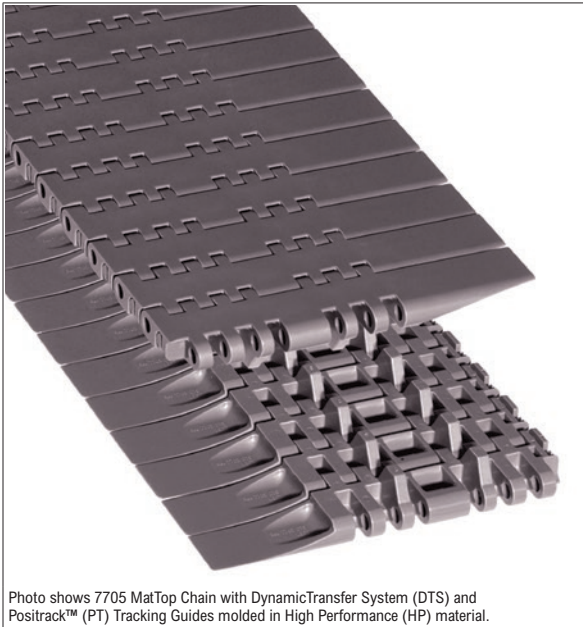


Photo shows 7705 MatTop Chain with DynamicTransfer System (DTS) and Positrack™ (PT) Tracking Guides molded in High Performance (HP) material.

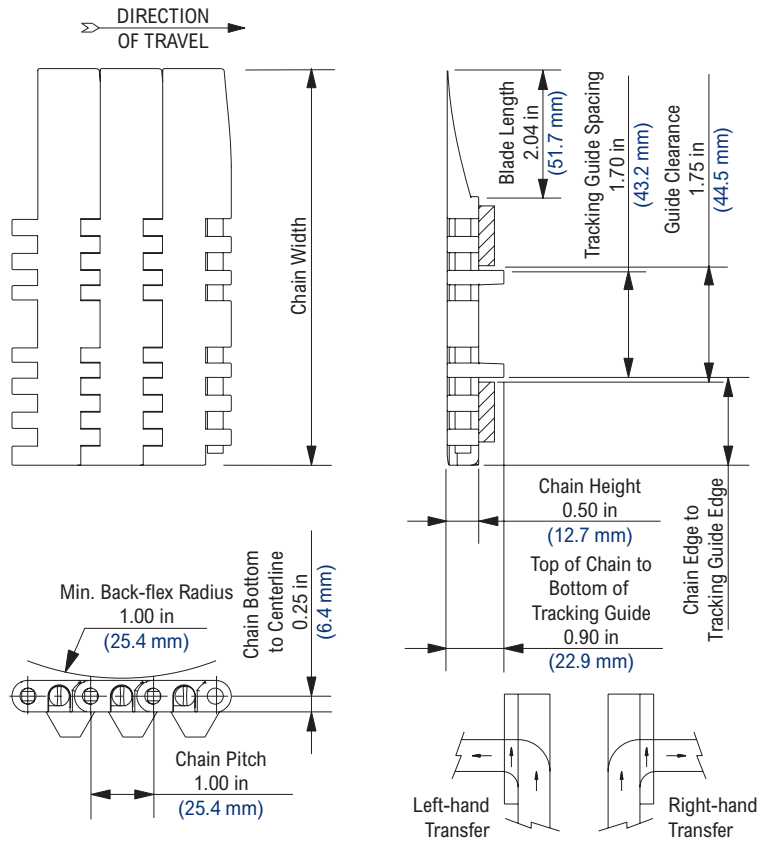

Chain Information

Chain Width			Chain Edge to Tracking Guide Edge		Number of Sprockets	Chain Strength	
desc	in	mm	in	mm		lbs	N
4 1/2	6.30	160.0	1.40	35.6	1	1,025	4,559
7 1/2	9.30	236.2	2.90	73.7	2	1,750	7,784

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2.76	13.48	Yes
HT	High Temperature	Polypropylene	40	220	212	4	104	100	1.85	9.03	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	2.76	13.48	Yes
Non-Standard Materials											
Dry-PT™	Dry PET Low Friction	Polyester	-40	180	150	-40	82	66	2.76	13.48	Yes
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	3.04	14.85	No
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	2.76	13.48	Yes
WX	Green Abrasion Resistant Polyamide	Acetal	-40	220	NR	-40	104	NR	2.70	13.18	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, Dry-PT, DynamicTransfer System, DTS, Platinum Series, Platinum Series X, PS and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 5335768, 5634550

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 120 pitch, 10 ft (3.048 m) length strands.

Available in both left-hand and right-hand modules.

Also known as single module DTS.

Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

7705 DTS-R PT


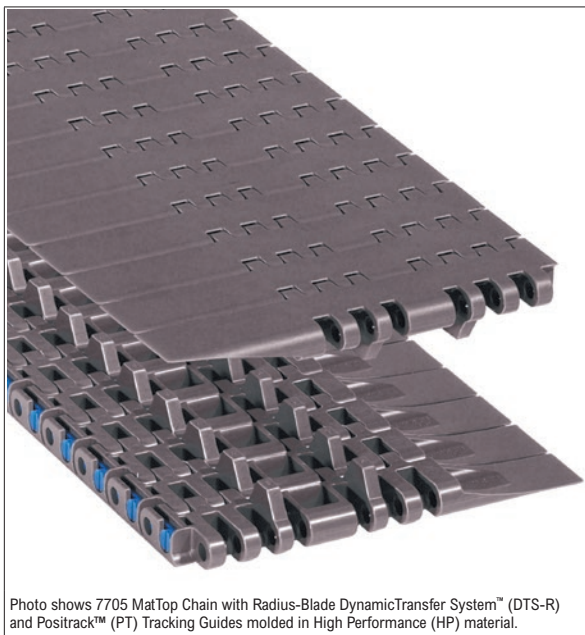


Photo shows 7705 MatTop Chain with Radius-Blade DynamicTransfer System™ (DTS-R) and Positrack™ (PT) Tracking Guides molded in High Performance (HP) material.

Chain Information

Chain Width	Chain Edge to Tracking Guide Edge		Number of Sprockets	Chain Strength			
	desc	in		mm	in	mm	lbs
4 1/2	6.30	160	1.40	35.6	1	1,025	4,559
7 1/2	9.30	236.2	2.90	73.7	2	1,750	7,784

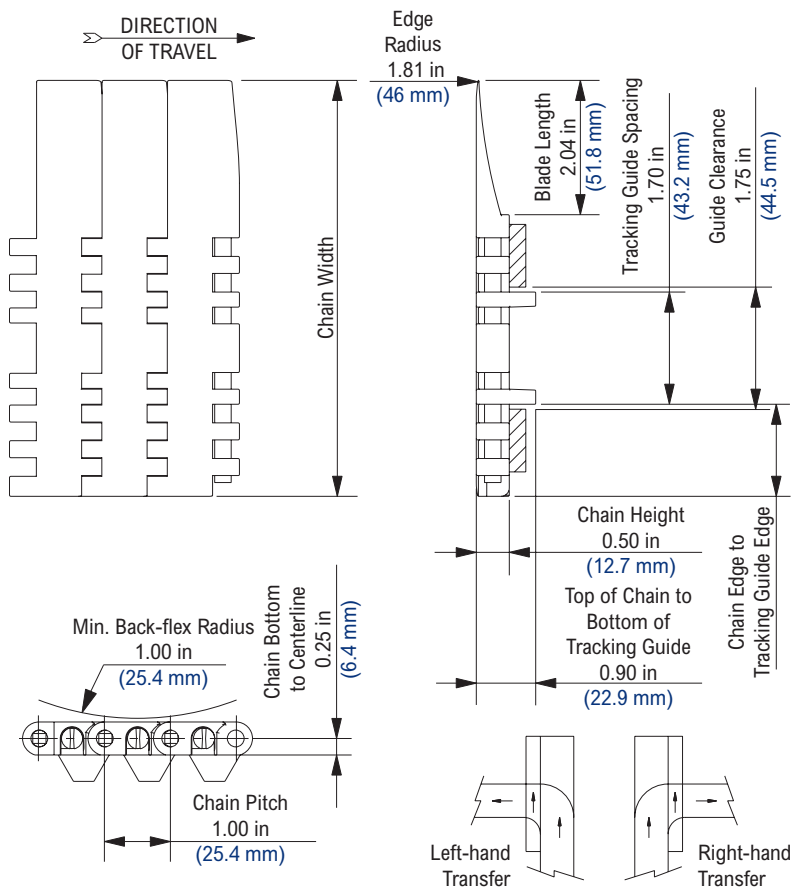

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2.76	13.48	Yes
Non-Standard Materials											
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	1.30	6.35	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, DynamicTransfer System, DTS, Platinum Series X and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 5335768, 5634550

Additional Notes

Stocked in 120 pitch, 10 ft (3.048 m) length strands.

Available in both left-hand and right-hand modules.

DTS-R's radius blade, designated by blue plugs, optimizes the transfer of unstable products when conveying onto blade.

NS7700-21T and NS7700-31T sprockets may not be compatible with 7705 MTW PT due to bore adapters that can interfere with the chains' positrack.

Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.


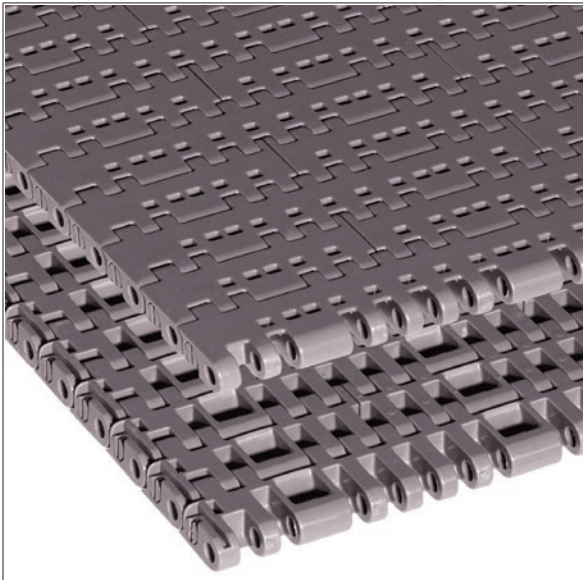


Photo shows 7706 MatTop Chain molded in High Performance (HP) material.

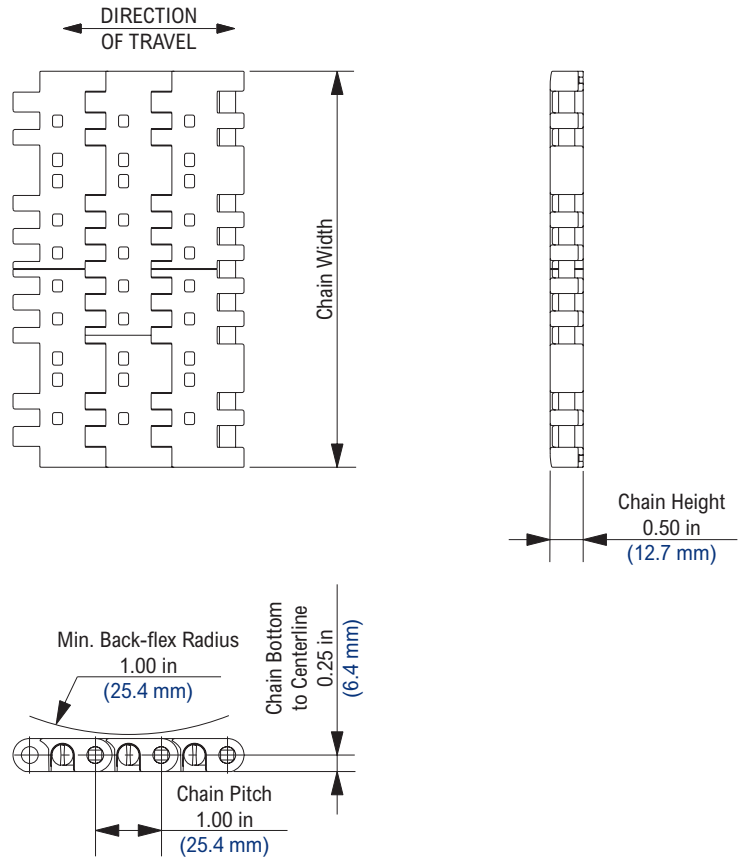

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft	N/m	lbs/ft ²	kg/m ²	
			min	max		min	max						
Standard Materials													
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2,950	43,041	2.70	13.18	Yes
HT	High Temperature	Polypropylene	40	220	212	4	104	100	1,800	26,262	1.85	9.03	Yes
Non-Standard Materials													
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	1,770	25,824	2.70	13.18	No
FRPLUS™	Flame Retardant Low Friction	Acetal	0	+180	+140	-18	+82	+60	1,475	21,521	2.97	14.50	No
PSX™	Platinum Series X™	Polyester	-40	+180	+150	-40	+82	+66	2,950	43,041	2.76	13.48	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, FRPLUS, Platinum Series X and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patent: 5335768

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300.

Open area = 8.0%.

Stainless steel pins are available on a made-to-order basis.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

7706 (MTW)



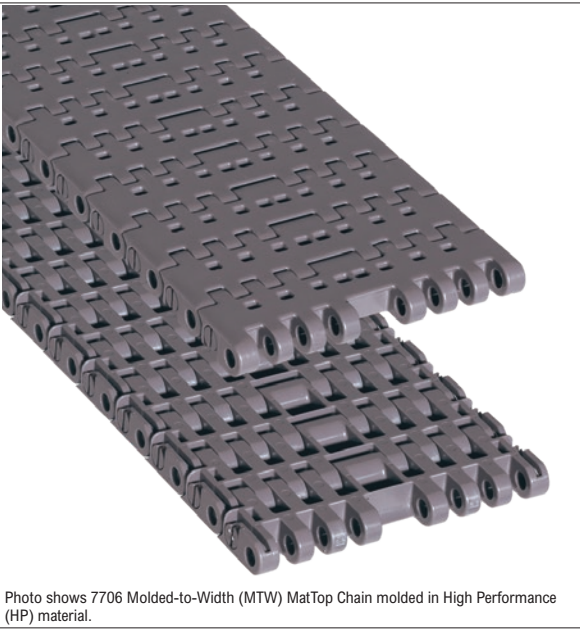


Photo shows 7706 Molded-to-Width (MTW) MatTop Chain molded in High Performance (HP) material.

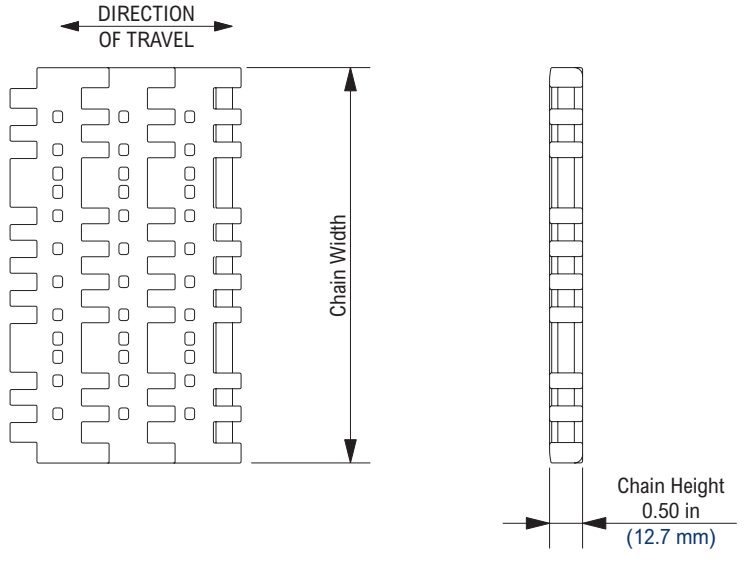

Chain Information

Chain Width			Number of Sprockets	Chain Strength	
desc	in	mm		lbs	N
3 1/4	3.25	82.6	1	685	3,047
4 1/2	4.50	114.3	1	1,025	4,559
6	6.00	152.4	2	1,475	6,561
7 1/2	7.50	190.5	2	1,750	7,784
15	15.00	381.0	3	3,400	15,124

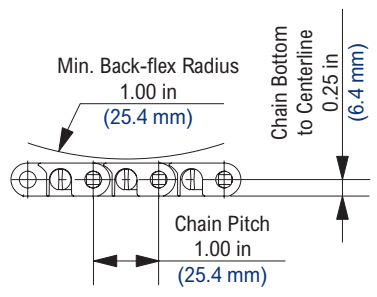

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2.70	13.18	Yes
Non-Standard Materials											
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	2.70	13.18	No
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	2.97	14.50	No
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	2.70	13.18	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.
 Rexnord, MatTop, FRPLUS, Platinum Series and PS are trademarks of Regal Rexnord Corporation.
 All rights reserved.
 U.S. Patent: 5335768

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.
 For chain width information see Rexnord Chain Width Table on page 300.
 Open area = 8.0%.
 Stainless steel pins are available on a made-to-order basis.
 WX7706-15 is supplied as a bricked assembly.
 Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended.
 For additional material information, see material portfolio.

7706 (MTW) PT


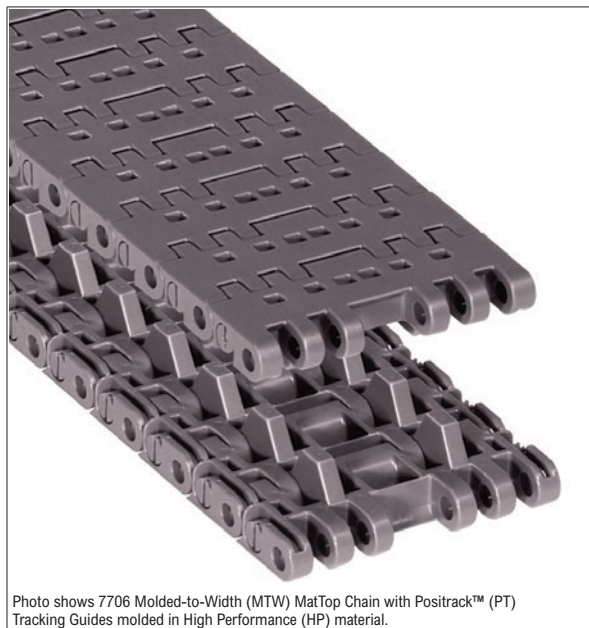


Photo shows 7706 Molded-to-Width (MTW) MatTop Chain with Positrack™ (PT) Tracking Guides molded in High Performance (HP) material.

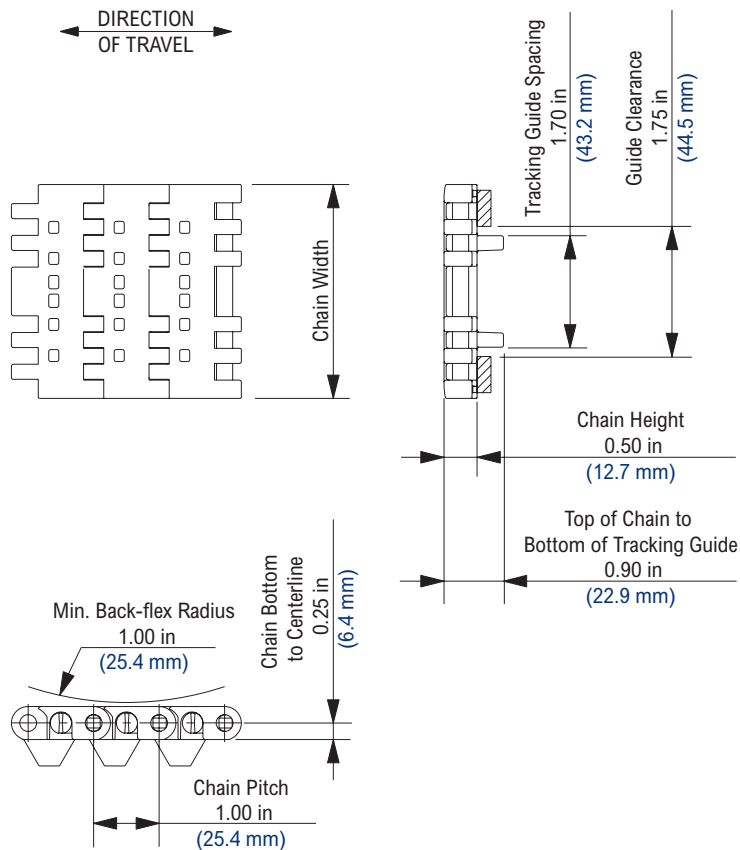

Chain Information

Chain Width			Number of Sprockets	Chain Strength	
desc	in	mm		lbs	N
3 1/4	3.25	82.6	1	685	3,047
4 1/2	4.50	114.3	1	1,025	4,559
7 1/2	7.50	190.5	2	1,750	7,784

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft ²	kg/m ²	
			min	max		min	max				
			dry	wet		dry	wet				
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2.70	13.18	Yes
Non-Standard Materials											
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	2.70	13.18	No
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	2.97	14.50	No
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	2.70	13.18	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, FRPLUS, Platinum Series and PS are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patent: 5335768

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300. Open area = 8.0%.

Stainless steel pins are available on a made-to-order basis.

NS7700-21T and NS7700-31T sprockets may not be compatible with 7706 MTW PT due to bore adapters that can interfere with the chains' Positrack.

Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

7708


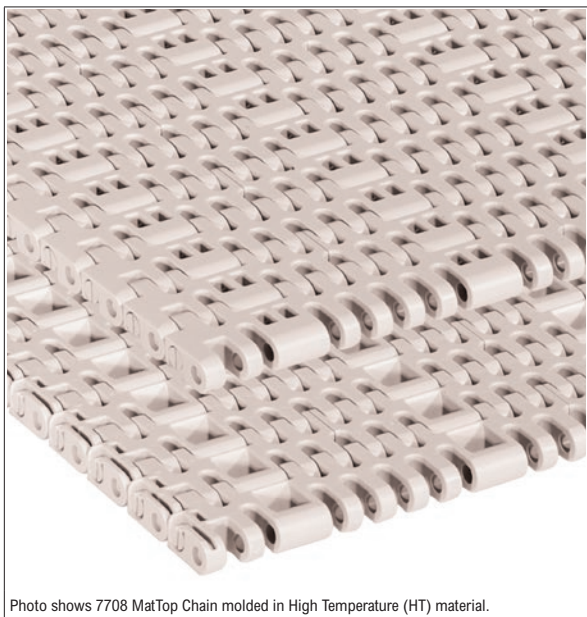


Photo shows 7708 MatTop Chain molded in High Temperature (HT) material.

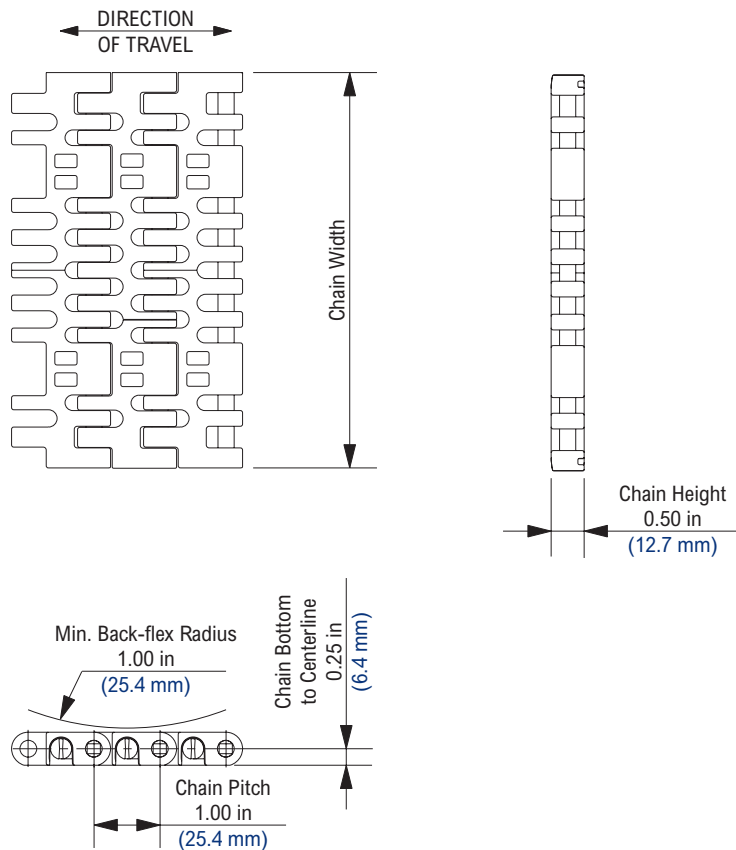

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2,950	43,041	2.38	11.62	Yes
HT	High Temperature	Polypropylene	40	220	212	4	104	100	1,800	26,262	1.60	7.81	Yes
Non-Standard Materials													
USP	Ultra Stabilized Polypropylene	Polypropylene	40	220	212	4	104	100	1,800	26,262	1.60	7.81	No
WHT	White High Temperature	Polypropylene	40	220	212	4	104	100	1,800	26,262	1.60	7.81	Yes
WLT	White Low Temperature	Polyethylene	-100	80	80	-73	27	27	800	11,672	1.60	7.81	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patent: 5335768

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300. Open area = 20.0%.

Stainless steel pins are available on a made-to-order basis.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.


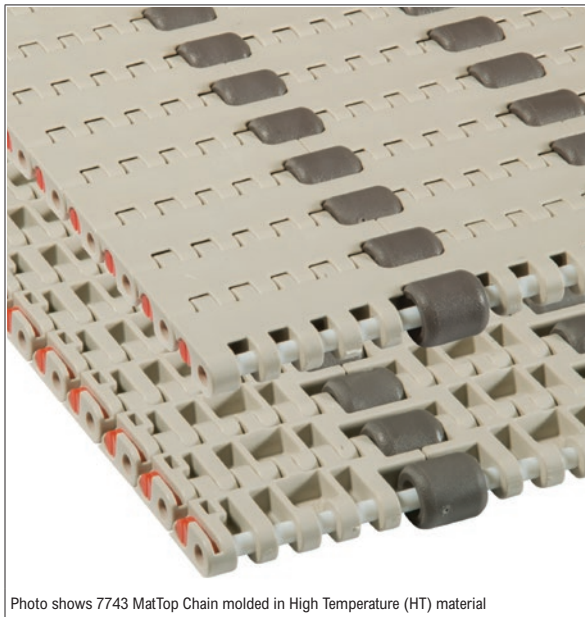


Photo shows 7743 MatTop Chain molded in High Temperature (HT) material

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

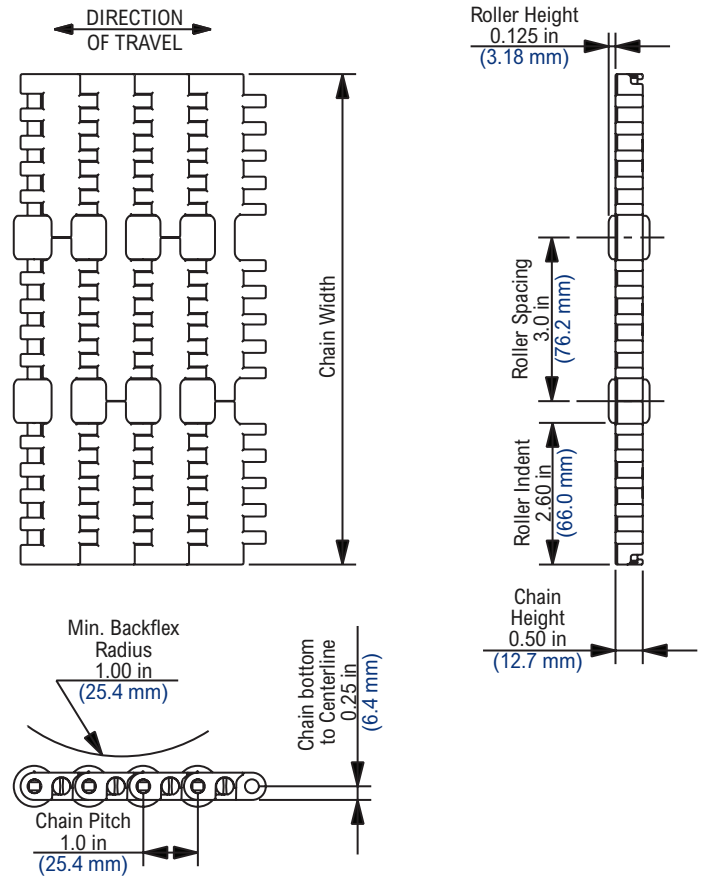

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft	N/m	lbs/ft ²	kg/m ²	
			min	max		min	max						
				dry	wet		dry	wet					
Standard Materials													
HP™	High Performance	Polyester	-40	180	150	-40	82	66	1,925	28,086	2.93	14.31	Yes
HT	High Temperature	Polyester	40	220	212	4	104	100	1,170	17,070	2.29	11.18	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

For chain width information see Rexnord Chain Width Table on page 300. Open area = 3.0%. Chain is assembled with HP rollers. Typical coefficient of friction between chain and product = 0.09. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.


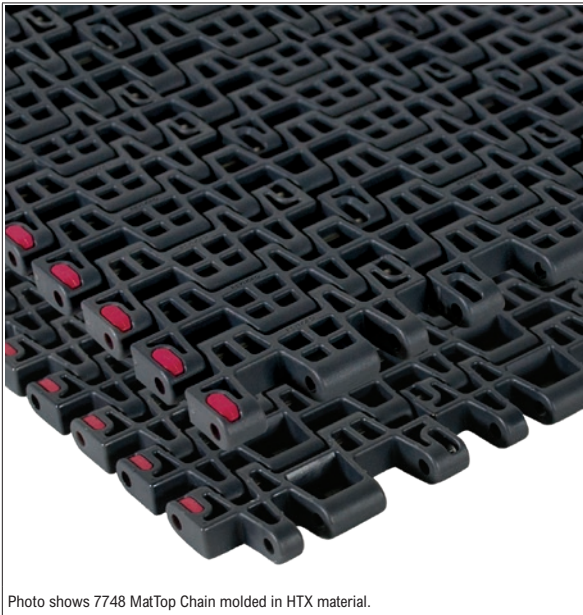


Photo shows 7748 MatTop Chain molded in HTX material.

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

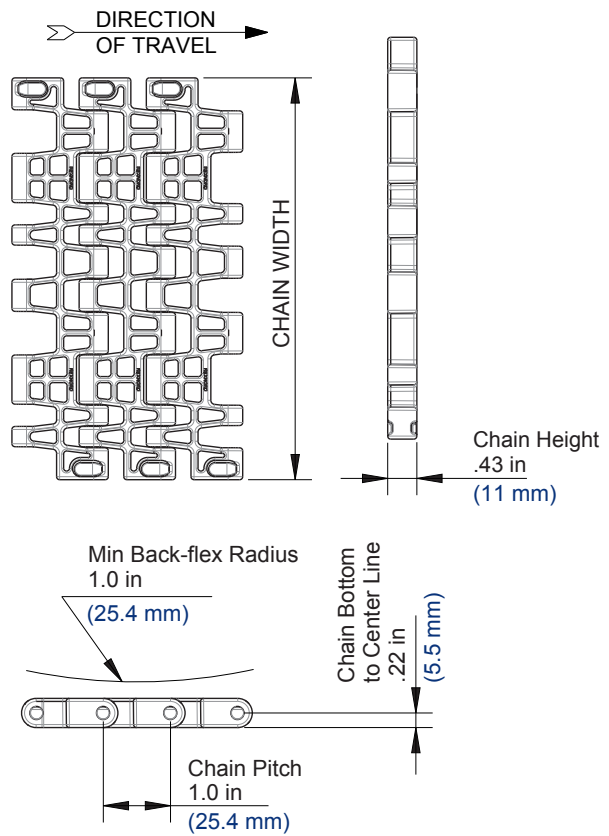

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HTX™	Extreme High Temperature	Stainless Steel	-40	275	NR	-40	135	NR	1,600	23,357	2.12	10.36	No


Regulatory Information

Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.


Additional Notes

For chain width information see Rexnord Chain Width Table on page 300. Open areas = 42%. Chain strength is listed at room temperature. Material is designed for surface temperatures up to 300° F. Primary application is entering and exiting 500° F heat shrink tunnel ovens. For additional material information, see material portfolio.


SSS7700 Stainless Steel Split Sprocket

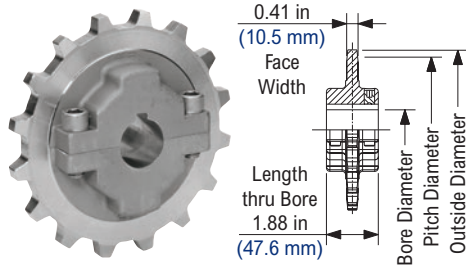

NS7700 Thermoplastic Split Sprocket

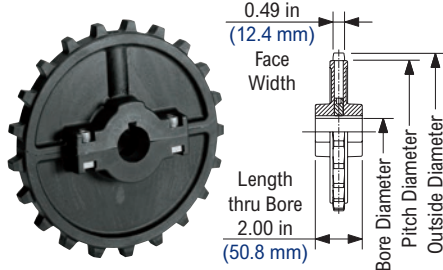

NS7700 Thermoplastic Split Sprocket with Adapter

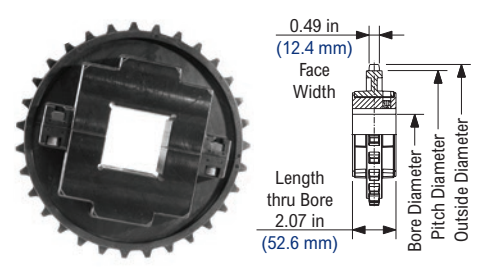

SSS7700 Stainless Steel Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
16	16	5.126	130.20	5.14	130.6	1	2	25	50	1	1	25	25	1	2	25	50	3.50	1.59
18	18	5.759	146.28	5.78	146.8	1	2	25	50	1	1	25	25	1	2	25	50	5.00	2.27
21	21	6.710	170.43	6.72	170.7	1	2 1/2	25	60	1	3 1/2*	25	90*	1	3 1/2	25	60	6.00	2.72

Shaft-ready round bore sprockets are shipped with keyway and no setscrew.

* For the 21 tooth sprocket, the 3-1/2 in and 90 mm square bores and all round bores under 2 in (50mm) are supplied as machined bores. All other bores are supplied with split bore adapters.

NS7700 Thermoplastic Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
16	16	5.126	130.20	5.14	130.6	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	0.73	0.33
18	18	5.759	146.28	5.78	146.8	1	1 5/8	25	40	-	-	-	-	1	1 5/8	25	40	0.84	0.38
21	21	6.710	170.43	6.72	170.7	1	1 5/8	25	40	3 1/2	3 1/2	90	90	1	1 5/8	25	40	0.97	0.44
31	31	9.885	251.08	9.93	252.2	2	4 1/2	50	120	2	4 1/2	50	120	2	4 1/2	50	120	3.72	1.69

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

NS7700 Thermoplastic Sprocket with Adapter Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
21	21	6.710	170.43	6.72	170.7	1 11/16	2 1/2	25	65	1	3	25	75	1 11/16	3	25	75	0.97	0.44
31	31	9.885	251.08	9.93	252.2	1	1 15/16	25	45	1	1 1/2	25	40	1	1 15/16	25	40	3.72	1.69




Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

End Module with Positrack Tracking Guides

For 7705 Metric assembled-to-width chain only.

End modules may be positioned either on the left-hand or right-hand side of the chain.





End modules will be spaced every other pitch.

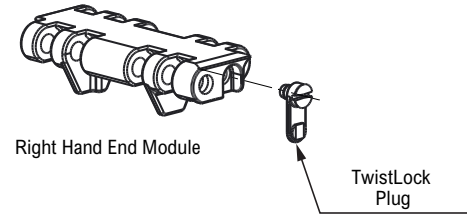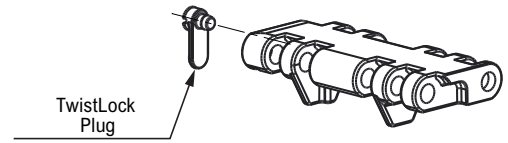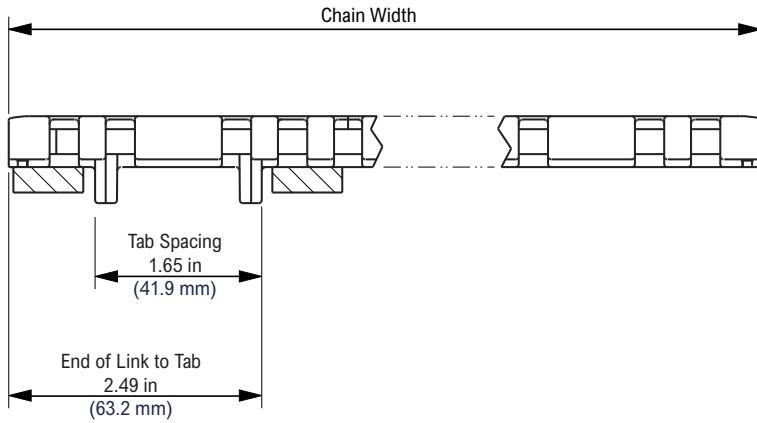

DTS-C Transfer Comb Kit

Each kit includes one comb and two mounting screws.

Wearstrip is sold in 10 ft (3.048 m) lengths and is sold separately.

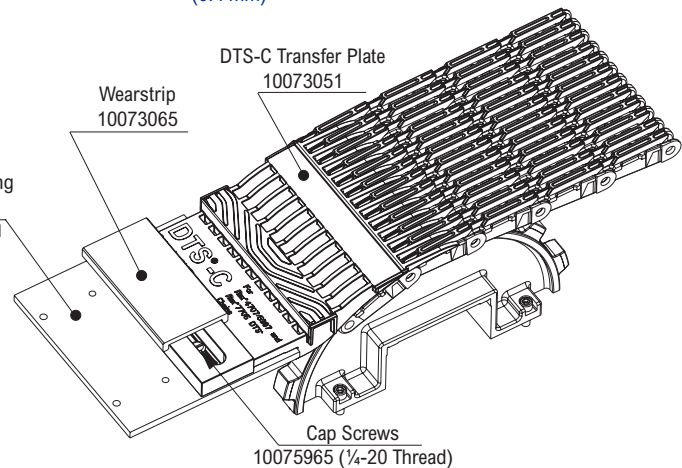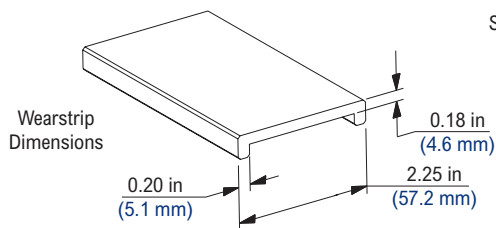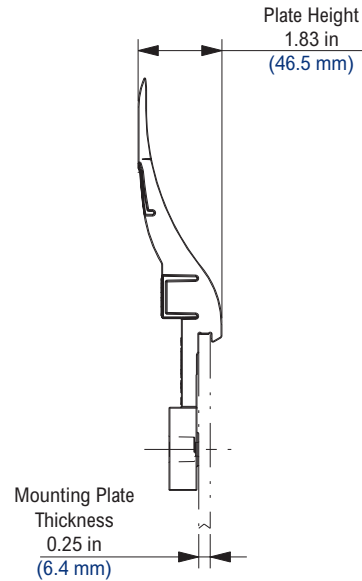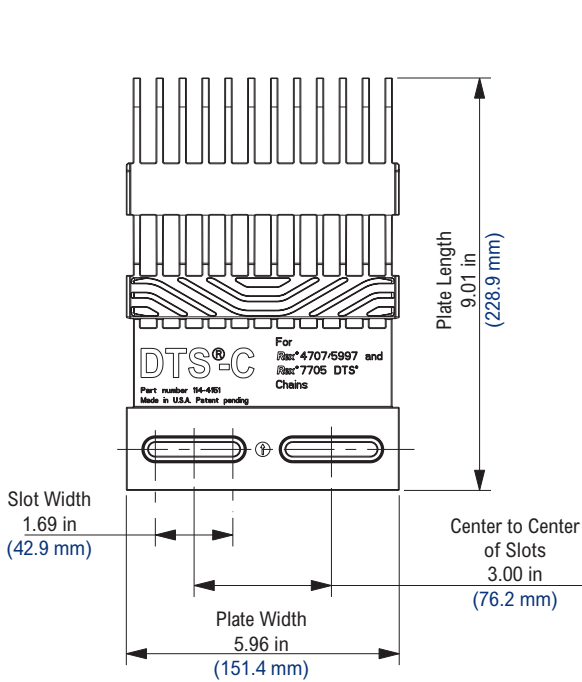


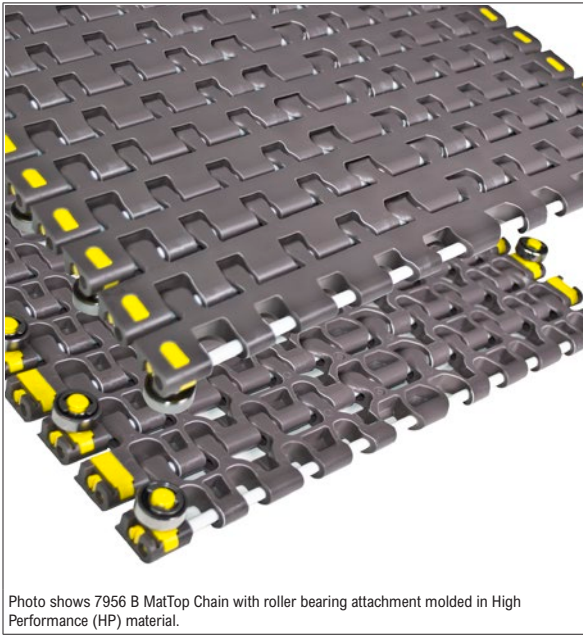


Photo shows 7956 B MatTop Chain with roller bearing attachment molded in High Performance (HP) material.

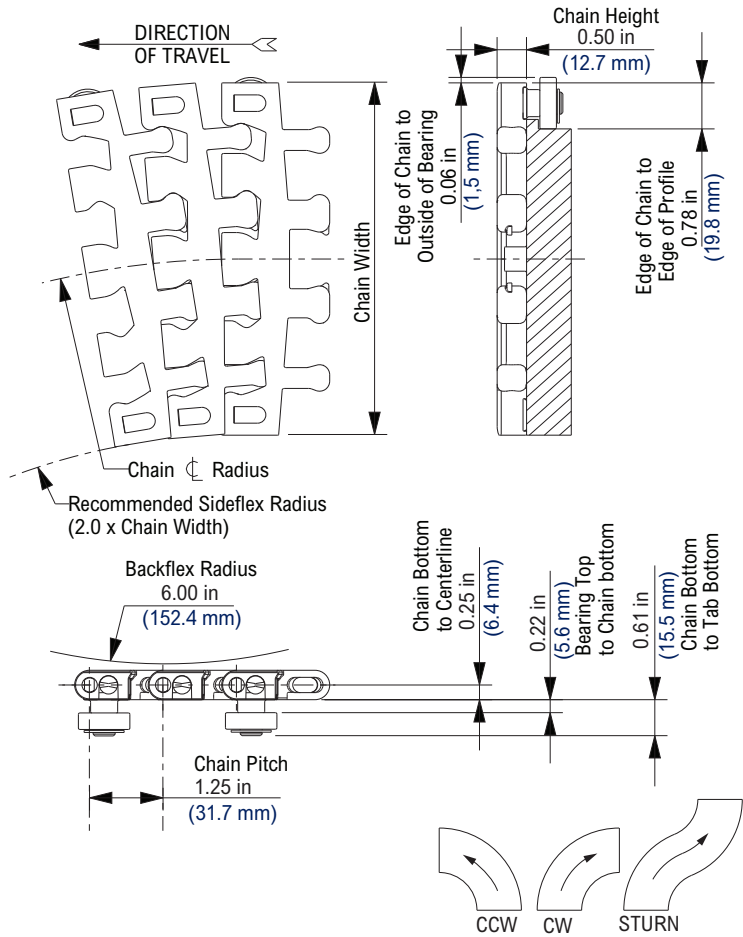

Chain Information

desc	Chain Width		Guide Width		Number of Sprockets	Chain Strength	
	in	mm	in	mm		lbs	N
6	6.00	152.4	4.22	107.2	1	450	2,002
12	12.00	304.8	10.16	258.1	4	800	3,559
15	15.00	381.0	13.03	331.0	4	900	4,003
18	18.00	457.2	16.09	408.7	4	950	4,226
24	24.00	609.6	22.06	560.3	6	1,000	4,448
30	30.00	762.0	28.16	715.3	8	1,300	5,783

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
			dry	wet		dry	wet				
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2.38	11.62	Yes
Non-Standard Materials											
WSM	White Cut Resistant	Polyester	-40	180	150	-40	82	66	2.38	11.62	Yes
BSM	Black Cut Resistant	Polyester	-40	180	150	-40	82	66	2.38	11.62	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, RexFlex and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved Patent Pending

Additional Notes

Stocked in 48 pitch, 5 ft (1.520 m) length strands.
 Open area = 16.0%
 Stainless steel pins are standard with the 6 in (152.4 mm) width. All other widths come with polyester pins.
 Also known as the RexFlex™.
 Must specify turn direction i.e. HP7956B-15-ccw.
 Carbon steel bearings are standard. Stainless steel bearings are available on a made-to-order basis for wet or high pressure wash applications.
 Chain strength is listed at room temperature. NR = Not Recommended.
 For CW & CCW chains inside radius supplied with NT Attachment.

7956 GT


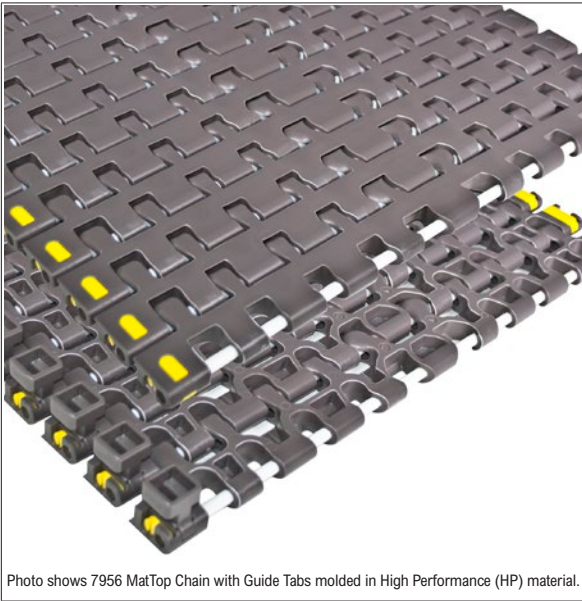


Photo shows 7956 MatTop Chain with Guide Tabs molded in High Performance (HP) material.

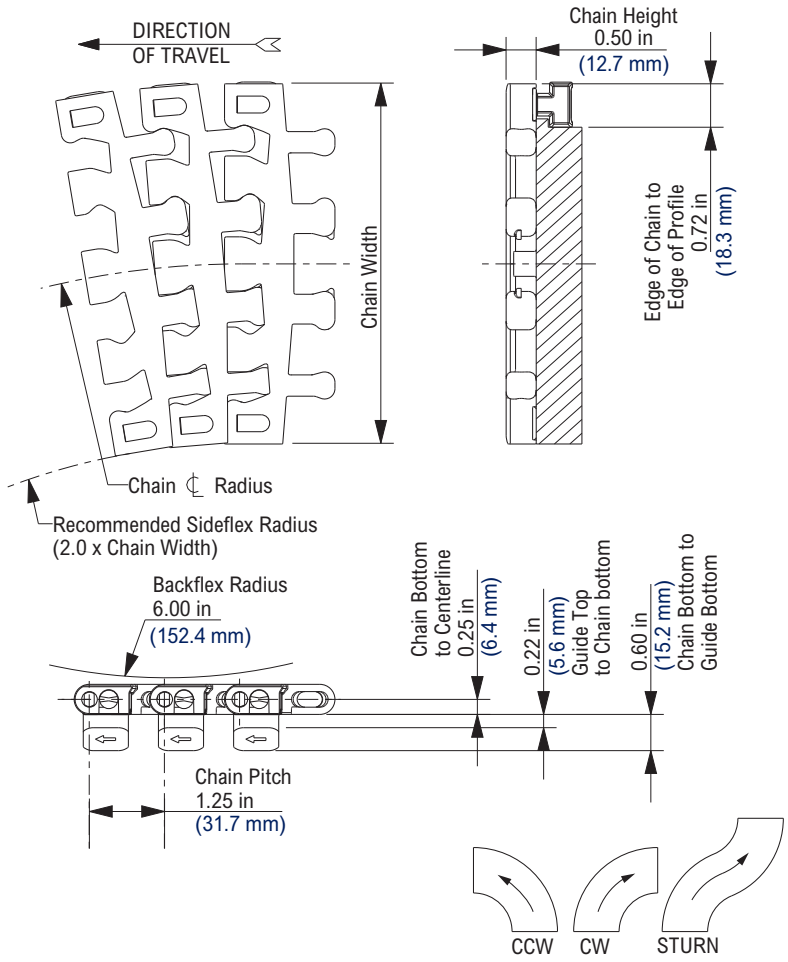

Chain Information

desc	Chain Width		Guide Width		Number of Sprockets	Chain Strength	
	in	mm	in	mm		lbs	N
6	6.00	152.4	4.34	110.2	1	450	2,002
12	12.00	304.8	10.28	261.1	4	800	3,559
15	15.00	381.0	13.13	335.5	4	900	4,003
18	18.00	457.2	16.19	411.2	4	950	4,226
24	24.00	609.6	22.16	562.9	6	1,000	4,448
30	30.00	762.0	28.28	718.3	8	1,300	5,783

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	Kg/m ²	
			dry	wet		dry	wet				
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2.20	10.74	Yes
Non-Standard Materials											
DUV	Plain Acetal Ultraviolet Resistant	Polyester	0	180	150	-18	82	66	2.38	11.62	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, RexFlex and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved Patent Pending

Additional Notes

Stocked in 48 pitch, 5 ft (1.520 m) length strands.

Open area = 16.0%

Stainless steel pins are standard with the 6 in (152.4 mm) width. All other widths come with polyester pins.

Also known as the RexFlex™.

Must specify turn direction i.e. HP7956B-15-ccw.

Carbon steel bearings are standard. Stainless steel bearings are available on a made-to-order basis for wet or high pressure wash applications.

Chain strength is listed at room temperature. NR = Not Recommended.

For CW & CCW chains inside radius supplied with NT Attachment.


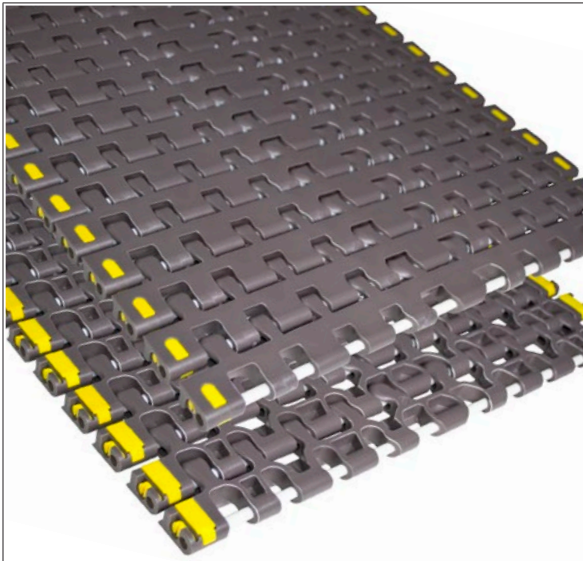


Photo shows 7956 without TABs MatTop Chain molded in High Performance (HP) material.

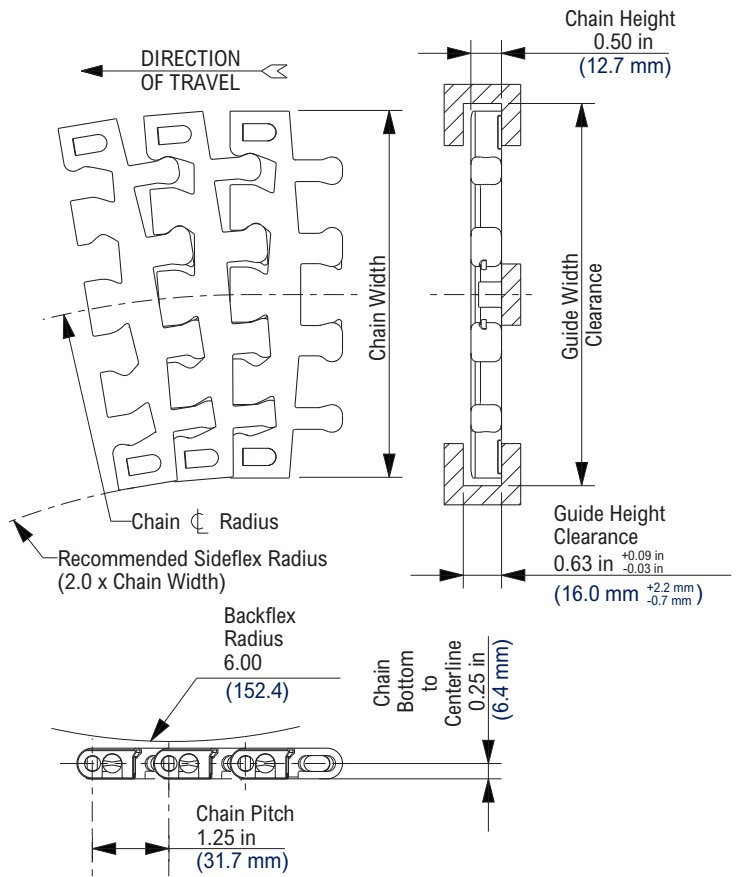

Chain Information

desc	Chain Width		Guide Width		Number of Sprockets	Chain Strength	
	in	mm	in	mm		lbs	N
6	6.00	152.4	6.19	157.2	1	450	2,002
12	12.00	304.8	12.16	308.9	4	800	3,559
15	15.00	381.0	15.09	383.3	4	900	4,003
18	18.00	457.2	18.19	462.0	4	950	4,226
24	24.00	609.6	24.16	613.7	6	1,000	4,448
30	30.00	762.0	30.16	766.1	8	1,300	5,783

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	Kg/m ²	
			dry	wet		dry	wet				
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2.38	11.62	Yes
Non-Standard Materials											
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	2.38	11.62	Yes
WHP	White High Performance	Polyester	-40	180	150	-40	82	66	2.38	11.62	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, RexFlex, MatTop, Platinum Series and PS are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 6036001, 4436200

Additional Notes

Stocked in 48 pitch, 5 ft (1.524 m) length strands.

Open area = 16.0%.

Stainless steel pins are standard with the 6 in (152.4 mm) width.

Also known as RexFlex™ chain.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

7956 TAB


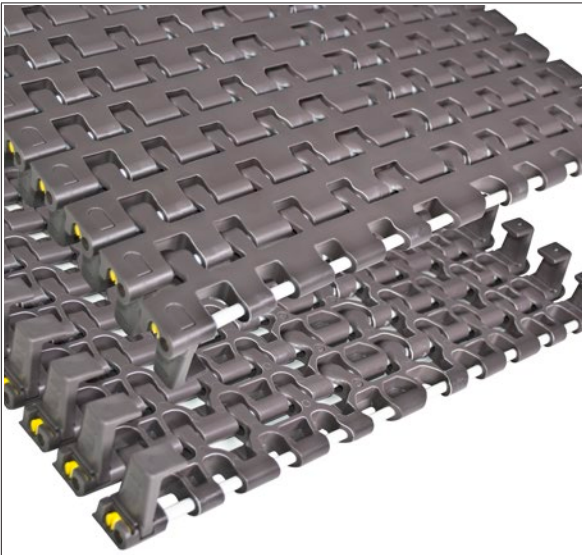


Photo shows 7956 TAB Molded-to-Width (MTW) MatTop Chain molded in High Performance (HP) material.

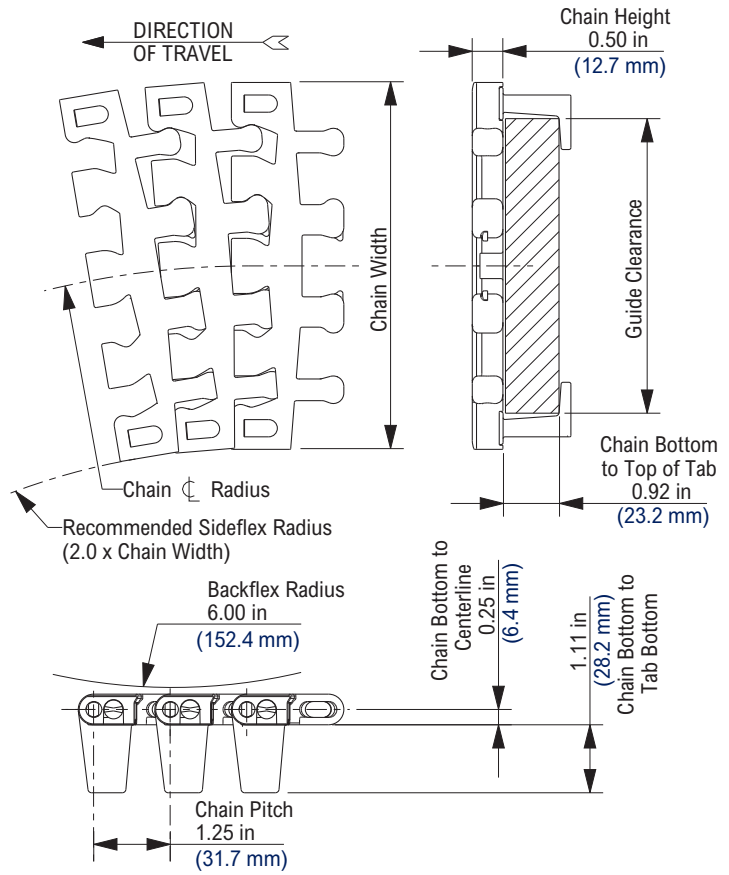

Chain Information

desc	Chain Width		Guide Width		Number of Sprockets	Chain Strength	
	in	mm	in	mm		lbs	N
6	6.00	152.4	4.72	119.9	1	450	2,002
12	12.00	304.8	10.66	270.8	4	800	3,559
15	15.00	381.0	13.50	342.9	4	900	4,003
18	18.00	457.2	16.56	420.6	4	950	4,226
24	24.00	609.6	22.53	572.3	6	1,000	4,448
30	30.00	762.0	28.63	727.2	8	1,300	5,783

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	Kg/m ²	
			dry	wet		dry	wet				
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2.38	11.62	Yes
Non-Standard Materials											
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	2.38	11.62	Yes
WHP	White High Performance	Polyester	-40	180	150	-40	82	66	2.38	11.62	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, RexFlex, MatTop, Platinum Series and PS are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 6036001, 4436200

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 48 pitch, 5 ft (1.524 m) length strands.

Open area = 16.0%.


Stainless steel pins are standard with the 6 in (152.4 mm) width.

Also known as RexFlex™ chain.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

NS7956 Thermoplastic Split Sprocket

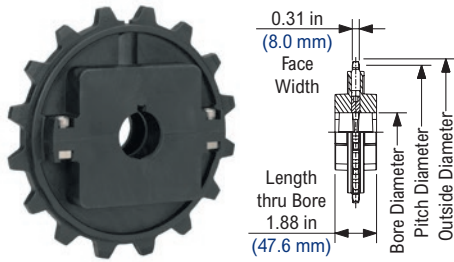

NS7956 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	in	mm	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
16	16	6.407	162.74	6.44	163.6	1	2 1/2	25	60	1 1/2	2 1/2	25	60	1	2 1/2	25	60	0.50	0.23
26	26	10.370	263.40	10.46	265.7	1	2 1/2	25	60	1 1/2	2 1/2	40	60	1	2 1/2	25	60	1.00	0.45

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft. Standard adapter is UHMWPE.

7963B



Photo shows 7963B MatTop Chain molded in High Performance (HP) material.

Chain Information

desc	Chain Width		Guide Clearance		Number of Sprockets	Chain Strength	
	in	mm	in	mm		lbs	N
13	13.00	330.2	13.25	336.55	3	650	2,891
13.5	13.50	342.9	13.75	349.25	3	650	2,891
14	14.00	355.6	14.25	361.95	3	650	2,891
14.5	14.50	368.3	14.75	374.65	3	650	2,891
15	15.00	381.0	15.25	387.35	3	700	3,114
16	16.00	406.4	16.25	412.75	3	700	3,114
16.5	16.50	419.1	16.75	425.45	3	700	3,114
17	17.00	431.8	17.25	438.15	3	700	3,114
17.5	17.50	444.5	17.75	450.85	3	700	3,114
18	18.00	457.2	18.25	463.55	3	700	3,114

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
			dry	wet		dry	wet				
Non-Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	3.09	15.11	Yes
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	3.09	15.11	Yes


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, Platinum Series and PS are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 7527146

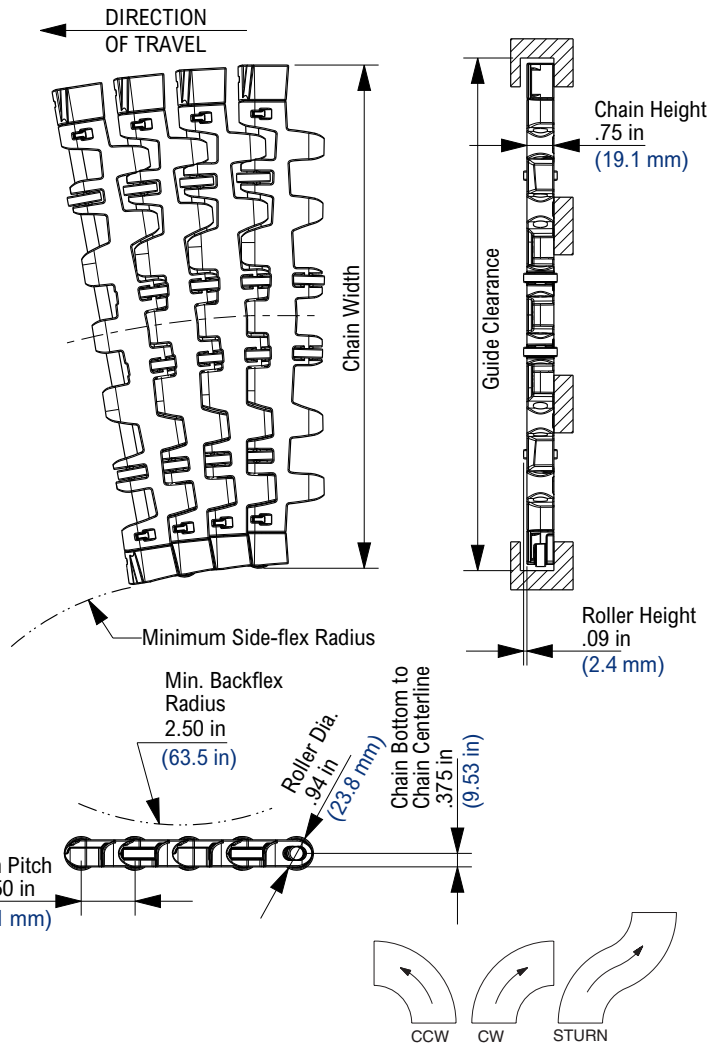

Additional Notes

Stocked in 40 pitch, 5ft (1.52 m) length strands.

Open area = 16.0%.

Must specify turn direction i.e. HP7963B-15IN CCW.

Standard plugs for CW and CCW are B on the inside and NT on the outside.


S-Turn comes with bearings on both sides.

Chain Strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.



Photo shows 7963NT MatTop Chain molded in High Performance (HP) material.

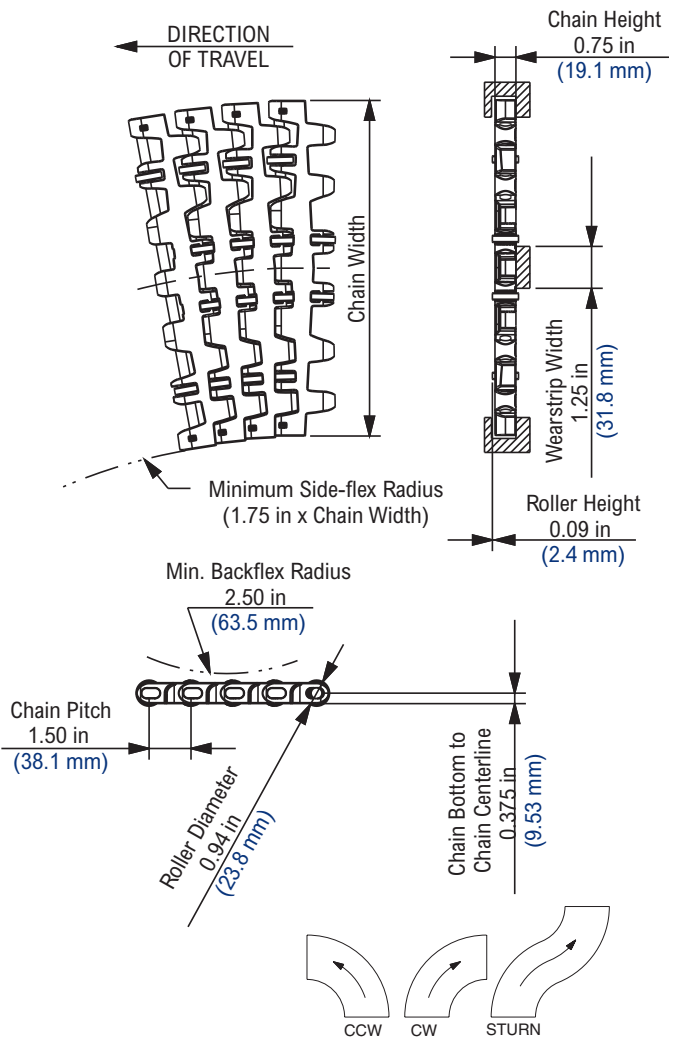

Chain Information

desc	Chain Width		Guide Clearance		Number of Sprockets	Chain Strength	
	in	mm	in	mm		lbs	N
12	12.00	304.8	12.25	311.15	3	650	2,891
13	13.00	330.2	13.25	336.55	3	650	2,891
13.5	13.50	342.9	13.75	349.25	3	650	2,891
14	14.00	355.6	14.25	361.95	3	650	2,891
14.5	14.50	368.3	14.75	374.65	3	650	2,891
15	15.00	381.0	15.25	387.35	3	700	3,114
16	16.00	406.4	16.25	412.75	3	700	3,114
16.5	16.50	419.1	16.75	425.45	3	700	3,114
17	17.00	431.8	17.25	438.15	3	700	3,114
17.5	17.50	444.5	17.75	450.85	3	700	3,114
18	18.00	457.2	18.25	463.55	3	700	3,114

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Non-Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	3.09	15.11	Yes
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	3.09	15.11	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Regalrexnord, MatTop, Platinum Series and PS are trademarks of Regalrexnord Corporation.

All rights reserved.

Additional Notes

Stocked in 40 pitch, 5ft (1.52 m) length strands.

Open area = 16.0%.

Standard plugs are NT on both inside and outside.

Chain Strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.


7963ST



Photo shows 7963ST MatTop Chain molded in High Performance (HP) material.

Chain Information

desc	Chain Width		Guide Clearance		Number of Sprockets	Chain Strength	
	in	mm	in	mm		lbs	N
13	13.00	330.2	13.25	336.55	3	650	2,891
13.5	13.50	342.9	13.75	349.25	3	650	2,891
14	14.00	355.6	14.25	361.95	3	650	2,891
14.5	14.50	368.3	14.75	374.65	3	650	2,891
15	15.00	381.0	15.25	387.35	3	700	3,114
16	16.00	406.4	16.25	412.75	3	700	3,114
16.5	16.50	419.1	16.75	425.45	3	700	3,114
17	17.00	431.8	17.25	438.15	3	700	3,114
17.5	17.50	444.5	17.75	450.85	3	700	3,114
18	18.00	457.2	18.25	463.55	3	700	3,114

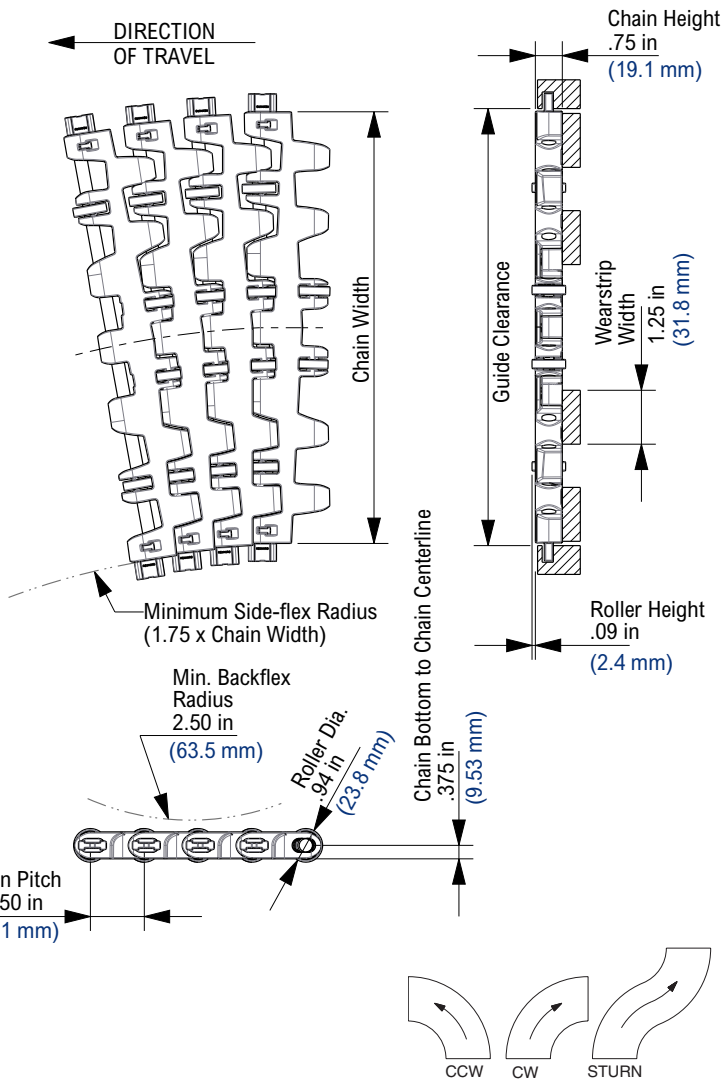

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Non-Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	3.09	15.11	Yes
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	3.09	15.11	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, Platinum Series and PS are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 7527146

Additional Notes

Stocked in 40 pitch, 5ft (1.52 m) length strands.

Open area = 16.0%.


Standard plugs are ST on both inside and outside.

Chain Strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.




Photo shows 7966B MatTop Chain molded in High Performance (HP) material.

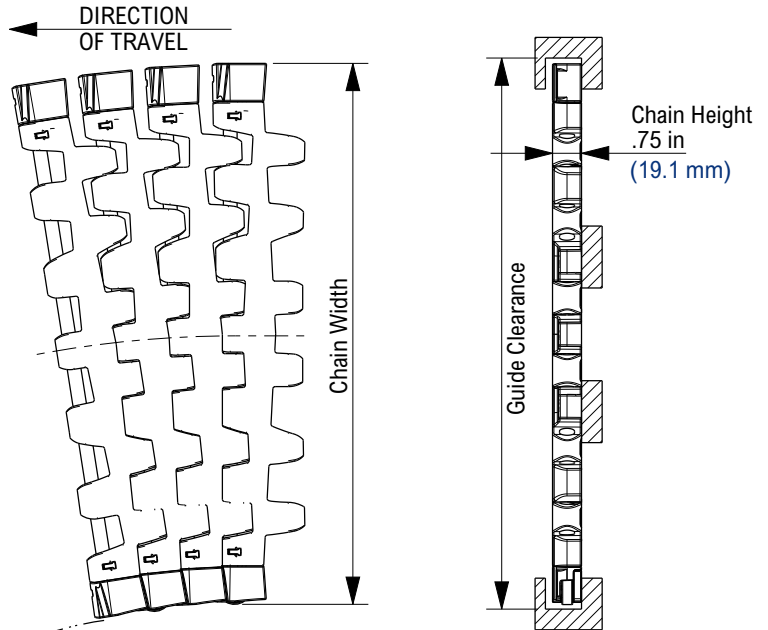

Chain Information

desc	Chain Width		Guide Clearance		Number of Sprockets	Chain Strength	
	in	mm	in	mm		lbs	N
13	13.00	330.2	13.25	336.55	3	650	2,891
13.5	13.50	342.9	13.75	349.25	3	650	2,891
14	14.00	355.6	14.25	361.95	3	650	2,891
14.5	14.50	368.3	14.75	374.65	3	650	2,891
15	15.00	381.0	15.25	387.35	3	700	3,114
16	16.00	406.4	16.25	412.75	3	700	3,114
16.5	16.50	419.1	16.75	425.45	3	700	3,114
17	17.00	431.8	17.25	438.15	3	700	3,114
17.5	17.50	444.5	17.75	450.85	3	700	3,114
18	18.00	457.2	18.25	463.55	3	700	3,114

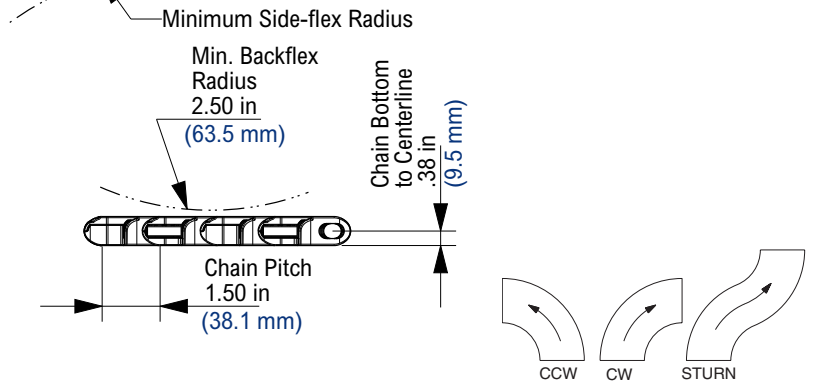

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	3.09	15.11	Yes
Non-Standard Materials											
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	3.09	15.11	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Regnord, MatTop, Platinum Series and PS are trademarks of Regal Regnord Corporation.

All rights reserved.

Additional Notes

Stocked in 40 pitch, 5ft (1.52 m) length strands.

Open area = 16.0%.

Must specify turn direction i.e. HP7966B-15IN CCW.

Standard plugs for CW and CCW are B on the inside and NT on the outside S-Turn comes with bearings on both sides.


Chain Strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

7966NT



Photo shows 7963NT MatTop Chain molded in High Performance (HP) material.

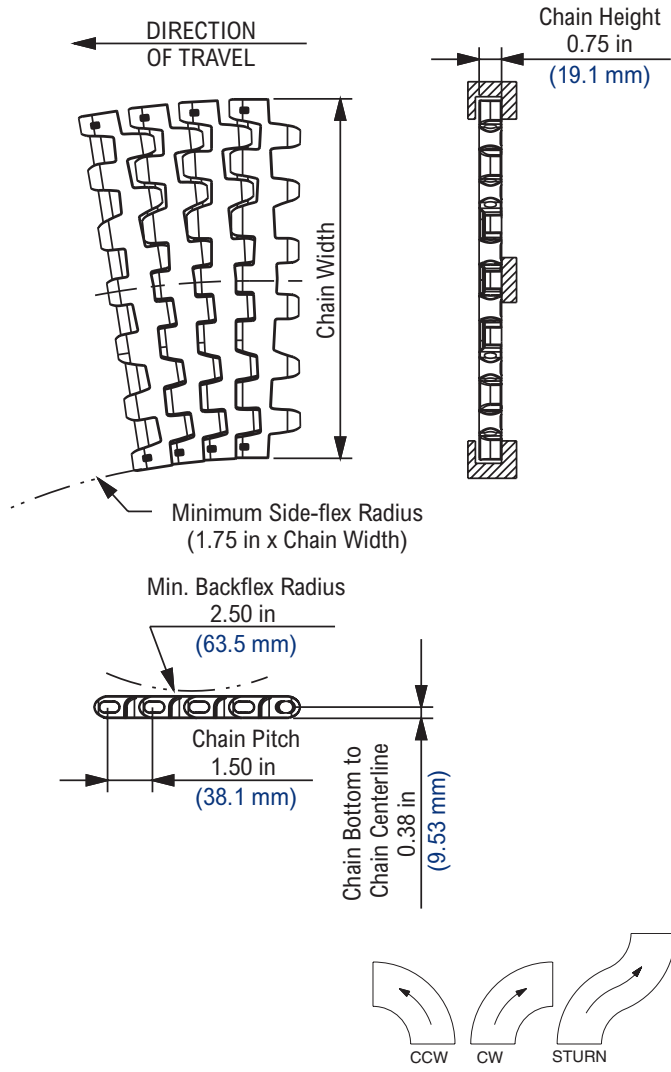

Chain Information

desc	Chain Width		Guide Clearance		Number of Sprockets	Chain Strength	
	in	mm	in	mm		lbs	N
12	12.00	304.8	12.25	311.15	3	650	2,891
13	13.00	330.2	13.25	336.55	3	650	2,891
13.5	13.50	342.9	13.75	349.25	3	650	2,891
14	14.00	355.6	14.25	361.95	3	650	2,891
14.5	14.50	368.3	14.75	374.65	3	650	2,891
15	15.00	381.0	15.25	387.35	3	700	3,114
16	16.00	406.4	16.25	412.75	3	700	3,114
16.5	16.50	419.1	16.75	425.45	3	700	3,114
17	17.00	431.8	17.25	438.15	3	700	3,114
17.5	17.50	444.5	17.75	450.85	3	700	3,114
18	18.00	457.2	18.25	463.55	3	700	3,114

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	3.09	15.11	Yes
Non-Standard Materials											
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	3.09	15.11	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, Platinum Series and PS are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 7527146

Additional Notes

Stocked in 40 pitch, 5ft (1.52 m) length strands.

Open area = 16.0%.


Standard plugs are NT on both inside and outside.

Chain Strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.



Photo shows 7966ST MatTop Chain molded in High Performance (HP) material.

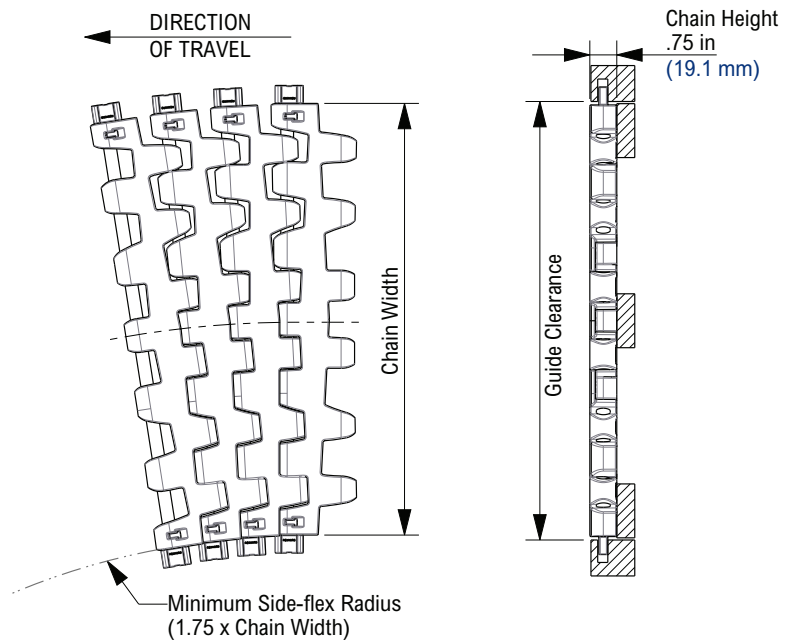

Chain Information

desc	Chain Width		Guide Clearance		Number of Sprockets	Chain Strength	
	in	mm	in	mm		lbs	N
12	12.00	304.8	12.25	311.15	3	650	2,891
13	13.00	330.2	13.25	336.55	3	650	2,891
13.5	13.50	342.9	13.75	349.25	3	650	2,891
14	14.00	355.6	14.25	361.95	3	650	2,891
14.5	14.50	368.3	14.75	374.65	3	650	2,891
15	15.00	381.0	15.25	387.35	3	700	3,114
16	16.00	406.4	16.25	412.75	3	700	3,114
16.5	16.50	419.1	16.75	425.45	3	700	3,114
17	17.00	431.8	17.25	438.15	3	700	3,114
17.5	17.50	444.5	17.75	450.85	3	700	3,114
18	18.00	457.2	18.25	463.55	3	700	3,114

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
			dry	wet		dry	wet				
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	3.09	15.11	Yes
Non-Standard Materials											
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	3.09	15.11	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, Platinum Series and PS are trademarks of Regal Rexnord Corporation.

All rights reserved.

Additional Notes

Stocked in 40 pitch, 5ft (1.52 m) length strands.

Open area = 16.0%.



Standard plugs are ST on both inside and outside.

Chain Strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

NS7960 Thermoplastic Split Sprocket

KUS7960 Thermoplastic Split Sprocket

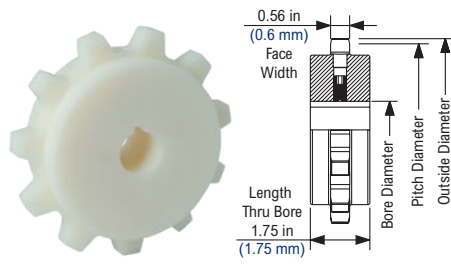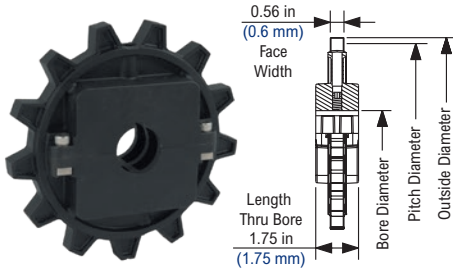

NS7960 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
13	13	6.27	159.21	6.46	164.10	1	2 1/2	25	65	1	2 1/2	25	65	1	2 1/2	25	65	1.07	0.48
16	16	7.69	195.30	7.92	201.17	1	3	25	80	1	3	25	80	1	3	25	80	1.40	0.64

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft. Standard adapter is UHMWPE.

KUS7960 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
11	11	5.324	135.23	5.49	139.44	3/4	2 1/2	20	65	1	2 1/2	20	65	3/4	2 1/2	20	65	1.18	0.54


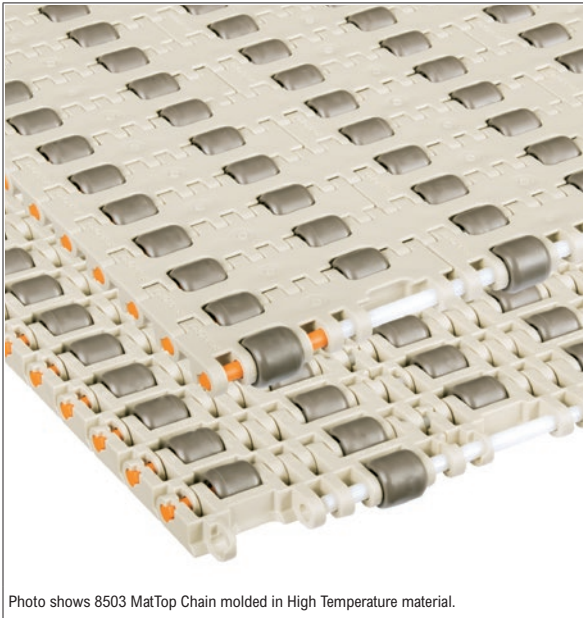


Photo shows 8503 MatTop Chain molded in High Temperature material.

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

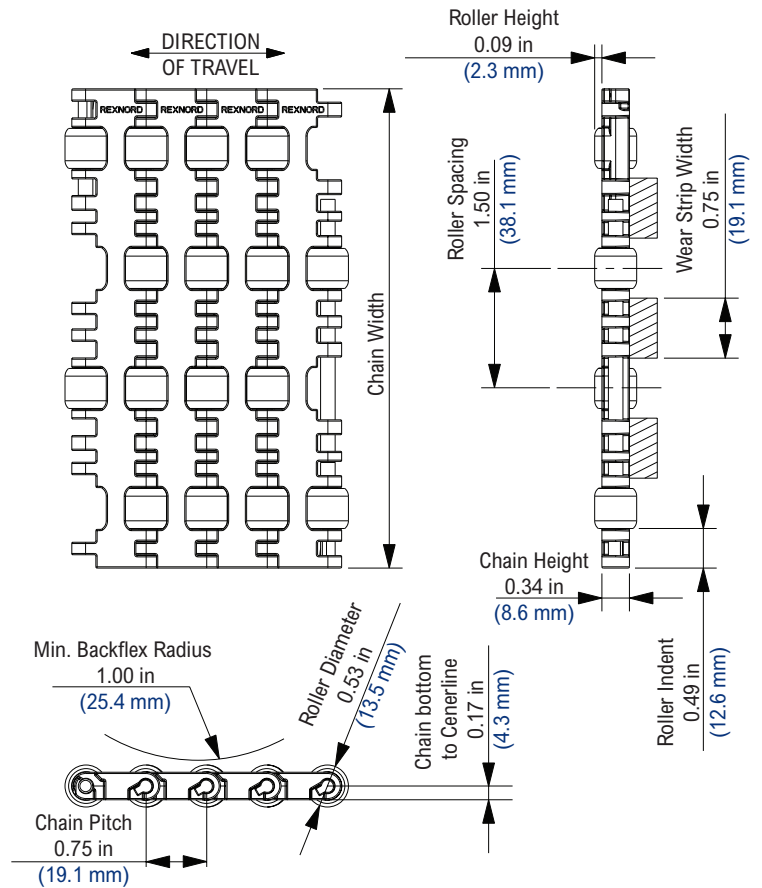

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft	N/m	lbs/ft ²	kg/m ²	
			min	max		min	max						
Standard Materials													
HP™	High Performance	Polyester	40	180	150	4	82	66	775	11,307	2.36	11.52	Yes
Non-Standard Materials													
HT	High Temperature	Polyester	40	220	212	4	104	100	425	6,201	1.58	7.71	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patent 7527146

Additional Notes

For chain width information see Rexnord Chain Width Table on page 300. Open area = 6.0%. Chain is assembled with HP rollers. Typical coefficient of friction between chain and product = 0.09. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

8505


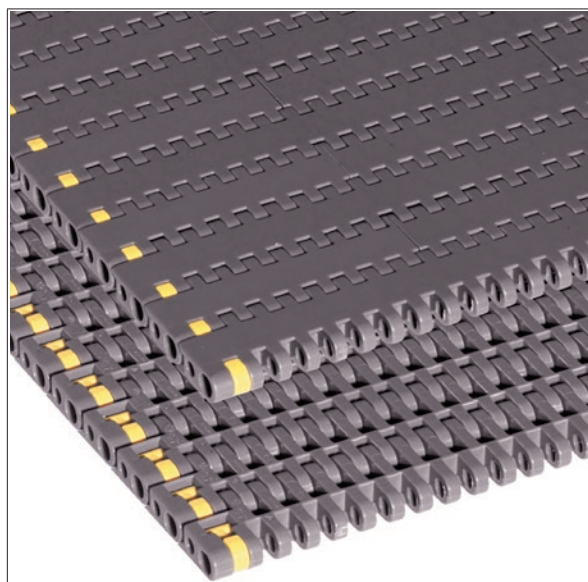


Photo shows 8505 MatTop Chain molded in High Performance (HP) material.

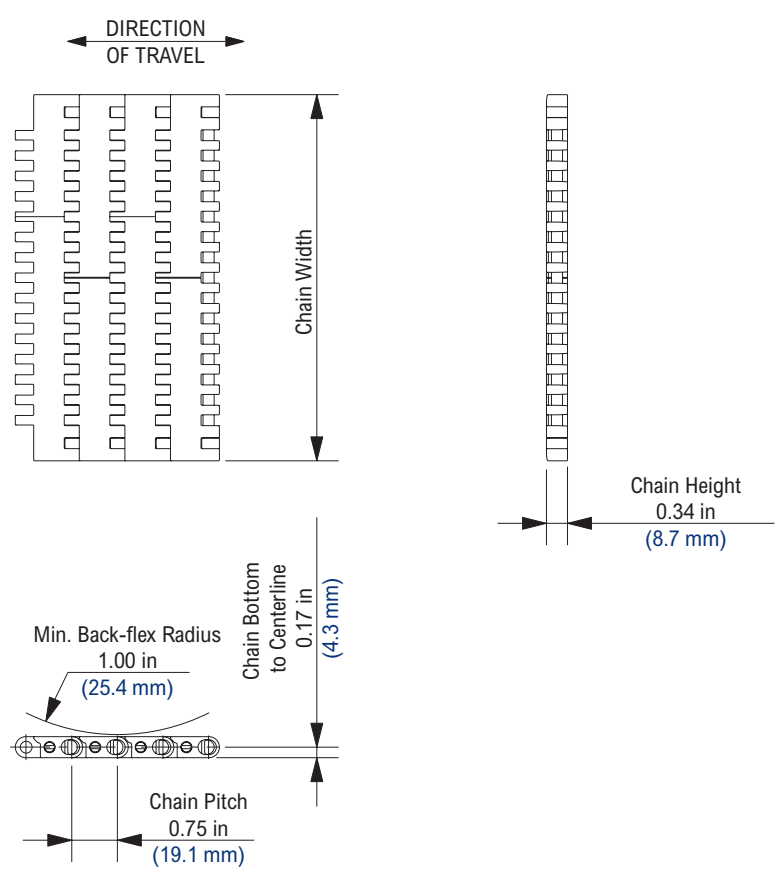

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 25%	2	7
25% - 75%	4	13
75% - 100%	6	20

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2,000	29,180	1.82	8.89	Yes
WHT	White High Temperature	Polypropylene	40	220	212	4	104	100	900	13,131	1.22	5.96	Yes
Non-Standard Materials													
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	1,200	17,508	1.82	8.89	No
Dry-PT™	Dry PET Low Friction	Polyester	-40	180	150	-40	82	66	2,000	29,180	1.82	8.89	Yes
DUV	Plain Acetal Ultraviolet Resistant	Polyester	0	180	150	-18	82	66	2,000	29,180	1.82	8.89	No
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	1,000	14,590	2.00	9.77	No
HT	High Temperature	Polypropylene	40	220	212	4	104	100	900	13,131	1.22	5.96	Yes
KHT	Khaki High Temperature	Polypropylene	40	220	212	4	104	100	900	13,131	1.22	5.96	Yes
LF	Low Friction	Polyester	-40	180	150	-40	82	66	2,000	29,180	1.82	8.89	Yes
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	2,000	29,180	1.82	8.89	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	2,000	29,180	1.82	8.89	Yes
WLT	White Low Temperature	Polyethylene	-100	80	80	-73	27	27	700	10,213	1.20	5.86	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, MatTop, Dry-PT, Platinum Series, Platinum Series X, PS and PSX are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patents: 5335768, 4436200

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For chain width information see Rexnord Chain Width Table on page 300. Open area = 4.1%. Stainless steel pins are available on a made-to-order basis. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

8505 (Metric)


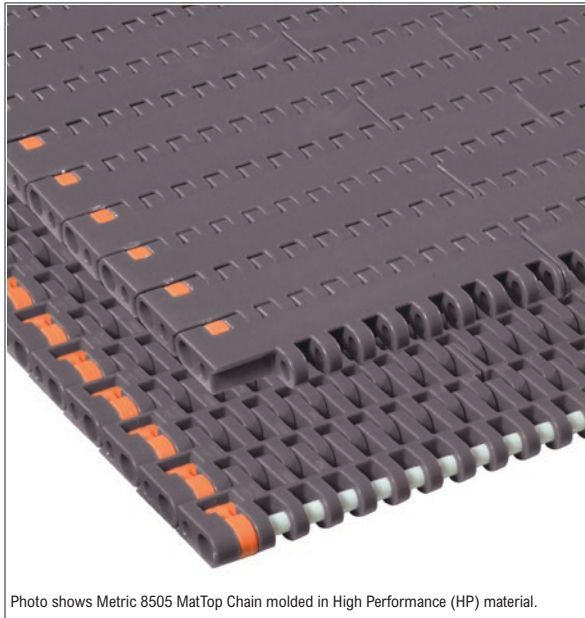


Photo shows Metric 8505 MatTop Chain molded in High Performance (HP) material.

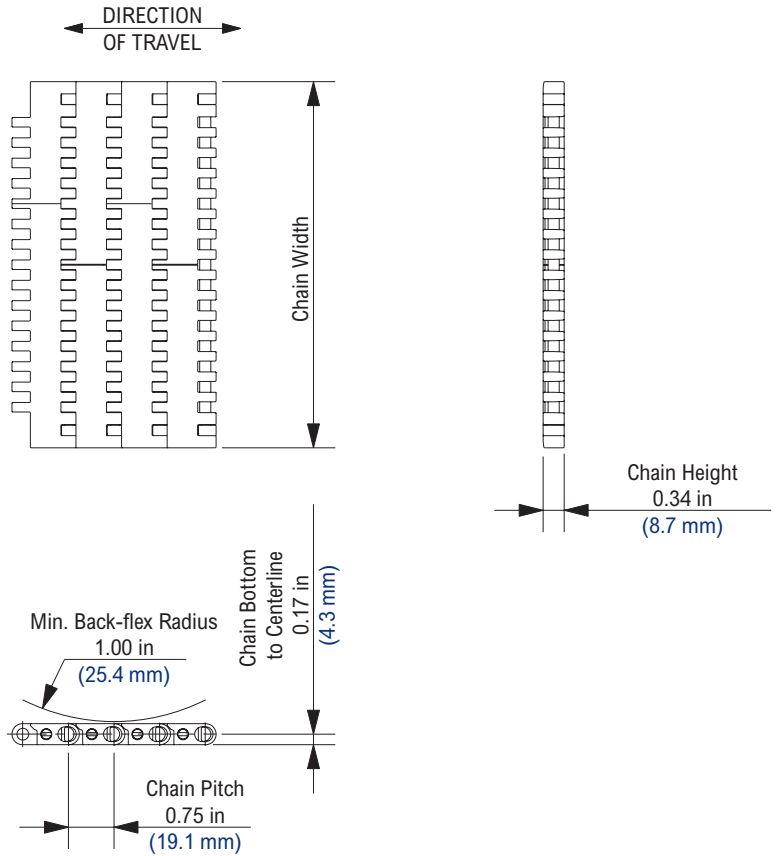

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 25%	2	7
25% - 75%	4	13
75% - 100%	6	20

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2,000	29,180	1.82	8.89	Yes
Non-Standard Materials													
Dry-PT™	Dry PET Low Friction	Polyester	-40	180	150	-40	82	66	2,000	29,180	1.82	8.89	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	2,000	29,180	1.82	8.89	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, MatTop, Dry-PT, Platinum Series X and PSX are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

For chain width information see Rexnord Chain Width Table on page 300. Open area = 4.1%. Stainless steel pins are available on a made-to-order basis. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

8505 RubberTop™


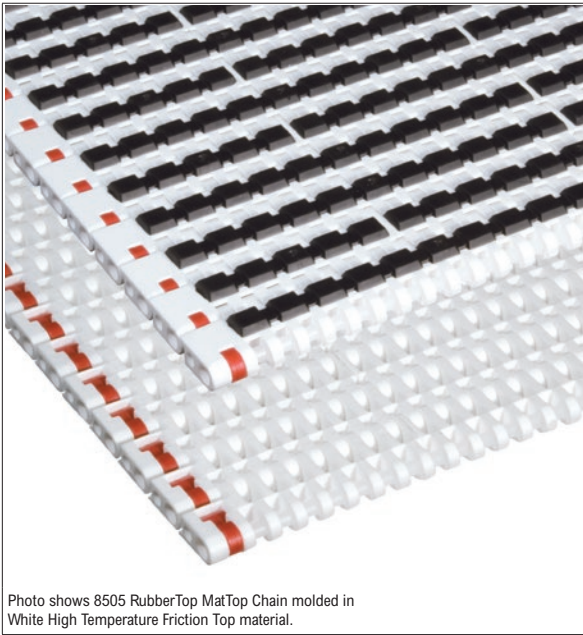


Photo shows 8505 RubberTop MatTop Chain molded in White High Temperature Friction Top material.

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 25%	2	7
25% - 75%	4	13
75% - 100%	6	20

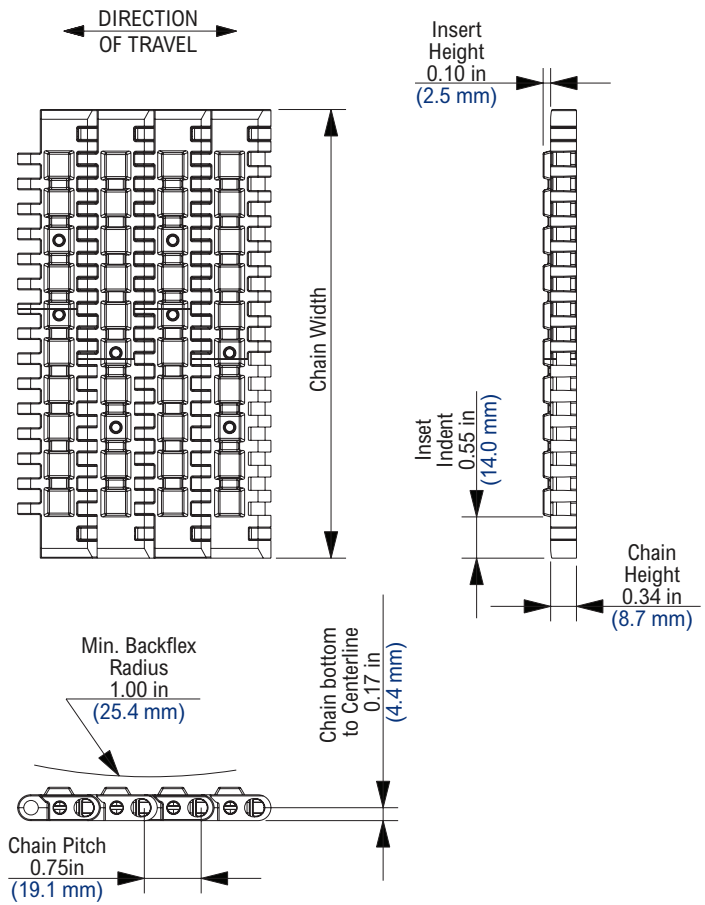

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HT	High Temperature	Polypropylene	40	180	150	4	82	66	900	13,131	1.47	7.17	Yes
Non-Standard Materials													
KHT	Khaki High Temperature	Polypropylene	40	180	150	4	82	66	900	13,131	1.47	7.17	Yes
WHT	White High Temperature	Polypropylene	40	180	150	4	82	66	900	13,131	1.47	7.17	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, MatTop and RubberTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For chain width information see Rexnord Chain Width Table on page 300. Links are molded with 50 Shore A TPE friction pads. Open area = 4.1%.

8505 V


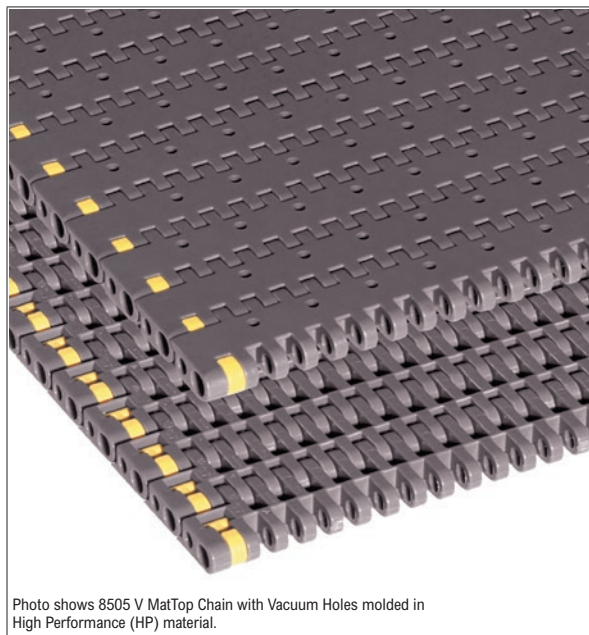


Photo shows 8505 V MatTop Chain with Vacuum Holes molded in High Performance (HP) material.

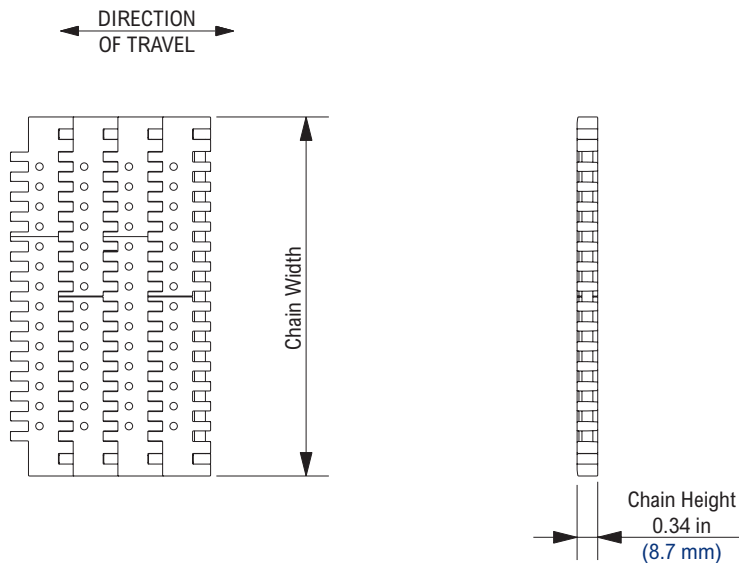

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 25%	2	7
25% - 75%	4	13
75% - 100%	6	20

Hole Diameter		Hole Spacing		Holes per Module	Open Area
in	mm	in	mm		
1/8	3.2	0.33	8.4	18	9.0 %
1/8	3.2	0.67	17.0	9	6.6 %
1/8	3.2	1.00	25.4	6	5.7 %
1/8	3.2	1.33	33.8	5	5.3 %
1/8	3.2	1.67	42.4	4	5.1 %
1/8	3.2	2.00	50.8	3	4.9 %

Standard hole sizes listed per 6 in (152.4 mm) module. All vacuum holes are centered on the chain.

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Non-Standard Materials													
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2,000	29,180	1.82	8.89	Yes
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	1,000	14,590	1.98	9.67	No

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Regal, MatTop and FRPLUS are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 5335768, 4436200

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300.

Stainless steel pins are available on a made-to-order basis.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

8505 (MTW)


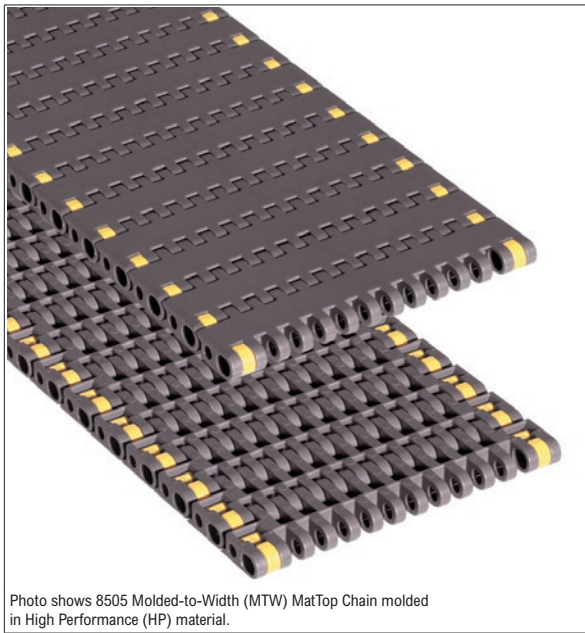


Photo shows 8505 Molded-to-Width (MTW) MatTop Chain molded in High Performance (HP) material.

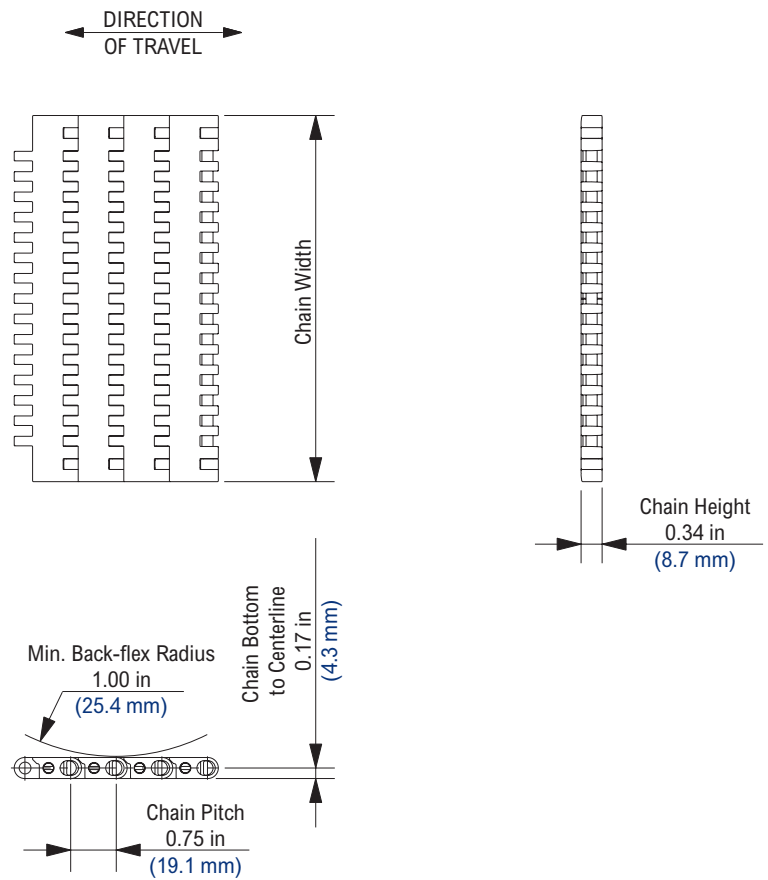

Chain Information

desc	Chain Width		Number of Sprockets	Chain Strength	
	in	mm		lbs	N
2 1/3	2.33	59.2	1	225	1,001
3 1/4	3.25	82.6	1	240	1,068
85MM	3.35	85.0	1	240	1,068
4 1/2	4.50	114.3	1	360	1,601
6	6.00	152.4	2	500	2,224
7 1/2	7.50	190.5	2	625	2,780
12	12.00	304.8	4	2,000	8,896

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
			dry	wet		dry	wet				
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	1.82	8.89	Yes
Non-Standard Materials											
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	1.82	8.89	No
Dry-PT™	Dry PET Low Friction	Polyester	-40	180	150	-40	82	66	1.82	8.89	Yes
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	2.00	9.77	No
HT	High Temperature	Polypropylene	40	220	212	4	104	100	1.22	5.96	Yes
KHT	Khaki High Temperature	Polypropylene	40	220	212	4	104	100	1.22	5.96	Yes
LF	Low Friction	Polyester	-40	180	150	-40	82	66	1.82	8.89	Yes
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	1.82	8.89	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	1.82	8.89	Yes
WHT	White High Temperature	Polypropylene	40	220	212	4	104	100	1.22	5.96	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, Dry-PT, Platinum Series, Platinum Series X, PS and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 5335768, 4436200

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 160 pitch, 10 ft (3.048 m) length strands.

Open Area = 4.1%.

Stainless steel pins are available on a made-to-order basis.

Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

8505 (MTW) PT


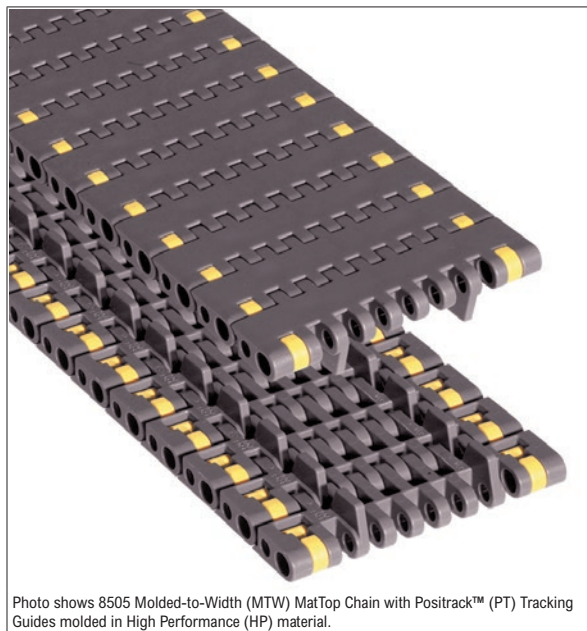


Photo shows 8505 Molded-to-Width (MTW) MatTop Chain with Positrack™ (PT) Tracking Guides molded in High Performance (HP) material.

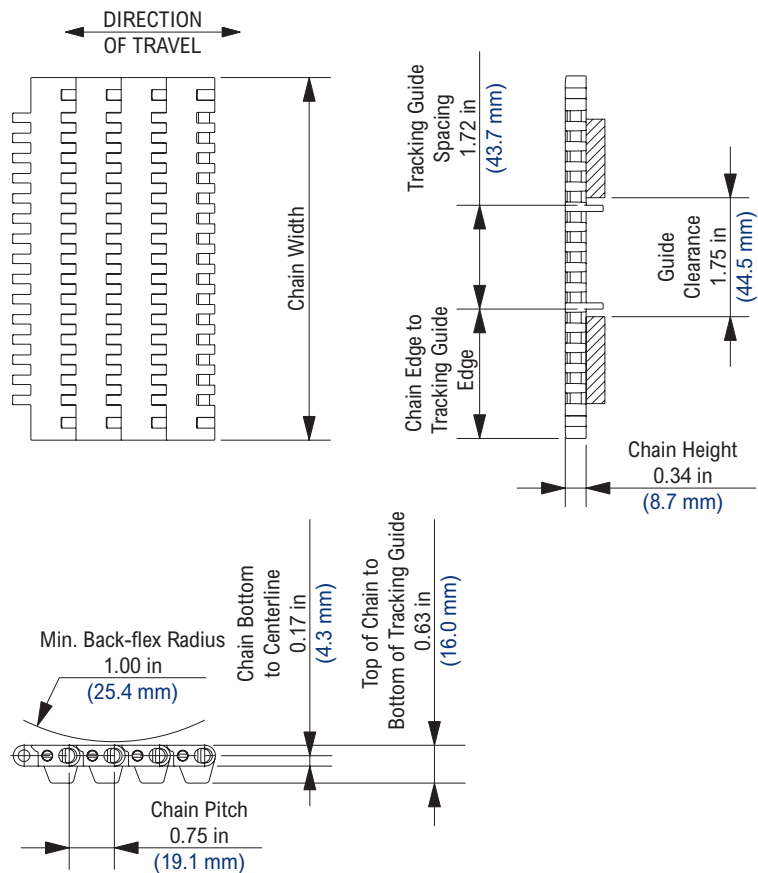

Chain Information

desc	Chain Width		Chain Edge to Tracking Guide Edge		Number of Sprockets	Chain Strength	
	in	mm	in	mm		lbs	N
3 1/4	3.25	82.6	0.76	19.3	1	240	1,068
85MM	3.35	85.0	0.81	20.6	1	240	1,068
4 1/2	4.50	114.3	1.39	35.3	1	360	1,601
6	6.00	152.4	2.14	54.4	1	500	2,224
7 1/2	7.50	190.5	2.89	73.4	1	625	2,780

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	1.82	8.89	Yes
Non-Standard Materials											
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	1.82	8.89	No
Dry-PT™	Dry PET Low Friction	Polyester	-40	180	150	-40	82	66	1.82	8.89	Yes
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	2.00	9.77	No
KHT	Khaki High Temperature	Polypropylene	40	220	212	4	104	100	1.22	5.96	Yes
LF	Low Friction	Polyester	-40	180	150	-40	82	66	1.82	8.89	Yes
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	1.82	8.89	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	1.82	8.89	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, Dry-PT, Platinum Series, Platinum Series X, PS and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 5335768, 4436200

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 160 pitch, 10 ft (3.048 m) length strands.

Open Area = 4.1%.

Stainless steel pins are available on a made-to-order basis.

Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

8505 DTS™ PT


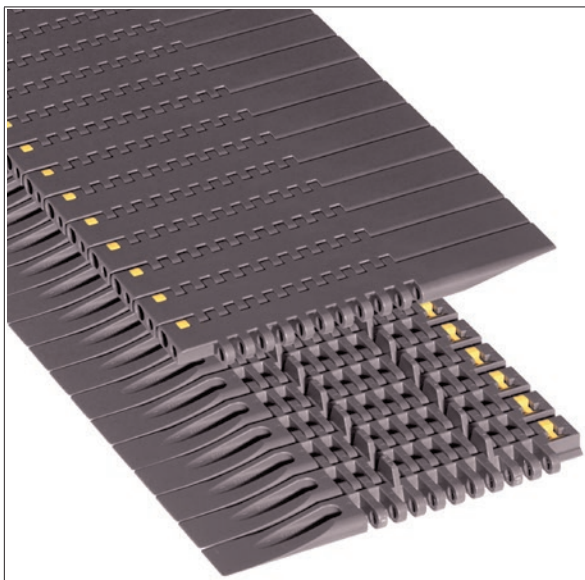


Photo shows 8505 MatTop Chain with DynamicTransfer System (DTS) and Positrac™ (PT) Tracking Guides molded in High Performance (HP) material.

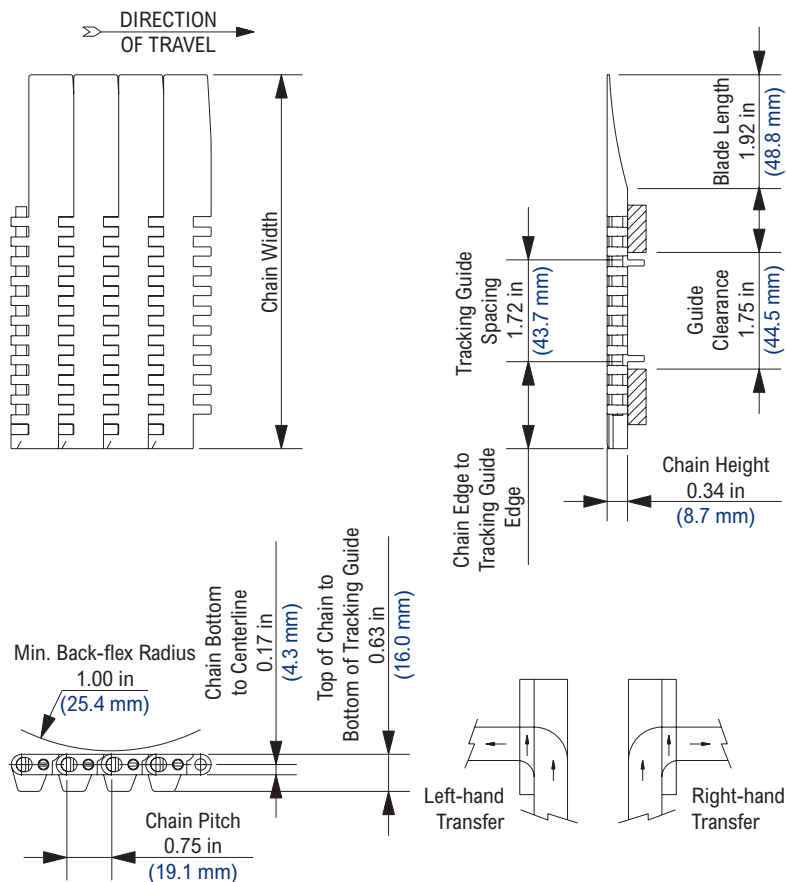

Chain Information

desc	Chain Width		Chain Edge to Tracking Guide Edge		Number of Sprockets	Chain Strength	
	in	mm	in	mm		lbs	N
4 1/2	6.30	160.0	1.47	37.3	1	360	1,601
7 1/2	9.30	236.2	2.83	71.9	1	600	2,669

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
			dry	wet		dry	wet				
Standard Materials											
Dry-PT™	Dry PET Low Friction	Polyester	-40	180	150	-40	82	66	1.82	8.89	Yes
HP™	High Performance	Polyester	-40	180	150	-40	82	66	1.82	8.89	Yes
PSX™	Platinum Series X™	Polyester	-40	180	150	-40	82	66	1.82	8.89	Yes
Non-Standard Materials											
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	2.00	9.77	No
KHT	Khaki High Temperature	Polypropylene	40	220	212	4	104	100	1.22	5.96	Yes
LF	Low Friction	Polyester	-40	180	150	-40	82	66	1.82	8.89	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, Dry-PT, FRPLUS, Platinum Series X, and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 5335768, 5634550, 4436200

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 160 pitch, 10 ft (3.048 m) length strands.

Available in both left-hand and right-hand modules.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.



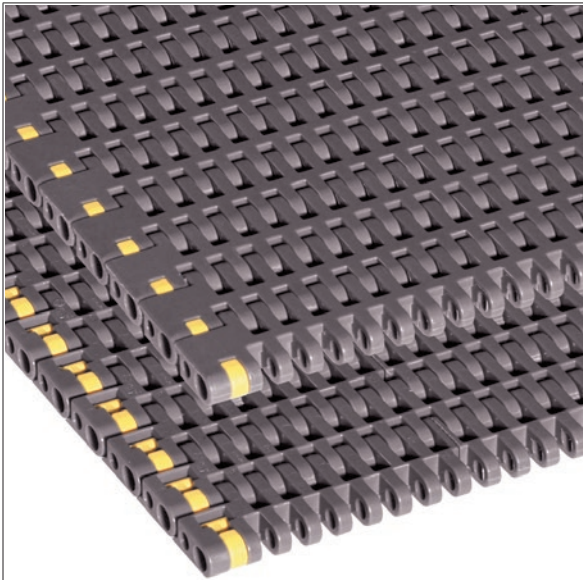



Photo shows 8506 MatTop Chain molded in High Performance (HP) material.

DIRECTION OF TRAVEL

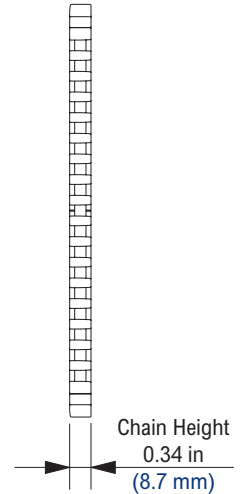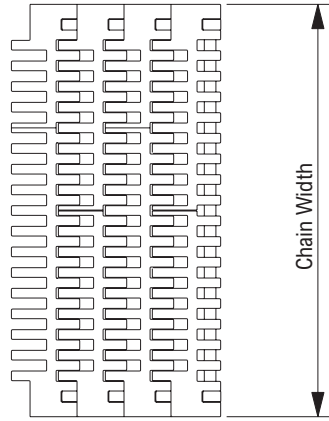

Chain Information

Chain Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 25%	2	7
25% - 75%	4	13
75% - 100%	6	20



Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max dry wet		min	max dry wet		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2,000	29,180	1.61	7.86	Yes
WHT	White High Temperature	Polypropylene	40	220	212	4	104	100	900	13,131	1.06	5.18	Yes
Non-Standard Materials													
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	1,200	17,508	1.61	7.86	No
FR	Flame Retardant	Polyester	0	180	140	-18	82	60	900	13,131	1.61	7.86	No
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	1,000	14,590	1.98	9.67	No
HT	High Temperature	Polypropylene	40	220	212	4	104	100	900	13,131	1.06	5.18	Yes
KHT	Khaki High Temperature	Polypropylene	40	220	212	4	104	100	900	13,131	1.06	5.18	Yes
LF	Low Friction	Polyester	-40	180	150	-40	82	66	2,000	29,180	1.61	7.86	Yes
LUV	Low Temp. Ultraviolet Resistant	Polyethylene	-40	80	80	-40	27	27	700	10,213	1.06	5.18	No
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	2,000	29,180	1.61	7.86	Yes
WLT	White Low Temperature	Polyethylene	-100	80	80	-73	27	27	700	10,213	1.06	5.18	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, Platinum Series and PS are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 5335768, 4436200

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300.

Open area = 21.0%.

Stainless steel pins are available on a made-to-order basis.

Chain strength is listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

8506 (MTW)


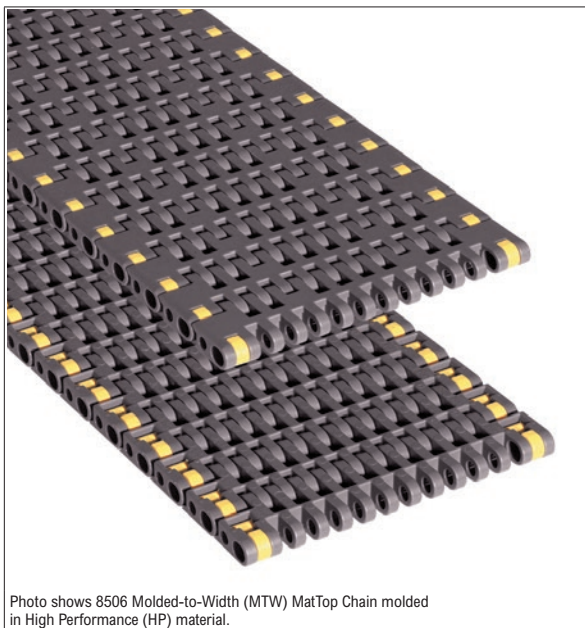


Photo shows 8506 Molded-to-Width (MTW) MatTop Chain molded in High Performance (HP) material.

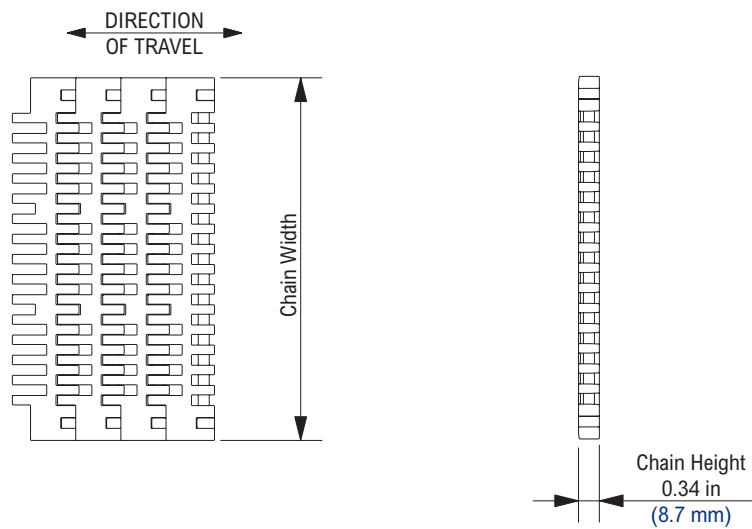

Chain Information

desc	Chain Width		Number of Sprockets	Chain Strength	
	in	mm		lbs	N
2 1/3	2.33	59.2	1	225	1,001
3 1/4	3.25	82.6	1	240	1,068
85MM	3.35	85.0	1	240	1,068
4 1/2	4.50	114.3	1	360	1,601
6	6.00	152.4	2	500	2,224
7 1/2	7.50	190.5	2	625	2,780
12	12.00	304.8	4	2,000	8,896

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
			dry	wet		dry	wet				
Standard Materials											
HP™	High Performance	Polyester	-40	180	150	-40	82	66	1.61	7.86	Yes
Non-Standard Materials											
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	1.98	9.67	No
HT	High Temperature	Polypropylene	40	220	212	4	104	100	1.06	5.18	Yes
LF	Low Friction	Polyester	-40	180	150	-40	82	66	1.61	7.86	Yes
WHT	White High Temperature	Polypropylene	40	220	212	4	104	100	1.06	5.18	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop and FRPLUS are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 5335768, 4436200

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

Stocked in 160 pitch, 10 ft (3.048 m) length strands.

Open Area = 21.0%.

Stainless steel pins are available on a made-to-order basis.

Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended.

For additional material information, see material portfolio.

8506 (MTW) PT


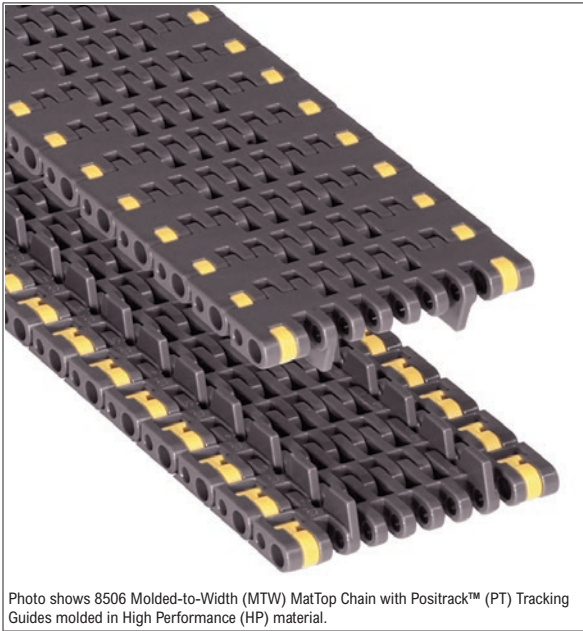


Photo shows 8506 Molded-to-Width (MTW) MatTop Chain with Positrack™ (PT) Tracking Guides molded in High Performance (HP) material.

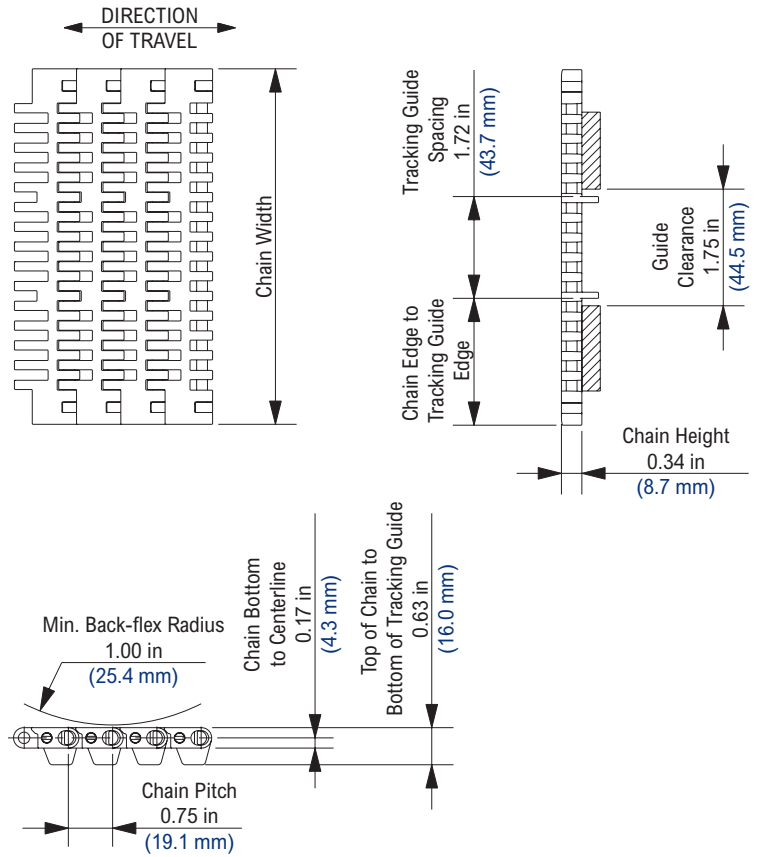

Chain Information

desc	Chain Width		Chain Edge to Tracking Guide Edge		Number of Sprockets	Chain Strength	
	in	mm	in	mm		lbs	N
3 1/4	3.25	82.6	0.76	19.3	1	240	1,068
85MM	3.35	85.0	0.81	20.6	1	240	1,068
4 1/2	4.50	114.3	1.39	35.3	1	360	1,601
6	6.00	152.4	2.14	54.4	1	500	2,224
7 1/2	7.50	190.5	2.89	73.4	1	625	2,780

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Approximate Weight		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs/ft ²	kg/m ²	
Standard Materials											
HP™	High Performance™	Polyester	-40	180	150	-40	82	66	1.61	7.86	Yes
Non-Standard Materials											
FRPLUS™	Flame Retardant Low Friction	Acetal	0	180	140	-18	82	60	1.98	9.67	No
HT	High Temperature	Polypropylene	40	220	212	4	104	100	1.06	5.18	Yes
LF	Low Friction	Polyester	-40	180	150	-40	82	66	1.61	7.86	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, MatTop and FRPLUS are trademarks of Regal Rexnord Corporation. All rights reserved. U.S. Patents: 5335768, 4436200

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Stocked in 160 pitch, 10 ft (3.048 m) length strands. Open Area = 21.0%. Stainless steel pins are available on a made-to-order basis. Chain strength is based on acetal-based materials and listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.

8507


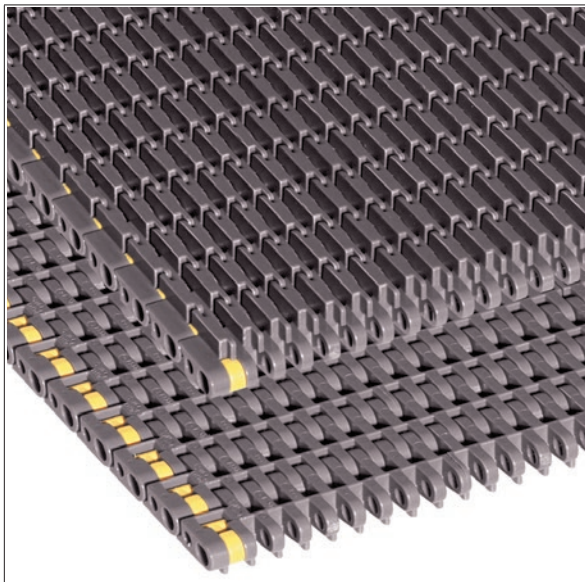


Photo shows 8507 MatTop Chain molded in High Performance (HP) material.

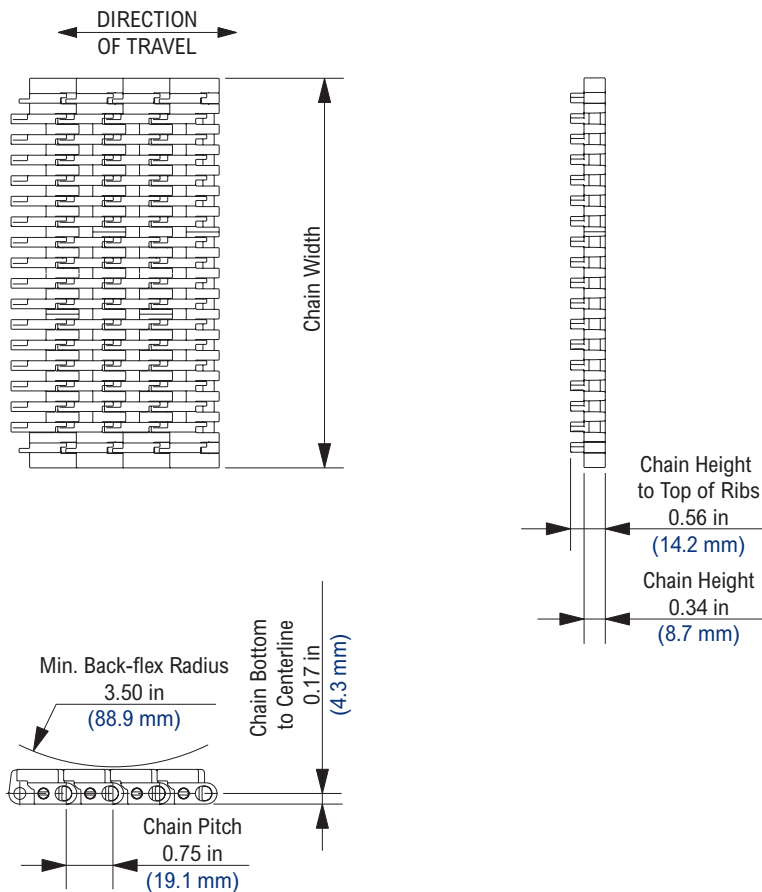

Chain Information

Chain Capacity	Number of Sprockets			
	with Transfer Comb		without Transfer Comb	
	per ft	per m	per ft	per m
0% - 25%	4	13	2	7
25% - 75%	6	20	4	13
75% - 100%	6	20	6	20

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HP™	High Performance	Polyester	-40	180	150	-40	82	66	2,000	29,180	2.27	11.08	Yes
HT	High Temperature	Polypropylene	40	220	212	4	104	100	900	13,131	1.53	7.47	Yes
Non-Standard Materials													
AS	Anti-Static	Polyester	0	180	NR	-18	82	NR	1,200	17,508	2.27	11.08	No
LF	Low Friction	Polyester	-40	180	150	-40	82	66	2,000	29,180	1.82	8.89	Yes
PS™	Platinum Series™	Polyester	-40	180	150	-40	82	66	2,000	29,180	2.27	11.08	Yes
WHT	White High Temperature	Polypropylene	40	220	212	4	104	100	900	13,131	1.53	7.47	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, MatTop, Platinum Series and PS are trademarks of Regal Rexnord Corporation.

All rights reserved.

U.S. Patents: 5335768, 4436200

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.

For chain width information see Rexnord Chain Width Table on page 300. Open area = 20.7%.

Stainless steel pins are available on a made-to-order basis.


Thermoplastic pins are available upon request.

Chain Load Ratings are listed at room temperature. The derate factor is the amount the chain capacity is reduced in comparison to standard materials.

NR = Not Recommended.

For additional material information, see material portfolio.


SSS8500 Stainless Steel Split Sprocket

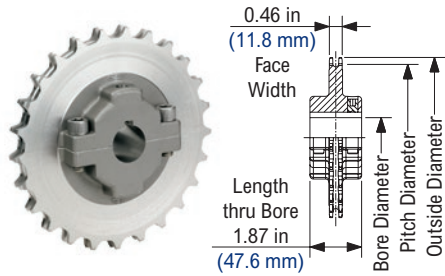

KU8500 Thermoplastic Sprocket



KU8500 Thermoplastic "H-Style" Sprocket

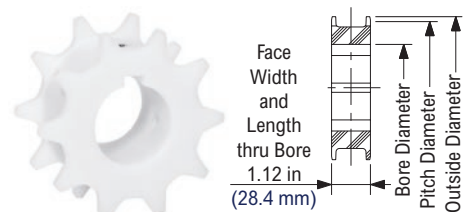

SSS8500 Stainless Steel Split Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)												Bore Diameter (Round)				Approximate Weight		
			Round						Square						in						
			in		mm		in		mm		in		mm		in		mm				
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
24	24	5.800	147.32	5.84	148.3	1	1 1/2	25	40	1	1	25	25	1	2	25	50	4.77	2.16		
25	25	6.040	153.42	6.09	154.7	1	1 1/2	25	40	1	1	25	25	1	2	25	50	4.97	2.25		
27	27	6.521	165.63	6.57	166.9	1	2 1/2	25	60	1	3 1/2	25	90	1	3 1/2	25	90	5.20	2.36		

Shaft-ready round bore sprockets are shipped with keyway and no setscrew.

* The 3-1/2 in and 90 mm bores for the 27 tooth square bore sprocket and all round bore sprockets above 1-1/2 in (40 mm) are supplied as machined bores. All other bores are supplied with split bore adapters.

KU8500 Thermoplastic Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)												Bore Diameter (Idler)				Approximate Weight		FDA Approval
			Round						Square						in						
			in		mm		in		mm		in		mm		in		mm				
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
10	10	2.450	62.23	2.42	61.5	3/4	1	25	25	1	1	25	25	3/4	1	25	25	0.28	0.13	Yes	
14	14	3.402	86.41	3.40	86.4	1	1 1/4	25	30	1	1 1/2	25	40	1	1 1/4	25	30	0.17	0.08	Yes	
17	17	4.120	104.65	4.15	105.4	1	1 1/2	25	40	1	1 1/2	25	40	1	1 1/2	25	40	0.38	0.17	Yes	
21	21	5.079	129.01	5.12	130.0	1	2 1/2	25	65	1	2 1/2	25	65	1	2 1/2	25	65	0.59	0.27	Yes	
24	24	5.800	147.32	5.84	148.3	1	3 3/8	25	85	1	2 3/4	25	70	1	3 1/2	25	65	0.69	0.31	Yes	
25	25	6.040	153.42	6.09	154.7	1	3 3/4	25	95	1	3	25	75	1	4	25	75	0.75	0.34	Yes	
27	27	6.520	165.61	6.57	166.9	1	3 3/4	25	95	1	3	25	75	1	4	25	75	0.80	0.36	Yes	
28	28	6.760	171.70	6.81	173.0	1	3 3/4	25	95	1	3	25	75	1	4	25	75	0.85	0.39	Yes	


Shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft. 10 tooth sprocket has a Length thru Bore of 1.38 in (35.1 mm).

KU8500 Thermoplastic "H-Style" Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)												Bore Diameter (Idler)				Approximate Weight		FDA Approval
			Round						Square						in						
			in		mm		in		mm		in		mm		in		mm				
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
14	14	3.402	86.41	3.40	86.4	1	1 1/4	25	30	1	1 1/2	25	40	1	1 1/4	25	30	0.17	0.08	Yes	
17	17	4.120	104.65	4.15	105.4	1	1 1/2	25	40	1	2	25	50	1	1 1/2	25	40	0.34	0.15	Yes	
25	25	6.040	153.42	6.09	154.7	1	3	25	75	1	3	25	80	1	2 1/2	25	65	0.97	0.44	Yes	

Shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.


NS8500 Thermoplastic Split Sprocket

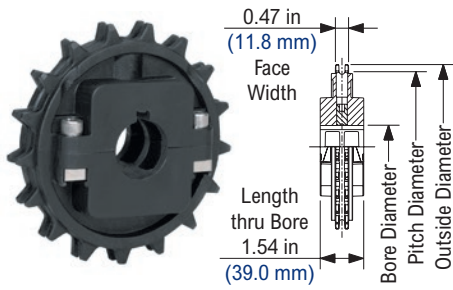

NS8500 Thermoplastic Split Sprocket Information



Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight		
						Round				Square				in		mm				
						in	mm	in	mm	min	max	min	max	min	max	min	max			min
actual	effect																		lbs	kg
17	17	4.120	104.65	4.15	105.4	1	1 1/2	25	40	1	1 1/2	25	40	1	1 1/2	25	40	0.48	0.22	
21	21	5.079	129.01	5.12	130.0	1	2	25	50	1	2	25	50	1	2	25	50	0.58	0.26	
24	24	5.800	147.32	5.84	148.3	1	2 1/2	25	65	1	2 1/2	25	65	1	2 1/2	25	65	0.68	0.31	
25	25	6.040	153.42	6.09	154.7	1	2 1/2	25	65	1	2 1/2	25	65	1	2 1/2	25	65	0.78	0.35	
27	27	6.521	165.63	6.57	166.9	1	2 5/8	25	65	1	2 1/2	25	65	1	3	25	75	1.18	0.54	

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

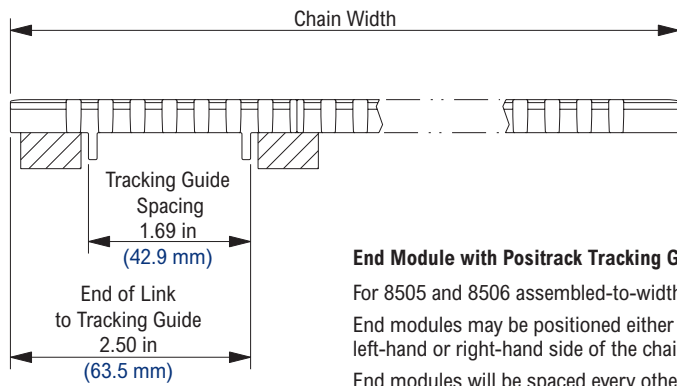

End Module with Positrack Tracking Guides

For 8505 and 8506 assembled-to-width chain only.
 End modules may be positioned either on the left-hand or right-hand side of the chain.
 End modules will be spaced every other pitch.

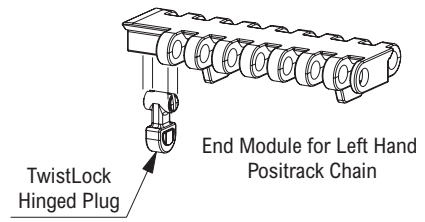

End Module for Right Hand Positrack Chain
 TwistLock Hinged Plug




Pusher Attachment (F-Style)

All pusher attachments are molded 6 in (152.4 mm) wide.
 The F3 designation represents an F-style pusher attachment at a height of 3 in (76.2 mm) that can be cut down to a minimum height of 1/4 in (6.35 mm).
 If chain is to have pushers and sideguards, pushers must be spaced on even pitch increments.
 Please indicate if pusher attachments are required every pitch,

every second pitch, etc. when ordering. Also, indicate if indents are required in the center, on one or both sides of the chain.

For example, "I would like F3 pusher attachments every 8th pitch indented 3/4 in on both sides of the chain."

Note: Not offered with 8505 Metric chain.

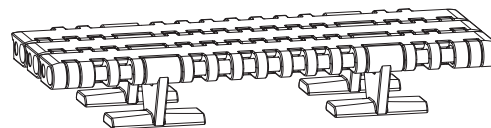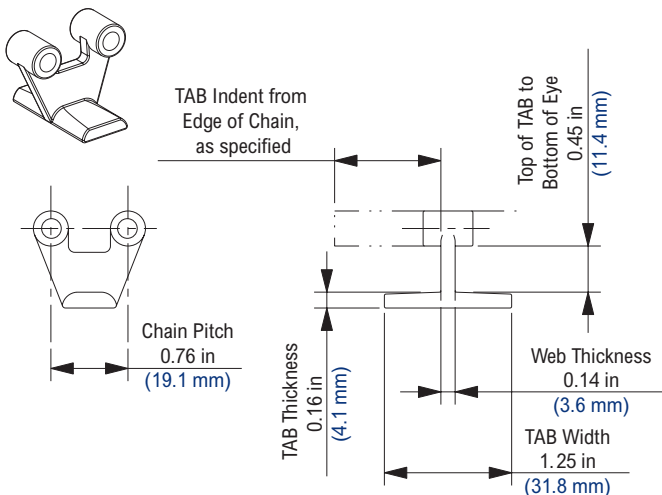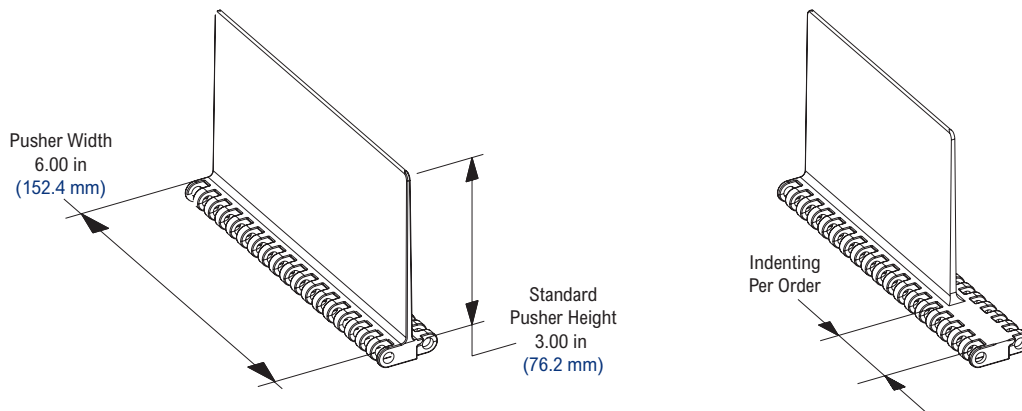

T - TAB Attachment

Minimum TAB indent, from edge of chain, is 0.92 in (23.4 mm) by .33 in (8.4 mm) increments.



Please indicate if hold down TAB attachments are required every second pitch, etc. when ordering.

Unless otherwise specified, TABs will be placed at 1.25 in (31.8 mm) indents on both sides.

For 8505 and 8506 chains only.

Note: Not offered with 8505 Metric chain.

Please contact Regal Rexnord for specific applications.

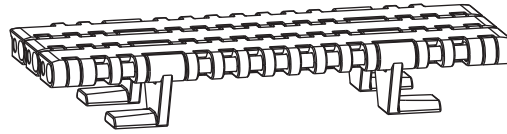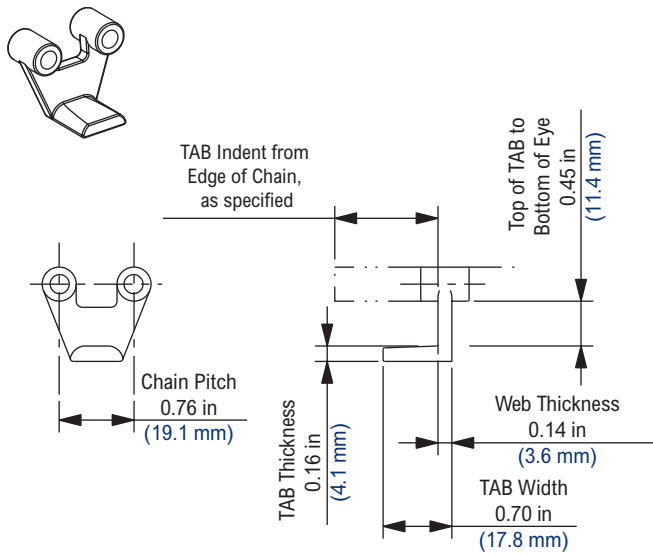

L - TAB Attachment

Minimum TAB indent, from edge of chain, is 0.92 in (23.4 mm) by .33 in (8.4 mm) increments.


Please indicate if hold down TAB attachments are required every second pitch, etc. when ordering.

Unless otherwise specified, TABs will be placed at 1.25 in (31.8 mm) indents on both sides.

For 8505 and 8506 chains only.

Note: Not offered with 8505 Metric chain.

Please contact Regal Rexnord for specific applications.

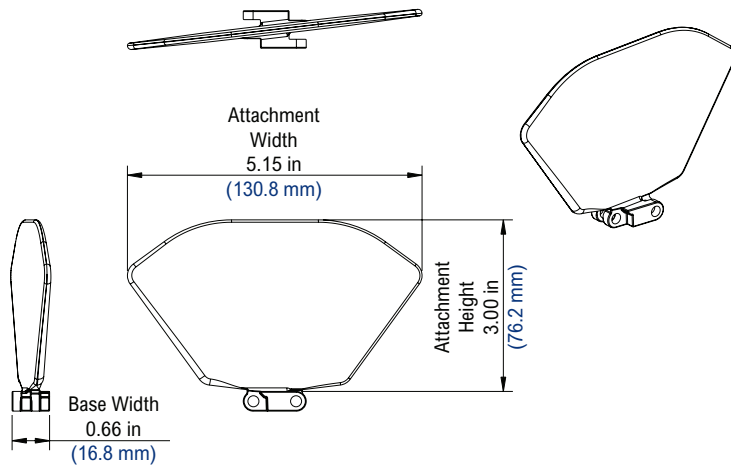

Sideguard Attachment

Please indicate if sideguard attachments are required down one or both sides of the chain when ordering.

Available sideguard indents are either 1.50 in (38.1 mm) or 2.25 in (57.2 mm) only.


Sideguard attachments can be cut down to a minimum height of 1 in (25.4 mm).

If the chain is ordered with both sideguard and pusher attachments, the sideguard attachment will be furnished the **same height** as the pusher attachment.

If chain is to have pushers and sideguards, pushers must be spaced on even pitch increments.

Please contact if any deviations from this standard are required.

Note: Not offered with 8505 Metric chain.

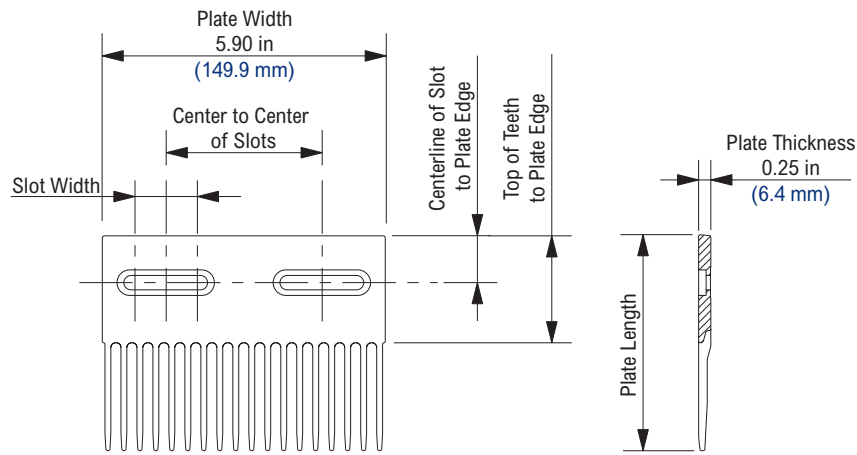


8507 Transfer Comb Kit

Transfer Comb Kit Number	Transfer Plate Part Number	Screw Part Number	Slot Caps Part Number	Plate Length		Slot Width		Centerline of Slot to Plate Edge		Top of Teeth to Plate Edge		Center to Center of Slots		Approximate Weight	
				in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
10131490	10071813	10075965	10069160	4.50	114.3	1.45	36.8	1.00	25.4	2.25	57.2	3.25	82.6	0.20	0.09
10131492	10071814	10075965	10069160	7.50	190.5	1.45	36.8	2.00	50.8	4.25	108.0	3.25	82.6	0.40	0.18

Transfer combs are molded of a proprietary black internally lubricated high temperature material.

Transfer comb kits are supplied with screws and slot caps.

For 8507 chain only.

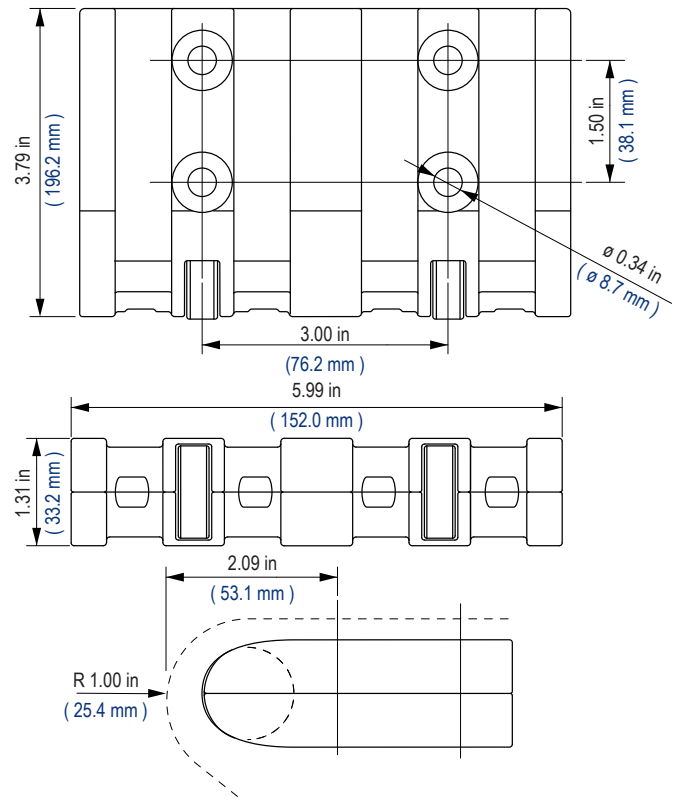

Dynamic Nose-Over Bar For 8500 Series Chains

Material: Nose-over bar in polyamide (PA). Steel bearings

Usage: For 8503, 8505 and 8507 MatTop chains

Dynamic Nose-Over Bar

Overall Length		Part Number
in	mm	
6.00	152.4	10193110

Rexnord™ Chain Width Table (MTW vs. Standard vs. Nonstandard)

Chain Series	MTW	Standard (uncut)				Nonstandard (cut)				Accessories						
	Molded to Width Chains	Minimum Chain Width		Chain Width Increment		Minimum Chain Width		Chain Width Increment		Pushers	Curved Pushers	Buckets	Sideguards	DTS-C	Hold Down TAB's	Vacuum Holes
		(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)							
395	----	6	152.4	2	50.8	----	----	----	----							
1000 FG/FT Metric	84 mm	3.35	85	3.35	85	0.98	25	0.20	5							
1000 FFPT/FFGP FreeFlow Metric	85 mm	3.35	85	3.35	85	0.98	25	0.20	5							
1000 RRR	38 mm	----	----	----	----	----	----	----	----							
1001FG/FT (w/PT)	3.3 in	----	----	----	----	----	----	----	----							
1255	----	10.04	255	3.35	85	4.69	119	0.67	17							
1265	----	13.39	340	3.35	85	10.04	255	0.67	17							RB, RBP, RBT
1275	----	13.39	340	3.35	85	10.04	255	0.67	17							
1285	----	13.39	340	3.35	85	10.04	357	0.67	17							
1503	6 in	6	152.4	3	76.2	----	----	----	----							
1505 / 1506	3 in, 4.5 in, 6 in, 38 mm, 46 mm	3	76.2	3	76.2	4.5	114.3	0.75	19.05	■		■				
1505 RubberTop™	----	3	76.2	3	76.2	4.5	114.3	0.75	19.05							
1505 DTS™ (w/PT)	6.3 in	----	----	----	----	----	----	----	----							
1533	----	6.69	170	3.35	85	----	----	----	----							
1553	----	10.04	255	3.35	85	----	----	----	----							
1625B-TAB	----	12	304.8	3	76.2	----	----	----	----						■	
3122HYB / 3125HYB / 3125HYB RT	4 in, 8 in	4	101.6	4	101.6	----	----	----	----	■						
3125 / 3129	4 in, 8 in	4	101.6	4	101.6	6	152.4	2	50.8	■		■				
3185	3.2 in	----	----	----	----	----	----	----	----							
3185 RubberTop	3.2 in	----	----	----	----	----	----	----	----							
4705	6 in	6	152.4	6	152.4	2	50.8	Any width possible		■		■		■	■	
4706	6 in	6	152.4	6	152.4	2	50.8	Any width possible		■		■				
4707	6 in	6	152.4	6	152.4	2	50.8	1	25.4					■		
5705 / 5706	3.25 in, 4.5 in, 6 in, 7.5 in, 15 in	6	152.4	3	76.2	3	76.2	1	25.4	■						
5705 SuperGrip™	----	6	152.4	3	76.2	3	76.2	1	25.4							
5705 / 5706 (w/PT)	3.25 in, 4.5 in	----	----	----	----	----	----	----	----							
5705 DTS (w/PT)	6.8 in	----	----	----	----	----	----	----	----							
5935	3 in	9	228.6	3	76.2	3	76.2	0.75	19.05	■		■		■	■	
5936	----	18	457.2	6	152.4	2.25	57.15	0.75	19.05	■		■		■	■	
5995	----	9	228.6	3	76.2	3	76.2	0.5	12.7							
5996	----	18	457.2	6	152.4	4.5	114.3	0.5	12.7	■		■				
5998	----	18	457.2	6	152.4	5	127	0.5	12.7	■		■				
6085	3 in, 6 in	3	76.2	3	76.2	3 3/5	91.44	3/5	15.24	■		■				
6938	3 in, 6 in	3	76.2	3	76.2	3.75	95.25	0.75	19.05	■		■				
6995 / 6999	----	18	457.2	6	152.4	5	76.2	0.5	12.7	■		■				
6995HYB / 6999HYB	----	12	304.8	3	76.2	9	228.6	3	76.2							
6997	----	12	304.8	6	152.4	5	127	0.5	12.7							
7526 Metric	----	10.04	255	3.34	85	6.69	170	0.66	17							
7703	----	9	228.6	3	76.2	5 in (3 in possible)		1	25.4							
7705 / 7706	3.25 in, 4.5 in, 6 in, 7.5 in, 15 in	6	152.4	3	76.2	5 in (3 in possible)		0.5	12.7							
7705 (w/PT)	3.25 in, 4.5 in, 7.5 in, 84 mm	----	----	----	----	----	----	----	----							
7706 (w/PT)	3.25 in, 4.5 in, 7.5 in	----	----	----	----	----	----	----	----							
7705 DTS (w/PT)	6.3 in, 9.3 in	----	----	----	----	----	----	----	----							
7705 DTS-R (w/PT)	6.3 in, 9.3 in	----	----	----	----	----	----	----	----							
7705 / 7706 Metric	----	10.04	255	3.34	85	5.59	142	Contact Regal Rexnord Engineering								
7705 Metric (w/PT)	----	10.04	255	3.34	85	5.59	142	Contact Regal Rexnord Engineering								
7705 RubberTop	----	9	228.6	3	76.2	9.5	241.3	0.5	12.7							
7705 SuperGrip	4 in, 6 in	9	228.6	3	76.2	9.5	241.3	0.5	12.7							
7708	----	9	228.6	3	76.2	5 in (3 in possible)		0.5	12.7							
7743	----	9	228.6	3	76.2	----	----	----	----							
7748	3 in, 6 in	3	76.2	3	76.2	5	127	1	25.4							
7956	6 in, 12 in, 15 in, 18 in, 24 in, 30 in	----	----	----	----	----	----	----	----							Bearing, GT, TAB
7963/7966	12 in, 15 in	12	304.8	0.5	12.7	----	----	----	----							Bearing, NT, ST
8503	----	3	76.2	3	76.2	----	----	----	----							
8505	3.25 in, 85 mm, 4.5 in, 6 in, 7.5 in, 12 in	9	228.6	3	76.2	2 1/3	59.26	1/3	8.5	■		■		■	■	
8505 DTS (w/PT)	6.3 in, 9.3 in	----	----	----	----	----	----	----	----							
8505 Metric	----	10.04	255	3.34	85	3.34	85	1/3	8.5							
8505 RubberTop	----	9	228.6	3	76.2	2 1/3	59.26	1/3	8.5						■	
8506	2.33 in, 3.25 in, 85 mm, 4.5 in, 6 in, 7.5 in, 12 in	9	228.6	3	76.2	2 1/3	59.26	1/3	8.5	■		■		■	■	
8505 / 8506 (w/PT)	3.25 in, 85 mm, 4.5 in, 6 in, 7.5 in, 12 in	9	228.6	3	76.2	2 1/3	59.26	1/3	8.5	■		■		■	■	
8507	----	18	457.2	6	152.4	3	76.2	1/3	8.5							

* Actual Chain Width = Effective (or Nominal) Chain Width (Multiples of 3 in (76.2 mm))+ 0.75 in (19.0 mm)

Rexnord™ Chain Width Table (MTW vs Standard Vs Nonstandard)

Rexnord™ KleanTop™ Belt

Rexnord KleanTop Belts provide a plastic modular belting solution for applications requiring adherence to strict hygiene regulations, such as those found in the food industry. Available in assembled-to-width and molded-to-width configurations, Rexnord KleanTop Belts are engineered to satisfy a wide range of conveyor applications for various product sizes. Products within the KleanTop line satisfy many needs in hygienic applications including temperature and abrasion resistance, heavy load carrying capacity and ease of cleaning.



Description	Format	Example 1	Example 2	Example 3	Explanation
Belts					
Material Prefix	...	WHT	BHT	SMB	Belt material from belt page
Belt Description	...	8505	1505DTS	2015	Belt description from belt page
Width Description	- ...	-6	-4.5	-21.33IN	Belt width from belt page
Pusher Attachments					
Height	F...IN (MM)	-	-	DRF3IN	Height of pusher
Pitches Between Pushers	T...P	-	-	T5P	1 = every row, 2 = every other row, etc.
Side-Indent	N...IN (MM)	-	-	N2IN	Distance from edge of belt to side of pusher
Sideguard Attachments					
Sideguard Height	ISR, S...IN (MM)	-	-	S2IN	Height of sideguard
Side-Indent	N...IN (MM)	-	-	N2IN	Distance from edge of belt to side of sideguard
Sprockets					
Sprocket Description	...	SSS8500	NS7700	N1500	Sprocket description
Number Of Actual Teeth	-...T	-25T	-21T	-7T	Actual number of teeth
Bore Diameter	...IN (...MM)	1-1/2IN	2-1/2IN	3/4IN	Bore diameter
No. of Keyways	...KW	1KW	-	-	Number of keyways required
No. of Setscrews	...SS	1SS	-	-	Number of setscrews required
Bore Type	...Bore	Idler	Square	Shaft-Ready	Bore type

When ordering, please use the guidelines outlined in the chart above to ensure accuracy.

Belt Guideline Examples:


- WHT595-12IN** is 595 belt in WHT; 12 inches wide.
- SMB1095-18IN** is 1095 belt in SMB; 18 inches wide.
- WLT2015 24IN F4IN T6P N2IN** is 2015 belt in WLT; 24 inches wide with 4 inch pusher every 6 pitches indented 2 inches.

Sprocket Guideline Examples:

- KU590-36T 1-1/2IN S** is a one piece Thermoplastic 590 Series machined sprocket with 36 teeth and 1.5 inch square bore.
- KU1090-18T 1-1/2IN 1KW1SS** is a one piece Thermoplastic 1090 Series machined sprocket with 18 teeth and 1.5 inch round bore with keyway and setscrew.
- KUS1090-18T 2-1/2IN S** is a split Thermoplastic 590 Series machined sprocket with 36 teeth and 2.5 inch square bore.

Sprocket Round Bore Nomenclature:

- Shaft-Ready** — Tight fit on the shaft with a keyway and setscrew.
- Plain Bore** — Same tight fit bore as a shaft-ready bore, but without keyway and setscrew.
- Idler Bore** — Round bore with a clearance fit (no keyway or setscrew). Designed to spin freely on the shaft.
- Rough Stock Bore** — Wide tolerance bore used for work in process. Not for use on any shaft. Must be further machined for actual use.
- Overbore** — Round bore with a slightly loose fit on the shaft with keyway but no setscrew. Designed to move laterally on the shaft during setup and still transmit torque through the keyway as a drive sprocket in the actual application. Not recommended for axial float in thermal applications.

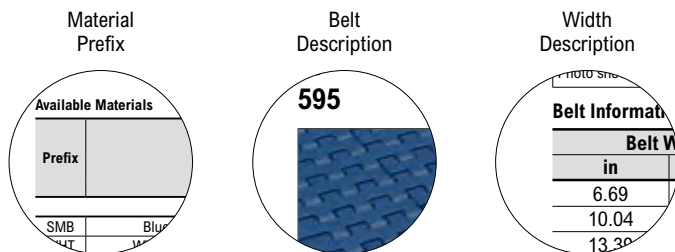


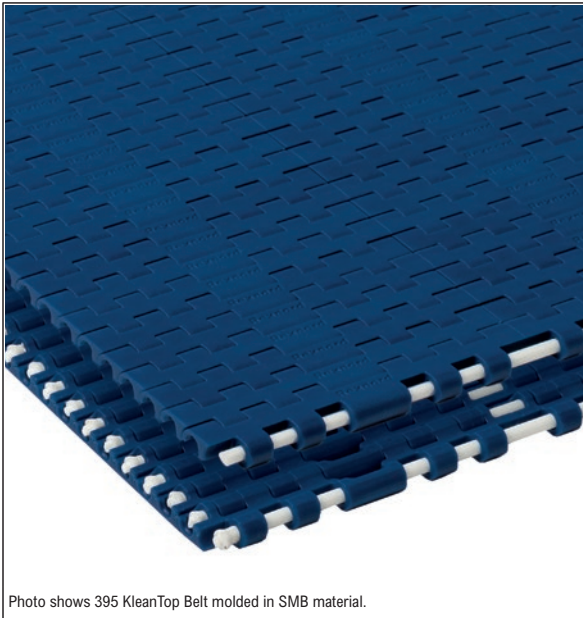


Photo shows 395 KleanTop Belt molded in SMB material.

Belt Information

Belt Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 100%	6	18

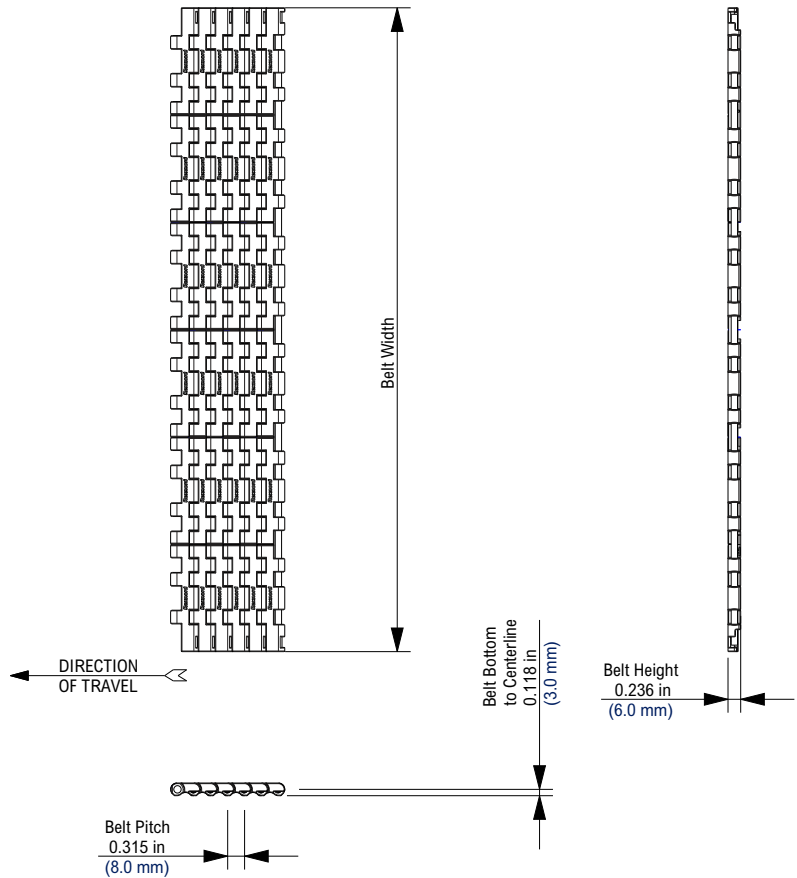

Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft	N/m	lbs/ft ²	kg/m ²	
			min	max		min	max						
				dry	wet		dry	wet					
Standard Materials													
WSM	White Cut Resistant (POM)	Polyester	-40	180	140	-40	82	60	500	7,300	1.16	5.7	Yes
SMB	Blue Cut Resistant (POM)	Polyester	-40	180	140	-40	82	60	500	7,300	1.16	5.7	Yes

Additional Notes

Please contact our Application Engineering Team for applications where temperature and humidity are concerned.

For belt width information see KleanTop Belt Width Table on page 349.

Open area < 2%.


Metric width version is available through special order with extended lead times.

Belt strength is listed at room temperature.

For additional material information, see material portfolio.

Contact Regal Rexnord™ Customer Service for specific product availability.


KU390 Thermoplastic Sprocket

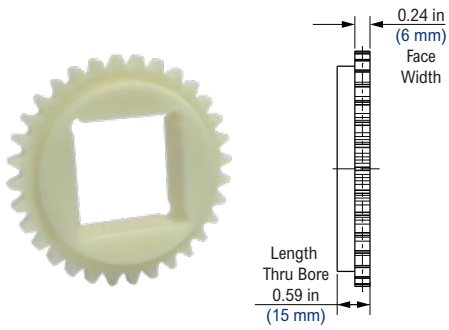


KU390 Thermoplastic Sprocket Information


Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
24T	24T	2.4	61	2.5	63	3/4	1	20	30	1	1	25	30	1	1	25	30	0.05	0.02
32T	32T	3.2	83	3.3	83.3	3/4	1 1/2	20	50	1	1 1/2	25	45	1	2	25	50	0.10	0.05
36T	36T	3.6	92	3.7	93.2	3/4	2	20	60	1	2	25	55	1	2	25	60	0.15	0.07

390 Series Minimum Nose-over Bar Diameter

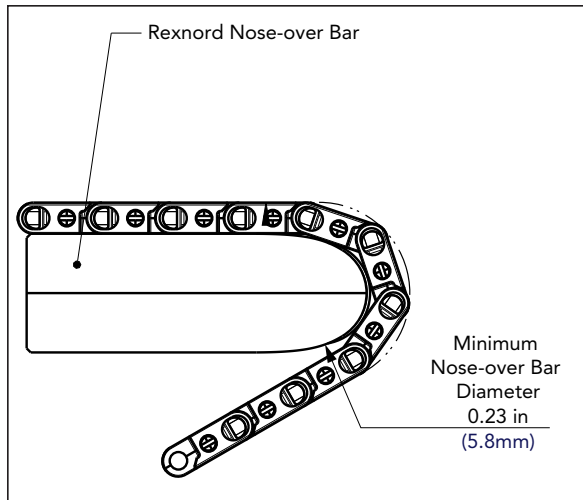

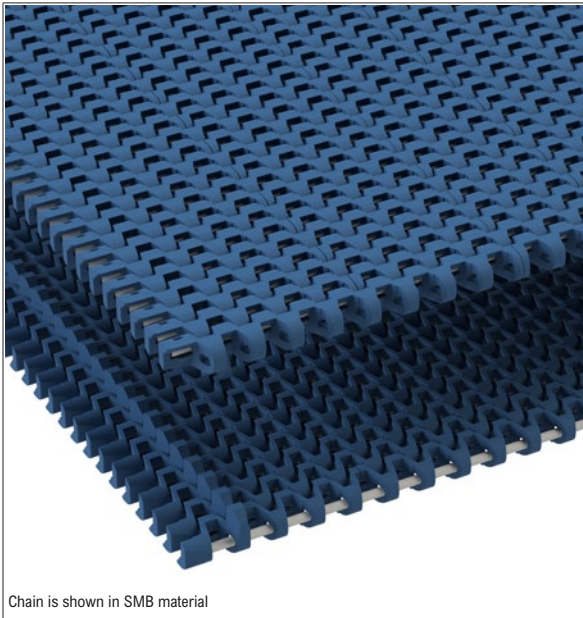

Chain is shown in SMB material

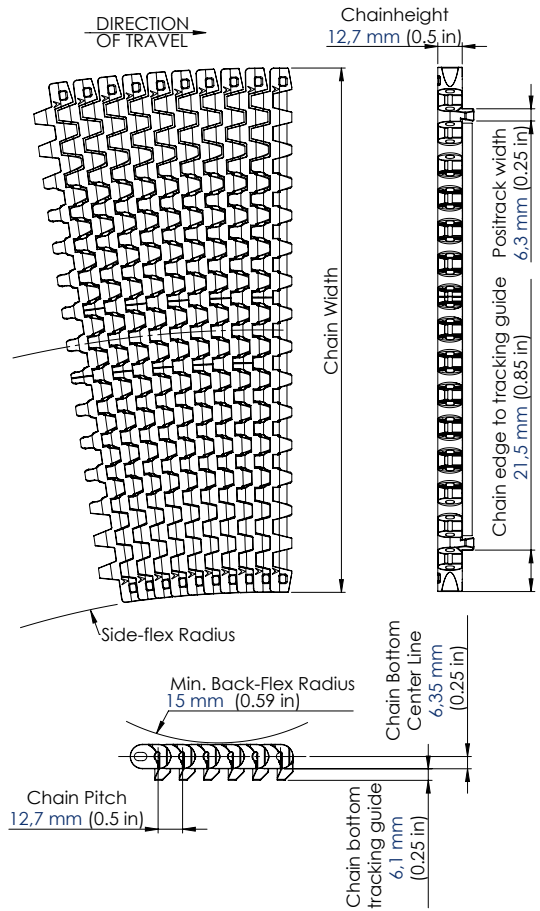

Chain Information

Chain Capacity	Number of Sprockets per	
	ft of chain width	mm of chain width
Drive Shaft	8 per ft	4 per 170 mm
Idler Shaft	4 per ft	1 per 170 mm

Available Materials

Available Widths	Prefix	Chain Material	Rod Material	Temperature Range						Working Load (max)				Approximate Weight		FDA/EU Approved Material
				Fahrenheit			Celsius			Straight		Max Curve Load		lbs/ft ²	kg/m ²	
				min	max dry	max wet	min	max dry	max wet	lbs/ft	N/m	lbs/ft	N/m			
Standard Materials																
85 mm up to 680 mm with standard increments of 17 mm	XLG	Low Friction Acetal (Green)	GVK	-40	180	150	-40	82	66	1028	15000	293	1300	2.04	9.94	FDA
	SMB	Blue Cut Resistant	GVK	-40	180	150	-40	82	66	1028	15000	293	1300	2.04	9.94	FDA/EU
	BSE (V-2)	Blue Self Extinguishing	GVK	-40	220	212	-40	104	100	1028	15000	293	1300	1.69	8.24	FDA/EU


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. For belt width information see KleanTop Belt Width Table on page 349. Open area = 10%. Nose over diameter = 0.75 inches (19.05 mm). Minimum Side-flex radius = Two times the chain width. Chain strength is listed at room temperature. NR = Not Recommended. 7526 numeric nomenclature changed to 505 to align with global Regal Rexnord™ standards. (7526 is a North America product only.) For additional material information, see material portfolio.

KU505 Thermoplastic Solid Sprocket

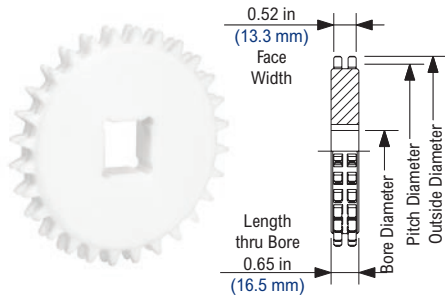

KU505 Thermoplastic Solid Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight			
						Round				Square				in		mm					
						in	mm	in	mm	min	max	min	max	min	max	min	max			min	max
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
28	28	4.46	113.28	4.46	113.3	1	2 1/2	25	65	1	2	25	50	1	2 1/2	25	65	0.31	0.14		

All sprocket bores are oversized for a sliding fit. Shaft-ready round bores are shipped with one keyway and no setscrews.


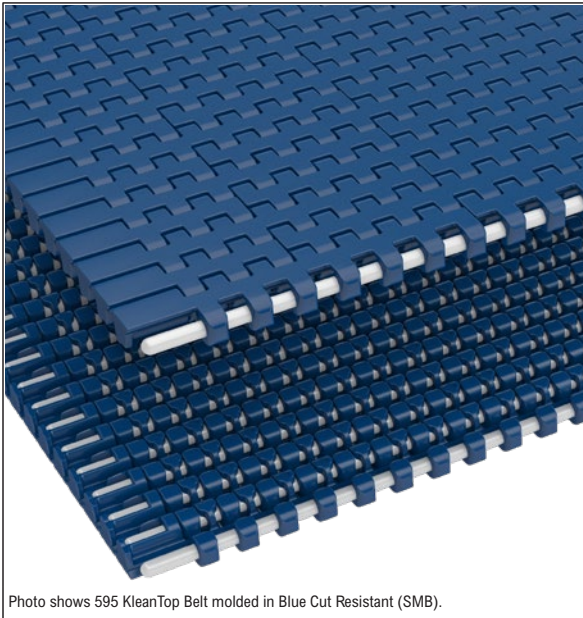


Photo shows 595 KleanTop Belt molded in Blue Cut Resistant (SMB).

Belt Information

Belt Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	6
50% - 100%	4	12

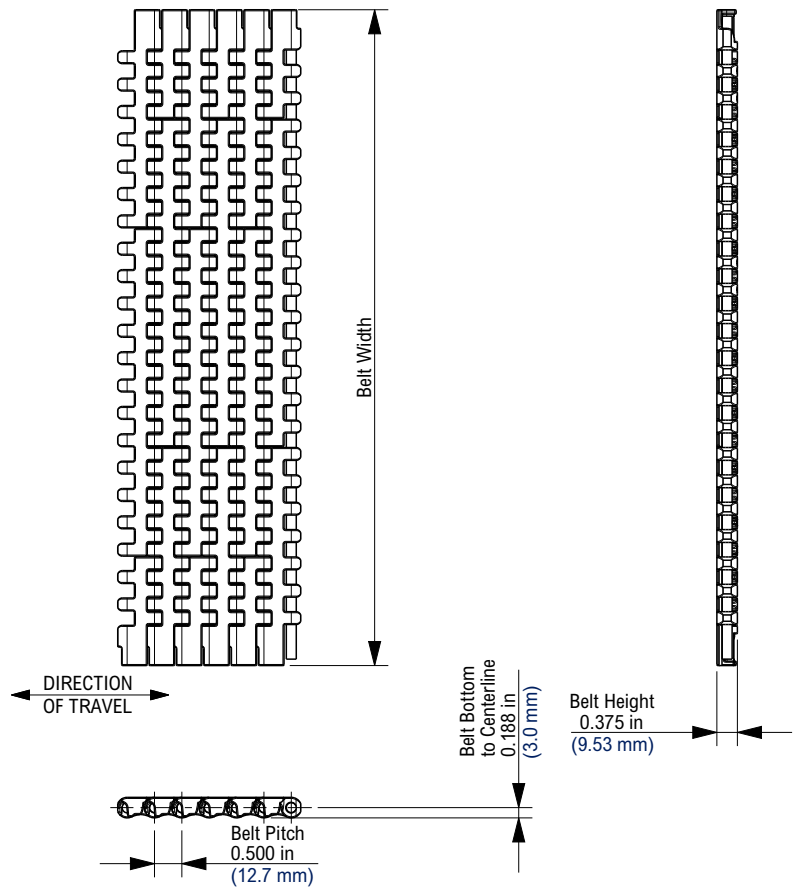

Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft	N/m	lbs/ft ²	kg/m ²	
			min	max		min	max						
Standard Materials													
SMB	Blue Cut Resistant (POM)	Polyester	-40	180	140	-40	82	60	1,100	16,048	1.59	7.76	Yes
WHT	White High Temperature (PP)	Polyester	40	220	140	4	104	60	700	10,213	1.02	4.98	Yes
BHT	Blue High Temperature (PP)	Polyester	40	220	140	4	104	60	700	10,213	1.02	4.98	Yes

Additional Notes

- Please contact our Application Engineering Team for applications where temperature and humidity are concerned.
- For belt width information see KleanTop Belt Width Table on page 349.
- Open area < 3%.
- Belt strength is listed at room temperature.
- For additional material information, see material portfolio.
- Contact Regal Rexnord™ Customer Service for specific product availability.


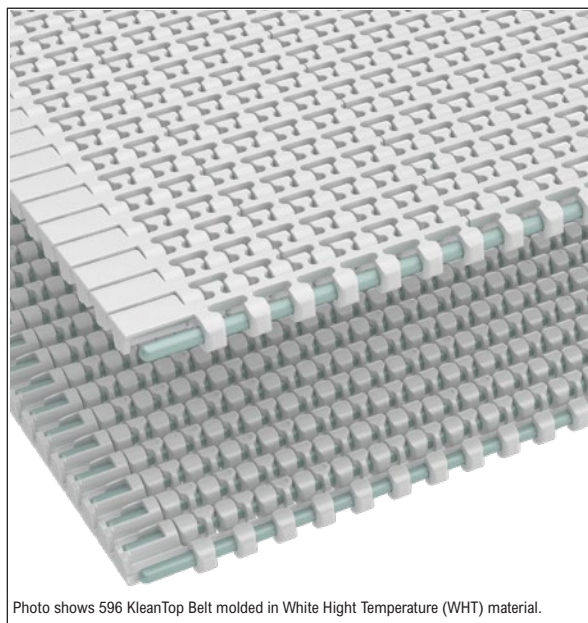


Photo shows 596 KleanTop Belt molded in White High Temperature (WHT) material.

Belt Information

Belt Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	6
50% - 100%	4	12

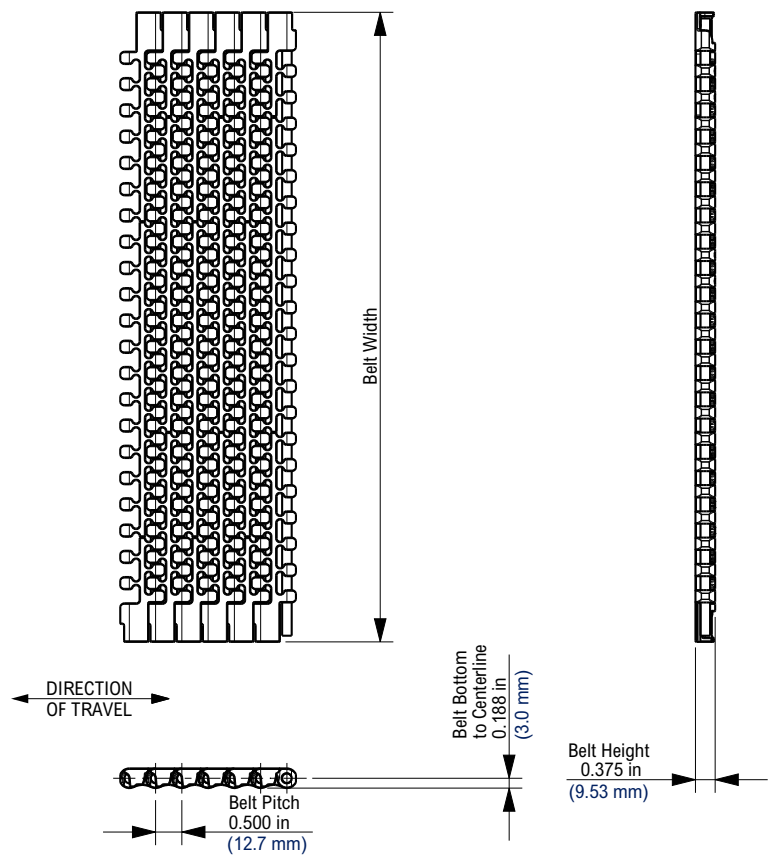


Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
SMB	Blue Cut Resistant (POM)	Polyester	-40	180	140	-40	82	60	900	13,130	1.48	7.23	Yes
WHT	White High Temperature (PP)	Polyester	40	220	140	4	104	60	500	7,295	0.95	4.64	Yes
BHT	Blue High Temperature (PP)	Polyester	40	220	140	4	104	60	500	7,295	0.95	4.64	Yes


Additional Notes

- Please contact our Application Engineering Team for applications where temperature and humidity are concerned.
- For belt width information see KleanTop Belt Width Table on page 349.
- Open area = 25%.
- Belt strength is listed at room temperature.
- For additional material information, see material portfolio.
- Contact Regal Rexnord™ Customer Service for specific product availability.

KU590 Thermoplastic Sprocket

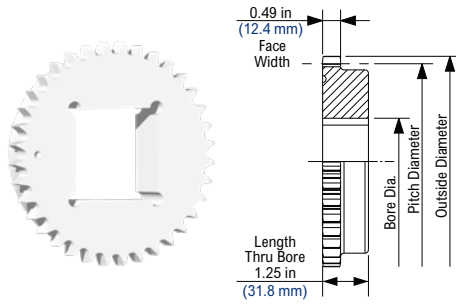

KUS590 Thermoplastic Split Sprocket

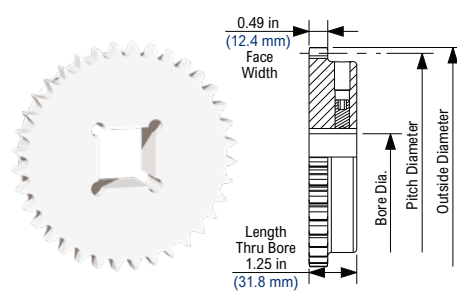


KU590 Thermoplastic Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	in	mm	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
19T	19T	3.0	77.2	3.0	76.7	1	1 7/16	25	35	1	1 1/2	25	38	1	1 3/4	25	45	0.18	0.08
24T	24T	3.8	97.3	3.8	97.2	1	1 3/4	25	45	1	1 5/8	25	40	1	2	25	50	0.34	0.16
28T	28T	4.5	113.4	4.5	113.9	1	2 1/4	25	55	1	2 1/4	25	55	1	3	25	76	0.54	0.24
36T	36T	5.7	145.7	5.8	146.4	1	3	25	75	1	3	25	75	1	4	25	102	1.00	0.45

KUS590 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	in	mm	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
36T	36T	5.7	145.7	5.8	146.4	1	2 3/4	25	70	1	2 1/2	25	60	1	2 3/4	25	70	1.05	0.47

590 Series Minimum Nose-over Bar Diameter

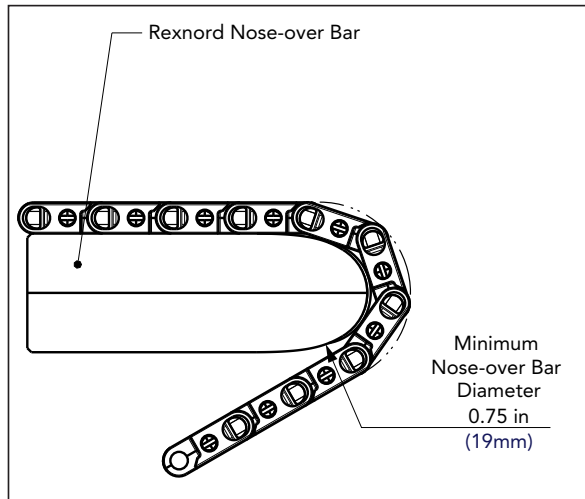

1011


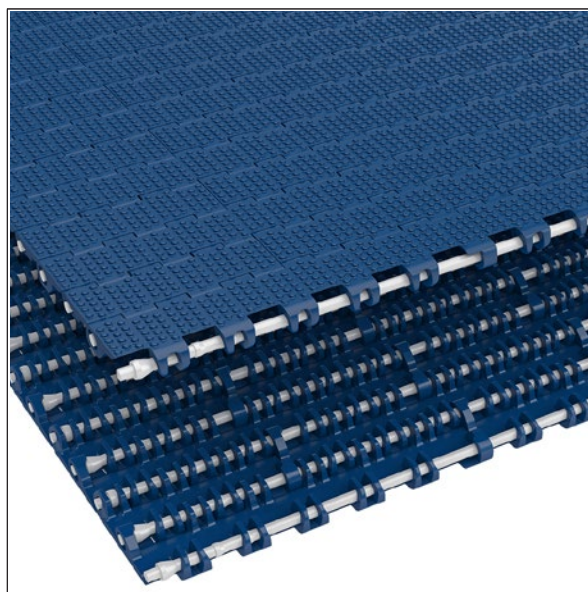


Photo shows 1011 KleanTop Belt molded in Blue High Temperature (BHT) material.

Belt Information

Belt Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	3	6
50% - 100%	6	12

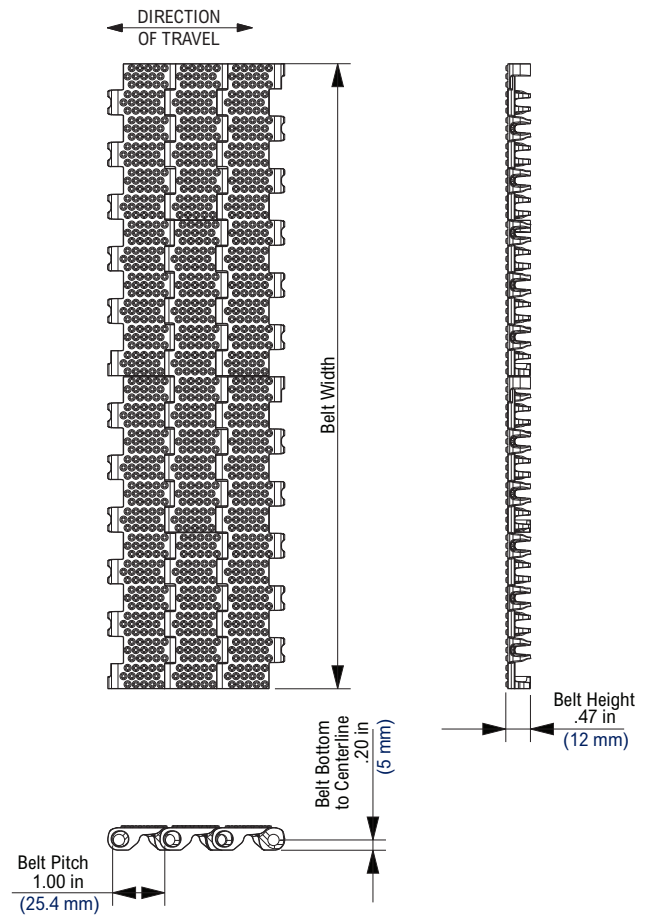

Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
WHT	White High Temperature (PP)	Polyester	40	220	140	4	104	60	400	6000	0.90	4.39	Yes
BHT	Blue High Temperature (PP)	Polyester	40	220	140	4	104	60	400	6000	0.90	4.39	Yes
WLT	White Low Temperature (PE)	Polyester	-100	80	140	-73	27	60	350	5000	0.98	4.78	Yes
BLT	Blue Low Temperature (PE)	Polyester	-100	80	140	-73	27	60	350	5000	0.98	4.78	Yes

Additional Notes

- Please contact our Application Engineering Team for applications where temperature and humidity are concerned.
- For belt width information see KleanTop Belt Width Table on page 349.
- Open area < 2%.
- Minimum available width is 2 in (50.8 mm).
- Belt strength is listed at room temperature.
- For additional material information, see material portfolio.
- Contact Regal Rexnord™ Customer Service for specific product availability.


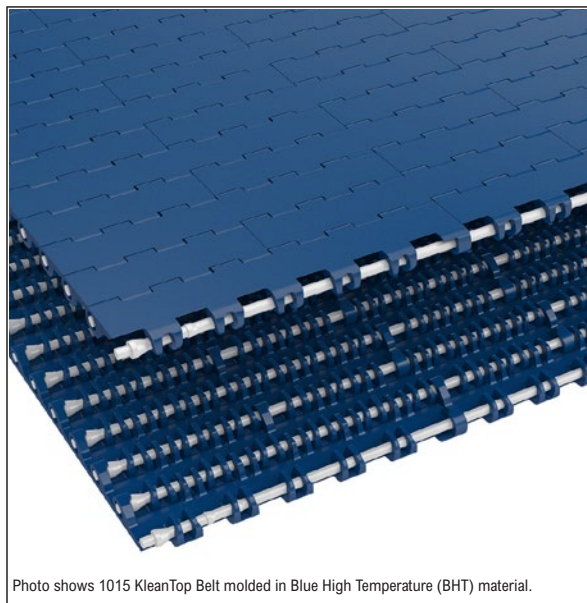


Photo shows 1015 KleanTop Belt molded in Blue High Temperature (BHT) material.

Belt Information

Belt Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	3	6
50% - 100%	6	12

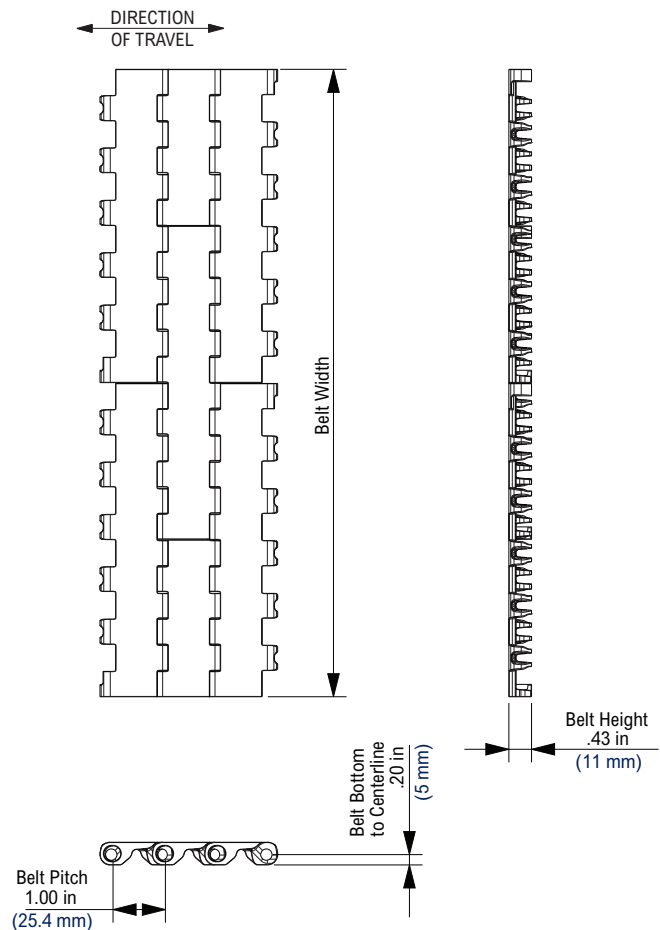

Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft	N/m	lbs/ft ²	kg/m ²	
			min	max		min	max						
Standard Materials													
WHT	White High Temperature (PP)	Polyester	40	220	140	4	104	60	400	6000	0.90	4.39	Yes
BHT	Blue High Temperature (PP)	Polyester	40	220	140	4	104	60	400	6000	0.90	4.39	Yes
WLT	White Low Temperature (PE)	Polyester	-100	80	140	-73	27	60	350	5000	0.98	4.78	Yes
BLT	Blue Low Temperature (PE)	Polyester	-100	80	140	-73	27	60	350	5000	0.98	4.78	Yes
WSM	White Cut Resistant (POM)	Polyester	-40	180	140	-40	82	60	800	12000	1.44	7.03	Yes

Additional Notes

- Please contact our Application Engineering Team for applications where temperature and humidity are concerned.
- For belt width information see KleanTop Belt Width Table on page 349.
- Open area < 2%.
- Minimum available width is 2 in (50.8 mm).
- Belt strength is listed at room temperature.
- For additional material information, see material portfolio.
- Contact Regal Rexnord™ Customer Service for specific product availability.

1016


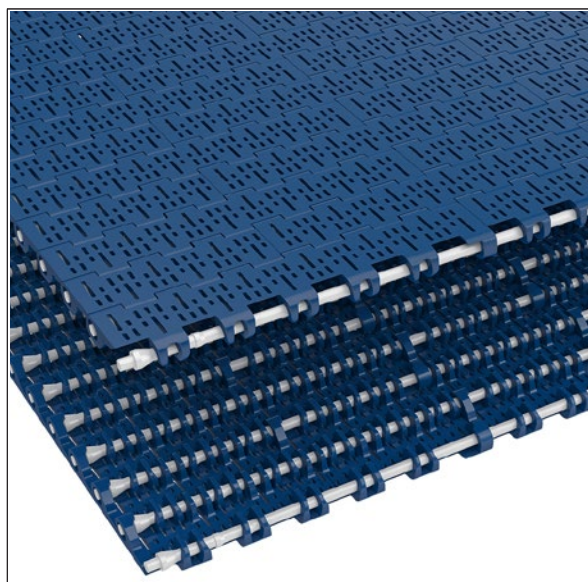


Photo shows 1016 KleanTop Belt molded in Blue High Temperature (BHT) material.

Belt Information

Belt Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	3	6
50% - 100%	6	12

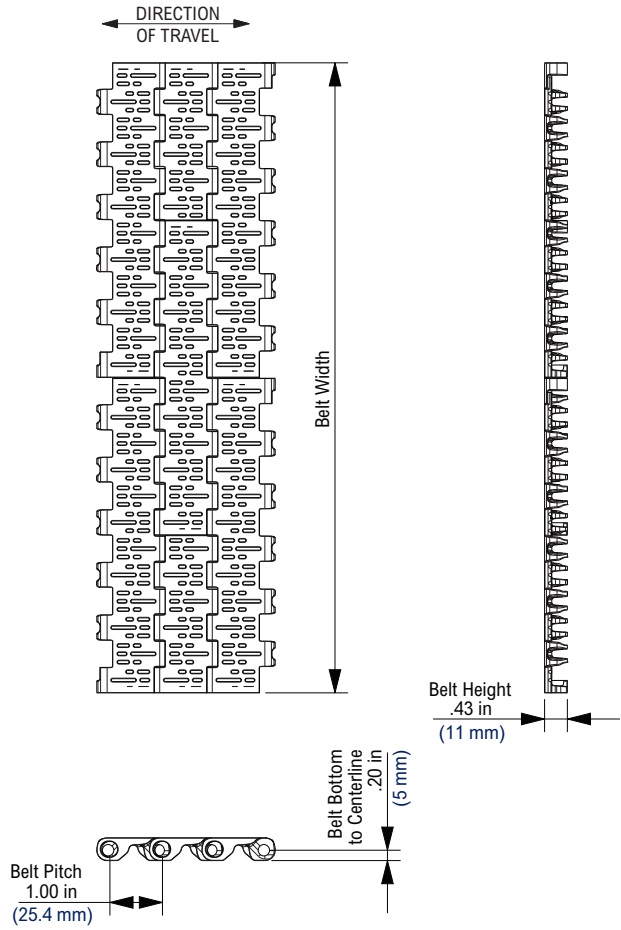

Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
WHT	White High Temperature (PP)	Polyester	40	220	140	4	104	60	400	6000	0.90	4.39	Yes
BHT	Blue High Temperature (PP)	Polyester	40	220	140	4	104	60	400	6000	0.90	4.39	Yes
WLT	White Low Temperature (PE)	Polyester	-100	80	140	-73	27	60	350	5000	0.98	4.78	Yes
BLT	Blue Low Temperature (PE)	Polyester	-100	80	140	-73	27	60	350	5000	0.98	4.78	Yes

Additional Notes

- Please contact our Application Engineering Team for applications where temperature and humidity are concerned.
- For belt width information see KleanTop Belt Width Table on page 349.
- Open area = 20%.
- Minimum available width is 2 in (50.8 mm).
- Belt strength is listed at room temperature.
- For additional material information, see material portfolio.
- Contact Regal Rexnord™ KleanTop Customer Service for specific product availability.


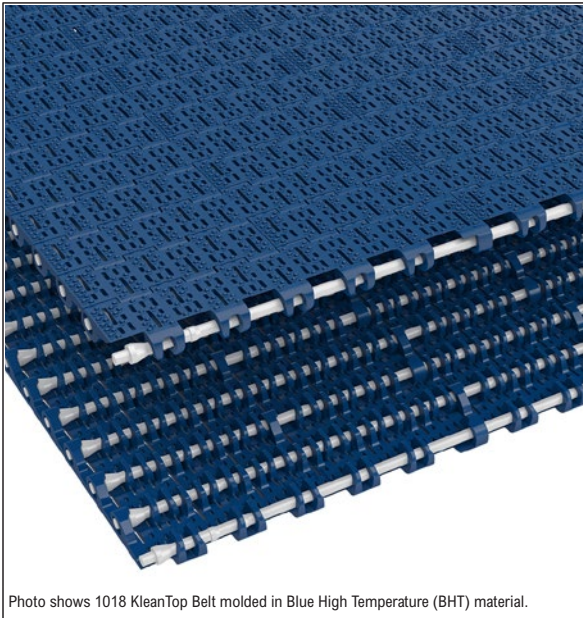


Photo shows 1018 KleanTop Belt molded in Blue High Temperature (BHT) material.

Belt Information

Belt Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	3	6
50% - 100%	6	12

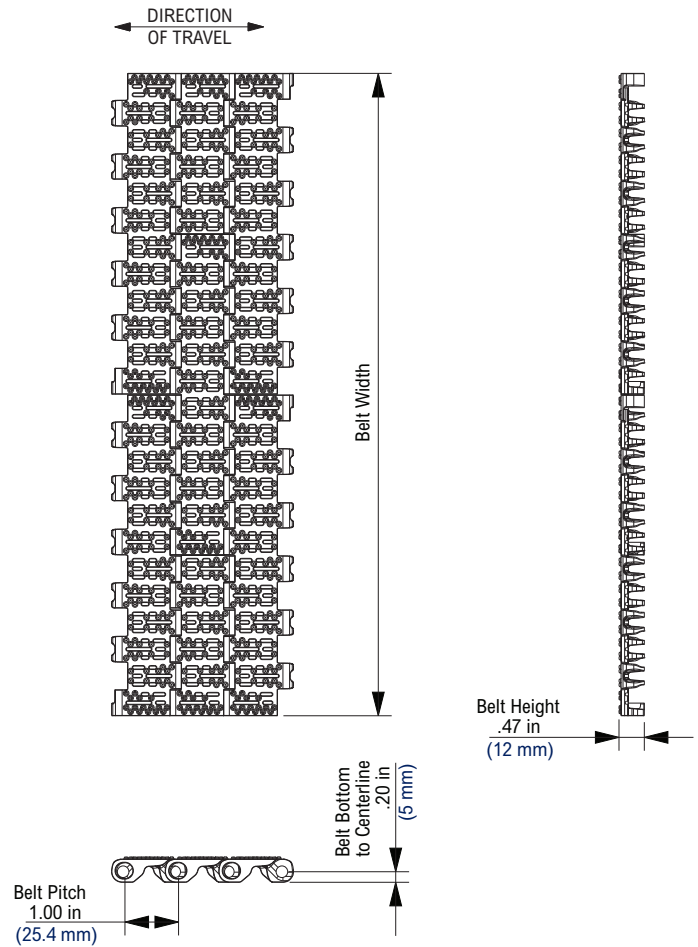


Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft	N/m	lbs/ft ²	kg/m ²	
			min	max		min	max						
				dry	wet		dry	wet					
Standard Materials													
WHT	White High Temperature (PP)	Polyester	40	220	140	4	104	60	400	6000	0.90	4.39	Yes
BHT	Blue High Temperature (PP)	Polyester	40	220	140	4	104	60	400	6000	0.90	4.39	Yes
WLT	White Low Temperature (PE)	Polyester	-100	80	140	-73	27	60	350	5000	0.98	4.78	Yes
BLT	Blue Low Temperature (PE)	Polyester	-100	80	140	-73	27	60	350	5000	0.98	4.78	Yes


Additional Notes

- Please contact our Application Engineering Team for applications where temperature and humidity are concerned.
- For belt width information see KleanTop Belt Width Table on page 349.
- Open area = 20%.
- Minimum available width is 2 in (50.8 mm).
- Belt strength is listed at room temperature.
- For additional material information, see material portfolio.
- Contact Regal Rexnord™ Customer Service for specific product availability.


KU1010 Bi-directional Drive Sprocket

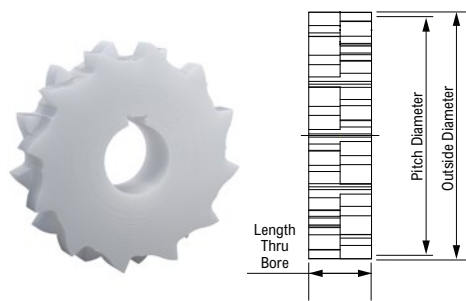

KU1010 Unii-directional Sprocket

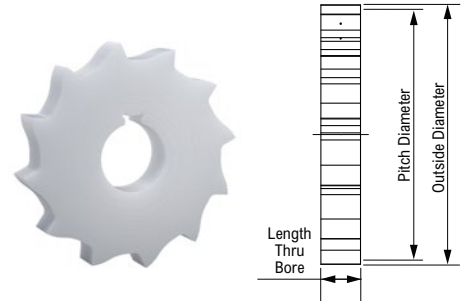

KU1010 Idler Sprocket

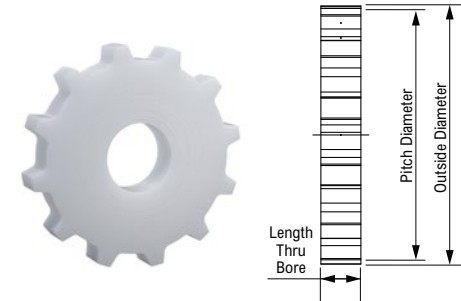

KU1010 Bi-directional Drive Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight		FDA Approval
						Round				Square				in		mm				
						in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	
actual	effect																			
10	10	3.2	82.2	3.3	82.7	3/4	1 1/2	20	40	1	1 1/2	25	40	-	-	-	-	0.31	0.14	Yes
12	12	3.9	98.1	3.9	98.9	3/4	2	20	50	1	1 1/2	25	40	-	-	-	-	0.46	0.21	Yes
16	16	5.1	130.2	5.2	131.5	3/4	2 1/2	20	65	1	2 1/2	25	65	-	-	-	-	0.82	0.37	Yes
18	18	5.8	146.3	5.8	147.8	3/4	3	20	75	1	3	25	75	-	-	-	-	1.04	0.47	Yes
20	20	6.4	162.4	6.5	164	3/4	3 1/2	20	90	1	3 1/2	25	90	-	-	-	-	1.57	0.71	Yes

KU1010 Uni-directional Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight		FDA Approval
						Round				Square				in		mm				
						in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	
actual	effect																			
10	10	3.2	82.2	3.3	82.7	3/4	1 1/2	20	40	1	1 1/2	25	40	-	-	-	-	0.16	0.07	Yes
12	12	3.9	98.1	3.9	98.9	3/4	2	20	50	1	1 1/2	25	40	-	-	-	-	0.23	0.11	Yes
16	16	5.1	130.2	5.2	131.5	3/4	2 1/2	20	65	1	2 1/2	25	65	-	-	-	-	0.41	0.19	Yes
18	18	5.8	146.3	5.8	147.8	3/4	3	20	75	1	3	25	75	-	-	-	-	0.52	0.24	Yes
20	20	6.4	162.4	6.5	164	3/4	3 1/2	20	90	1	3 1/2	25	90	-	-	-	-	0.79	0.36	Yes









KU1010 Idler Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight		FDA Approval
						Round				Square				in		mm				
						in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	
actual	effect																			
10	10	3.2	82.2	3.3	82.7	-	-	-	-	-	-	-	-	3/4	1 1/2	20	40	0.16	0.07	Yes
12	12	3.9	98.1	3.9	98.9	-	-	-	-	-	-	-	-	3/4	2	20	50	0.23	0.11	Yes
16	16	5.1	130.2	5.2	131.5	-	-	-	-	-	-	-	-	3/4	2 1/2	20	65	0.41	0.19	Yes
18	18	5.8	146.3	5.8	147.8	-	-	-	-	-	-	-	-	3/4	3	20	75	0.52	0.24	Yes
20	20	6.4	162.4	6.5	164	-	-	-	-	-	-	-	-	3/4	3 1/2	20	90	0.79	0.36	Yes

Rexnord™ 1010 Series KleanTop™ Belt Compatible Sprockets


1010 Series Pusher Attachment (DRF-Style)

A pusher with side-indent 0, 1 in and 2 in is available (1 in indent is molded). Height of pusher is 4 in (available cut to lower height, with a minimum of .25 in).

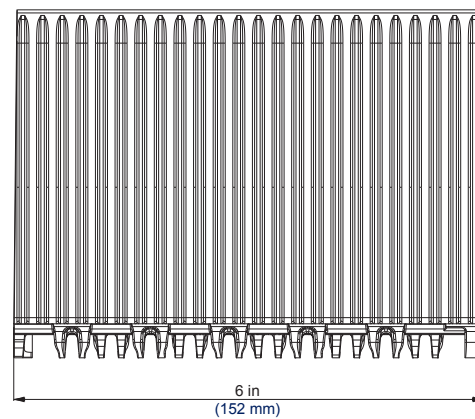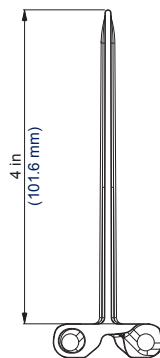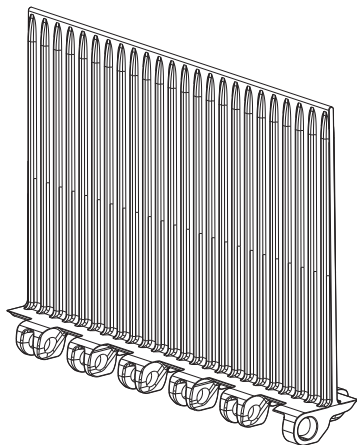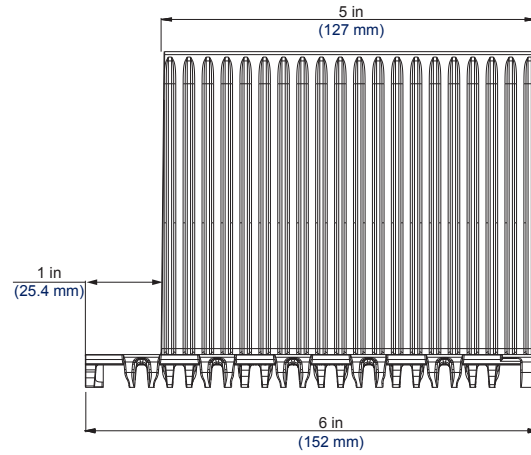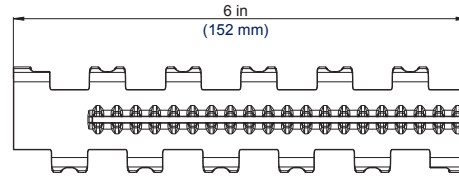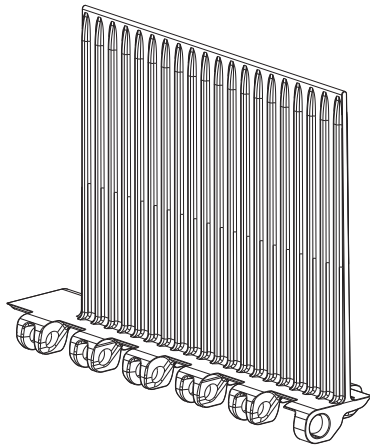


1010 Series 2 in Sideguard Attachment

Sideguard placed left and right with a minimum side-indent of 1.5 in.

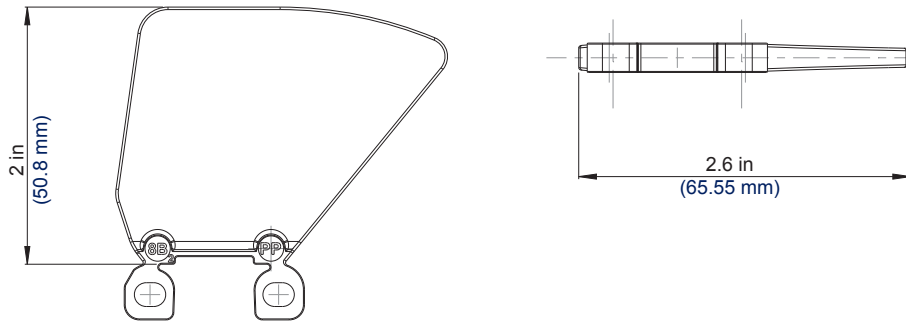

1010 Series 3 in Sideguard Attachment

Sideguard placed left and right with a minimum side-indent of 1.5 in – a different running direction is special.

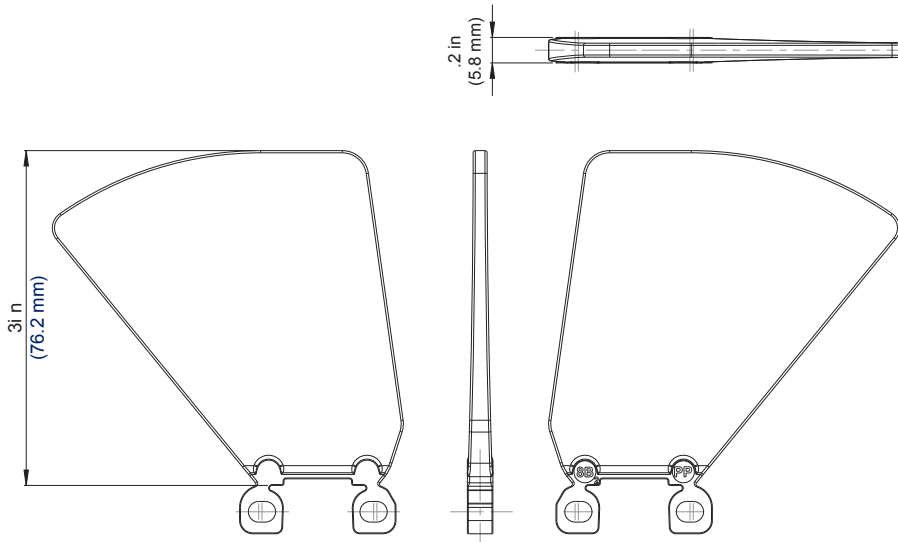


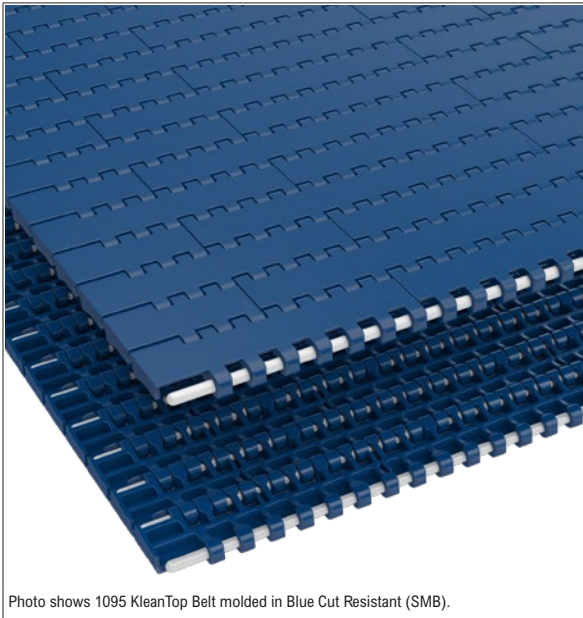


Photo shows 1095 KleanTop Belt molded in Blue Cut Resistant (SMB).

Belt Information

Belt Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	3	9
50% - 100%	6	18

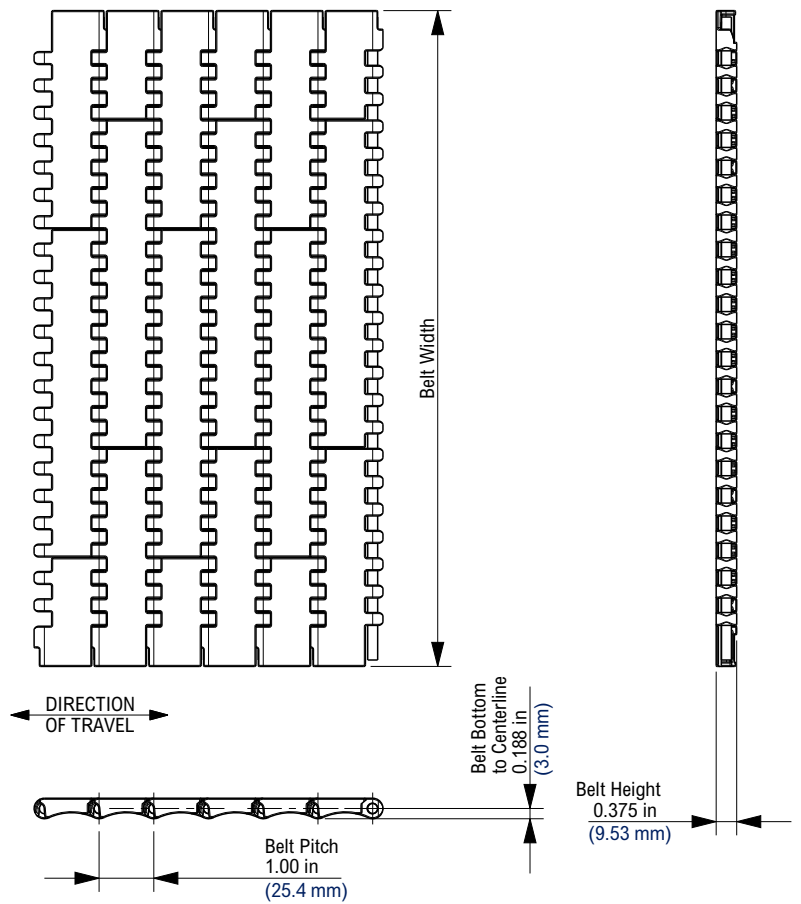

Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
				dry	wet		dry	wet					
Standard Materials													
SMB	Blue Cut Resistant (POM)	Polyester	-40	180	140	-40	82	60	1,500	21,884	1.48	7.23	Yes
WHT	White High Temperature (PP)	Polyester	40	220	140	4	104	60	900	13,130	0.95	4.64	Yes
BHT	Blue High Temperature (PP)	Polyester	40	220	140	4	104	60	900	13,130	0.95	4.64	Yes

Regulatory Information

Please contact our Application Engineering Team for applications where temperature and humidity are concerned.
 For belt width information see KleanTop Belt Width Table on page 349.
 Open area < 2%.
 Belt strength is listed at room temperature.
 For additional material information, see material portfolio.
 Contact Regal Rexnord™ Customer Service for specific product availability.

1096


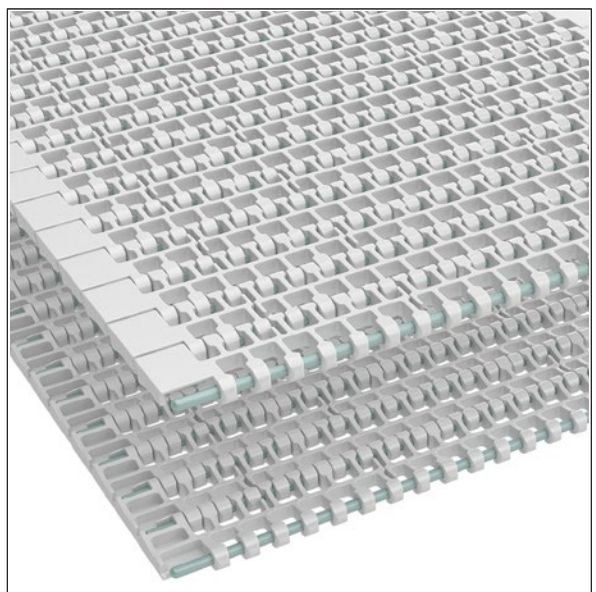


Photo shows 1096 KleanTop Belt molded in White High Temperature (WHT) material.

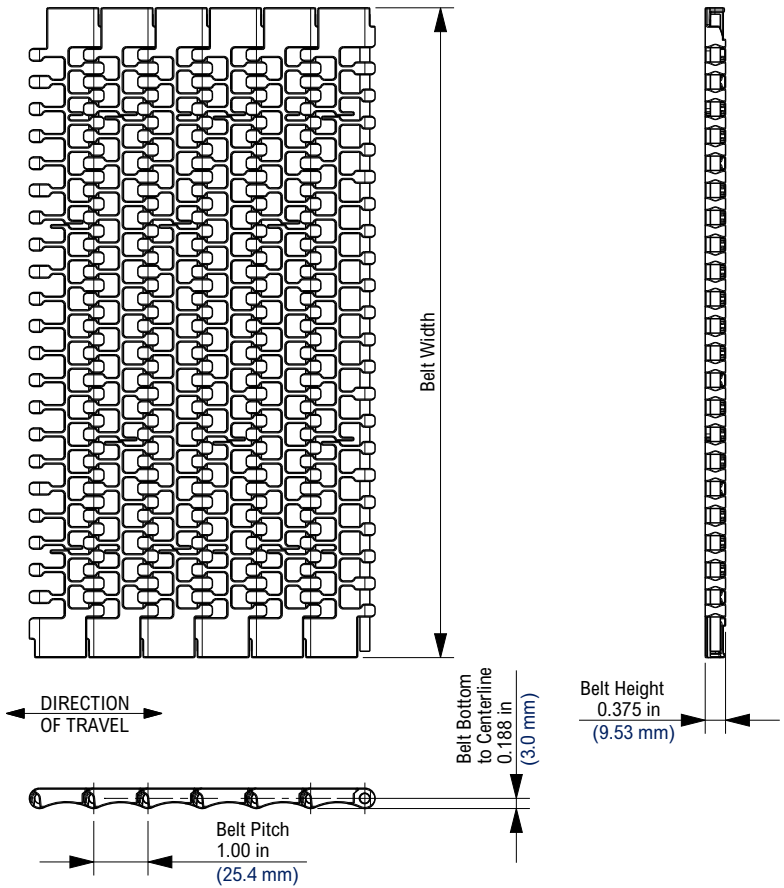

Belt Information

Belt Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	3	9
50% - 100%	6	18

Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
SMB	Blue Cut Resistant (POM)	Polyester	-40	180	140	-40	82	60	1,500	21,884	1.12	5.47	Yes
WHT	White High Temperature (PP)	Polyester	40	220	140	4	104	60	900	13,130	0.72	3.52	Yes
BHT	Blue High Temperature (PP)	Polyester	40	220	140	4	104	60	900	13,130	0.72	3.52	Yes
FTR	Fryer Temperature Resistant (PA)	Polypropylene	-80	220	NR	-62	104	NR	1,500	21,884	1.01	4.92	Yes

NR = Not Recommended

Regulatory Information

Please contact our Application Engineering Team for applications where temperature and humidity are concerned.

For belt width information see KleanTop Belt Width Table on page 349.


Open area = 45%.

Belt strength is listed at room temperature.


For additional material information, see material portfolio.

Contact Regal Rexnord™ Customer Service for specific product availability.

KU1090 Thermoplastic Sprocket

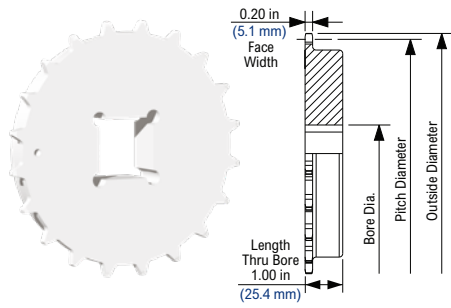

KUS1090 Thermoplastic Split Sprocket

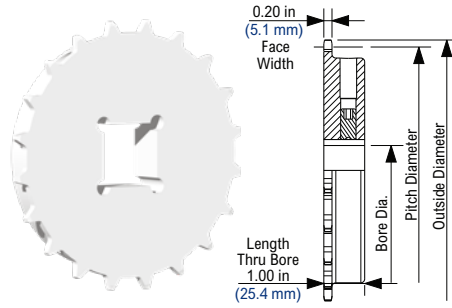


KU1090 Thermoplastic Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						min	max	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm													lbs	kg
12T	12T	3.9	98.2	3.9	98	1	1 3/4	25	45	1	1 5/8	25	40	1	2 1/2	25	65	0.26	0.12
18T	18T	5.8	146.3	5.8	147.3	1	3 1/4	25	80	1	3	25	75	1	4 1/2	25	115	0.77	0.35
20T	20T	6.4	162.4	6.5	163.9	1	3 1/2	25	85	1	3 1/4	25	80	1	5	25	127	0.95	0.43

KUS1090 Thermoplastic Split Sprocket Information


Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						min	max	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm													lbs	kg
12T	12T	3.9	98.2	3.9	98	-	-	-	-	1	1 1/2	25	35	-	-	-	-	0.24	0.11
18T	18T	5.8	146.3	5.8	147.3	1	2 3/4	25	70	1	2 3/4	25	70	1	3 1/4	25	80	0.82	0.37
20T	20T	6.4	162.4	6.5	163.9	1	3	25	75	1	3 1/4	25	80	1	3 1/2	25	85	1.00	0.45

1090 Series Minimum Nose-over Bar Diameter

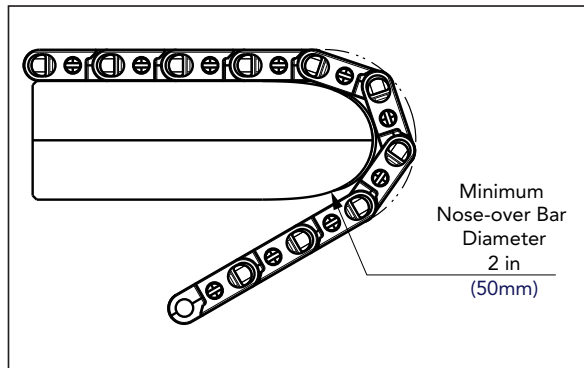


1090 Series Double Ribbed Pusher Attachment (DRF-Style)

Pushers are molded at 1 in and 2 in heights. Can be cut down to a minimum of .25 in. Minimum indent of 1.5 in, with 0.5 in increments.

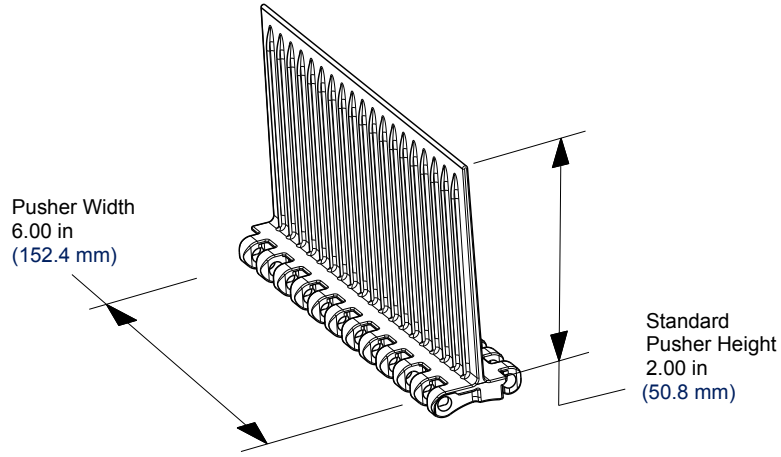

1090 Series Sideguard Attachment (SG-Style)

Molded 1 in and 2 in heights, left- and right-specific each available. Indents available at 1.25 in, 1.75 in, and 2.25 in.

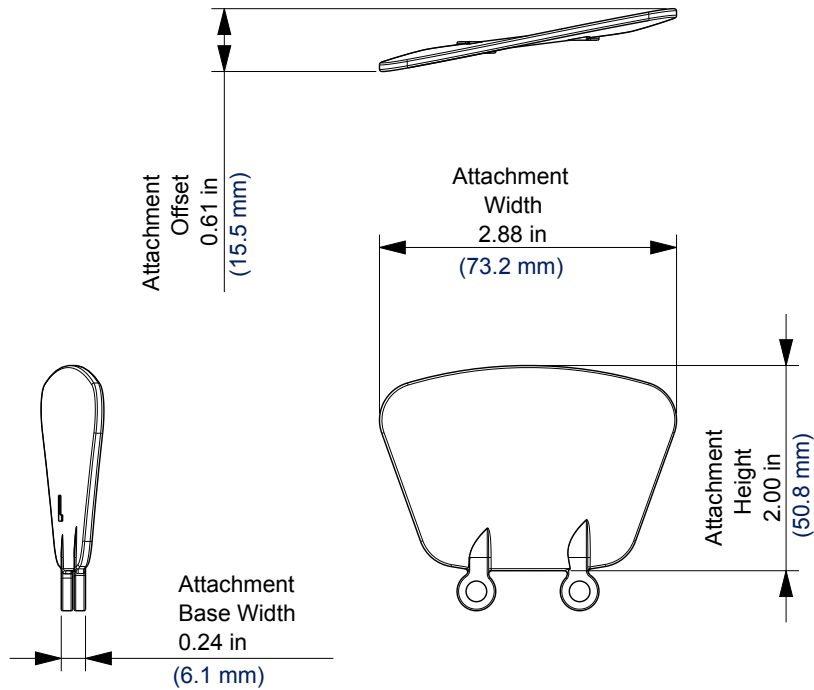



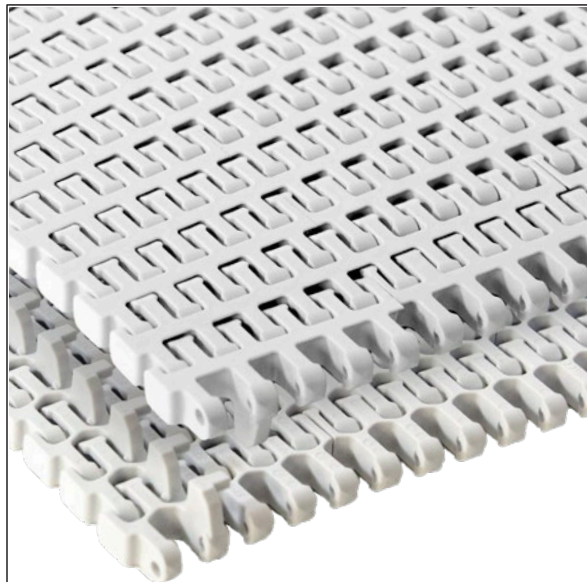


Photo shows 1255 KleanTop Belt molded in White High Temperature (WHT) material.

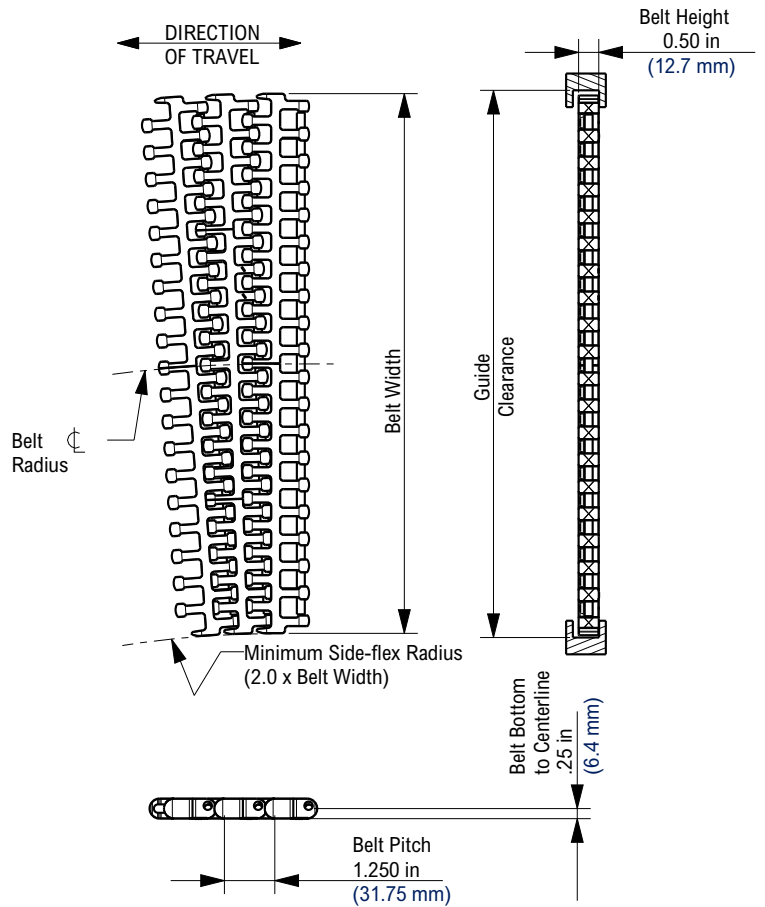


Belt Information


Belt Width		Drive Sprockets	Idler Sprockets
in	mm		
6.69	170	3	2
10.04	255	5	3
13.39	340	6	4
16.73	425	7	5
20.08	510	8	6
23.43	595	9	7
26.77	680	10	8
30.12	765	11	9



RB Guide Configuration



RBP Guide Configuration



RBT Guide Configuration

Contact Customer Service for tab configuration options.

Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength				Approximate Weight		FDA Approval
			Fahrenheit			Celsius			Straight		Curve		lbs/ft ²	kg/m ²	
			min	max		min	max		lbs/ft	N/m	lbs	N			
Standard Materials															
SMB	Blue Cut Resistant (POM)	Polyester	-40	180	140	-40	82	60	1,508	22,000	450	2,000	1.64	8.00	Yes
WSM	White Cut Resistant (POM)	Polyester	-40	180	140	-40	82	60	1,508	22,000	450	2,000	1.64	8.00	Yes
WHT	White High Temperature (PP)	Polyester	40	220	140	4	104	60	754	11,000	270	1,200	1.07	5.20	Yes
BHT	Blue High Temperature (PP)	Polyester	40	220	140	4	104	60	754	11,000	270	1,200	1.07	5.20	Yes

Additional Notes

Please contact our Application Engineering Team for applications where temperature and humidity are concerned.

For belt width information see KleanTop Belt Width Table on page 349.

Open area = 39%.

Belt strength is listed at room temperature.

For additional material information, see material portfolio.

Contact Regal Rexnord™ Customer Service for specific product availability.

“S-turn” capable KleanTop Belt.



1255 SuperGrip




Photo shows 1255 SuperGrip KleanTop Belt molded in White High Temperature (WHT) material.

Belt Information


Belt Width		Drive Sprockets	Idler Sprockets
in	mm		
6.69	170	3	2
10.04	255	5	3
13.39	340	6	4
16.73	425	7	5
20.08	510	8	6
23.43	595	9	7
26.77	680	10	8
30.12	765	11	9

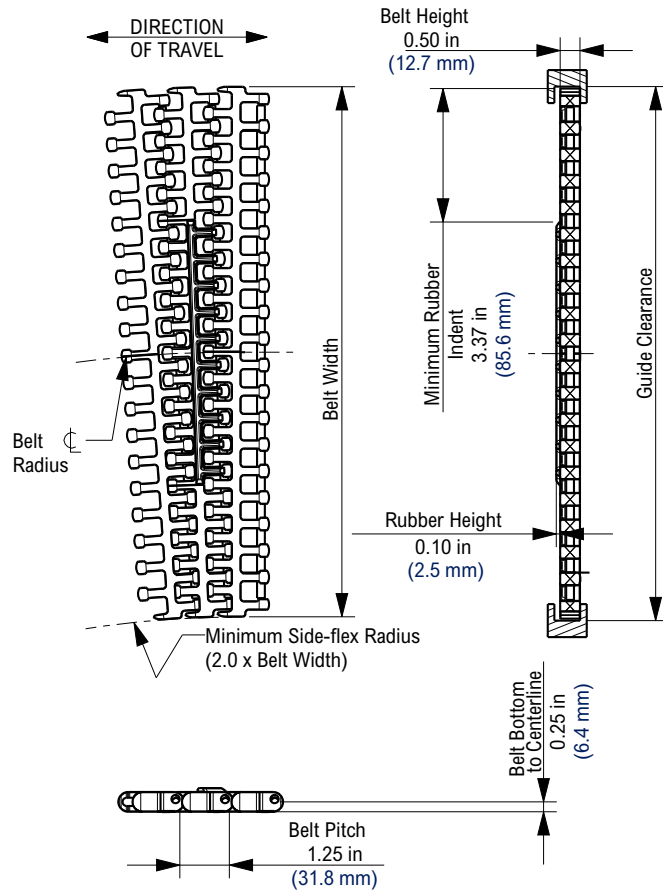

RB Guide Configuration



RBP Guide Configuration



RBT Guide Configuration

Contact Customer Service for tab configuration options.

Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength				Approximate Weight		FDA Approval
			Fahrenheit			Celsius			Straight		Curve		lbs/ft ²	kg/m ²	
			min	max		min	max		lbs/ft	N/m	lbs	N			
				dry	wet		dry	wet							
Standard Materials															
WHT	White High Temperature (PP)	Polyester	40	220	140	4	104	60	754	11,000	270	1,200	1.07	5.20	Yes
BHT	Blue High Temperature (PP)	Polyester	40	220	140	4	104	60	754	11,000	270	1,200	1.07	5.20	Yes

Additional Notes

Please contact our Application Engineering Team for applications where temperature and humidity are concerned.

For belt width information see KleanTop Belt Width Table on page 349.

Open area = 39%.

Belt strength is listed at room temperature.

For additional material information, see material portfolio.

Contact Regal Rexnord™ Customer Service for specific product availability.

“S-turn” capable KleanTop Belt.



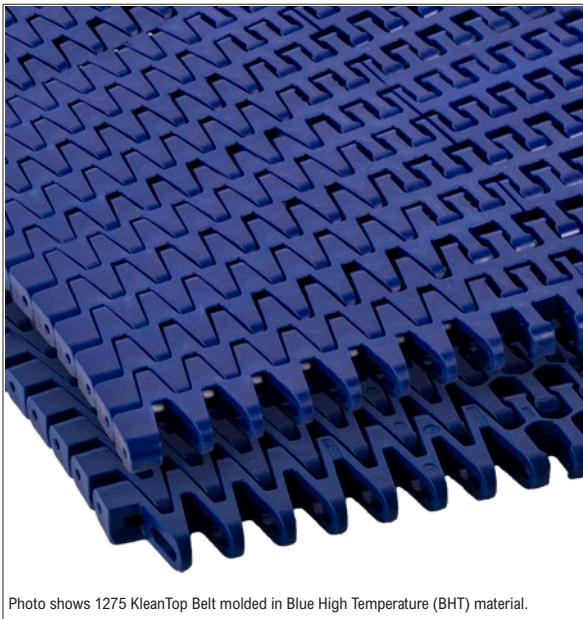


Photo shows 1275 KleanTop Belt molded in Blue High Temperature (BHT) material.

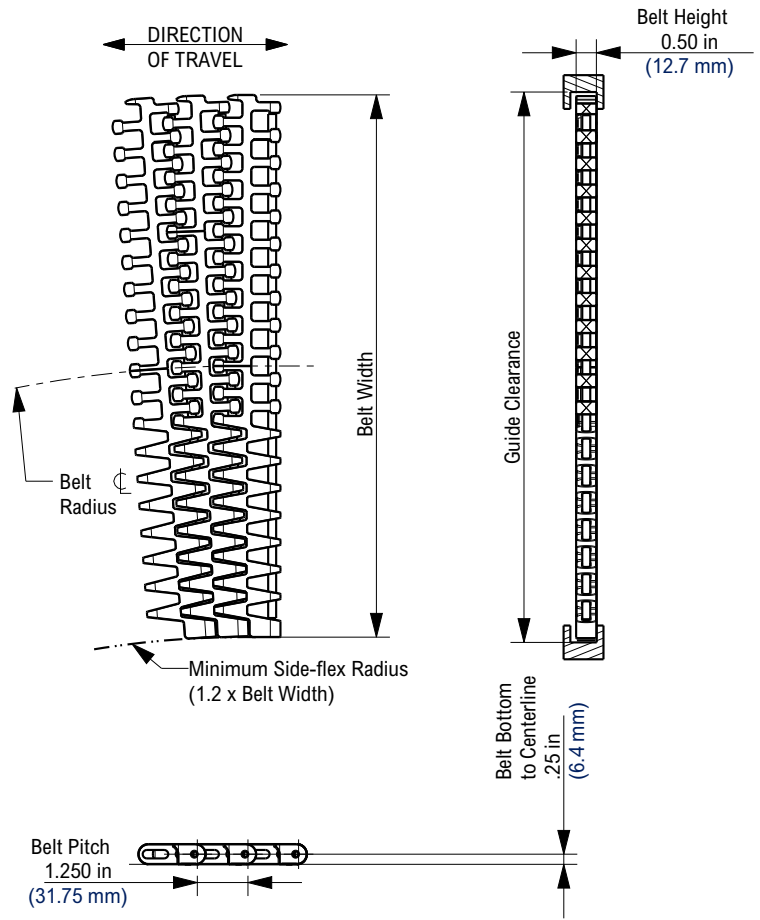


Belt Information


Belt Width		Drive Sprockets	Idler Sprockets
in	mm		
10.04	255	5	3
13.39	340	6	4
16.73	425	7	5
20.08	510	8	6
23.43	595	9	7
26.77	380	10	8
30.12	765	11	9



RB Guide Configuration



RBP Guide Configuration



RBT Guide Configuration

Contact Customer Service for tab configuration options.


Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength				Approximate Weight		FDA Approval
			Fahrenheit			Celsius			Straight		Curve		lbs/ft ²	kg/m ²	
			min	max dry	max wet	min	max dry	max wet	lbs/ft	N/m	lbs	N			
Standard Materials															
SMB	Blue Cut Resistant (POM)	Polyester	-40	180	140	-40	82	60	1,508	22,000	450	2,000	1.64	8.00	Yes


Additional Notes

- Please contact our Application Engineering Team for applications where temperature and humidity are concerned.
- For belt width information see KleanTop Belt Width Table on page 349.
- Open area = 39%.
- Belt strength is listed at room temperature.
- For additional material information, see material portfolio.
- Contact Regal Rexnord™ Customer Service for specific product availability.
- 1275 combines 1255 outer & center modules with tight side-flexing 1275 inner modules.

KU1200 Thermoplastic Sprocket

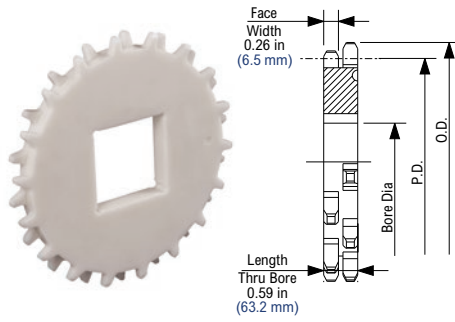

KUS1200 Thermoplastic Split Sprocket

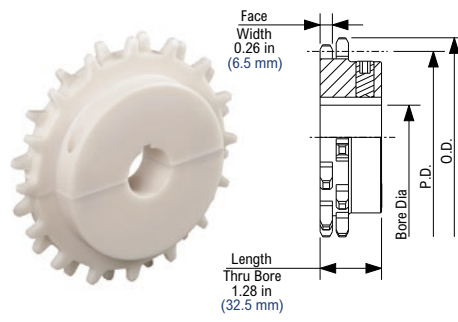

KU1200 Thermoplastic Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight			
						Round				Square				in		mm					
						in	mm	min	max	min	max	min	max	min	max	min	max			min	max
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
10T	10T	4	102.8	4.2	106.6	1	2	25	55	1	1 1/2	25	40	1	2	20	55	0.19	0.09		
13T	13T	5.2	132.7	5.4	137.5	1	3	25	75	1	2 1/2	25	60	1	3	20	75	0.38	0.20		
15T	15T	6	152.7	6.2	158.1	1 3/16	3 1/2	30	105	1	3	25	70	1	3 1/2	20	105	0.53	0.24		
16T	16T	6.4	162.8	6.6	168.3	1 3/16	3 1/2	30	115	1	3	25	80	1	3 1/2	20	115	0.60	0.27		

KUS1200 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight			
						Round				Square				in		mm					
						in	mm	min	max	min	max	min	max	min	max	min	max			min	max
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
10T	10T	4	102.8	4.2	106.6	1	1 1/2	20	40	1	1 3/8	25	35	1	1 5/8	25	40	0.39	0.2		
13T	13T	5.2	132.7	5.4	137.5	1	1 7/8	25	45	1	1 1/2	25	40	1	1 7/8	25	50	0.63	0.3		
15T	15T	6	152.7	6.2	158.1	1 3/16	2 3/4	25	70	1	2 1/4	25	60	1	2 3/4	25	70	0.86	0.4		
16T	16T	6.4	162.8	6.6	168.3	1 3/16	3	30	70	1	2 1/2	25	65	1	3	25	75	1.03	0.5		


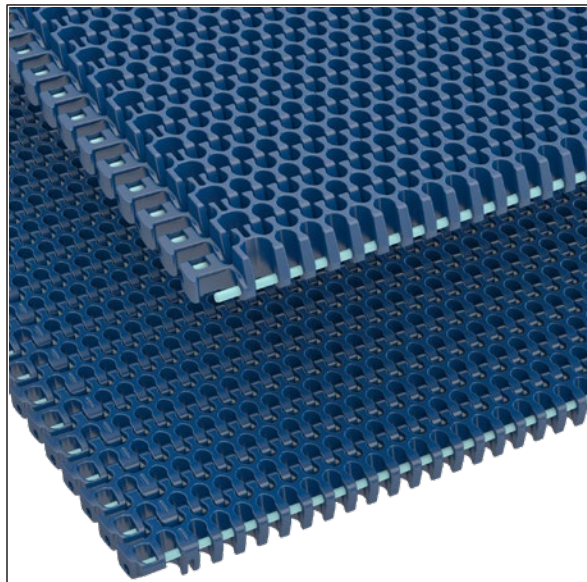


Photo shows 1654 KleanTop High Deck Belt molded in Blue Cut Resistant material.

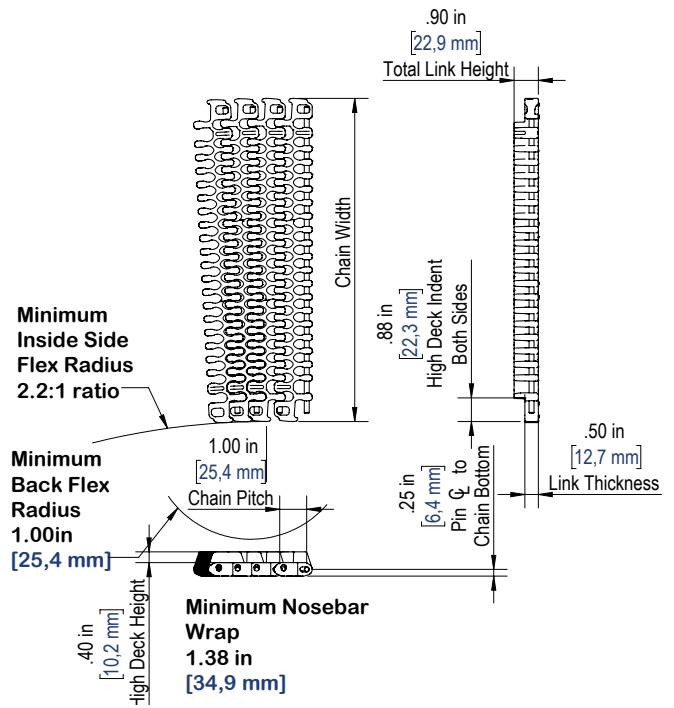

Belt Information

Min	Number of Sprockets	
	per ft of width	per m of width
Drive Shaft	3	9
Idler Shaft	2	4

Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength				Approximate Weight		FDA and EU Approval
			Fahrenheit			Celsius			Straight		Curve		lbs/ft ²	Kg/m ²	
			min	max		min	max		lbs/ft	N/m	lbs	N			
				dry	wet		dry	wet							
Standard Materials															
SMB	Blue Cut Resistant	Polyester	-40	180	140	-40	82	60	1,713	25,000	540	2,400	2.97	14,50	Yes
WHT	White High Temperature	Polyester	40	220	140	4	104	60	1,096	16,000	270	1,200	2.03	9,91	Yes
FTR	Fryer Temperature Resistant (PA)	Polyester	-80	220	NR	-62	104	NR	1,636*	23,000*	480*	2,170*	2.42	11,82	Yes
Non-standard Materials															
WSM	White Cut Resistant	Polyester	-40	180	140	-40	82	60	1,713	25,000	540	2,400	2.97	14,50	Yes
BHT	Blue High Temperature	Polyester	40	220	140	4	104	60	1,096	16,000	270	1,200	2.03	9,91	Yes

*FTR belt strengths listed are for dry conditions only.

NR = Not Recommended

Additional Notes

Please contact our Application Engineering Team for applications where temperature and humidity are concerned.

1654 KleanTop standard radius is "S" turn and nose-bar capable.

Standard radius side flex ratio of 2:2:1.

Belt widths available from 6 inch (152,4 mm) to 48 inches (1219,2 mm).

Consult your Regal Rexnord™ sales representative for standard width offering.

Open area = 38%.

Belt strength is listed at room temperature.

For additional material information, see the material portfolio online at regalrexnord.com or contact Regal Rexnord Application Engineering.

Contact Regal Rexnord Customer Care or your Regal Rexnord sales representative for specific product and ordering information.

1655



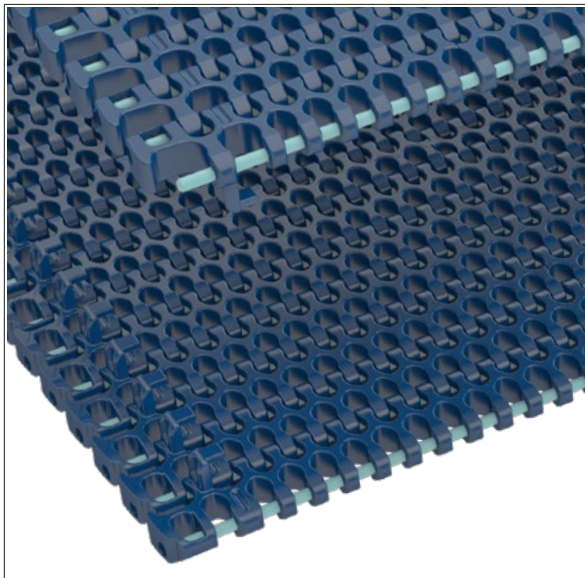


Photo shows 1655 KleanTop FlushGrid Belt molded in Blue Cut Resistant material.

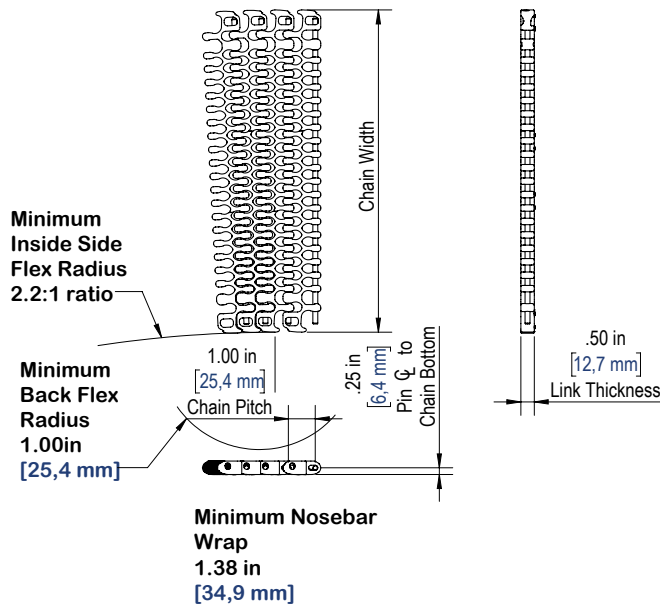

Belt Information

Min	Number of Sprockets	
	per ft of width	per m of width
Drive Shaft	3	9
Idler Shaft	2	4

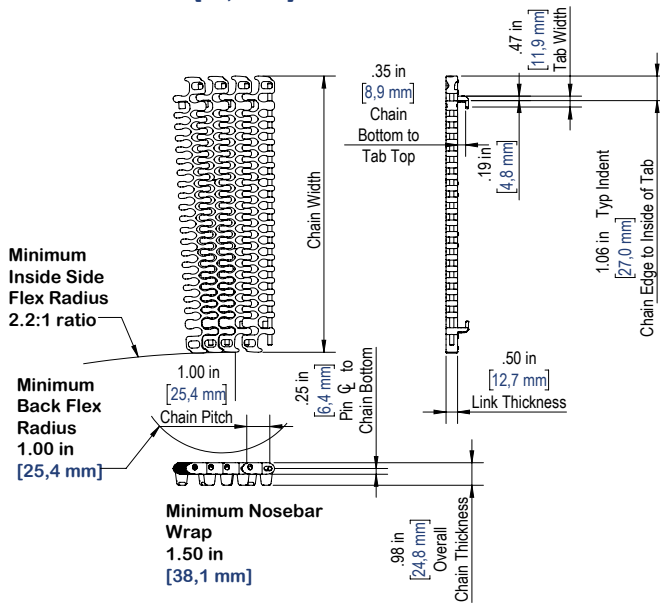

Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength				Approximate Weight		FDA Approval
			Fahrenheit			Celsius			Straight		Curve		lbs/ft ²	Kg/m ²	
			min	dry	wet	min	dry	wet	lbs/ft	N/m	lbs	N			
Standard Materials															
SMB	Blue Cut Resistant	Polyester	-40	+180	+140	-40	+82	+60	1,713	25,000	540	2,400	1.79	8.74	Yes
WHT	White High Temperature	Polyester	+40	+220	+140	+4	+104	+60	1,096	16,000	270	1,200	1.24	6.07	Yes
Non-standard Materials															
WSM	White Cut Resistant	Polyester	-40	+180	+140	-40	+82	+60	1,713	25,000	540	2,400	1.79	8.74	Yes
BHT	Blue High Temperature	Polyester	+40	+220	+140	+4	+104	+60	1,096	16,000	270	1,200	1.24	6.07	Yes

Additional Notes

Please contact our Application Engineering Team for applications where temperature and humidity are concerned. 1655 KleanTop standard radius is "S" turn and nose-bar capable.
 Standard radius side flex ratio of 2:2:1.
 Belt widths available from 6 inch (152,4 mm) to 48 inches (1219,2 mm).
 Consult your Regal Rexnord™ sales representative for standard width offering.
 Open area = 38%.

Belt strength is listed at room temperature.
 For additional material information, see the material portfolio online at regalrexnord.com or contact Regal Rexnord Application Engineering.
 Contact Regal Rexnord Customer Care or your Regal Rexnord sales representative for specific product and ordering information.



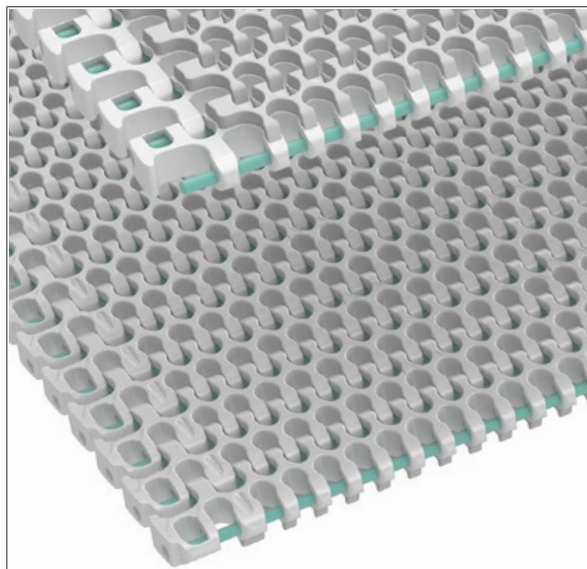


Photo shows 1655RT KleanTop Friction Top Belt molded in White High Temperature material.

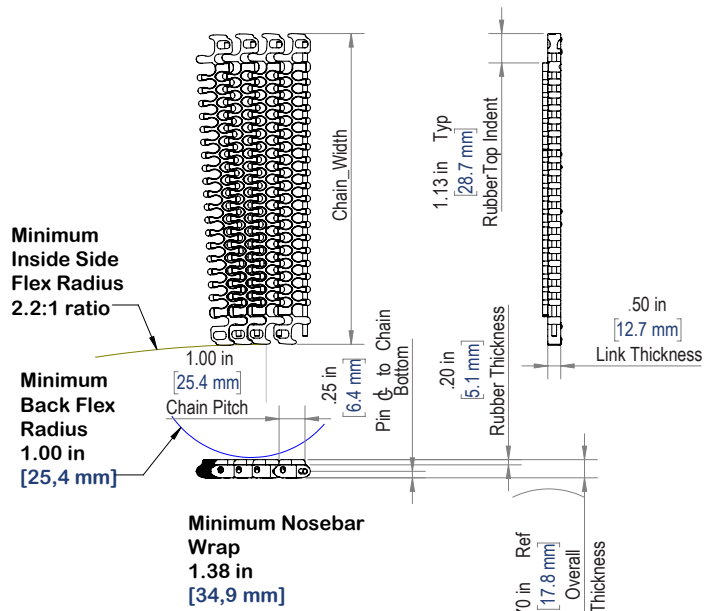

Belt Information

Min	Number of Sprockets	
	per ft of width	per m of width
Drive Shaft	3	9
Idler Shaft	2	4

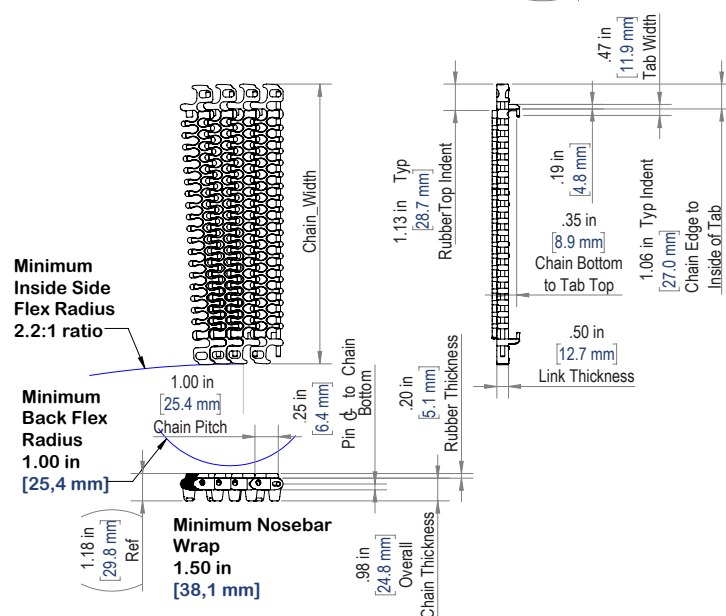

Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength				Approximate Weight		FDA Approval	
			Fahrenheit			Celsius			Straight		Curve		lbs/ft ²	Kg/m ²		
			min	dry	wet	min	dry	wet	lbs/ft	N/m	lbs	N				
Standard Materials																
WHT	White High Temperature	Polyester	+40	+220	+140	+4	+104	+60	1,096	16,000	270	1,200	1.24	6.07	Yes	
Non-standard Materials																
BHT	Blue High Temperature	Polyester	+40	+220	+140	+4	+104	+60	1,096	16,000	270	1,200	1.24	6.07	Yes	

Additional Notes

- 1655RT KleanTop Radius Friction Top Belt is "S" turn and nose-bar capable.
- The FDA- and EU-approved Rubber Top material enables conveying on both inclines and declines, allowing for product stability and conveying flexibility.
- Standard radius side flex ratio of 2:2:1.
- Belt widths available from 6 inch (152,4 mm) to 48 inches (1219,2 mm).
- Consult your Regal Rexnord™ sales representative for standard width offering.
- Open area = 38%.
- Rubber Top material hardness is 65 on Shore A hardness scale.

- Belt strength is listed at room temperature.
- For additional material information, see the material portfolio online at regalrexnord.com or contact Regal Rexnord Application Engineering.
- Contact Regal Rexnord Customer Care or your Regal Rexnord sales representative for specific product and ordering information.

1675



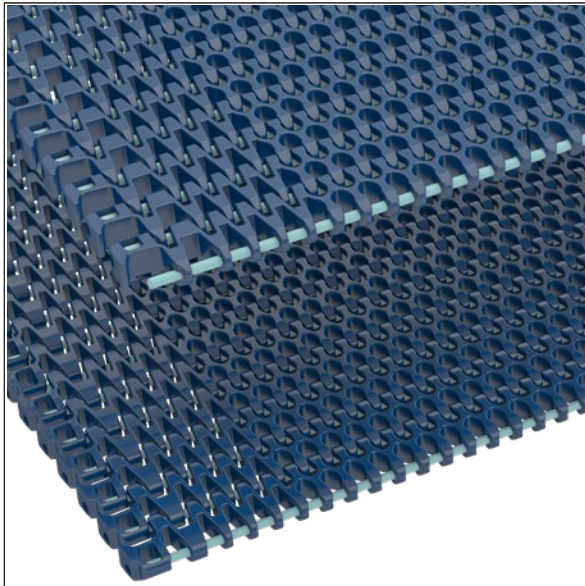


Photo shows 1675 KleanTop Tight Radius Belt molded in Blue Cut Resistant material.

Belt Information

Min	Number of Sprockets	
	per ft of width	per m of width
Drive Shaft	3	9
Idler Shaft	2	4

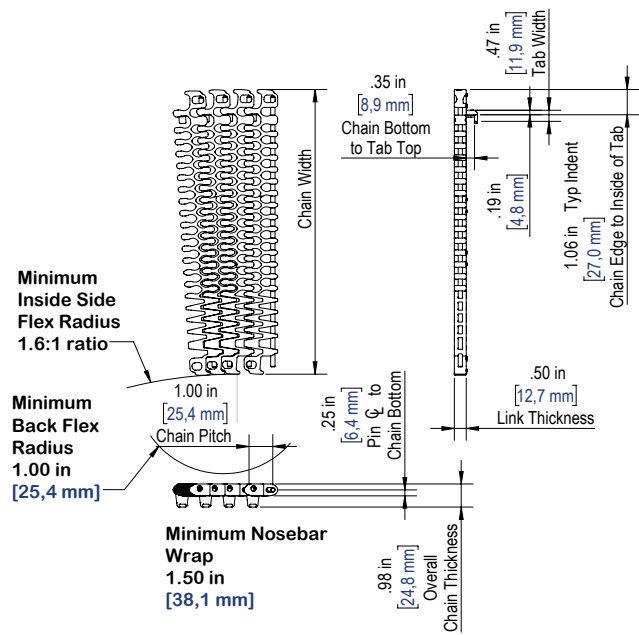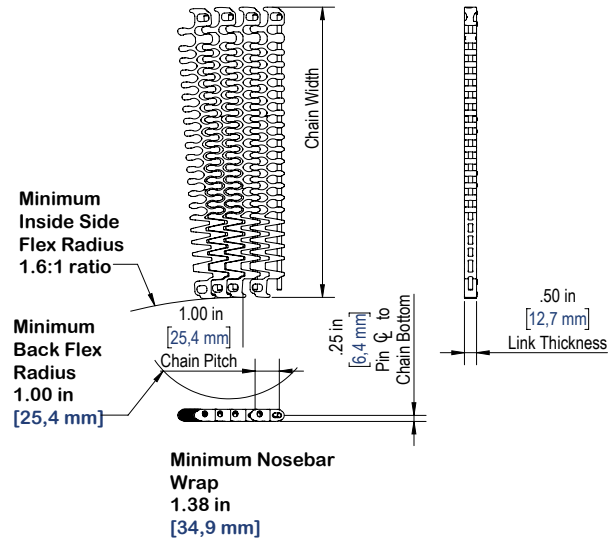

Available Materials


Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength				Approximate Weight		FDA Approval
			Fahrenheit			Celsius			Straight		Curve		lbs/ft ²	Kg/m ²	
			min	dry	wet	min	dry	wet	lbs/ft	N/m	lbs	N			
Standard Materials															
SMB	Blue Cut Resistant	Polyester	-40	180	140	-40	82	60	1,713	25,000	540	2,400	1.79	8,74	Yes
WHT	White High Temperature	Polyester	40	220	140	4	104	60	1,096	16,000	270	1,200	1.24	6,07	Yes
Non-standard Materials															
WSM	White Cut Resistant	Polyester	-40	180	140	-40	82	60	1,713	25,000	540	2,400	1.79	8,74	Yes
BHT	Blue High Temperature	Polyester	40	220	140	4	104	60	1,096	16,000	270	1,200	1.24	6,07	Yes

Additional Notes

- Please contact our Application Engineering Team for applications where temperature and humidity are concerned. 1675 KleanTop standard radius is nose-bar capable.
- Tight radius side flex ratio of 1:6:1.
- Belt widths available from 6 inch (152,4 mm) to 48 inches (1219,2 mm).
- Consult your Regal Rexnord™ sales representative for standard width offering.
- Open area = 38%.

- Belt strength is listed at room temperature.
- For additional material information, see the material portfolio online at regalrexnord.com or contact Regal Rexnord Application Engineering.
- Contact Regal Rexnord Customer Care or your Regal Rexnord sales representative for specific product and ordering information.


KUS1600 Thermoplastic Sprocket

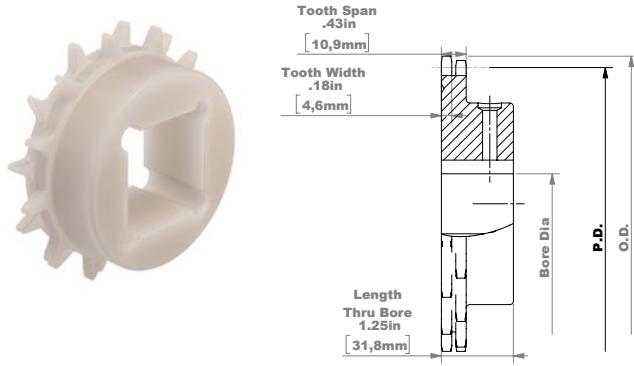

KU1600 Thermoplastic Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
6T	6T	2.0	50,8	1.9	48,3	0.75*	0.75*	20*	20*	–	–	–	–	0.8	0.9	19	20	0.04	0.02
9T	9T	2.9	74,3	2.9	73,7	0.8	1.1	20	25	–	–	–	–	0.8	1.5	19	35	0.14	0.06
12T	12T	3.9	98,1	3.9	98,0	1	1.4	25	40	1.0	1.5	25	30	1	2.1	25	55	0.29	0.13
16T	16T	5.1	130,2	5.2	130,9	1	2.3	25	55	1.0	2	25	50	1	3.3	25	80	0.64	0.29
18T	18T	5.8	146,3	5.8	147,3	1	2.8	25	70	1.0	2.5	25	60	1	3.8	25	90	0.88	0.40
20T	20T	6.4	162,4	6.5	163,9	1	3.3	25	80	1.0	2.8	25	70	1	4	25	100	1.13	0.51

* pre-bore

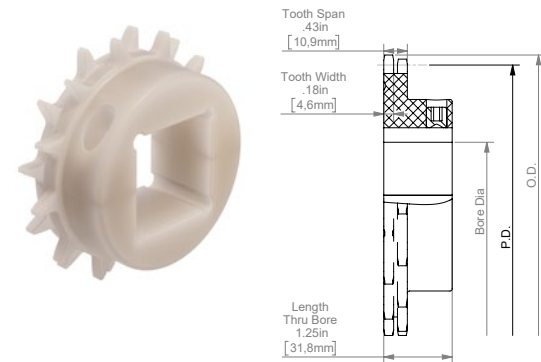

KUS1600 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
12T	12T	3.9	98,1	3.9	98,0	1	1.6	25	40	1	1.6	25	40	1	1.8	25	45	0.36	0.16
16T	16T	5.1	130,2	5.2	130,9	1	2	25	50	1.0	2	25	50	1	2.4	25	60	0.63	0.29
18T	18T	5.8	146,3	5.8	147,3	1	2.5	25	60	1.0	2.3	25	55	1	2.8	25	70	0.88	0.40
20T	20T	6.4	162,4	6.5	163,9	1	3	25	75	1.0	2.8	25	70	1	3.6	25	90	1.13	0.51

Regal Rexnord recommends dual tooth sprocket to increase belt life.

Consult Regal Rexnord™ Application Team and Engineering manual to allow for proper alignment of single row tooth sprockets.


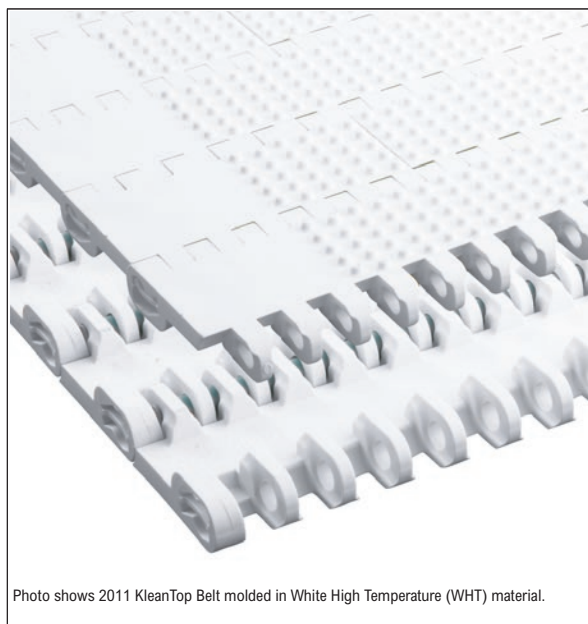


Photo shows 2011 KleanTop Belt molded in White High Temperature (WHT) material.

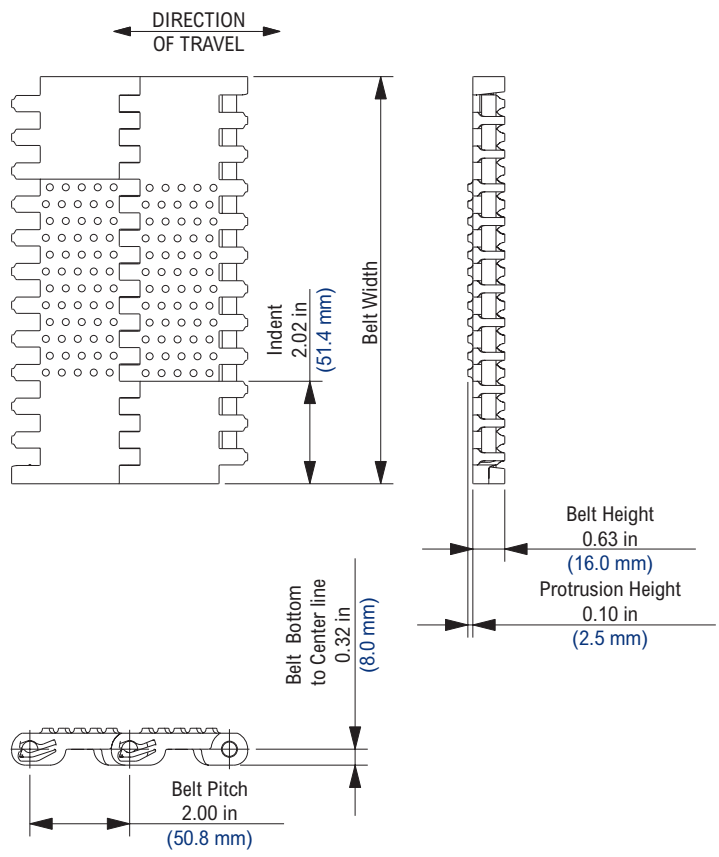

Belt Information

Belt Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 17%	2	7
17% - 50%	3	10
50% - 100%	4	13

Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
BHT	Blue High Temperature (PP)	Polypropylene	40	220	212	4	104	100	800	11,672	1.89	9.23	Yes
BLT	Blue Low Temperature (PE)	Polyethylene	-100	80	80	-73	27	27	500	7,295	2.03	9.91	Yes
WHT	White High Temperature (PP)	Polypropylene	40	220	212	4	104	100	800	11,672	1.89	9.23	Yes
WLT	White Low Temperature (PE)	Polyethylene	-100	80	80	-73	27	27	500	7,295	2.03	9.91	Yes

Additional Notes

- Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.
- For belt width information see KleanTop Belt Width Table on page 349.
- Open area < 2%.
- Stainless steel pins are available on a Made-To-Order basis.
- All 2011 belts are supplied with 2 in (50.8 mm) indent without nubs.
- Belt strength is listed at room temperature.
- For additional material information, see material portfolio.
- Contact Regal Rexnord™ Customer Service for specific product availability.


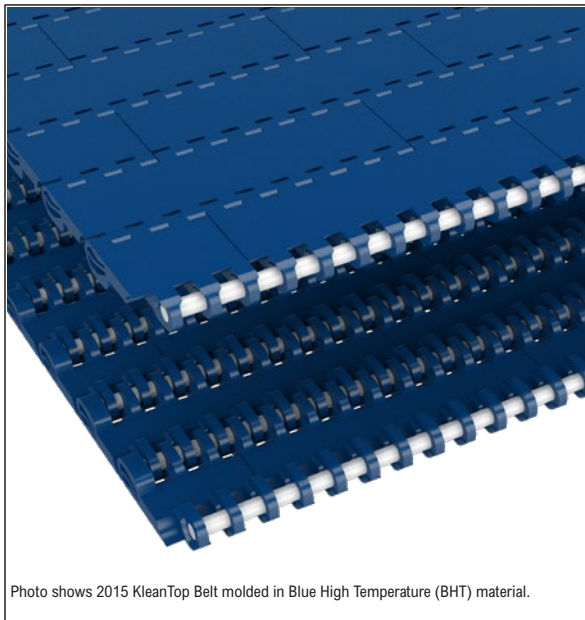


Photo shows 2015 KleanTop Belt molded in Blue High Temperature (BHT) material.

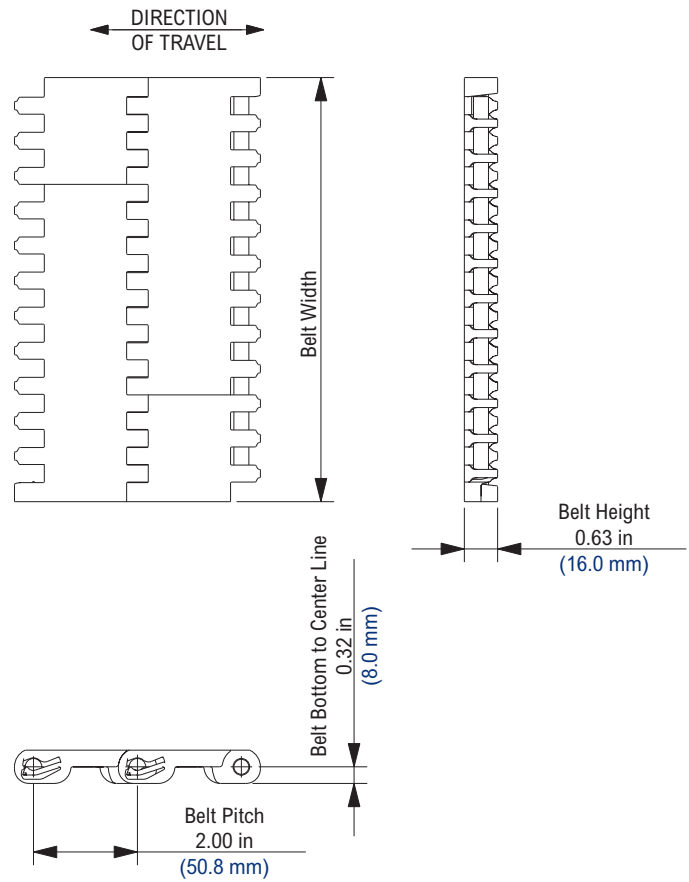

Belt Information

Belt Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 17%	2	7
17% - 50%	3	10
50% - 100%	4	13

Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft	N/m	lbs/ft ²	kg/m ²	
			min	max		min	max						
Standard Materials													
BHT	Blue High Temperature (PP)	Polypropylene	40	220	212	4	104	100	800	11,672	1.89	9.23	Yes
BLT	Blue Low Temperature (PE)	Polyethylene	-100	80	80	-73	27	27	500	7,295	2.03	9.91	Yes
FTR	Fryer Temperature Resistant (PA)	Polyester	-80	220	NR	-62	104	NR	1,000	14,590	2.89	14.11	Yes
WHT	White High Temperature (PP)	Polypropylene	40	220	212	4	104	100	800	11,672	1.89	9.23	Yes
WLT	White Low Temperature (PE)	Polyethylene	-100	80	80	-73	27	27	500	7,295	2.03	9.91	Yes
WSM	White Cut Resistant (POM)	Polyester	-40	180	140	-40	82	60	1,000	14,590	2.89	14.11	Yes

NR = Not Recommended

Additional Notes

- Please contact our Application Engineering Team for applications where temperature and humidity are concerned.
- For belt width information see KleanTop Belt Width Table on page 349.
- Open area < 2%.
- Stainless steel pins are available on a Made-To-Order basis.
- Belt strength is listed at room temperature.
- For additional material information, see material portfolio.
- Contact Regal Rexnord™ Customer Service for specific product availability.

2016


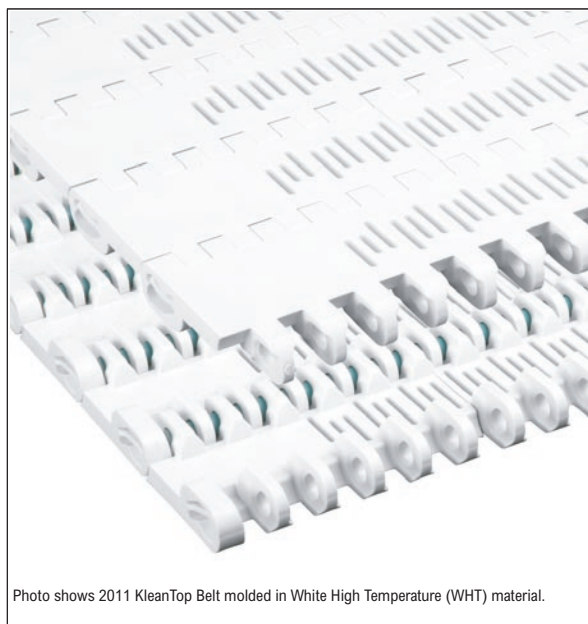


Photo shows 2011 KleanTop Belt molded in White High Temperature (WHT) material.

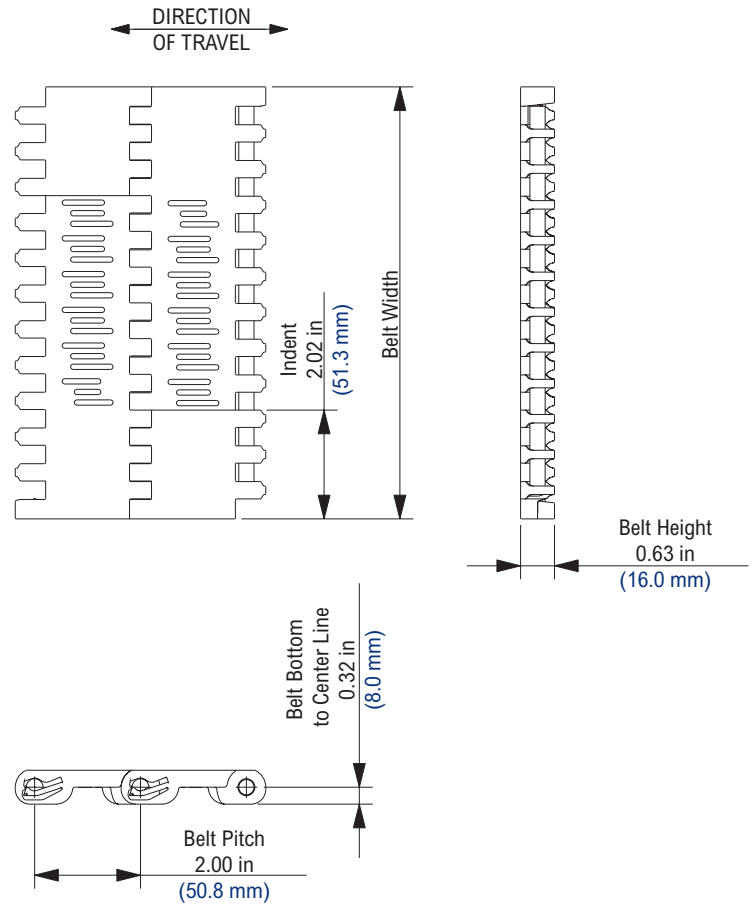

Belt Information

Belt Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 17%	2	7
17% - 50%	3	10
50% - 100%	4	13

Available Materials


Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
BHT	Blue High Temperature (PP)	Polypropylene	40	220	212	4	104	100	800	11,672	1.89	9.23	Yes
FTR	Fryer Temperature Resistant (PA)	Polyester	-80	220	NR	-62	104	NR	1,000	14,590	2.89	14.11	Yes
WHT	White High Temperature (PP)	Polypropylene	40	220	212	4	104	100	800	11,672	1.89	9.23	Yes
WLT	White Low Temperature (PE)	Polyethylene	-100	80	80	-73	27	27	500	7,295	2.03	9.91	Yes

NR = Not Recommended

Additional Notes

- Please contact our Application Engineering Team for applications where temperature and humidity are concerned.
- For belt width information see KleanTop Belt Width Table on page 349.
- Open area = 18%.
- Stainless steel pins are available on a Made-To-Order basis.
- All 2016 belts are supplied with 2 in (50.8 mm) indent without nubs.
- Belt strength is listed at room temperature.
- For additional material information, see material portfolio.
- Contact Regal Rexnord™ Customer Service for specific product availability.

KU2010 TruTrack Thermoplastic Sprocket

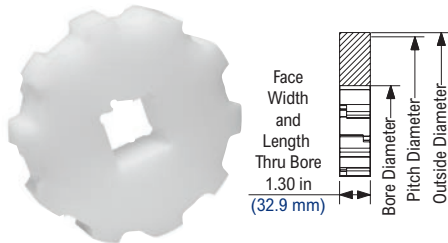

KU2010 TruTrack Thermoplastic Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight		FDA Approval
						Round				Square				in		mm				
						actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	
8	8	5.2	132.7	4.8	120.9	3/4	3	20	75	1 1/2	2	40	50	3/4	3	20	75	0.44	0.20	Yes
10	10	6.5	164.4	6.1	153.9	3/4	3 1/2	20	90	1 1/2	2 1/2	40	65	3/4	3 1/2	20	90	1.06	0.48	Yes
12	12	7.7	196.3	7.4	188	1	3 1/2	25	90	1 1/2	3 1/2	40	90	1	3 1/2	25	90	1.59	0.72	Yes
16	16	10.3	260.4	10.3	262.1	1	3 1/2	25	90	1 1/2	4 1/2	40	120	1	3 1/2	25	90	3.62	1.64	Yes

Shaft-ready bores are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft. Custom machined sprocket sizes are available on MTO basis. KU2010 sprockets are available in UHMWPE or abrasion resistant Nylon. Material must be noted when ordering.

Pusher Attachment (F-Style)

All pusher attachments are molded 6 in (152.4 mm) wide and in two heights: F6 with a 6 in (152.4 mm) height and F4 with 4 in (101.6 mm) height. Pusher attachments can be cut down to a minimum height of .25 in (6.35 mm).

When ordering, please indicate if pusher attachments are required every pitch, every second pitch, etc.

See page 302 for ordering guidelines.

Order example: WSM 2015 K30 F6 T6P N2 CN2 is a 2015 solid top belt in WSM material with a width of 30 in (762 mm) F6 pushers located every 6th pitch with a side indent of 2 in (50.8 mm) and a center notch of 2 in (50.8 mm).


See Engineering Manual for back-flex information for belts with pusher attachments.

Standard side indents are 1.33 in (33.9 mm) and 2.00 in (50.8 mm).

Other indents at increments of .67 in (16.9 mm) are available upon request.

Center notches are also available upon request.

Contact Regal Rexnord™ FlatTop engineering for material options.

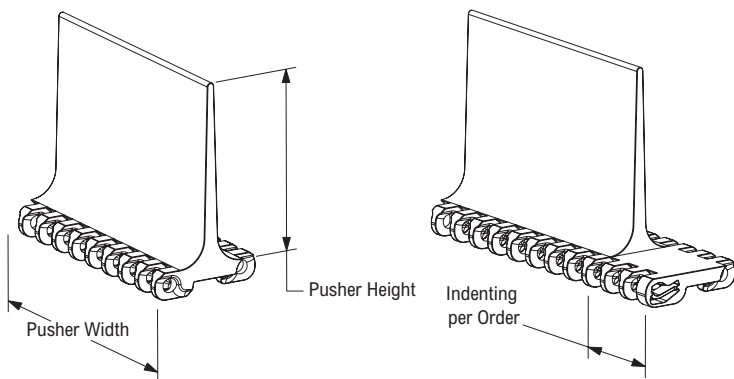


Curved Pusher Attachment (C-Style)

All curved pusher attachments are molded 6 in (152.4 mm) wide and in two heights: C6 with a 6 in (152.4 mm) height and C4 with 4 in (101.6 mm) height.

When ordering, please indicate if curved pusher attachments are required every pitch, every second pitch, etc.

See page 6 for ordering guidelines.

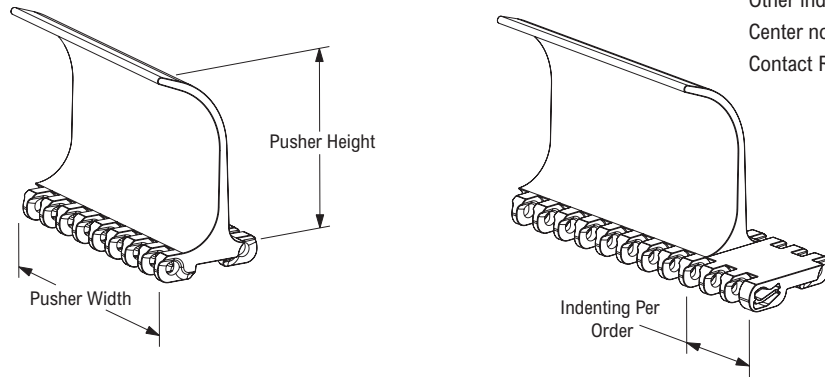

Order example: WSM 2016 K18 C4 T3P N2 is a 2016 perforated top belt in WSM material with a width of 18 in (457 mm) C4 pushers located every 3rd pitch with a side indent of 2 in (50.8 mm).

See Engineering Manual for back-flex information for belts with pusher attachments.

Standard side indents are 1.33 in (33.9 mm) and 2.00 in (50.8 mm). Other indents at increments of .67 in (16.9 mm) are available upon request.

Center notches are also available upon request.


Contact Regal Rexnord™ FlatTop engineering for material options.

Double Ribbed Curved Pusher Attachment (DRC-Style)

All ribbed curved pusher attachments are molded 6 in (152.4 mm) wide and in two heights: DRC with a 6 in (152.4 mm) height and DRC with 4 in (101.6 mm) height.

When ordering, please indicate if curved pusher attachments are required every pitch, every second pitch, etc.

See page 6 for ordering guidelines.

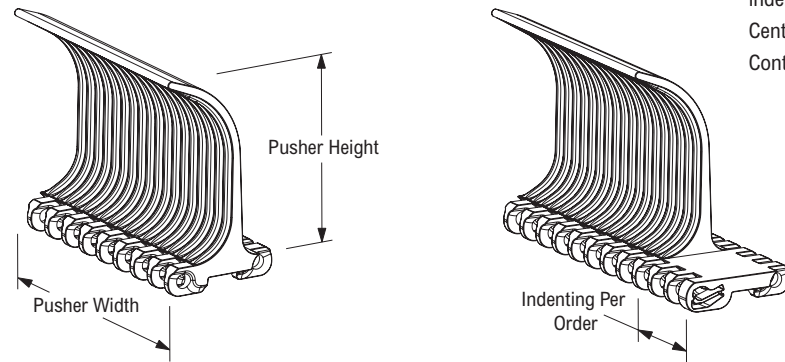

Order example: WSM 2011 K20 DRC T4P N2.66 is a 2011 nub top belt in WSM material with a width of 20 in (508 mm) DRC pushers located every 4th pitch with a side indent of 2.66 in (67.6 mm).

See Engineering Manual for back-flex information for belts with pusher attachments.

Standard side indents are 1.33 in (33.9 mm) and 2.00 in (50.8 mm). Other indents at increments of .67 in (16.9 mm) are available upon request.

Center notches are also available upon request.

Contact Rexnord FlatTop engineering for material options.

Curved Pusher Attachment (B-Style)

All bucket style pusher attachments are molded 6 in (152.4 mm) wide and in two heights: B6 with a 6 in (152.4 mm) height and B4 with 4 in (101.6 mm) height.

Center notches are also available upon request.


See page 6 for ordering guidelines.

Order example: WSM 2015-30 B6 T6P N2 is a 2015 solid top belt in WSA material with a width of 30 in (762 mm) B6 pushers located every 6th pitch with a side indent of 2 in (50.8 mm)

See engineering manual for back-flex information for belts with pusher attachments.

Standard side indent is 2.00 in (50.8 mm). Other indents starting at 1.33 in (33.9 mm) with increments of .67 in (16.9 mm) are available upon request.

When ordering, please indicate if bucket pusher attachments are required every pitch, every second pitch, etc.

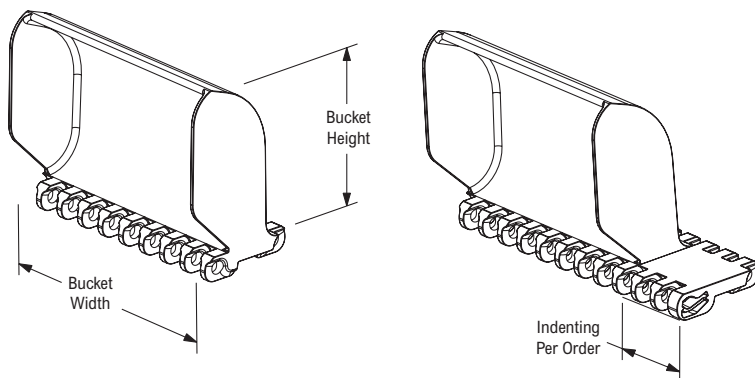

Sideguard Attachment

Standard side indent is 2 in (50.8 mm). Other side indents are 1.33 in (33.9 mm) and 2.66 in (67.7 mm). Other side-indents are available upon request.

SG4 Sideguards are molded 4 in (101.6 mm) high and can be cut down to a minimum height of 1 in (25.4 mm).

If the belt is ordered with sideguards and pushers, the sideguard attachments will be furnished at the same height as the pusher attachments (up to 4 in (101.6 mm)). All sideguards supplied in WLT or BLT material. Sideguards are situated .33 in (8.5 mm) from the pusher, reducing the side indent by .67 in (16.9 mm).


Example sideguard specification:

WSM, WHT, or WLT link = WLT Sideguard

BLT or BHT link = BLT Sideguard

Example belt specification:

Order example: WSM 2016 K16 F4 T4P SG4 N2.66 is a 2016 perforated top belt in WSM material with a width of 16 in (406 mm) F4; 4 in (102 mm) pushers located every 4th pitch (8 in (203.3 mm)) side indent of 2.66 in (67.7 mm) from the edge of the belt to the pusher. Distance from the edge of the belt to the sideguards is 2 in (50.8 mm).

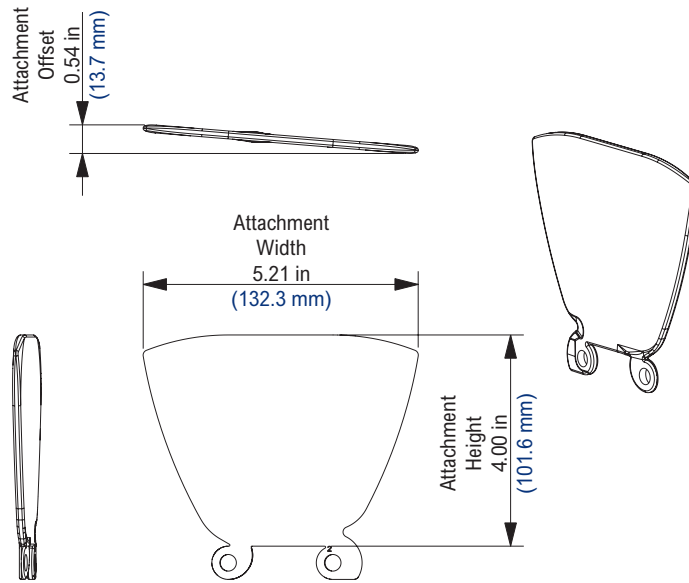

2010 Series ISR Integrated Side Rail Attachment

If the belt is ordered with both ISR and pusher attachments, the ISR attachment will be furnished the same height as the pusher attachment.


ISR attachments are available with a 2 in. indents only.

The 0.66 inch rail offset creates a fixed dimension of 2.66 inches to the pusher attachment.

ISR attachments are molded in 4 in. heights. Standard materials are POM and PP.

Please indicate if ISR attachments are required down one or both sides of the belt when ordering.

Please contact Regal Rexnord™ Corporation if any deviations from this standard are required.

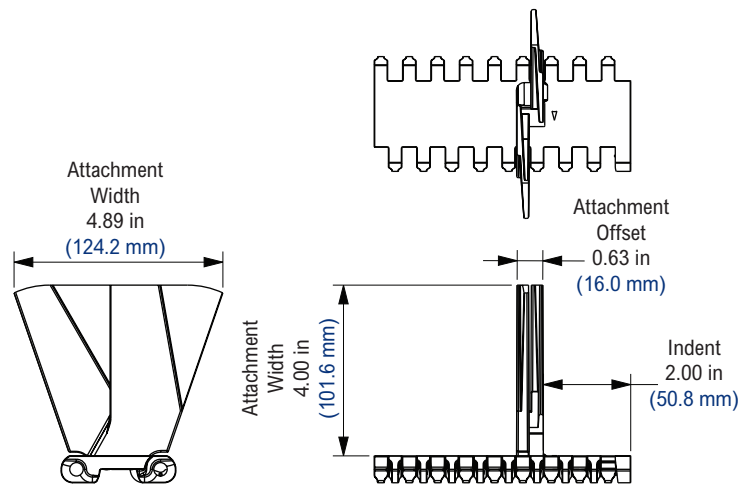

5966


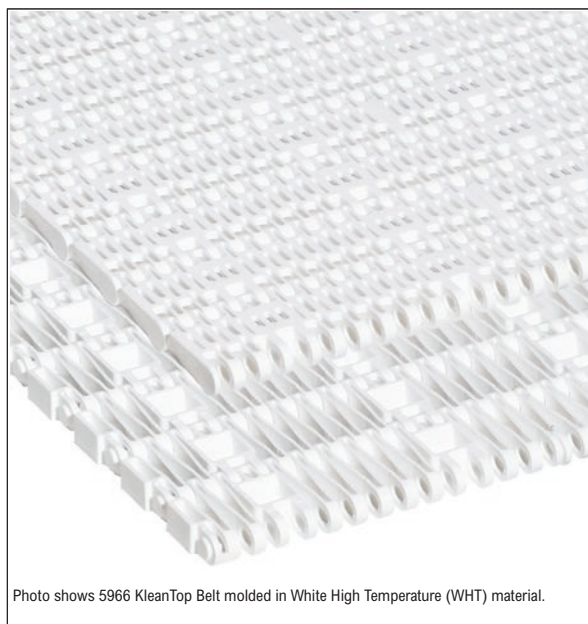


Photo shows 5966 KleanTop Belt molded in White High Temperature (WHT) material.

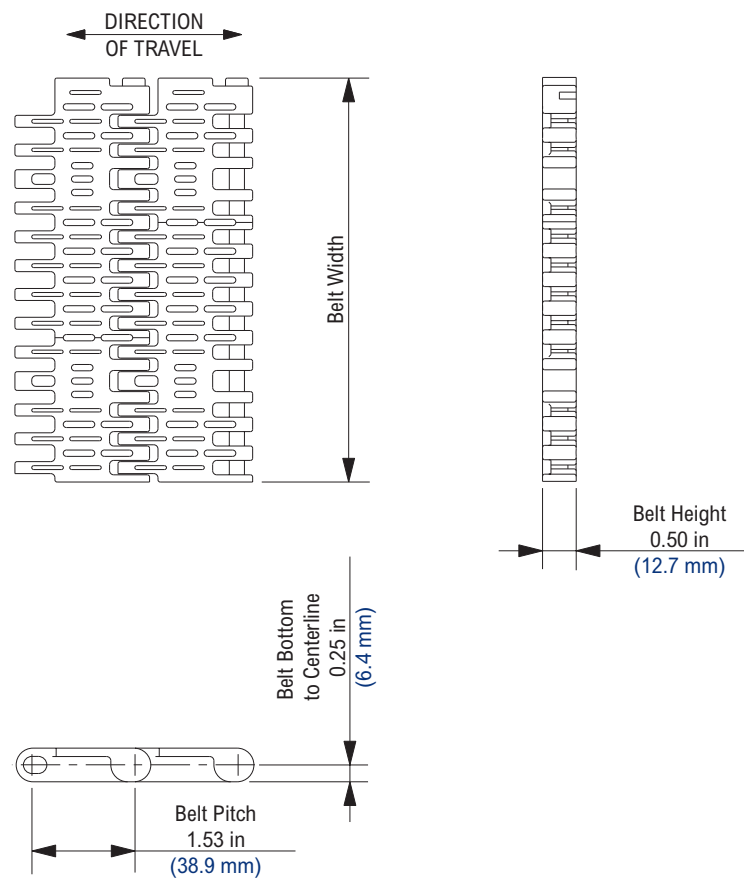

Belt Information

Belt Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13


Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max dry wet		min	max dry wet		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
WHT	White High Temperature (PP)	Polypropylene	40	220	212	4	104	100	900	13,131	1.00	4.88	Yes
WLT	White Low Temperature (PE)	Polyethylene	-100	80	80	-73	27	27	600	8,754	1.10	5.37	Yes
Non-Standard Materials													
BLT	Blue Low Temperature (PE)	Polyethylene	-100	80	80	-73	27	27	600	8,754	1.10	5.37	Yes

Additional Notes

- Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.
- For belt width information see KleanTop Belt Width Table on page 349.
- Open area = 31%.
- Stainless steel pins are available on a Made-To-Order basis.
- Belt strength is listed at room temperature.
- For additional material information, see material portfolio.
- Contact Regal Rexnord™ Customer Service for specific product availability.

N5966 Thermoplastic Sprocket

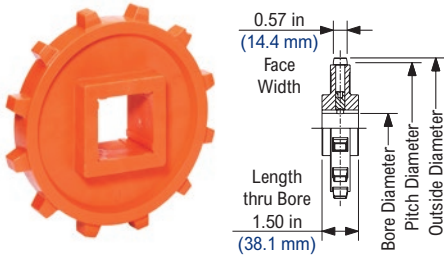

N5966 Thermoplastic Sprocket Imperial Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)											Approximate Weight		
						Hex	Round						Square						
actual	effect	in	mm	in	mm	in											lbs	kg	
8	8	4	101.6	4	101.6	-	-	-	-	-	-	-	-	-	1 1/2	-	-	0.53	0.24
12	12	5.9	150.4	5.9	150.2	1 1/2	2	1	1 3/16	1 1/4	1 7/16	1 1/2	1 15/16	1 1/2	2	2 1/2	0.73	0.33	

N5966 Thermoplastic Sprocket Metric Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)							Approximate Weight	
						Round				Square				
actual	effect	in	mm	in	mm	mm							lbs	kg
8	8	4	101.6	4	101.6	-	-	-	-	40	-	-	0.53	0.24
12	12	5.9	150.4	5.9	150.2	30	35	40	50	40	50	65	0.73	0.33

Shaft-ready round bore sprockets are shipped with keyway and setscrew.


Pusher Attachment (F-Style)

All pusher attachments are molded 6 in (152.4 mm) wide and can be cut down to a minimum height of .25 in (6.35 mm).

The F3 designation represents an F-style pusher attachment at a height of 3 in (76.2 mm).

Please indicate if pusher attachments are required every pitch, every second pitch, etc. when ordering. Also, indicate if indents are required in the center, on one or both sides of the chain.

For example. "I would like F3 pusher attachments every 8th pitch indented .75 in on both sides of the chain."

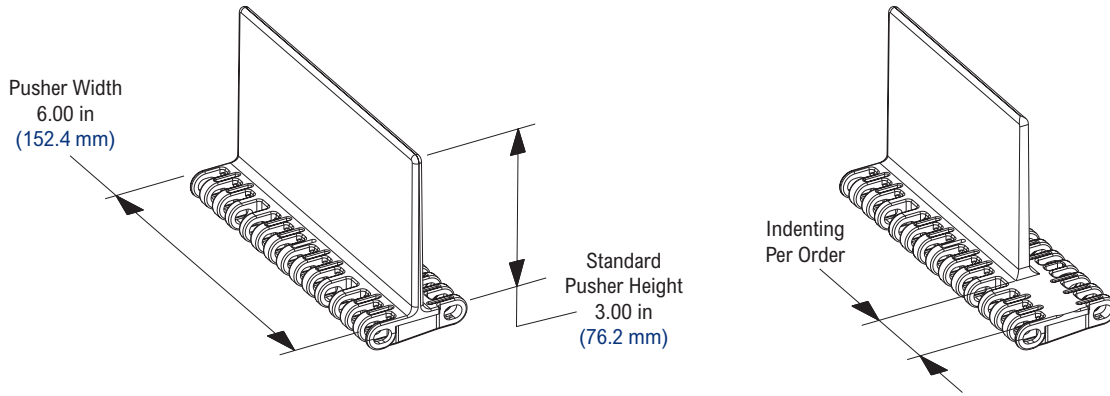


Pusher Attachment (DRF-Style)

All pusher attachments are molded 6 in (152.4 mm) wide and can be cut down to a minimum height of .25 in (6.35 mm).

The F6 designation represents an F-style pusher attachment at a height of 6 in (152.4 mm).

Please indicate if pusher attachments are required every pitch, every second pitch, etc. when ordering. Also, indicate if indents are required in the center, on one or both sides of the chain.

For example. "I would like F6 pusher attachments every 8th pitch indented .75 in on both sides of the chain."

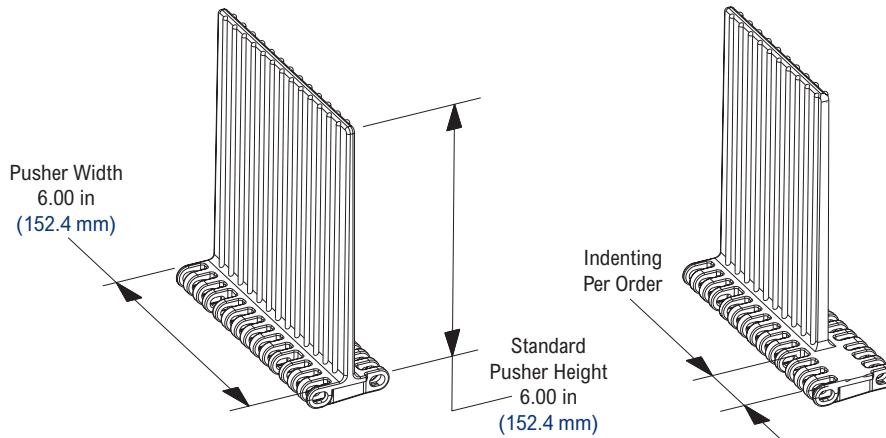


Sideguard Attachment

Please indicate if sideguard attachments are required down one or both sides of the chain when ordering.

Sideguard attachments can be cut down to a minimum height of 1 in (25.4 mm).

If the chain is ordered with both sideguard and pusher attachments, the sideguard attachment will be furnished the same height as the pusher attachment.


Please contact Regal Rexnord if any deviations from this standard are required.

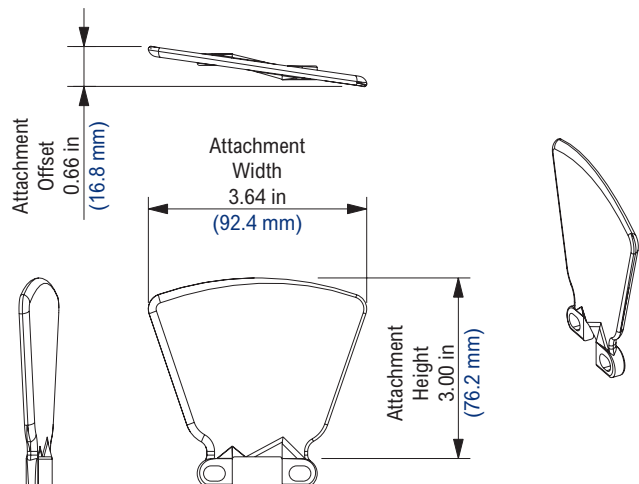

5998 Heavy Duty



Photo shows 5998 HD KleanTop Belt molded in White High Temperature (WHT) material.

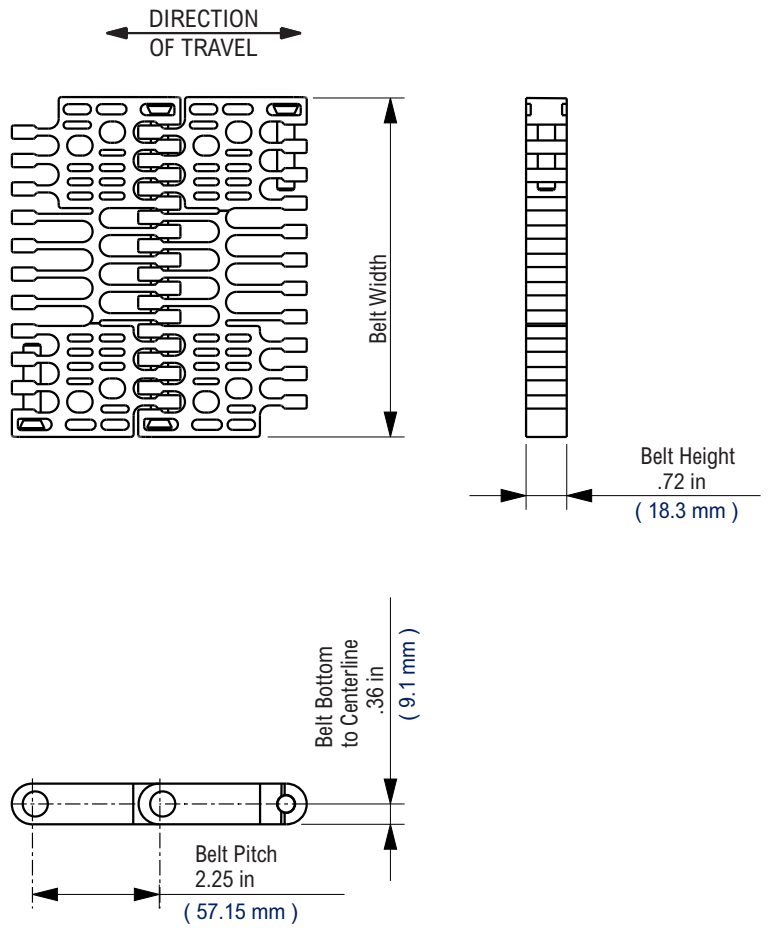

Belt Information




Belt Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 50%	2	7
50% - 100%	4	13

Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius							
			min	max		min	max		lbs/ft	N/m	lbs/ft ²	kg/m ²	
Standard Materials													
HUV	High Temp. Ultraviolet Resistance	Polypropylene	40	220	180	4	104	82	2,400	35,016	1.70	8.30	No
WHT	White High Temperature (PP)	Polypropylene	40	220	212	4	104	100	2,400	35,016	1.70	8.30	Yes
WLT	White Low Temperature (PE)	Polyethylene	-100	80	80	-73	27	27	1,600	23,344	1.80	8.79	Yes
Non-Standard Materials													
DUV	Plain Acetal Ultraviolet Resistant	Polypropylene	0	180	150	-18	82	66	3,500	51,065	2.30	11.23	No

Additional Notes

- Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply.
- For belt width information see KleanTop Belt Width Table on page 349.
- Open area = 42.1%.
- Stainless steel pins are available on a Mold-To-Order basis.
- Belt strength is listed at room temperature.
- For additional material information, see material portfolio.
- Contact Regal Rexnord™ Customer Service for specific product availability.



NS5996 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						in	mm	in	mm	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
9	9	6.6	167.1	6.5	164.1	1	2 5/8	25	70	1	3 1/2*	25	90*	1	2 3/4	25	70	1.68	0.76
12	12	8.7	220.8	8.7	221	1	2 3/4	25	70	1	3 1/2*	25	90*	1	2 3/4	25	70	1.98	0.90
14	14	10.1	256.8	10.0	254.8	1	4 1/2	25	120	1	4 1/2**	25	120**	1	3 1/2	25	90	2.12	0.96

* The 3-1/2 in and 90 mm bores for the 9 and 12 tooth square bore sprockets are supplied as molded bores. All other bores are supplied with split bore adapters.

** The 3-1/2 in, 4-1/2 in, 90 mm and 120 mm bores for the 14 tooth square bore sprockets are supplied as molded bores. All other bores are supplied with split bore adapters.

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft. Similar bore sizes are available with the use of split plastic adapters.

N5996 Thermoplastic Sprocket Molded in HS (Heat Stabilized) — Imperial Information

Number of Teeth		Pitch Diameter		Outside Diameter		Imperial Bore Diameter						Approximate Weight			
						Square									
						in									
actual	effect	in	mm	in	mm							lbs	kg		
9	9	6.6	167.1	6.5	164.1	1 1/2 in			2 in			3 1/2 in		0.88	0.40

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

N5996 Thermoplastic Sprocket Molded in HS (Heat Stabilized) — Metric Information

Number of Teeth		Pitch Diameter		Outside Diameter		Metric Bore Diameter						Approximate Weight	
						Square							
						mm							
actual	effect	in	mm	in	mm							lbs	kg
9	9	6.6	167.1	6.5	164.1	40			-			0.88	0.40
14	14	10.1	256.8	10.1	256.5	-			90			1.60	0.73

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

N5996 Thermoplastic Sprocket Molded in PE (Polyethylene) — Imperial Information

Number of Teeth		Pitch Diameter		Outside Diameter		Imperial Bore Diameter						Approximate Weight		
						Round			Square					
						in			in					
actual	effect	in	mm	in	mm							lbs	kg	
7	7	5.2	131.7	4.9	125.5	-	-	-	1 1/2	-	-	-	0.38	0.17
9	9	6.6	167.1	6.5	164.1	-	-	-	1 1/2	2	2 1/2	-	0.69	0.31

Shaft-ready round bore sprockets are shipped with keyway and setscrew.

5998 Pusher Attachment (F-Style)


All pusher attachments are molded 6 in (152.4 mm) wide and can be cut down to a minimum height of .25 in (6.35 mm).

The F4 designation represents an F-style pusher attachment at a height of 4 in (101.6 mm).

Please indicate if pusher attachments are required every pitch, every second pitch, etc. when ordering. Also, indicate if indents are required in the center, on one or both sides of the chain.

For example, "I would like F4 pusher attachments every 8th pitch indented .75 in on both sides of the chain."

For 5998 chain only.

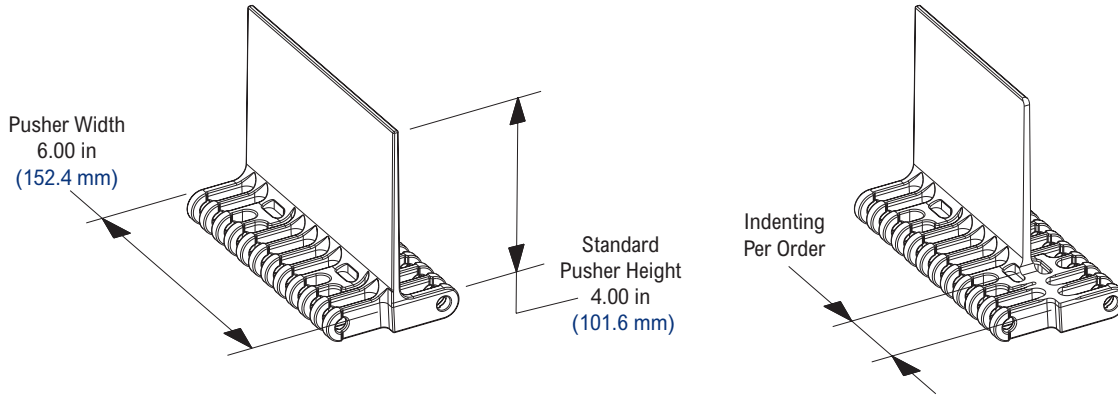


Sideguard Attachment

Please indicate if sideguard attachments are required down one or both sides of the chain when ordering.

Sideguard attachments can be cut down to a minimum height of 1 in (25.4 mm).

If the chain is ordered with both sideguard and pusher attachments, the sideguard attachment will be furnished the same height as the pusher attachment.

Please contact Regal Rexnord if any deviations from this standard are required.

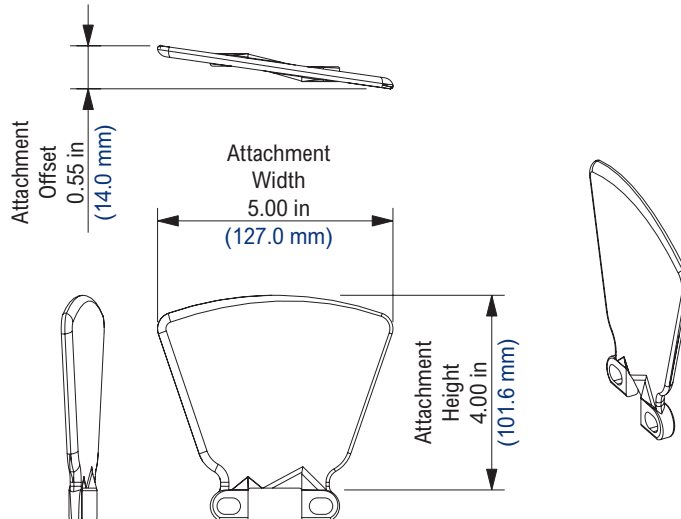


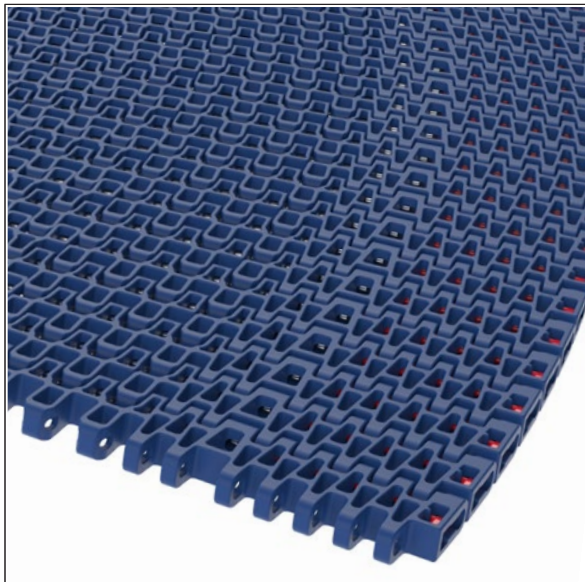



Photo shows 6400 Series KleanTop Plastic Spiral Cage Belt molded in Blue Cut Resistant material.

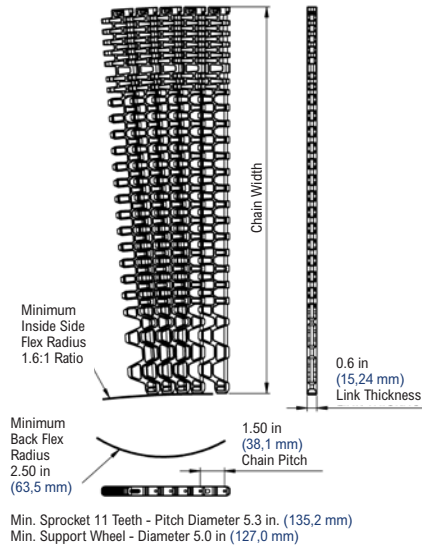

Belt Information*

Sprockets Per Width of Belt		Number of Sprockets Per Shaft
Belt Width in	Belt Width mm	
18 to 21	457 to 533	3
22 to 25	558 to 635	4
26 to 29	660 to 736	5
30 to 33	762 to 838	6
34 to 37	863 to 939	7
38 to 41	965 to 1041	8
42 to 45	1066 to 1143	9
46 to 49	1168 to 1244	10
50 to 53	1270 to 1346	11
54 to 57	1371 to 1447	12
58 to 61	1473 to 1549	13
62 to 65	1574 to 1651	14
66 to 69	1676 to 1752	15
70 to 71	1778 to 1803	16
72	1829	17

*Recommended: 1 inner and 1 outer support wheel per shaft.

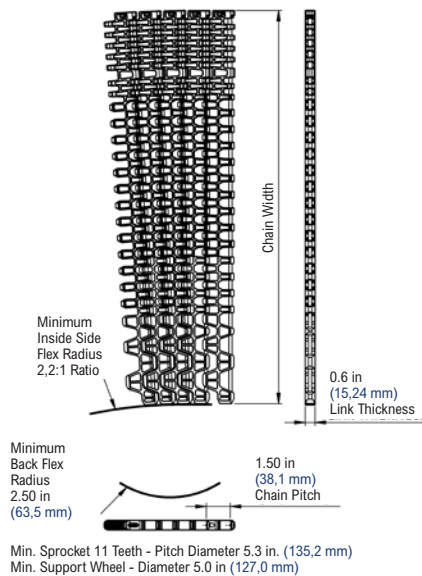

Available Materials

Prefix	Belt Material	Rod Material	Temperature Range						Belt Strength				Approximate Weight		FDA Approval
			Fahrenheit			Celsius			Straight		Radius Spiral		lbs/ft ²	Kg/m ²	
			min	max		min	max		lbs/ft	N/m	lbs	N			
	dry	wet		dry	wet										
Standard Materials															
SMB	Blue Cut Resistant	Stainless Steel	-40	180	150	-40	82	66	1800	26000	600	2600	2.3	11,3	Yes
WHT	White High Temperature	Stainless Steel	40	220	212	4	104	100	1100	16000	300	1300	1.7	8,6	Yes
BSE	Blue Flame Retardant	Stainless Steel	-40	220	212	-40	104	100	1800	26000	600	2600	1.9	9,4	Yes


Additional Notes

6400 Series is available in 1.6:1 and 2.2:1 radius side flex options.
 Belt widths available from 18 inches (457,2 mm) to 72 inches (1828,8 mm).
 Standard increments of 2 inches (50,8 mm).
 Consult your Regal Rexnord™ sales representative for additional width offering.
 Open area = 45%.

Belt strength is listed at room temperature.


For additional material information, see the material portfolio online at Rexnord.com or contact Regal Rexnord Application Engineering.
 Contact Regal Rexnord Customer Care or your Regal Rexnord sales representative for specific product and ordering information.

KU6400 Thermoplastic Sprocket

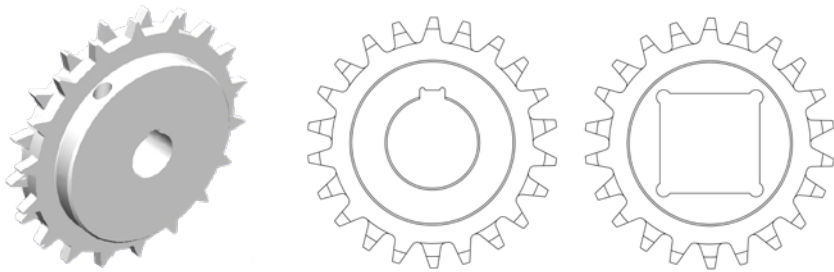


KU6400 Thermoplastic Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in		mm		in		mm		in		mm			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
11T	11T	5.3	135,2	5.4	138,0	1.5	2.0	40,0	50,0	1.5	2.0	40,0	50,0	1.0	2.0	20,0	60,0	0.95	0,43
13T	13T	6.3	159,2	6.4	162,0	1.5	2.5	40,0	60,0	1.5	2.5	40,0	60,0	1.0	2.5	20,0	60,0	1.41	0,64
16T	16T	7.7	195,3	7.9	201,0	1.5	2.5	40,0	60,0	1.5	2.5	40,0	60,0	1.0	3.0	20,0	60,0	2.21	1,00

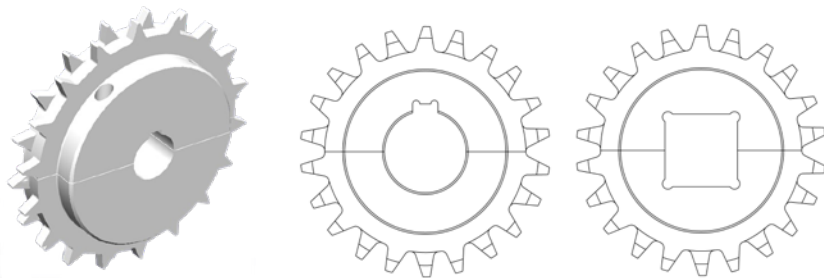

KUS6400 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight	
						Round				Square				in		mm			
						in		mm		in		mm		in		mm			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
11T	11T	5.3	135,2	5.4	138,0	1.5	1.75	40,0	45,0	1.5	1.5	40,0	40,0	1.0	1.75	20,0	45,0	1.02	0,46
13T	13T	6.3	159,2	6.4	162,0	1.5	2.5	40,0	60,0	1.5	2.5	40,0	60,0	1.0	2.5	20,0	60,0	1.52	0,69
16T	16T	7.7	195,3	7.9	201,0	1.5	2.5	40,0	60,0	1.5	2.5	40,0	60,0	1.0	2.5	20,0	60,0	2.32	1,05

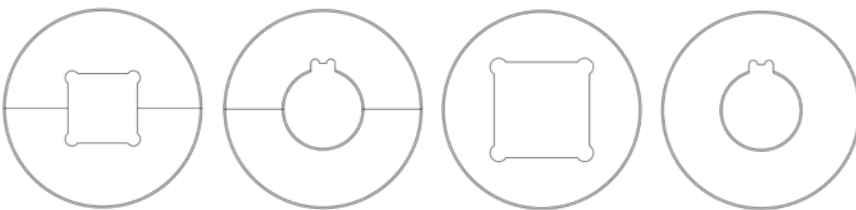

KT6400 Thermoplastic SUPPORT WHEEL

Support Wheel Aligns with Sprocket Tooth Count	Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Round)				Approximate Weight		
			Round				Square				in		mm				
			in		mm		in		mm		in		mm				
in	mm	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
11T	4.5	114,5	1.5	2.0	40,0	50,0	1.5	2.0	40,0	50,0	1.0	2.0	20,0	60,0	0.88	0,40	
13T	5.5	139,3	1.5	2.5	40,0	60,0	1.5	2.5	40,0	60,0	1.0	2.5	20,0	60,0	1.33	0,60	
16T	6.9	176,3	1.5	2.5	40,0	60,0	1.5	2.5	40,0	60,0	1.0	3.0	20,0	60,0	2.16	0,98	


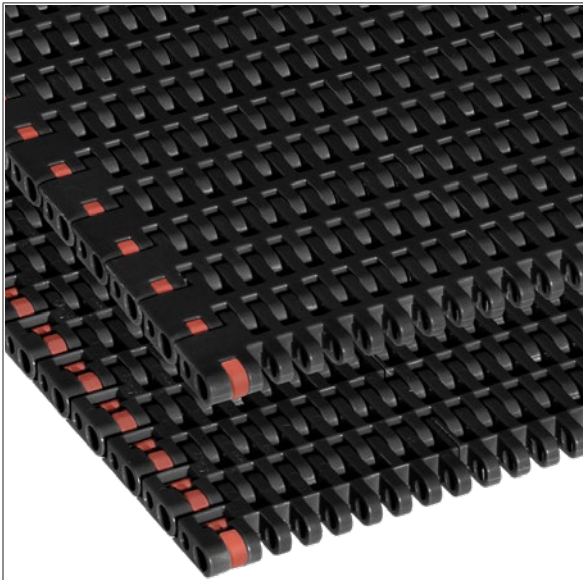


Photo shows 8506 KleanTop Belt molded in Fryer Temperature Resistant (FTR) material.

Belt Information

Belt Capacity	Number of Sprockets	
	per ft of width	per m of width
0% - 25%	2	7
25% - 75%	4	13
75% - 100%	6	20

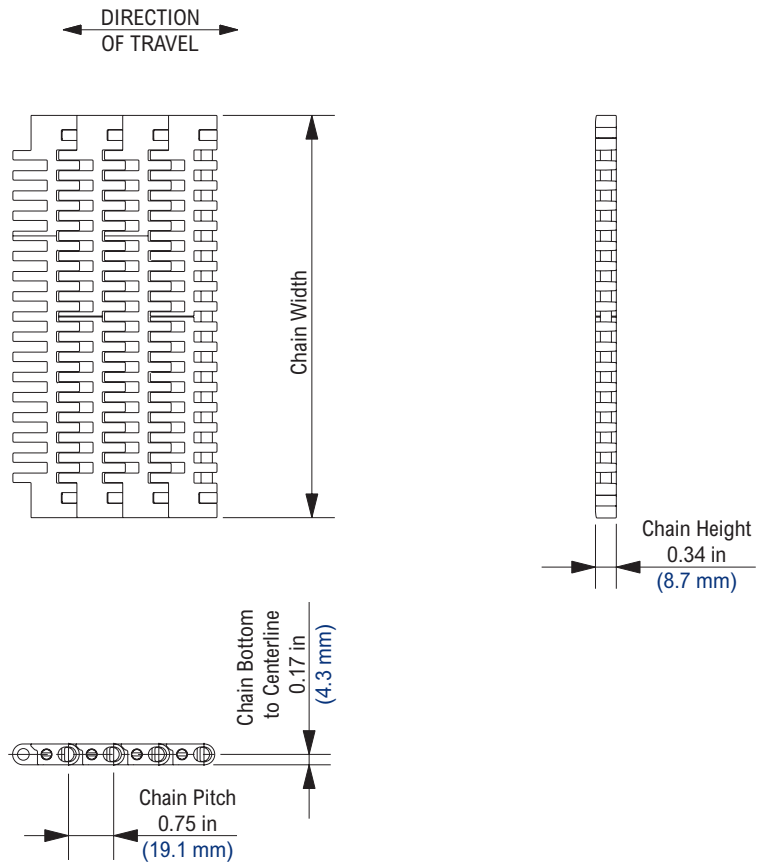

Available Materials

Prefix	Belt Material	Standard Pin Material	Temperature						Belt Strength		Approximate Weight		FDA Approval
			Fahrenheit			Celsius			lbs/ft	N/m	lbs/ft ²	kg/m ²	
			min	max		min	max						
Standard Materials													
FTR	Fryer Temperature Resistant (PA)	Polyester	-80	220	NR	-62	104	NR	2,000	29,180	1.61	7.86	Yes



Additional Notes

- Please contact our Application Engineering Team for applications where temperature and humidity are concerned.
- For belt width information see KleanTop Belt Width Table on page 349.
- Open area = 21.0%.
- Stainless steel pins are available on a Mold-To-Order basis.
- NR = Not Recommended.
- Belt strength is listed at room temperature.
- For additional material information, see material portfolio.
- Contact Regal Rexnord™ Customer Service for specific product availability.

SSS8500 Stainless Steel Split Sprocket

KU8500 Thermoplastic Sprocket

KU8500 Thermoplastic "H-Style" Sprocket

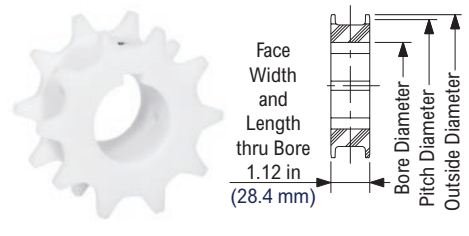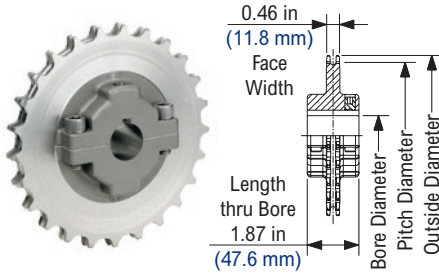

SSS8500 Stainless Steel Split Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)												Bore Diameter (Round)				Approximate Weight		
			Round						Square						in		mm				
			in		mm		in		mm		in		mm		min	max	min	max			
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
24	24	5.8	147.3	5.8	148.3	1	1 1/2	25	40	1	1	25	25	1	2	25	50	4.77	2.16		
25	25	6	153.4	6.1	154.7	1	1 1/2	25	40	1	1	25	25	1	2	25	50	4.97	2.25		
27	27	6.5	165.6	6.6	166.9	1	2 1/2	25	60	1	3 1/2	25	90	1	3 1/2	25	90	5.20	2.36		

Shaft-ready round bore sprockets are shipped with keyway and no setscrew.

* The 3-1/2 in and 90 mm bores for the 27 tooth square bore sprocket and all round bore sprockets above 1-1/2 in (40 mm) are supplied as machined bores. All other bores are supplied with split bore adapters.

KU8500 Thermoplastic Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)												Bore Diameter (Idler)				Approximate Weight		FDA Approval	
			Round						Square						in		mm					
			in		mm		in		mm		in		mm		min	max	min	max				
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg	
10	10	2.5	62.2	2.4	61.5	3/4	1	25	25	1	1	25	25	3/4	1	25	25	0.28	0.13	Yes		
14	14	3.4	86.4	3.4	86.4	1	1 1/4	25	30	1	1 1/2	25	40	1	1 1/4	25	30	0.17	0.08	Yes		
17	17	4.1	104.7	4.2	105.4	1	1 1/2	25	40	1	1 1/2	25	40	1	1 1/2	25	40	0.38	0.17	Yes		
21	21	5.1	129	5.1	130	1	2 1/2	25	65	1	2 1/2	25	65	1	2 1/2	25	65	0.59	0.27	Yes		
24	24	5.8	147.3	5.8	148.3	1	3 3/8	25	85	1	2 3/4	25	70	1	3 1/2	25	65	0.69	0.31	Yes		
25	25	6	153.4	6.1	154.7	1	3 3/4	25	95	1	3	25	75	1	4	25	75	0.75	0.34	Yes		
27	27	6.5	165.6	6.6	166.9	1	3 3/4	25	95	1	3	25	75	1	4	25	75	0.80	0.36	Yes		
28	28	6.8	171.7	6.8	173	1	3 3/4	25	95	1	3	25	75	1	4	25	75	0.85	0.39	Yes		


Shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft. 10 tooth sprocket has a Length thru Bore of 1.38 in (35.1 mm).

KU8500 Thermoplastic "H-Style" Sprocket Information

Number of Teeth	Pitch Diameter	Outside Diameter	Bore Diameter (Shaft-Ready)												Bore Diameter (Idler)				Approximate Weight		FDA Approval	
			Round						Square						in		mm					
			in		mm		in		mm		in		mm		min	max	min	max				
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg	
14	14	3.4	86.4	3.4	86.4	1	1 1/4	25	30	1	1 1/2	25	40	1	1 1/4	25	30	0.17	0.08	Yes		
17	17	4.1	104.7	4.2	105.4	1	1 1/2	25	40	1	2	25	50	1	1 1/2	25	40	0.34	0.15	Yes		
25	25	6	153.4	6.1	154.7	1	3	25	75	1	3	25	80	1	2 1/2	25	65	0.97	0.44	Yes		

Shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

NS8500 Thermoplastic Split Sprocket

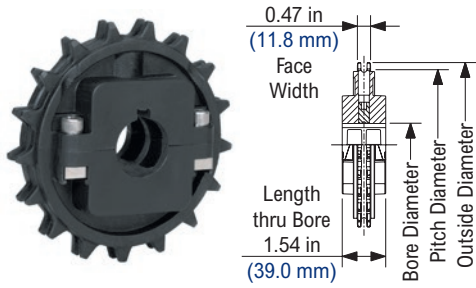

NS8500 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight			
						Round				Square				in		mm					
						in	mm	min	max	min	max	min	max	min	max	min	max			min	max
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
17	17	4.1	104.7	4.2	105.4	1	1 1/2	25	40	1	1 1/2	25	40	1	1 1/2	25	40	0.48	0.22		
21	21	5.1	129	5.1	130	1	2	25	50	1	2	25	50	1	2	25	50	0.58	0.26		
24	24	5.8	147.3	5.8	148.3	1	2 1/2	25	65	1	2 1/2	25	65	1	2 1/2	25	65	0.68	0.31		
25	25	6	153.4	6.1	154.7	1	2 1/2	25	65	1	2 1/2	25	65	1	2 1/2	25	65	0.78	0.35		
27	27	6.5	165.6	6.6	166.9	1	2 5/8	25	65	1	2 1/2	25	65	1	3	25	75	1.18	0.54		

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.

Pusher Attachment (F-Style)

All pusher attachments are molded 6 in (152.4 mm) wide.

The F3 designation represents an F-style pusher attachment at a height of 3 in (76.2 mm) that can be cut down to a minimum height of .25 in (6.35 mm).



If chain is to have pushers and sideguards, pushers must be spaced on even pitch increments.

Please indicate if pusher attachments are required every pitch,

every second pitch, etc. when ordering. Also, indicate if indents are required in the center, on one or both sides of the chain.

For example, "I would like F3 pusher attachments every 8th pitch indented .75 in on both sides of the chain."

Note: Not offered with 8505 Metric chain.

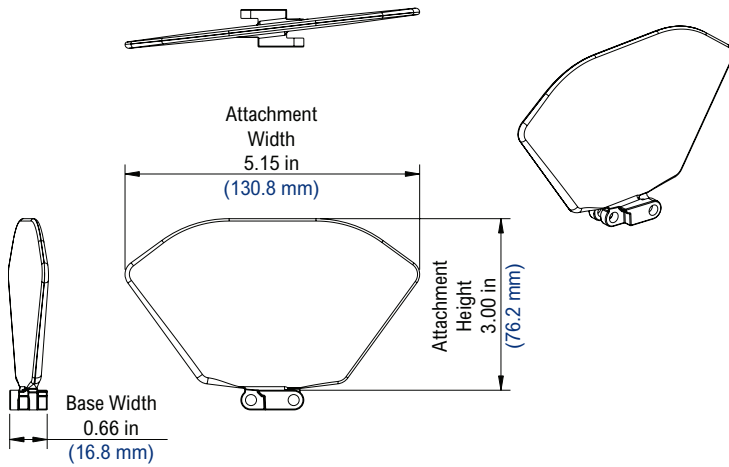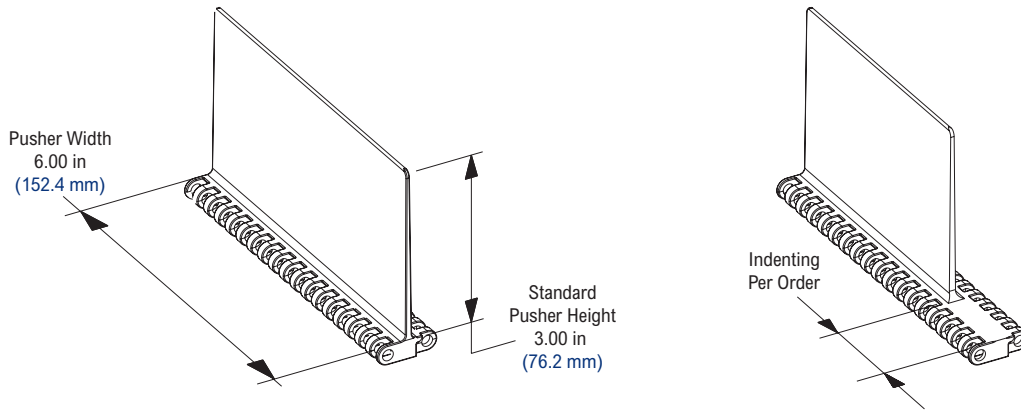

Sideguard Attachment

Please indicate if sideguard attachments are required down one or both sides of the chain when ordering.

Available sideguard indents are either 1.50 in (38.1 mm) or 2.25 in (57.2 mm) only.

Sideguard attachments can be cut down to a minimum height of 1 in (25.4 mm).

If the chain is ordered with both sideguard and pusher attachments, the sideguard attachment will be furnished the **same height** as the pusher attachment.

If chain is to have pushers and sideguards, pushers must be spaced on even pitch increments.

Please contact if any deviations from this standard are required.

Note: Not offered with 8505 Metric chain.

KleanTop™ Belt Width Table (Standard Vs Nonstandard)

Belt Series	Standard (uncut)				Nonstandard (cut)				Accessories				
	Minimum Belt Width		Belt Width Increment		Minimum Belt Width		Belt Width Increment		Pushers	Curved Pushers	Buckets	Sideguards	Hold Down TABs
	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)					
395	6	152.4	2	50.8	-----	-----	-----	-----					
505	10.04	255	3.34	85	6.69	170	0.66	17					
595	6	152.4	6	152.4	4	101.6	0.5	-----					
596	6	152.4	6	152.4	4	101.6	0.5	-----					
1011	6	152.4	-----	-----	2	50.8	1	25.4	■			■	
1015	6	152.4	-----	-----	2	50.8	1	25.4	■			■	
1016	6	152.4	-----	-----	2	50.8	1	25.4	■			■	
1018	6	152.4	-----	-----	2	50.8	1	25.4	■			■	
1095	6	152.4	6	152.4	4	101.6	0.5	12.7	■			■	
1096	6	152.4	6	152.4	4	101.6	0.5	12.7	■			■	
1255	10.04	255	3.35	85	4.69	119	0.67	17					
1255 SuperGrip	10.04	255	3.35	85	8.03	204	0.67	17					RB, RBP, RBT
1275	13.39	340	3.35	85	10.04	255	0.67	17					
1654	6	152.4	2	50.8	6	152.4	0.5	12.7					RB
1655	6	152.4	2	50.8	6	152.4	0.5	12.7					
1655 RT	6	152.4	2	50.8	6	152.4	0.5	12.7					RB, RBT
1675	6	152.4	2	50.8	6	152.4	0.5	12.7					
2011	8	203.2	2	50.8	6	152.4	2/3	16.93	■	■	■	■	
2015	6	152.4	2	50.8	4 2/3	118.53	2/3	16.93	■	■	■	■	
2016	8	203.2	2	50.8	6	152.4	2/3	16.93	■	■	■	■	
5966	18	457.2	6	152.4	4-11/16 in (3 in possible)		Contact Regal Rexnord™ Engineering		■			■	
5998 HD	18	457.2	6	152.4	5	127	0.5	12.7	■			■	
6400	18	457.2	6	152.4	19	482.6	1	25.4					
8506	9	228.6	3	76.2	2-2/3	67.7	1/3	8.5	■			■	

* Actual Belt Width = Effective (or Nominal) Belt Width (Multiples of 3 in (76.2 mm)) + 0.75 in (19.0 mm).

KleanTop™ Sprocket and Shaft Drop Height Adjustment

Sprocket and Wearstrip Location with Non-Raised-Rib Belts:

- The distance from the end of the wearstrip to the sprocket shaft centerline should equal dimension "C" (one belt pitch); otherwise, the wearstrip will interfere with the free articulation of the belt as it enters the sprocket
- The leading edges of the wearstrip should be beveled
- The following formulas and dimensions used in conjunction with the figure will give the proper shaft and wearstrip positioning

Sprocket Location For Conventional Belts:

A = (Pitch Diameter/2) - E

C = One Belt Pitch (see table below)

"C" equals one belt pitch which ensures support under belt at all times.

Example:

For a 5996 belt utilizing a 14T sprocket:

$$A = (\text{Pitch Diameter}/2) - E \\ = (10.111 \text{ in}/2) - 0.360 \text{ in} = 4.696 \text{ in}$$

$$C = 2.25 \text{ in}$$

Metric:

$$A = (\text{Pitch Diameter}/2) - E \\ = (256.82 \text{ mm}/2) - 9.14 \text{ mm} = 119.27 \text{ mm}$$

$$C = 57.1 \text{ mm}$$

Tolerances:

$$A = +.03 \text{ in} / -.00 \text{ in} \text{ (+.8 mm} / \text{-.0 mm)}$$

$$C = +.25 \text{ in} / -.00 \text{ in} \text{ (+6.3 mm} / \text{-.0 mm)}$$

Note: Above values are good only for sprockets mounted between support tracks. For sprockets mounted in line with support tracks:


$$C = \sqrt{\left(\frac{\text{O.D.}}{2}\right)^2 - (A-t)^2} + 0.125$$

$$A = (\text{Pitch Diameter}/2) - E$$

O.D. = Outside Diameter of Sprockets

t = Wearstrip Thickness

- Wearstrips in line with sprockets can also be angled back on the bottom for more clearance

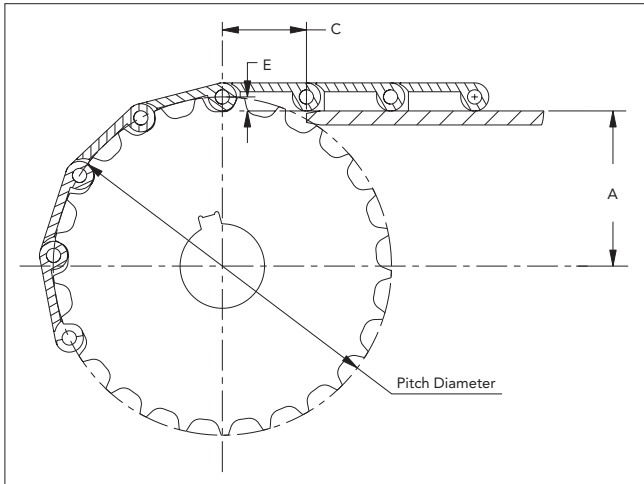

Note: Dimensions apply for both head and tail shafts

Shaft Drop Values for Conventional Chain

Belt Series	Chain Number	C Dimension		E Dimension	
		(in)	(mm)	(in)	(mm)
390	395	0.315	8.0	0.118	3.0
590	595/596	0.50	12.7	0.188	4.78
1010	1011/1015/1016/1018	1.00	25.4	0.200	5.08
1090	1095/1096	1.00	25.4	0.188	4.78
1200	1255/1275	1.25	31.8	0.250	6.35
1600	1654/1655/1655RT/1675	1.00	25.4	0.250	6.35
2010	2011/2015/2016	2.00	50.8	0.320	8.00
5966	5966	1.50	38.1	0.250	6.35
5990	5998HD	2.25	57.2	0.360	9.14
8500	8506	0.75	19.1	0.170	4.32



Rexnord™ Materials

All Rexnord Chain is formed or molded from the highest quality materials available. From low friction to high temperature, we offer the widest selection of materials specifically tailored around the needs of our customers. We are committed to ongoing research and development allowing us to adapt to our customers and their demanding application requirements.

MATERIAL INDEX

Material Prefix	Description	Page	Primary Components	FDA Approved
AS	Anti-Static	353	Electrically conductive acetal (POM)	No
BHT	Blue High Temperature	375	Polypropylene (PP)	Yes
BIR	Black Impact Resistant	354	Impact resistant nylon (PA)	No
BLT	Blue Low Temperature	380	Polyethylene (HDPE)	Yes
BM	Black Material	353	Acetal (POM)	Yes
BRM	Black Material with Red Ends	353	Acetal (POM)	Yes
BRSM	Black Cut Resistant with Red End Links	356	Cut and abrasive wear resistant acetal (POM)	Yes
BSM	Black Cut Resistant	392	Cut and abrasive wear resistant acetal (POM)	Yes
BWR	Black Wear Resistant	357	Wear resistant nylon (PA) composite	No
BWX	Black Abrasion Resistant Polyamide	393	Abrasion resistant nylon (PA)	No
BYM	Black Material with Yellow Ends	355	Acetal (POM)	Yes
BYSM	Black Cut Resistant with Yellow End Links	356	Cut and abrasive wear resistant acetal (POM)	Yes
CR	Extreme Chemical Resistant	358	Fluorinated polymer	Yes
Dry-PT™	Dry PET Low Friction (Lime Green)	359	Advanced performance polymer alloy designed for run dry PET container applications	Yes
DUV	Acetal Ultraviolet Resistant	360	Ultraviolet resistant acetal (POM)	No
EPDM	Ethylene propylene rubber	361	Ethylene propylene rubber	No
ESD	Electrostatic Dissipative	362	Electrically conductive polypropylene (PP)	No
FR	Flame Retardant	363	Flame retardant polyester (PBT)	No
FR-ESD	Flame Retardant Electrostatic Dissipative	364	Flame retardant electrostatic dissipative Nylon (PA)	No
FRPLUS™	Flame Retardant Low Friction	365	High performance flame retardant polymer	No
FR-PA	Flame Retardant Nylon	366	Flame retardant Nylon (PA)	No
FTR	Fryer Temperature Resistant	367	Fryer Temperature Resistant Nylon (PA).	Yes
GTC	Grey Tough Composite	368	High-strength, impact modified composite.	No
GTC	Grey Tough Composite Friction Top	369	High-strength, impact modified composite with high friction pads.	No
HCAS	High Capacity Anti-static	370	High capacity Anti-static acetal (POM)	No
HC-ESD	High Capacity Electrostatic Dissipative	371	High capacity electrostatic dissipative acetal (POM)	No
HP™	High Performance	372	High performance, internally lubricated acetal (POM)	Yes
HP	High Performance Friction Top	373	High performance HP with molded high friction pads	No
HS	Heat Stabilized	374	Heat stabilized nylon (PA)	No
HT	High Temperature	375	Polypropylene (PP)	Yes
HT	High Temperature Friction Top	376	High temperature polypropylene with TPE high friction pads	No
HTB	Black High Temperature	375	Polypropylene (PP)	Yes
HTX™	Extreme High Temperature	377	Leading edge advanced polymer designed specifically for heat shrink tunnels	No
HUV	High Temperature Ultraviolet Resistant	378	Ultraviolet resistant polypropylene (PP)	No
KHT	Khaki High Temperature Friction Top	375	Polypropylene (PP)	Yes
KHT	Khaki High Temperature Friction Top	376	High temperature polypropylene with TPE high friction pads	Yes
LF	Low Friction	379	Low friction acetal (POM)	Yes
LT	Low Temperature	380	Low temperature polyethylene	Yes
LUV	Low Temperature Ultraviolet Resistant	381	Ultraviolet resistant polyethylene (HDPE)	No
MR	Melt Resistant	382	Melt resistant nylon (PA)	No
Neoprene	Neoprene	383	Neoprene	No
P	Chemical Resistant	384	Polyester (PBT)	Yes
PS™	Platinum Series™	385	High-speed, Platinum Series internally lubricated acetal (POM)	Yes
PSX™	Platinum Series X™	386	High-speed, Platinum Series internally lubricated acetal (POM)	Yes
RHT	Red High Temperature	375	Polypropylene (PP)	Yes
RSM	Red Cut Resistant	392	Cut and abrasive wear resistant acetal (POM)	Yes
S	Carbon Steel	387	Carbon steel	No
SMB	Blue Cut Resistant	392	Cut and abrasive wear resistant acetal (POM)	Yes
SRMB	Blue Cut Resistant with Red End Links	356	Cut and abrasive wear resistant acetal (POM)	Yes
SSA	Stainless Steel Austenitic	388	Austenitic stainless steel	Yes
SSB	Stainless Steel Low Magnetic	389	Low ferromagnetic austenitic stainless steel	Yes
SSC	Stainless Steel Ferritic	390	Chrome Nickel Ferritic Stainless Steel	Yes
SYMB	Blue Cut Resistant with Yellow End Links	356	Cut and abrasive wear resistant acetal (POM)	Yes
USP	Ultra Stabilized Polypropylene	391	Polypropylene (PP) and Chemical Stabilizers	Yes
WHP	White High Performance	372	High performance, internally lubricated acetal (POM)	Yes
WHT	White High Temperature Friction Top	375	Polypropylene (PP)	Yes
WHT	White High Temperature Friction Top	376	High temperature polypropylene with TPE high friction pads	Yes
WLT	White Low Temperature	380	Polyethylene (HDPE)	Yes
WSM	White Cut Resistant	392	Cut and abrasive wear resistant acetal (POM)	Yes
WX	Green Abrasion Resistant Polyamide	393	Abrasion Resistant Polyamide (PA) Composite	No
XLA	Grey Internally Lubricated Acetal	394	Internally lubricated polyacetal (POM)	Yes
XLG	Green Low Friction Acetal	395	Internally lubricated polyacetal (POM)	Yes
YSM	Yellow Cut Resistant	392	Cut and abrasive wear resistant acetal (POM)	Yes



Brief Description

Formulated to reduce or eliminate nuisance static buildup that can occur while conveying products or during product accumulation. Used to dissipate nuisance sparks for Class II type static environments only. Please contact Application Engineering at 262.376.4800 for specific uses for this material.

Primary Components

Electrically conductive acetal (POM)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
AS	Anti-Static (Black)	0	180	NR	-18	82	NR	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	NR	NR	NR	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR	NR	NR	NR
Oil	NR	NR	NR	NR	NR	NR	NR

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.30	0.25	0.25	0.20
Water	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR
Oil	NR	0.10	0.10	0.10

Regulatory Information

Rexnord, TableTop and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

- Types of Static Environments:
Class I: Static spark causes explosion. Use stainless steel chain materials.
Class II: Static spark is a nuisance charge causing slight shock, possible circuit damage or electrical malfunction.
- Electrical Properties: Surface resistivity = $10^3 \Omega/\text{sq}$.
- Wearstrip Recommendations: Wearstrips must be grounded to the conveyor frame and must be electrically conductive to be effective. The conveyor frame should also be externally grounded.
- Strength Considerations:
 - Rexnord™ TableTop™ & MatTop™ Chains molded from anti-static material must be derated 40% from their acetal counterparts.
 - Pressure-Velocity (PV) Limits: PV Limit of Rexnord TableTop Chains molded from anti-static material must be derated 40% from acetal materials. PV Limits relate to the speed and tension exerted as the chain travels around the corners.
- Depending on application requirements, the entire conveyor chain can be comprised of anti-static material or sections of antistatic material can be interspersed at various intervals.
- AS friction factor should be used when interspersing AS links into any other material.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

BIR



Brief Description

BIR is a proprietary advanced engineered plastic alloy specifically formulated to take constant impact in both dry and wet conditions. It has excellent impact resistance as well as good chemical resistance.

Primary Components

Impact resistant plastic alloy

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
BIR	Black Impact Resistant	-40	220	212	-40	104	100	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	0.17	0.18	0.15	NR	0.20	0.20	0.22
Soap and Water	0.12	0.14	0.10	NR	0.15	0.15	0.15
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.28	0.20	0.20	0.25
Water	0.25	0.23	0.23	0.22
Soap and Water	0.18	0.18	0.18	0.18
Oil	0.10	0.10	0.10	0.10

1. Strength Considerations:

- Pressure-Velocity (PV) Limits: PV Limit of Rexnord TableTop Chains molded from impact resistant material must be derated 20% from acetal materials. PV Limits relate to the speed and tension exerted as the chain travels around the corners.

2. It is important to lubricate side-flexing chains in the corners to reduce noise levels at speeds in excess of 100FPM.

Regulatory Information

Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

BM



BYM



BRM



Brief Description

A general-purpose conveyor chain material which has low friction, high-strength, excellent wear life, superior fatigue resistance and is chemical resistant in a wide range of environments.

Primary Components

Acetal (POM)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet	dry	wet			
BM	Black Material	-40	180	150	-40	82	66	Yes
BRM	Black Material with Red Ends	-40	180	150	-40	82	66	Yes
BYM	Black Material with Yellow Ends	-40	180	150	-40	82	66	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	0.17	0.20	0.15	NR	0.20	0.20	0.22
Soap and Water	0.12	0.14	0.10	NR	0.15	0.15	0.15
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.30	0.25	0.25	0.20
Water	0.23	0.21	0.21	0.18
Soap and Water	0.15	0.15	0.15	0.15
Oil	0.10	0.10	0.10	0.10

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord is a trademark of Regal Rexnord Corporation.

All rights reserved.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.


BRSM



BYSM



SRMB



SYMB



Brief Description

Automotive handling applications require chains to be assembled with different color end links to provide contrast. These are the same chain modules molded in wear and cut resistant materials (BSM, SMB, RSM and YSM) only assembled in the same chain. Can be used in both dry and wet conditions and in applications where abrasive wear due to products or environment is a concern. Has good impact resistance and is as strong as standard acetal materials.

Primary Components

Cut and abrasive wear resistant acetal (POM)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet	dry	wet			
BRSM	Black Cut Resistant with Red End Links	-40	180	150	-40	82	66	No
BYSM	Black Cut Resistant with Yellow End Links	-40	180	150	-40	82	66	No
SRMB	Blue Cut Resistant with Red End Links	-40	180	150	-40	82	66	Yes
SYMB	Blue Cut Resistant with Yellow End Links	-40	180	150	-40	82	66	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	NR	NR	NR	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR	NR	NR	NR
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.30	0.25	0.25	0.20
Water	0.23	0.21	0.21	0.18
Soap and Water	0.15	0.15	0.15	0.15
Oil	0.10	0.10	0.10	0.10

1. Not available for Rexnord TableTop and Multiflex chains.

Regulatory Information

Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.



Brief Description

Formulated to be used in applications where chain is subjected to very abrasive product surfaces. Used to convey irregularly shaped products such as castings and machined steel parts. May extend chain wear life up to five times compared to acetal materials.

Primary Components

Wear resistant nylon (PA)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
BWR	Black Wear Resistant	-40	180	NR	-40	82	NR	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	NR	NR	NR	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR	NR	NR	NR
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.28	0.22	0.22	0.20
Water	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR
Oil	0.10	0.10	0.10	0.10

1. Strength Considerations:

- Pressure-Velocity (PV) Limits: PV Limit of Rexnord™ TableTop™ Chains molded from impact resistant material must be derated 20% from acetal materials. PV Limits relate to the speed and tension exerted as the chain travels around the corners.

2. It is important to lubricate side-flexing chains in the corners to reduce noise levels at speeds in excess of 100FPM; water lubrication is unacceptable because it will cause wear resistant material to swell and lose strength.

3. Not intended for wet applications due to expansion


Regulatory Information

Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

CR

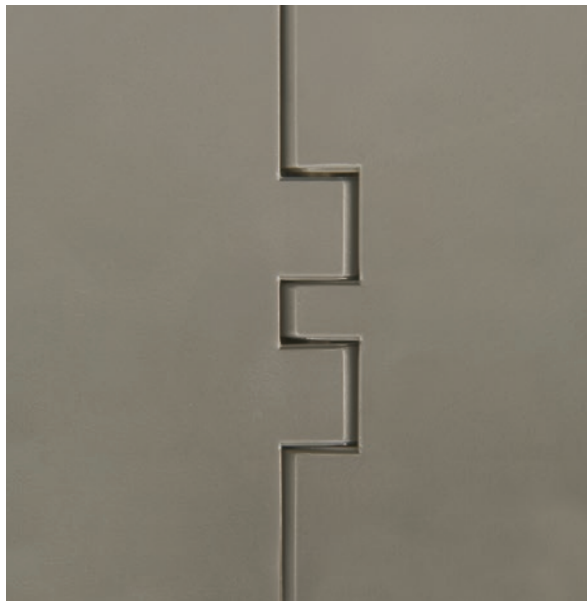

Brief Description

Able to withstand nearly any harsh chemical environment, including applications where strong oxidizing agents, acids and bases such as sodium hydroxide, sulfuric acid, hydrochloric acid, hydrofluoric acid and iodine are present. Please contact Regal Rexnord at (262) 376-4800 for specific uses for this material.

Primary Components

Fluorinated polymer

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
CR	Extreme Chemical Resistant (Grey)	40	240	212	4	116	100	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	0.17	0.18	0.15	NR	0.20	0.20	0.22
Soap and Water	0.12	0.14	0.10	NR	0.15	0.15	0.15
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.30	0.25	0.25	0.22
Water	0.23	0.21	0.21	0.20
Soap and Water	0.15	0.15	0.15	0.15
Oil	0.10	0.10	0.10	0.10

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, TableTop and MatTop are trademarks of Regal Rexnord Corporation.


All rights reserved.

1. Strength Considerations:

- Rexnord TableTop Chains molded from extreme chemical resistant material (with stainless steel pins) must be derated 20% from their acetal counterparts (with stainless steel pins).
- Rexnord TableTop Chains molded from extreme chemical resistant material (with plastic pins) must be derated 40% from their acetal counterparts (with stainless steel pins).
- Rexnord MatTop Chains molded from extreme chemical resistant material must be derated 20% from their acetal counterparts.
- Pressure-Velocity (PV) Limits: PV Limit of Rexnord TableTop Chains molded from extreme chemical resistant material must be derated 20% from acetal materials. PV Limits relate to the speed and tension exerted as the chain travels around the corners.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

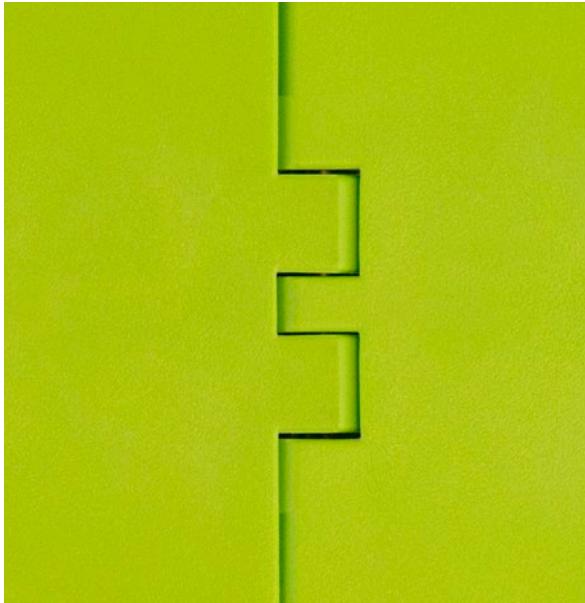

Brief Description

Dry-PT material is an advanced high performance polymer alloy specifically designed for the lowest constant coefficient of friction possible between the chain and PET containers. The material was designed to eliminate the need for lubrication in high-speed applications without a reduction in strength and wear resistance. The lime-green color is a visual indicator as to when the chain will need to be cleaned.

Primary Components

Advanced performance polymer alloy designed specifically for run-dry PET container applications.

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet	min	dry	wet		
Dry-PT	Dry PET Low Friction (Lime Green)	-40	180	150	-40	82	66	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	NR	NR	NR	NR	NR	0.14	NR
Water	NR	NR	NR	NR	NR	0.13	NR
Soap and Water	NR	NR	NR	NR	NR	0.12	NR
Oil	---	---	---	NR	---	---	---

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.18	0.18	0.17	0.12
Water	0.15	0.13	0.13	0.11
Soap and Water	0.12	0.11	0.11	0.11
Oil	---	---	---	---

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and Dry-PT are trademarks of Regal Rexnord Corporation.

All rights reserved.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

DUV



Brief Description

Formulated to reduce or eliminate material degradation in applications where ultraviolet radiation exposure is a concern. Retains its mechanical integrity when exposed to direct sunlight (outdoor applications) as well as in applications that use ultraviolet radiation to run a process. Has the same strength and wear properties as plain acetal material.

Primary Components

Ultraviolet resistant acetal (POM)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
DUV	Acetal Ultraviolet Resistant (Black)	0	180	150	-18	82	66	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	0.17	0.18	0.15	NR	0.20	0.20	0.22
Soap and Water	0.12	0.14	0.10	NR	0.15	0.15	0.15
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.30	0.25	0.25	0.20
Water	0.23	0.21	0.21	0.18
Soap and Water	0.15	0.15	0.15	0.15
Oil	0.10	0.10	0.10	0.10

Regulatory Information

Rexnord is a trademark of Regal Rexnord Corporation. All rights reserved.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

EPDM (Black)



EPDM (White)



Brief Description

EPDM is used as a gripper material that has outstanding resistance to oxygen and ozone. It also has good resistance to the very hot water used in many SideGrip rinser applications. It is available in several different durometers (or hardness) for different applications. It is available in several different durometers (or hardness) for different applications.

Primary Components

Ethylene propylene rubber

General Information

Prefix	Material	Temperature						FDA Approval				
		Fahrenheit			Celsius							
		min	max		min	max						
-	EPDM	-58	dry	wet	302	302	-50	dry	wet	150	150	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	NR	NR	NR	NR	NR	NR	NR
Water	NR	NR	NR	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR	NR	NR	NR
Oil	NR	NR	NR	NR	NR	NR	NR

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	NR	NR	NR	NR
Water	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR
Oil	NR	NR	NR	NR

1. This material is not available in TableTop™, MatTop™, or Multiflex chains. It is only available as a gripper material for SideGrip chains.
2. The temperature range for standard 50 shore EPDM grippers. Other hardnesses will affect the operating temperature.
3. Color may be black or white depending on chain series. See specific chain series in Product Catalog for color.

Regulatory Information

Rexnord, TableTop and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

ESD



Brief Description

A proprietary compound formulated for conveying sensitive products, such as electronics and computer chips, where controlling static charge and static decay are of critical importance. Meets the ESD Association Draft Standard DS 4.1 - 1995. Used to dissipate static charges that may occur while conveying products or during product accumulation. Also used to dissipate nuisance sparks for Class II type static environments only. Please contact Application Engineering at 262.376.4800 for specific uses for this material.

Primary Components

Electrically conductive polypropylene (PP)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet	dry	wet			
ESD	Electrostatic Dissipative (Black)	0	180	180	-18	82	82	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.28	0.29	0.22	0.35	0.30	0.30	0.35
Water	0.19	0.21	0.17	NR	0.25	0.25	0.25
Soap and Water	0.16	0.12	0.10	NR	0.20	0.20	0.20
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.35	0.30	0.30	0.26
Water	0.25	0.25	0.25	0.22
Soap and Water	0.20	0.20	0.20	0.19
Oil	0.10	0.10	0.10	0.10


Regulatory Information

Rexnord, TableTop and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

- Types of Static Environments:
 - Class I: Static spark causes explosion. Use stainless steel chain materials.
 - Class II: Static spark is a nuisance charge causing slight shock, possible circuit damage or electrical malfunction.
- Electrical Properties: Surface resistivity = 10⁶ to 10⁹ Ω/sq.
- Wearstrip Recommendations: Wearstrips must be grounded to the conveyor frame and must be electrically conductive to be effective. The conveyor frame should also be externally grounded.
- Strength Considerations:
 - Rexnord TableTop & MatTop Chains molded from ESD material must be derated 40% from their acetal counterparts.
 - Pressure-Velocity (PV) Limits: PV Limit of Rexnord TableTop Chains molded from ESD material must be derated 40% from acetal materials. PV Limits relate to the speed and tension exerted as the chain travels around the corners.
- Depending on application requirements, the entire conveyor chain can be comprised of anti-static material or sections of antistatic material can be interspersed at various intervals.
- Electrostatic dissipative material is only available in Rexnord MatTop and plastic.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

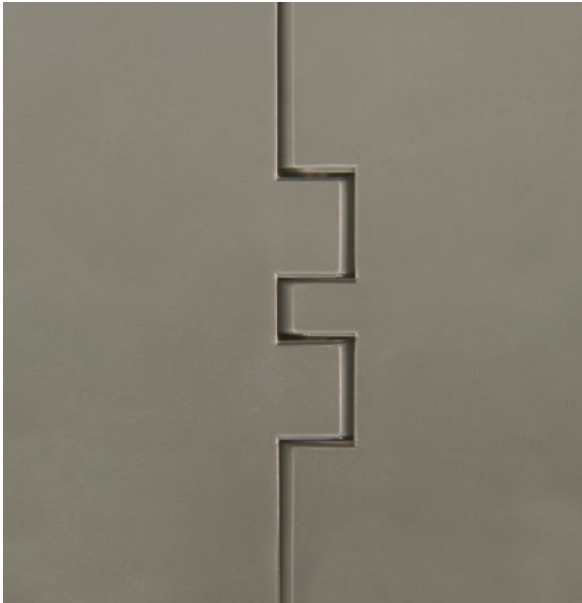

Brief Description

Formulated to eliminate the possibility of sustained combustion should the chain be accidentally ignited. Will self extinguish per the UL Standard 94 V-0 standard when the source of ignition or flame is removed.

Primary Components

Flame retardant polyester (PBT)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
FR	Flame Retardant (Gray)	0	180	140	-18	82	60	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	0.17	0.18	0.15	NR	0.20	0.20	0.22
Soap and Water	0.12	0.14	0.10	NR	0.15	0.15	0.15
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.30	0.25	0.25	0.22
Water	0.23	0.21	0.21	0.20
Soap and Water	0.15	0.15	0.15	0.15
Oil	0.10	0.10	0.10	0.10

Regulatory Information

Rexnord, TableTop and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

1. Strength Considerations:

- Rexnord™ TableTop™ Chains molded from flame retardant material must be derated 40% from their acetal counterparts.
- Rexnord MatTop™ Chains molded from flame retardant material must be derated 15% from their acetal counterparts.
- Pressure-Velocity (PV) Limits: PV Limit of Rexnord TableTop Chains molded from flame retardant material must be derated 20% from acetal materials. PV Limits relate to the speed and tension exerted as the chain travels around the corners.

2. Flame retardant material is not recommended for high temperature applications.

FR-ESD



Brief Description

Proprietary material that combines good wear resistance and strength with electrostatic dissipative and flame retardant properties. It is formulated for conveying heavy, sensitive products that contain electronics or computer chips, where controlling static charge and static decay are of critical importance. Meets the ESD Association Draft Standard SD 4.1 - 1995. Used to dissipate static charges that can occur while conveying products or during product accumulation. Also used to dissipate nuisance sparks for class II type static environments only. Meets the DIN4102-1 B1 flame retardant criteria for construction materials. Please contact Application Engineering at 262.376.4800 for specific uses for this material.

Primary Components

Flame Retardant electrostatic dissipative nylon (PA)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
FR-ESD	Flame Retardant Electrostatic Dissipative (Black)	0	180	NR	-18	82	NR	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	NR	NR	NR	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR	NR	NR	NR
Oil	NR	NR	NR	NR	NR	NR	NR


Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.30	0.25	0.25	0.22
Water	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR
Oil	NR	0.10	0.10	0.10

Regulatory Information

Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

- Types of Static Environments:
Class I: Static spark causes explosion. Use stainless steel materials.
Class II: Static spark is a nuisance charge causing slight shock, possible circuit damage or electrical malfunction.
- Electrical properties: Surface resistivity = 10⁵ to 10⁹ Ω/sq.
- FR-ESD is PTFE and is silicone free.
- Wearstrip Recommendations:
Wearstrips must be grounded to the conveyor frame and must be electrical conductive to be effective. The conveyor frame should also be externally grounded.
- Strength considerations:
Rexnord™ MatTop™ molded from FR-ESD material must be derated 40% from their acetal (BSM) counterparts.
- Actual dimensions of FR-ESD MatTop chains will differ +1.5% to +1.8% from nominal dimensions.

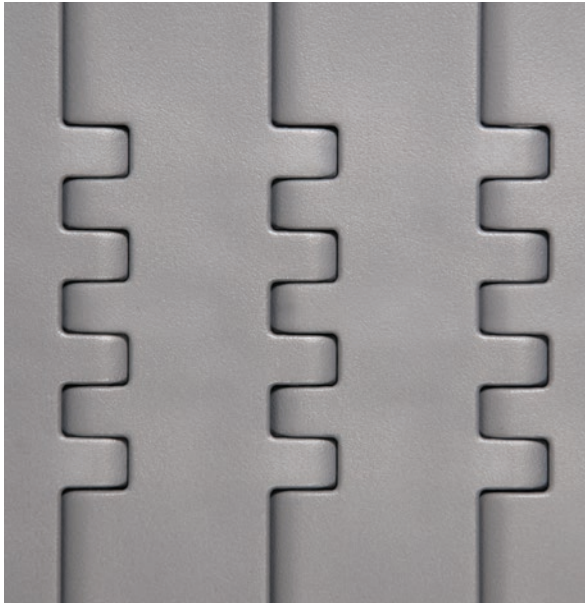

Brief Description

FRPLUS is a high performance flame retardant polymer formulated to eliminate the possibility of sustained combustion should the chain be accidentally ignited. The material will self extinguish per the UL Standard 91 V-0 standard when the source of ignition or flame is removed. FRPLUS combines good wear resistance with low coefficient of friction values, primary with steel and aluminum containers.

Primary Components

High performance flame retardant polymer

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
FRPLUS	Flame Retardant Low Friction (metallic silver)	0	180	140	-18	82	60	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.14	0.18	0.14	0.30	0.20	0.18	0.25
Water	0.13	0.16	0.12	NR	0.18	0.16	0.20
Soap and Water	0.12	0.14	0.10	NR	0.15	0.15	0.15
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.25	0.18	0.18	0.18
Water	0.20	0.16	0.16	0.16
Soap and Water	0.15	0.14	0.14	0.14
Oil	0.10	0.10	0.10	0.10

1. Only available in selected Rexnord MatTop chains.

Regulatory Information

Rexnord, MatTop and FRPLUS are trademarks of Regal Rexnord Corporation. All rights reserved.

FR-PA

**Brief Description**

Toughened proprietary polymer alloy formulated for high-load applications where flame retardant properties are required. The material has excellent wear and abrasive properties when exposed to glass, sand, and metallic powder. Meets the UL Standard 94 V-O and DIN4102-1 B1 flame retardant standards.

Primary Components

Flame retardant nylon (PA)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
FR-PA	Flame Retardant Nylon (Black)	-40	220	NR	-40	104	NR	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	NR	NR	NR	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR	NR	NR	NR
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.60	0.25	0.25	0.22
Water	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR
Oil	NR	NR	NR	NR

1. Only available in selected Rexnord™ MatTop™ chains.

Regulatory Information

Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.



Brief Description

Formulated to be used in oven / fryer discharge conveyor applications where the chain is exposed to high temperatures. Can resist contact temperatures up to 350° F (177° C). Used to convey high temperature products such as chips.

Primary Components

Fryer temperature resistant nylon (PA)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
FTR	Fryer Temperature Resistant (Black)	-80	220	NR	-62	104	NR	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	NR	NR	NR	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR	NR	NR	NR
Oil	NR	NR	NR	NR	NR	NR	NR

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.30	0.28	0.28	0.25
Water	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR
Oil	0.10	0.10	0.10	0.10

1. Only available in 8505/8506 MatTop chain series.
2. All applications must come through Application Engineering.


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, TableTop and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

GTC

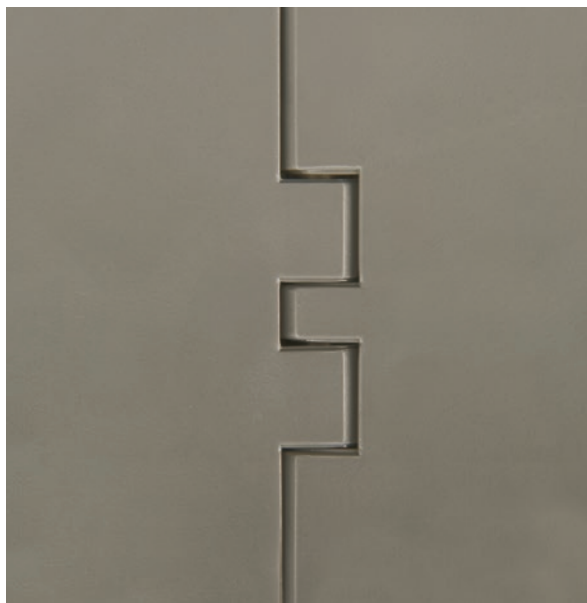**Brief Description**

GTC is a high-strength, toughened composite material specifically formulated to take constant impact. Its combination of high-strength and low stretch make it an excellent material for high-speed case incline (or decline) conveyors. Has excellent impact resistance as well as good chemical resistance.

Primary Components

High-strength, impact modified composite

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
GTC	Grey Tough Composite	0	180	140	-18	82	60	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	0.17	0.18	0.15	NR	0.21	0.21	0.23
Soap and Water	0.12	0.14	0.10	NR	0.15	0.15	0.15
Oil	---	---	---	NR	0.10	0.10	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.30	0.25	0.25	0.22
Water	0.23	0.21	0.21	0.20
Soap and Water	0.15	0.15	0.15	0.15
Oil	0.10	0.10	0.10	0.10


Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Patent Pending.

Rexnord is a trademark of Regal Rexnord Corporation.

All rights reserved.

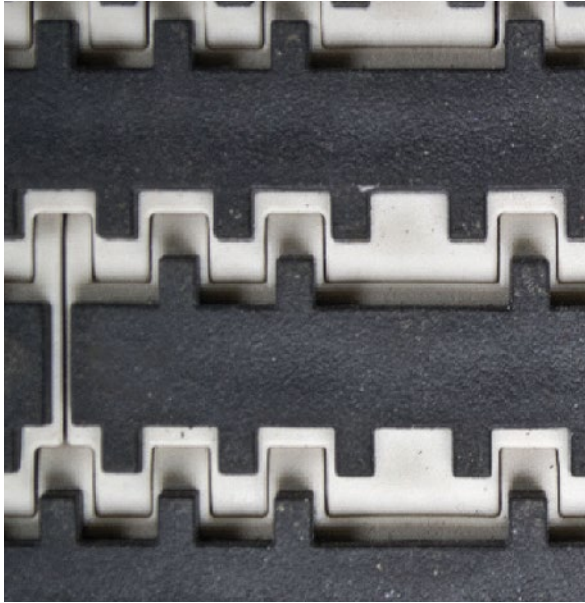

Brief Description

GTC is a high-strength, toughened composite material specifically formulated to take constant impact. Its combination of high-strength and low stretch along with high friction surface make it excellent for high-speed case incline (or decline) conveyors. Has excellent impact resistance as well as good chemical resistance.

Primary Components

High-strength, impact modified composite with high friction pads

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
GTC	Grey Tough Composite Friction Top	0	180	140	-18	82	60	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	NR	NR	NR	NR	NR	NR	NR
Water	NR	NR	NR	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR	NR	NR	NR
Oil	NR	NR	NR	0.87***	0.85***	NR	NR

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.30	0.25	0.25	0.22
Water	0.23	0.21	0.21	0.20
Soap and Water	0.15	0.15	0.15	0.15
Oil	0.10	0.10	0.10	0.10

1. Not available for Rexnord TableTop and Multiflex chains.

Regulatory Information

***It is not recommended to accumulate on RubberTop products; however, these values can be utilized when determining brake belt or "hold back" calculations.

Patent Pending.

Rexnord, TableTop and RubberTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

HCAS

**Brief Description**

Proprietary acetal material that combines good wear resistance, strength, and low friction characteristics with anti-static properties. It is formulated to reduce or eliminate nuisance static buildup that can occur while conveying heavy products or during product accumulation. Also used to dissipate nuisance sparks for class II type static environments only. Please contact Application Engineering at 262.376.4800 for specific uses for this material.

Primary Components

High capacity anti-static acetal (POM)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
HCAS	High Capacity Anti-static (Black)	0	180	150	-18	82	66	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	NR	NR	NR	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR	NR	NR	NR
Oil	NR	NR	NR	NR	NR	NR	NR

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.30	0.25	0.25	0.20
Water	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR
Oil	NR	0.10	0.10	0.10

Regulatory Information

Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

- Types of Static Environments:
Class I: Static spark causes explosion. Use stainless steel materials.
Class II: Static spark is a nuisance charge causing slight shock, possible circuit damage or electrical malfunction
- Electrical properties: Surface resistivity = 10^{11} to 10^{13} Ω /sq.
- HCAS is PTFE and is silicone free.
- Wearstrip Recommendations:
Wearstrips must be grounded to the conveyor frame and must be electrical conductive to be effective. The conveyor frame should also be externally grounded.
- Strength considerations:
Rexnord™ MatTop™ chains molded from HCAS material must be derated 15% from their acetal (BSM) counterparts.
- Depending on application requirements, the entire conveyor chain can be compromised of anti-static material or sections of anti-static material can be interspersed at various intervals.
- HCAS friction factor should be used when interspersing HCAS links into any other MatTop material.



Brief Description

Proprietary acetal material that combines good wear resistance, strength, and low friction characteristics with electrostatic dissipative properties. It is formulated for conveying heavy, sensitive products that contain electronics or computer chips, where controlling static charge and static decay are of critical importance. Meets the ESD Association Draft Standard SD 4.1 - 1995. Used to dissipate static charges that can occur while conveying products or during product accumulation. Also used to dissipate nuisance sparks for class II type static environments only. Please contact Application Engineering at 262.376.4800 for specific uses for this material.

Primary Components

High capacity electrostatic dissipative acetal (POM)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
HC-ESD	High Capacity Electrostatic Dissipative (Black)	0	180	150	-18	82	66	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	NR	NR	NR	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR	NR	NR	NR
Oil	NR	NR	NR	NR	NR	NR	NR

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.30	0.25	0.25	0.2
Water	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR
Oil	NR	0.10	0.10	0.10

Regulatory Information


Rexnord and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

- Types of Static Environments:
Class I: Static spark causes explosion. Use stainless steel materials.
Class II: Static spark is a nuisance charge causing slight shock, possible circuit damage or electrical malfunction
- Electrical properties: Surface resistivity = 10⁵ to 10⁹ Ω/sq.
- HC-ESD is PTFE and is silicone free.
- Wearstrip Recommendations:
Wearstrips must be grounded to the conveyor frame and must be electrical conductive to be effective. The conveyor frame should be also externally grounded.
- Strength considerations:
Rexnord™ MatTop™ molded from HC-ESD material must be derated 10% from their acetal (BSM) counterparts.
- Depending on application requirements, the entire conveyor chain can be compromised of HC-ESD material or sections HC-ESD material can be interspersed at various intervals.
- HC-ESD friction factor should be used when interspersing HC-ESD links into any other chain material.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

HP™

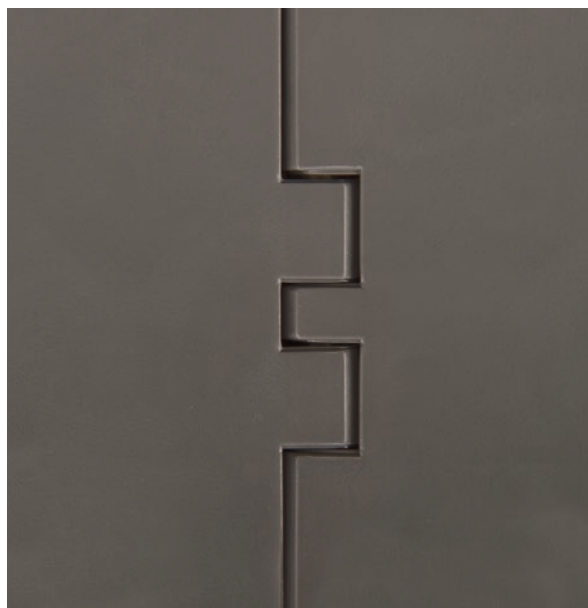

WHP



Brief Description

Patented Rexnord High Performance Material has the lowest coefficient of friction of any chain or belt material. Extensive testing has proven that new high performance materials can reduce wear up to 40% over plain acetal and 25% over low friction acetal. Ideal for dry running applications and will permit greater operating speeds for aggressive applications in the beverage and container industry. Used to lower product backline pressure and to minimize conveyor pulsation resulting in reduced chain flight wear and reduced chain elongation.

Primary Components

High performance, internally lubricated acetal (POM)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet	min	dry	wet		
HP	High Performance (Brown)	-40	180	150	-40	82	66	Yes
WHP	White High Performance	-40	180	150	-40	82	66	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.18	0.20	0.12	0.23	0.18	0.18	0.18
Water	0.14	0.18	0.11	NR	0.16	0.16	0.16
Soap and Water	0.12	0.14	0.10	NR	0.14	0.14	0.13
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips


Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.22	0.18	0.18	0.14
Water	0.20	0.16	0.16	0.12
Soap and Water	0.15	0.14	0.14	0.11
Oil	0.10	0.10	0.10	0.10

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.
 U.S. Patent: 4436200, 5176247
 Rexnord, TableTop, Platinum Series X, HP, LPC, 279 LPC and PSX are trademarks of Regal Rexnord Corporation.
 All rights reserved.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

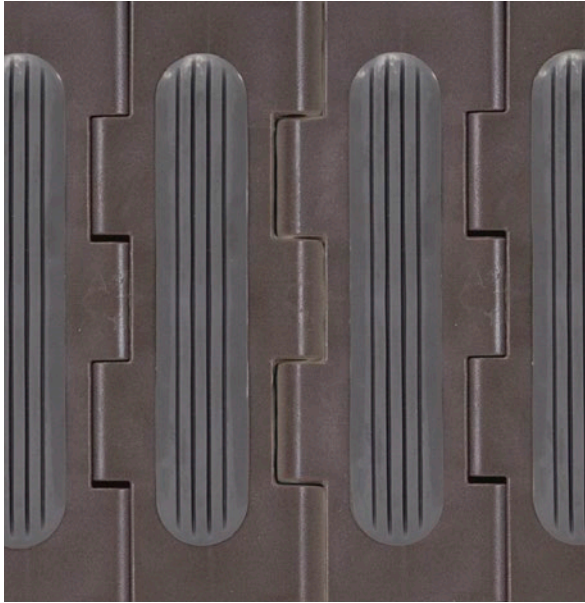

Brief Description

HP RubberTop and SuperGrip are specifically formulated for general high friction applications. The high performance HP base links in conjunction with molded high friction pads make it ideal for high-speed incline or decline conveyors.

Primary Components

High performance HP with molded high friction pads

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
HP	High Performance Friction Top	-40	180	150	-40	82	66	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	NR	NR	NR	NR	NR	NR	NR
Water	NR	NR	NR	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR	NR	NR	NR
Oil	NR	NR	NR	0.87***	0.85***	NR	NR

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.22	0.18	0.18	0.14
Water	0.20	0.16	0.16	0.12
Soap and Water	0.15	0.14	0.14	0.11
Oil	0.10	0.10	0.10	0.10

Regulatory Information

***It is not recommended to accumulate on RubberTop products; however, these values can be utilized when determining brake belt or "hold back" calculations.


Rexnord and RubberTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

HS

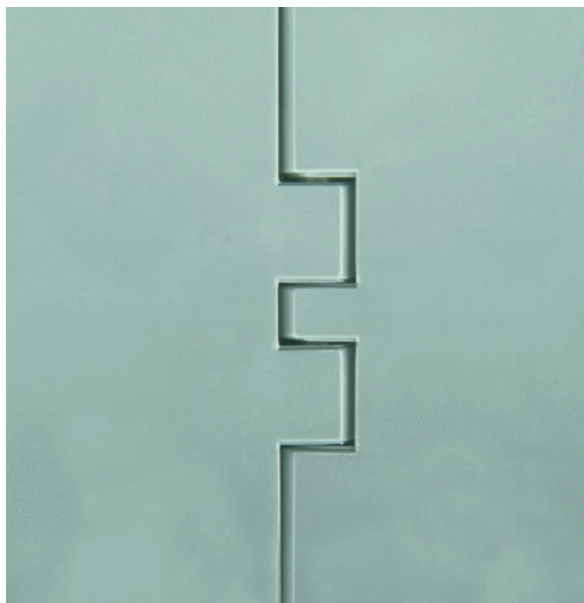**Brief Description**

Formulated to retain strength and resist degradation and swelling in hot, wet environments. Can be used in demanding high temperature applications such as bottle rinsers, sterilizers, warmers and pasteurizers.

Primary Components

Heat stabilized nylon (PA)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
HS	Heat Stabilized (Green)	-40	220	212	-40	104	100	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	0.17	0.18	0.15	NR	0.20	0.20	0.22
Soap and Water	0.12	0.14	0.10	NR	0.15	0.15	0.15
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.30	0.28	0.28	0.25
Water	0.25	0.23	0.23	0.22
Soap and Water	0.18	0.18	0.18	0.18
Oil	0.10	0.10	0.10	0.10

1. Strength Considerations

- Pressure-Velocity (PV) Limits: PV Limit of Rexnord™ TableTop™ Chains molded from heat stabilized material must be derated 20% from acetal materials. PV Limits relate to the speed and tension exerted as the chain travels around the corners.

2. Heat stabilized material, unlike other nylon materials, can be used in wet environments without the risk of swelling.

Regulatory Information

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.



All rights reserved.

HT

WHT

RHT

KHT

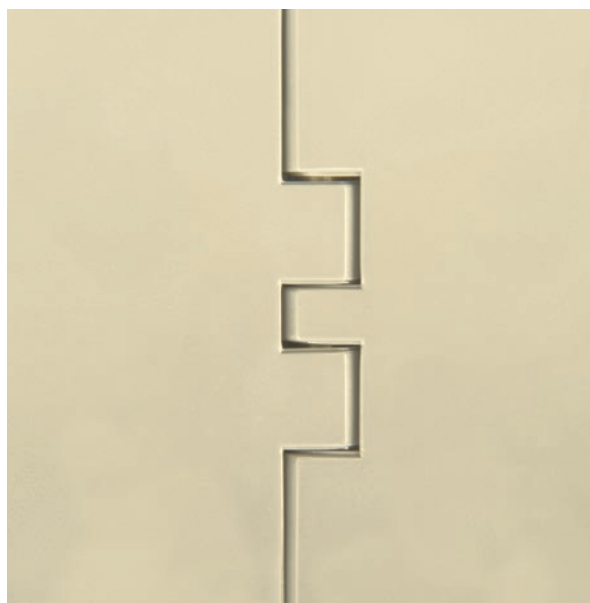

HTB



BHT



Brief Description

Formulated to be used in both high temperature and general applications in both dry and wet conditions. A good general purpose conveyor chain material and in addition has excellent resistance to chemicals including salts, alcohol, bases and many acids.

Primary Components

Polypropylene (PP)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet	min	dry	wet		
HT	High Temperature (Beige)	40	220	212	4	104	100	Yes
WHT	White High Temperature	40	220	212	4	104	100	Yes
RHT	Red High Temperature	40	220	212	4	104	100	Yes
KHT	Khaki High Temperature	40	220	212	4	104	100	Yes
BHT	Blue High Temperature	40	220	212	4	104	100	Yes
HTB	Black High Temperature	40	220	212	4	104	100	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.29	0.29	0.24	0.35	0.32	0.28	0.31
Water	0.19	0.21	0.18	NR	0.24	0.20	0.25
Soap and Water	0.15	0.14	0.10	NR	0.19	0.15	0.17
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.35	0.30	0.30	0.26
Water	0.30	0.25	0.25	0.22
Soap and Water	0.25	0.20	0.20	0.19
Oil	0.10	0.10	0.10	0.10

1. Buoyant in water.
2. Not available for Rexnord™ TableTop™ and Multiflex chains.

Regulatory Information


The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.


NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

HT RubberTop™ / SuperGrip™

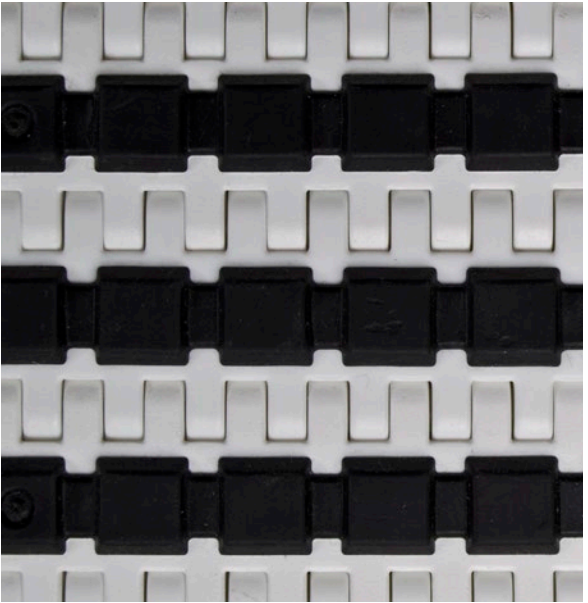

KHT



WHT



Brief Description

HT is specifically formulated for general high friction applications. The polypropylene base links in conjunction with high friction surface make it ideal for incline or decline conveyors

Primary Components

High temperature polypropylene with high friction pads

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
HT	High Temperature Friction Top	40	180	140	4	82	60	Yes
KHT	Khaki High Temperature Friction Top	40	180	140	4	82	60	Yes
WHT	White High Temperature Friction Top	40	180	140	4	82	60	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	NR	NR	NR	NR	NR	NR	NR
Water	NR	NR	NR	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR	NR	NR	NR
Oil	NR	NR	NR	0.87***	0.85***	NR	NR

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.35	0.30	0.30	0.26
Water	0.30	0.25	0.25	0.22
Soap and Water	0.25	0.20	0.20	0.19
Oil	0.10	0.10	0.10	0.10

1. Buoyant in water.
2. Not available for Rexnord™ TableTop™ and Multiflex chains.

Regulatory Information

***It is not recommended to accumulate on RubberTop products; however, these values can be utilized when determining brake belt or "hold back" calculations.
 Rexnord, TableTop and RubberTop are trademarks of Regal Rexnord Corporation.
 All rights reserved.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.



Brief Description

HTX is a leading edge advanced polymer engineered specifically for heat shrink tunnels. The result is a high-strength conveyor chain that provides excellent resistance to continuous temperature cycles. Chains manufactured in HTX also deliver superior wear and abrasion resistance.

Primary Components

Leading edge advanced polymer designed specifically for heat shrink tunnels

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
			dry	wet		dry	wet	
HTX	Extreme High Temperature (charcoal gray)	-40	275	NR	-40	135	NR	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	NR	NR	NR	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR	NR	NR	NR
Oil	---	---	---	NR	---	---	---

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.30	0.25	0.25	0.25
Water	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR
Oil	---	---	---	---

1. Material is designed for surface temperatures up to 300° F
2. Primary application is entering and exiting 500° F heat shrink tunnel ovens

Regulatory Information

Rexnord is a trademark of Regal Rexnord Corporation.
All rights reserved.

HUV

**Brief Description**

Formulated to reduce or eliminate material degradation in applications where ultraviolet radiation exposure is a concern. Retains its mechanical integrity when exposed to direct sunlight (outdoor applications) as well as in applications that use ultraviolet radiation to run a process. Has excellent resistance to chemicals including salts, alcohol, bases and many acids.

Primary Components

Polypropylene (PP)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
			dry	wet		dry	wet	
HUV	High Temperature Ultraviolet Resistant (Black)	40	220	180	4	104	82	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.28	0.29	0.22	0.35	0.30	0.30	0.35
Water	0.19	0.21	0.17	NR	0.25	0.25	0.25
Soap and Water	0.16	0.14	0.10	NR	0.20	0.20	0.20
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.35	0.30	0.30	0.26
Water	0.24	0.16	0.16	0.22
Soap and Water	0.20	0.20	0.20	0.19
Oil	0.10	0.10	0.10	0.10

1. Buoyant in water.
2. Not available for Rexnord™ TableTop™ and Multiflex chains.

Regulatory Information

Rexnord is a trademark of Regal Rexnord Corporation.
All rights reserved.



Brief Description

An excellent conveyor chain material with a low coefficient of friction between a variety of materials. Extensive testing has proven that low friction materials can reduce wear up to 15% over plain acetal. Ideal for dry running applications and will permit greater operating speeds. Used to lower product backline pressure and minimize conveyor pulsation resulting in reduced chain flight wear and reduced chain elongation.

Primary Components

Patented blend of low friction acetal (POM) and lubricants

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
			dry	wet		dry	wet	
LF	Low Friction (Tan)	-40	180	150	-40	82	66	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.20	0.20	0.150	0.30	0.20	0.20	0.25
Water	0.15	0.18	0.13	NR	0.18	0.18	0.20
Soap and Water	0.12	0.14	0.10	NR	0.15	0.15	0.15
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.25	0.20	0.20	0.16
Water	0.20	0.18	0.18	0.14
Soap and Water	0.15	0.15	0.15	0.13
Oil	0.10	0.10	0.10	0.10

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

U.S. Patent: 4436200.


Rexnord is a trademark of Regal Rexnord Corporation.

All rights reserved.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

LT

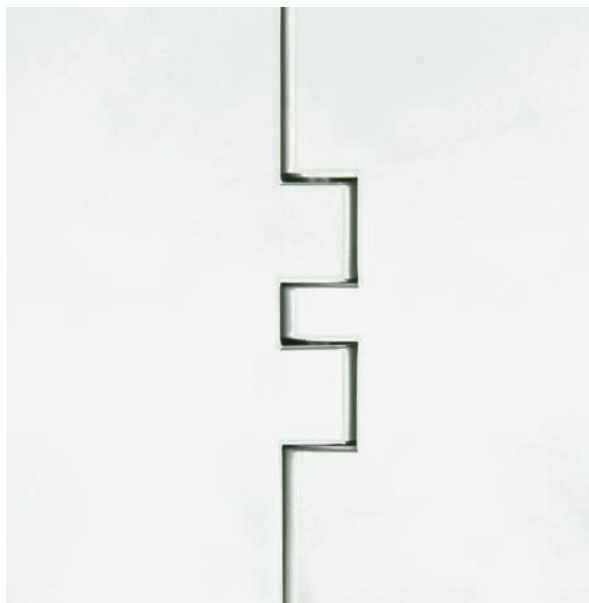

BLT



WLT

**Brief Description**

Formulated to retain toughness, impact strength and ductility in both dry and wet conditions. Retains its properties in temperatures as low as -100° F (-73° C). Has excellent impact resistance, and because of its inherent ductility, is excellent in applications where other materials may chip or fracture. Is also chemical resistant to most bleaches, bases, acids and hydrocarbons.

Primary Components

Polyethylene (HDPE)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
BLT	Blue Low Temperature	-100	80	80	-73	27	27	Yes
LT	Low Temperature (natural)	-100	80	80	-73	27	27	Yes
WLT	White Low Temperature	-100	80	80	-73	27	27	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.22	0.24	0.18	0.30	0.22	0.22	0.28
Water	0.17	0.17	0.14	NR	0.18	0.18	0.22
Soap and Water	0.12	0.14	0.10	NR	0.15	0.15	0.15
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.28	0.23	0.23	0.21
Water	0.22	0.20	0.20	0.19
Soap and Water	0.15	0.15	0.15	0.14
Oil	0.10	0.10	0.10	0.10

1. Buoyant in water.
2. Not available for Rexnord™ TableTop™ and Multiflex chains.

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.



Brief Description

Formulated to reduce or eliminate material degradation in applications where ultraviolet radiation exposure is a concern. Retains its mechanical integrity when exposed to direct sunlight (outdoor applications) as well as in applications that use ultraviolet radiation to run a process. Also retains toughness, impact strength and ductility in both dry and wet conditions and in temperatures as low as -40° F (-40° C). Has excellent impact resistance and because of its inherent ductility, is excellent in applications where other materials may chip or fracture. Chemical resistant to most bleaches, bases, acids and hydrocarbons.

Primary Components

Ultraviolet resistant polyethylene (HDPE)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
LUV	Low Temperature Ultraviolet Resistant (Black)	-100	80	80	-73	27	27	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.22	0.24	0.28	0.30	0.22	0.22	0.28
Water	0.17	0.17	0.14	NR	0.18	0.18	0.22
Soap and Water	0.12	0.14	0.10	NR	0.15	0.15	0.10
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.28	0.23	0.23	0.21
Water	0.22	0.20	0.20	0.19
Soap and Water	0.15	0.15	0.15	0.14
Oil	0.10	0.10	0.10	0.10

1. Buoyant in water.
2. Not available for Rexnord™ TableTop™ and Multiflex chains.

Regulatory Information

Rexnord and TableTop are trademarks of Regal Rexnord Corporation. All rights reserved.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

MR

**Brief Description**

Formulated to be used in applications where conveying hot products may cause chain top surface to melt. Can resist contact temperatures up to 375° F (190° C). Used to convey high temperature products such as hot cans and hot pans in container manufacturing and industrial part processing applications

Primary Components

Melt resistant nylon (PA)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
MR	Melt Resistant (Black)	-80	220	NR	-62	104	NR	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	NR	NR	NR	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR	NR	NR	NR
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.30	0.28	0.28	0.25
Water	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR
Oil	0.10	0.10	0.10	0.10

1. Strength Considerations:

- Pressure-Velocity (PV) Limits: PV Limit of Rexnord™ TableTop™ Chains molded from melt resistant material must be derated 20% from acetal materials. PV Limits relate to the speed and tension exerted as the chain travels around the corners.


2. It is important to lubricate side-flexing chains in the corners to reduce noise levels at speeds in excess of 100 FPM; water lubrication is unacceptable because it will cause melt resistant material to swell and lose strength.

Regulatory Information

Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

Neoprene (Black)

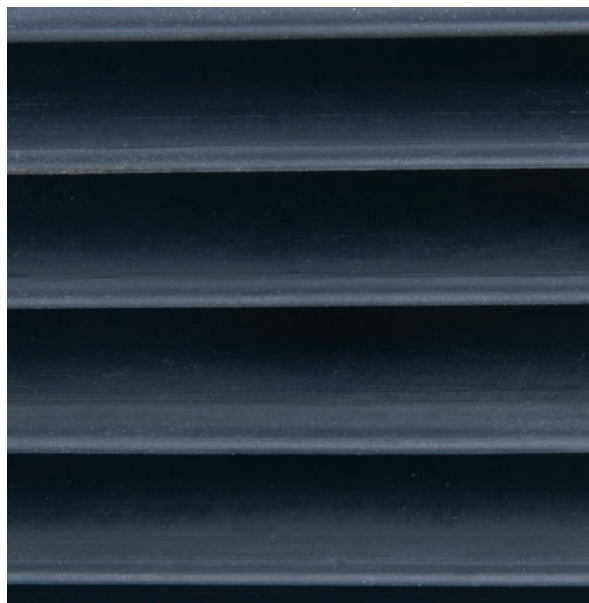

Neoprene (White)



Brief Description

Neoprene is used as a gripper material that has good resistance to gasoline, sunlight, ozone & oxidation. It is available in several different durometers (or hardness) for different applications.

Primary Components

Neoprene

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
-	Neoprene	-40	212	200	-40	100	93	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	NR	NR	NR	NR	NR	NR	NR
Water	NR	NR	NR	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR	NR	NR	NR
Oil	NR	NR	NR	NR	NR	NR	NR

Friction Factors Between Material and Wearstrips


Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	NR	NR	NR	NR
Water	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR
Oil	NR	NR	NR	NR

1. This material is not available in TableTop™, MatTop™, or Multiflex chains. It is only available as a gripper material for SideGrip chains.
2. The temperature range for standard 40 shore Neoprene grippers. Other hardnesses will affect the operating temperature.
3. Color may be black or white depending on chain series. See specific chain series for color.

Regulatory Information

Rexnord, TableTop and MatTop are trademarks of Regal Rexnord Corporation. All rights reserved.

P

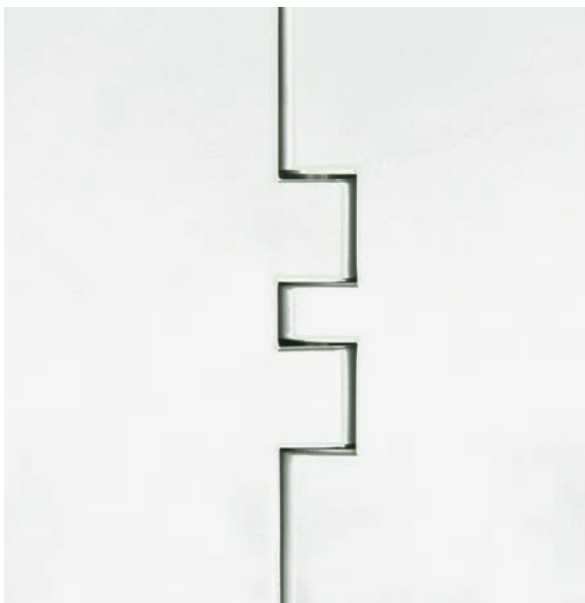**Brief Description**

Formulated to reduce or eliminate material degradation in applications where chemicals such as chlorine and phosphorous are present at moderate concentrations

Primary Components

Polyester (PBT)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
P	Chemical Resistant (White)	0	180	140	-18	82	60	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	0.17	0.18	0.15	NR	0.21	0.21	0.22
Soap and Water	0.12	0.14	0.10	NR	0.15	0.10	0.15
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.30	0.25	0.25	0.22
Water	0.23	0.21	0.21	0.20
Soap and Water	0.15	0.15	0.15	0.15
Oil	0.10	0.10	0.10	0.10

Regulatory Information


The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, TableTop and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

1. Strength Considerations:

- Rexnord™ TableTop™ Chains molded from chemical resistant material (with stainless steel pins) must be derated 20% from their acetal counterparts (with stainless steel pins).
- Rexnord TableTop Chains molded from chemical resistant material (with plastic pins) must be derated 40% from their acetal counterparts (with stainless steel pins).
- Rexnord MatTop Chains molded from chemical resistant material must be derated 20% from their acetal counterparts.
- Pressure-Velocity (PV) Limits: PV Limit of Rexnord TableTop Chains molded from chemical resistant material must be derated 20% from acetal materials. PV Limits relate to the speed and tension exerted as the chain travels around the corners.

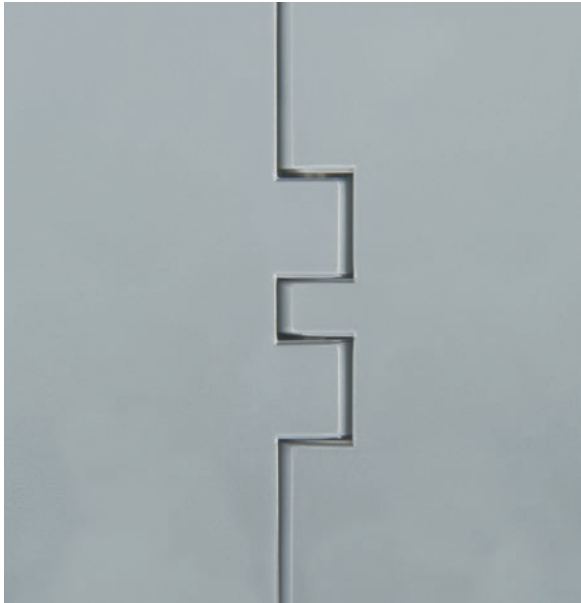

Brief Description

Platinum Series™ PS material is a specially formulated material especially suited for high-speed conveying. PS material can decrease high-speed wear by as much as 5 times. Side-flexing PV limits are also increased which means that a side-flexing chain molded in PS can be run 200% faster than the same chain in plain acetal, or 150% faster than the same chain in HP! “Optimized for PET” means that PET bottles running on PS chains exhibit the lowest friction available. Low coefficients of friction reduce product backline pressures and minimize pulsations.

Primary Components

High-speed Platinum Series internally lubricated acetal (POM)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
PS	Platinum Series (Silver)	-40	180	150	-40	82	66	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.18	0.20	0.12	0.23	0.18	0.16	0.18
Water	0.14	0.18	0.11	NR	0.16	0.15	0.16
Soap and Water	0.12	0.14	0.10	NR	0.14	0.14	0.13
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.22	0.18	0.18	0.12
Water	0.20	0.16	0.16	0.11
Soap and Water	0.15	0.14	0.14	0.11
Oil	0.10	0.10	0.10	0.10

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.


Rexnord, Platinum Series and PS are trademarks of Regal Rexnord Corporation.

All rights reserved.

NR denotes “not recommended”, Dash denotes “combination not tested”

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

PSX™

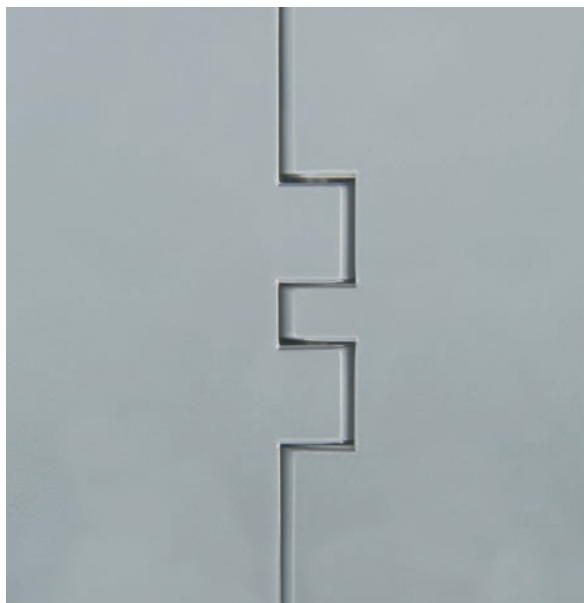

Brief Description

Platinum Series X™ PSX material is an advanced performance polymer alloy engineered specifically for run dry applications. PSX material minimizes the amount of conveyor lubrication needed, and in many cases offers a completely run dry solution.

Primary Components

Advanced performance polymer alloy designed specifically for run dry applications

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
PSX	Platinum Series X (Gray)	-40	180	150	-40	82	66	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.16	0.20	0.12	0.23	0.18	0.16	0.16
Water	0.13	0.18	0.11	NR	0.16	0.15	0.14
Soap and Water	0.12	0.14	0.10	NR	0.14	0.14	0.12
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.22	0.18	0.16	0.12
Water	0.20	0.16	0.14	0.11
Soap and Water	0.15	0.14	0.12	0.11
Oil	0.10	0.10	0.10	0.10

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, Platinum Series X and PSX are trademarks of Regal Rexnord Corporation.

All rights reserved.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.



Brief Description

A strong, abrasion resistant, fine grained, hardened carbon steel with a smooth surface finish. Used in applications requiring high-strength, impact resistance and hardened chain surface such as parts handling.

Primary Components

Carbon steel

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
			dry	wet		dry	wet	
S	Carbon Steel	-40	350	NR	-40	177	NR	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.34	0.35	0.33	0.43	0.31	0.30	0.38
Water	NR	NR	NR	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR	NR	NR	NR
Oil	0.10	0.10	NR	NR	NR	NR	0.10

Friction Factors Between Material and Wearstrips


Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.40	0.30	0.30	0.30
Water	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR
Oil	0.10	0.10	0.10	0.10

1. It is important to lubricate side-flexing chains in the corners to reduce noise levels; water lubrication is unacceptable due to the potential for corrosion and rusting.
2. Not available for Rexnord™ MatTop™ and Multiflex chains.

Regulatory Information

Rexnord and MatTop are trademarks of Regal Rexnord Corporation.

SSA

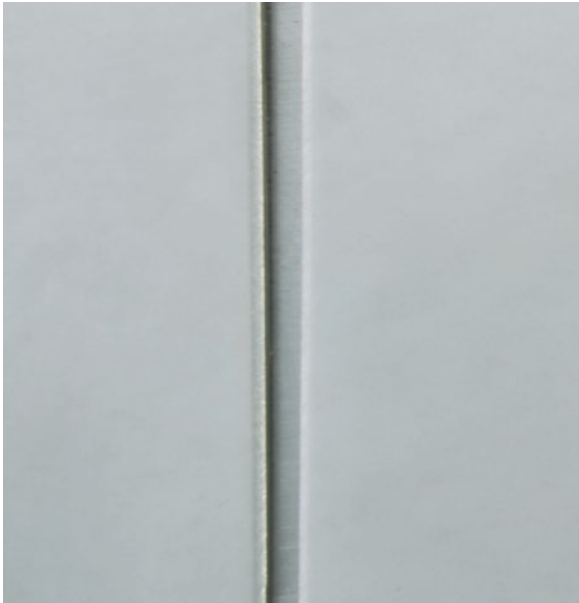

Brief Description

Stainless steel with excellent corrosion and abrasion resistance. Possesses resistance to acids, has non-magnetic qualities, good impact resistance, good surface hardness and smooth surface finish. Used in applications requiring corrosion and abrasion resistance, including glass containers and parts handling where water or lubricants are used.

Primary Components

Austenitic stainless steel

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet	dry	wet			
SSA	Stainless Steel Austenitic	-100	800	212	-75	425	100	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc) PET	PET	Steel
Dry	0.34	0.35	0.33	0.43	0.31	0.30	0.38
Water	0.27	0.30	0.29	NR	0.22	0.21	0.31
Soap and Water	0.14	0.15	0.15	NR	0.15	0.14	0.15
Oil	---	---	---	NR	---	---	---

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material		
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon
Dry	0.40	0.30	0.30
Water	0.35	0.22	0.22
Soap and Water	0.15	0.15	0.15
Oil	0.15	0.10	0.10

1. It is important to lubricate side-flexing chains in the corners to reduce noise levels.
2. Not available for Rexnord MatTop™ and Multiflex chains.

Regulatory Information


Based on the material chemistries, industry standards, and the documentation in the Federal Registry, it is the opinion of Regal Rexnord that the Rexnord™ TableTop™ stainless steel chains can be considered GRAS for direct food contact.

Rexnord, TableTop and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

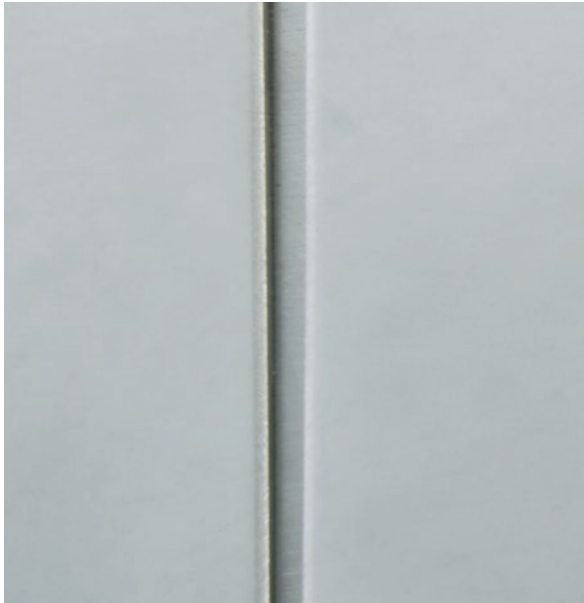

Brief Description

A special austenitic stainless steel used in applications that require the chain to allow magnetic fields to pass through. In some applications, magnets are used to stabilize or hold products that are conveyed on the top of the chain. Allows magnets to interact with the product without increasing chain tension or drive requirements. Can also be used in mechanical applications where magnetism introduced into the system can cause component malfunction. Has excellent corrosion, abrasion and impact resistance. Also has good surface hardness and a smooth surface finish. Used in corrosive environments where strong acids or bases are present.

Primary Components

Low ferromagnetic austenitic stainless steel

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
			dry	wet		dry	wet	
SSB	Stainless Steel Low Magnetic	-100	800	212	-75	425	100	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc) PET	PET	Steel
Dry	0.34	0.35	0.33	0.43	0.31	0.30	0.38
Water	0.27	0.30	0.29	NR	0.22	0.21	0.31
Soap and Water	0.14	0.15	0.15	NR	0.15	0.14	0.15
Oil	---	---	---	NR	---	---	---

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material		
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon
Dry	0.40	0.30	0.30
Water	0.35	0.22	0.22
Soap and Water	0.15	0.15	0.15
Oil	0.15	0.10	0.10

1. It is important to lubricate side-flexing chains in the corners to reduce noise levels.
2. Not available for Rexnord MatTop™ and Multiflex chains.


Regulatory Information

Based on the material chemistries, industry standards, and the documentation in the Federal Registry, it is the opinion of Regal Rexnord that the Rexnord™ TableTop™ stainless steel chains can be considered GRAS for direct food contact.

Rexnord, TableTop and MatTop™ are trademarks of Regal Rexnord Corporation.

All rights reserved.

SSC

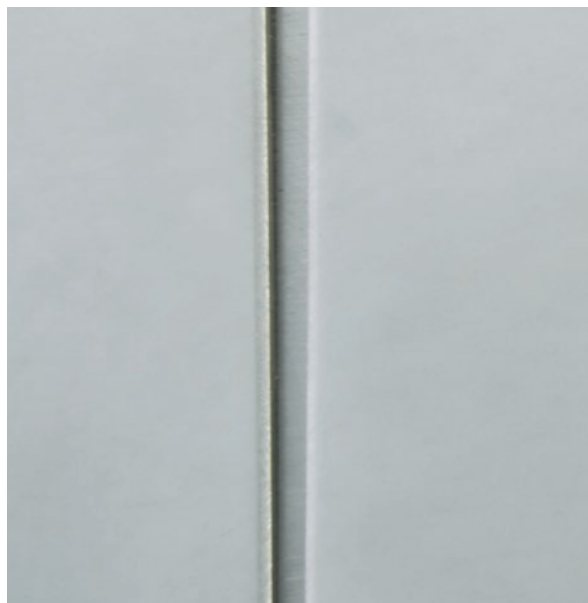**Brief Description**

Special chrome-nickel stainless steel alloy for excellent sliding properties, improved corrosion resistance, long wear life and high strength.

Primary Components

Chrome Nickel Ferritic Stainless Steel

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
SSC	Stainless Steel Ferritic	-94	750	250	-70	400	120	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.40	0.35	0.33	0.45	0.30	0.31	0.40
Water	0.35	0.30	0.29	NR	0.23	0.24	0.35
Soap and Water	0.15	0.15	0.15	NR	0.12	0.17	0.15
Oil	-	-	-	NR	-	-	-

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.40	0.30	0.30	0.40
Water	0.35	0.22	0.22	0.30
Soap and Water	0.15	0.15	0.15	0.20
Oil	0.15	0.10	0.10	0.10

1. It is important to lubricate side-flexing chains in the corners to reduce noise levels.
2. Not available for Rexnord MatTop™ and Multiflex chains.

Regulatory Information

Based on the material chemistries, industry standards, and the documentation in the Federal Registry, it is the opinion of Regal Rexnord that the Rexnord™ TableTop™ stainless steel chains can be considered GRAS for direct food contact.

Rexnord, TableTop and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.



Brief Description

USP is specifically formulated for chemically aggressive pasteurizer, warmer and cooler applications. USP offers advantages that include superior resistance to chemicals used in cleaning and boil-out as well as extended chain life in high-temperature environments. USP material remains stronger and more flexible than plain polypropylene in hot, oxidative environments such as pasteurizers or warmers/coolers. The end result is increased reliability throughout the entire life of the chain

Primary Components

Polypropylene (PP) + Chemical Stabilizers

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
USP	Ultra Stabilized Polypropylene (Dark Green)	40	220	212	4	104	100	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.29	0.29	0.24	0.35	0.32	0.28	0.31
Water	0.19	0.21	0.18	NR	0.24	0.20	0.25
Soap and Water	0.15	0.14	0.10	NR	0.19	0.15	0.17
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.35	0.30	0.30	0.26
Water	0.30	0.25	0.25	0.22
Soap and Water	0.25	0.20	0.20	0.19
Oil	0.10	0.10	0.10	0.10

1. Buoyant in water.
2. Not available for Rexnord™ TableTop™ and Multiflex chains.

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.


Rexnord and TableTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

WSM

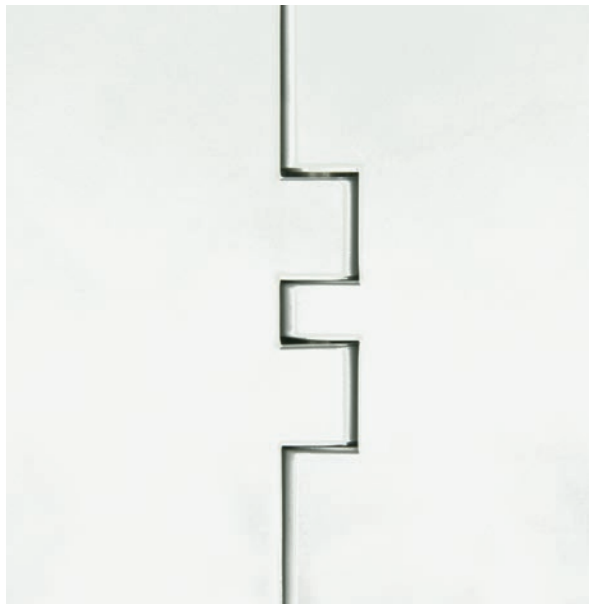

BSM



RSM



SMB



YSM



Brief Description

Formulated to be used in applications when superior wear and cut resistance is required. Can be used in both dry and wet conditions and in applications where abrasive wear due to products or environment is a concern. Cut resistant materials are commonly used in the meat processing industry on cutting, boning and trimming lines. Has good impact resistance and is as strong as standard acetal materials.

Primary Components

Cut and abrasive wear resistant acetal (POM)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
			dry	wet		dry	wet	
WSM	White Cut Resistant	-40	180	150	-40	82	66	Yes
BSM	Black Cut Resistant	-40	180	150	-40	82	66	No
SMB	Blue Cut Resistant	-40	180	150	-40	82	66	Yes
RSM	Red Cut Resistant	-40	180	150	-40	82	66	Yes
YSM	Yellow Cut Resistant	-40	180	150	-40	82	66	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	0.17	0.18	0.15	NR	0.20	0.20	0.22
Soap and Water	0.12	0.14	0.10	NR	0.15	0.15	0.15
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.30	0.25	0.25	0.20
Water	0.23	0.21	0.21	0.18
Soap and Water	0.15	0.15	0.15	0.15
Oil	0.10	0.10	0.10	0.10

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.


Rexnord is a trademark of Regal Rexnord Corporation.

All rights reserved.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

WX

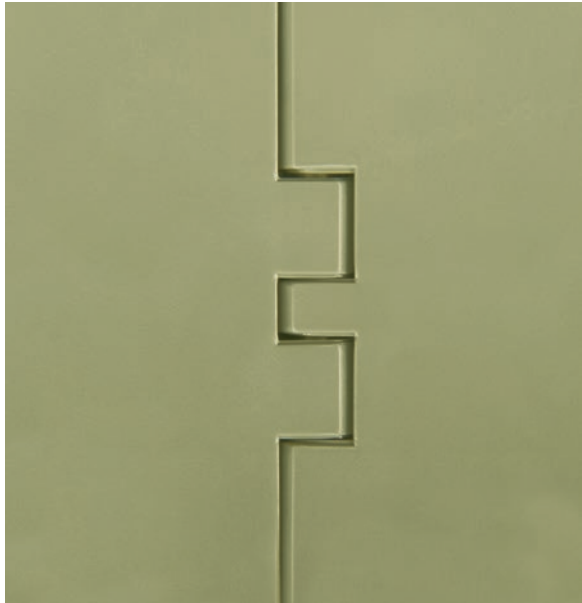

BWX



Brief Description

Formulated to be used in abrasive applications where chain is subjected to abrasives such as glass, sand and dirt. May extend chain wear life up to five times compared to acetal materials. Designed to be used in glass handling applications where abrasive shards of glass can wear other plastic chain materials rapidly. Can also be used in other abrasive applications.

Primary Components

Abrasion resistant nylon (PA)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet	min	dry	wet		
WX	Green Abrasion Resistant Polyamide	-40	220	NR	-40	104	NR	No
BWX	Black Abrasion Resistant Polyamide	-40	220	NR	-40	104	NR	No

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.25	0.27	0.20	0.33	0.25	0.25	0.30
Water	NR	NR	NR	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR	NR	NR	NR
Oil	---	---	---	NR	---	---	---

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.30	0.25	0.25	0.22
Water	NR	NR	NR	NR
Soap and Water	NR	NR	NR	NR
Oil	NA	NA	NA	NR

1. It is important to lubricate side-flexing chains in the corners to reduce noise levels at speeds in excess of 60 FPM; however water lubrication is unacceptable because it will cause wear resistant material to swell and lose strength.

Regulatory Information

Rexnord is a trademark of Regal Rexnord Corporation.
All rights reserved.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.

XLA



Brief Description

Internally lubricated, extra low friction acetal for improved wearlife and high-strength.

Primary Components

Internally lubricated acetal (POM) high-speed

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
XLA	Internally Lubricated Polyacetal (Grey)	-40	180	150	-40	82	66	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.20	0.20	0.15	0.30	0.20	0.20	0.25
Water	0.15	0.18	0.13	NR	0.18	0.18	0.20
Soap and Water	0.12	0.14	0.10	NR	0.15	0.15	0.15
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.25	0.20	0.20	0.16
Water	0.20	0.18	0.18	0.14
Soap and Water	0.15	0.15	0.15	0.13
Oil	0.10	0.10	0.10	0.10

1. Used for Low Backline Pressure (LBP) chains.

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord is a trademark of Regal Rexnord Corporation.

All rights reserved.



Brief Description

Internally lubricated, extra low friction acetal for improved wear life and high-strength.

Primary Components

Internally lubricated acetal (POM)

General Information

Prefix	Material	Temperature						FDA Approval
		Fahrenheit			Celsius			
		min	max		min	max		
		dry	wet		dry	wet		
XLG	Low Friction Acetal (Green)	-40	180	150	-40	82	66	Yes

Friction Factors Between Material and Product

Operating Condition	Product Material						
	Aluminum	Returnable Glass Bottles**	Non-Returnable Glass Bottles	Paper	Plastic (crates, shrink wrap, etc)	PET	Steel
Dry	0.20	0.20	0.15	0.30	0.20	0.20	0.25
Water	0.15	0.18	0.13	NR	0.18	0.18	0.20
Soap and Water	0.12	0.14	0.10	NR	0.15	0.15	0.15
Oil	---	---	---	NR	---	---	0.10

Friction Factors Between Material and Wearstrips

Operating Condition	Wearstrip Material			
	Carbon and Stainless Steel	UHMWPE	MoS ₂ -Filled Nylon	ULF
Dry	0.25	0.20	0.20	0.16
Water	0.20	0.18	0.18	0.14
Soap and Water	0.15	0.15	0.15	0.13
Oil	0.10	0.10	0.10	0.10

1. Only available in TableTop™ and MatTop™ chains.

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177.

Rexnord, TableTop and MatTop are trademarks of Regal Rexnord Corporation.

All rights reserved.

NR denotes "not recommended", Dash denotes "combination not tested"

**Friction of returnable bottles will vary depending on the quality of the glass, the amount of roughed-up surface, etc.



REXNORD™

Regal Rexnord

Contact us: [rexnord.com/contact](https://www.rexnord.com/contact)
[regalrexnord.com](https://www.regalrexnord.com)

The proper selection and application of products and components, including assuring that the product is safe for its intended use, are the responsibility of the customer. To view our Application Considerations, please visit <https://www.regalrexnord.com/Application-Considerations>.

To view our Standard Terms and Conditions of Sale, please visit <https://www.regalrexnord.com/Terms-and-Conditions-of-Sale> (which may redirect to other website locations based on product family).

"Regal Rexnord" is not indicative of legal entity. Refer to product purchase documentation for the applicable legal entity. Regal Rexnord, Dry-PT, Dynamic Transfer System (DTS), FRPLUS, HTX, HYB, KleanTop, LPC, Magnetflex, Marbett, MatTop, Platinum Series, Platinum Series X, PS, PSX, RexFlex, Rexnord, RubberTop, SideGrip, SpiralTop, TableTop, TwistLock, and ZeroGap are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

© 2016, 2025 Regal Rexnord Corporation, All Rights Reserved. MCC-8rxCAT-en-RE-EN-US 02/25

 **RegalRexnord™**